

This is a repository copy of *Delay-differential-equation modeling of mode-locked vertical-external-cavity surface-emitting lasers in different cavity configurations*.

White Rose Research Online URL for this paper:

<https://eprints.whiterose.ac.uk/id/eprint/151379/>

Version: Accepted Version

Article:

Avrutin, Eugene orcid.org/0000-0001-5488-3222 and Panajotov, Krassimir (2019) Delay-differential-equation modeling of mode-locked vertical-external-cavity surface-emitting lasers in different cavity configurations. *Materials*. ISSN: 1996-1944

Reuse

Items deposited in White Rose Research Online are protected by copyright, with all rights reserved unless indicated otherwise. They may be downloaded and/or printed for private study, or other acts as permitted by national copyright laws. The publisher or other rights holders may allow further reproduction and re-use of the full text version. This is indicated by the licence information on the White Rose Research Online record for the item.

Takedown

If you consider content in White Rose Research Online to be in breach of UK law, please notify us by emailing eprints@whiterose.ac.uk including the URL of the record and the reason for the withdrawal request.

Article

Delay-differential-equation modeling of mode-locked vertical-external-cavity surface-emitting lasers in different cavity configurations.

Eugene A. Avrutin¹ and Krassimir Panajotov^{2,3,*}

¹ Department of Electronic Engineering, University of York, York, UK; eugene.avrutin@york.ac.uk

² Faculty of Engineering Sciences, Brussels Photonics Team B-PHOT, Vrije Universiteit Brussel, 1050 Brussels, Belgium; kpanajot@b-phot.org

³ G. Nadjakov Institute of Solid State Physics, Bulgarian Academy of Sciences, 1784 Sofia, Bulgaria

* Correspondence: kpanajot@b-phot.org; Tel.: +32-2629-3567

Received: date; Accepted: date; Published: date

Abstract: A simple, versatile model for the dynamics of electrically and optically pumped vertical-external-cavity surface-emitting lasers mode locked by semiconductor saturable absorber mirror is presented. The difference between the laser operation in the linear and folded cavity, as well as the potential for colliding pulse operation, are studied.

Keywords: vertical-external-cavity surface-emitting lasers; mode locking; SESAM; frequency combs

1. Introduction

Vertical External-Cavity Surface-Emitting Lasers (VECSELs) first developed in 1997 [1] have the advantage of the mature VCSEL technology for the semiconductor gain chip consisting of an epitaxial Distributed Bragg Reflector (DBR) and several Quantum Well (QW) or Quantum Dot layers. This allows wavelength flexibility, output power scalability and mass production. The external cavity makes possible lasing to occur in a single transverse and longitudinal mode by implementing, respectively, spherical mirrors and Fabry-Perot filters in the external cavity [1-5]. On the contrary, multi-transverse mode lasing is typical for VCSELs with output power in excess of several mW due to spatial hole burning [6, 7]. Spectral coverage of VECSELs extends from 390 nm [8] to 5 μ m [9] and even to 244 nm [10] by an intracavity fourth harmonic generation. By efficient thermal management the output power is scaled by simply scaling the area of the optically pumped spot reaching 100W in CW operation [11]. VECSELs are very well-suited for mode-locked operation by utilizing Semiconductor Saturable-Absorber Mirror (SESAM) either in the external cavity [12] or integrated in the gain-chip [13]. Tremendous progress has been achieved since the first demonstration of an SESAM mode-locked VECSEL in 2000 [14]: the pulse durations in fundamentally mode locked operation has been decreased to 107 fs [15] and even to 60fs in a burst operation [16], the average output power has been increased to 6.4W [17] and the peak power increased to 4.35 kW [18]. While the shortest pulses have been achieved with optically pumped active layers, electrically pumped structures are promising for a number of applications. A versatile, but fairly complex theoretical model has been presented [19, 20] for mode locking in electrically pumped VECSELs, but only for the simplest linear geometry and using a semi-microscopic model for the optical properties of Quantum-Well active layers. Later, a delay-differential model of a similar type but with a simpler gain model was used for inclusion of complex transverse/lateral effects in a MIXCEL structure, in

which the active layer and the saturable absorber are hosted within the same chip [21], with a possibility to substantially enhance computational efficiency by narrowing the temporal window when simulating the pronounced ML regime [22]. In recent papers [23,24], a version of a delay-differential model was developed taking into account the folded, as well as simple linear, cavity geometries. These papers centred on lasers designed for ultrashort pulse generation and were mainly dedicated to the issue of multiple pulse (pulse molecule) generation observed under some operating conditions in such lasers; therefore the gain chip and saturable absorber were treated essentially as short travelling-wave amplifiers, ignoring their reflective nature and resonator properties (indeed, for femtosecond pulse generation it is beneficial to suppress the resonator properties of the chips by applying antireflection coatings, to minimise any narrowing of the emission spectra).

An alternative to the delay-differential equation modelling is an iterative pulse shaping approach [25,26,27], where gain, saturable absorption, and dispersion in each round trip are, as in classic mode locking theories, represented by pulse shaping operators in time or frequency domain, as appropriate. Such an approach is by necessity somewhat artificial as it separates dispersion from gain and absorption and also effectively assumes a unilateral ring cavity. Still it has proven very useful for many cases of practical significance, particularly when the main limitation for the pulse duration is the group velocity dispersion of the cavity (soliton mode locking regime). With simulation parameters deduced from measurements for a known laser, such a model is capable of providing very good agreement with experiment in both picosecond [26] and femtosecond [27] regimes; however it may be not the most appropriate for describing regimes and designs where more than one pulse can exist in the cavity, and for including the cavity parameters at the design stage.

Here we continue the work started in the earlier conference papers [28] and present a model based on an approach similar to that of [19, 20] and so treating the cavity properties of the gain and absorber chip consistently, but using a simpler, generic active layer model that can be used for both linear and folded-cavity geometry. The model can be, and is in this study, applied to study different regimes of laser operation, including the possibility of colliding pulse and multiple colliding pulse mode locking, and also can be used for inclusion of polarization effects in future.

The paper is organized as follows. In section 2 we present the derivation of the model and its application to a straightforward linear cavity. Sections 2 and 3 deal with different versions of a folded cavity, with either gain or the absorber forming the central chip. Finally, in section 4 a brief discussion and summary are presented.

2. Vertical External-Cavity Surface-Emitting Laser: time-delay model.

2.1. Derivation of a simple equation for the active cavity dynamics.

A schematic of the mode-locked VECSEL consisting of vertical-cavity amplifier chip (left side) and a SESAM chip (right side) is shown in Fig. 1.

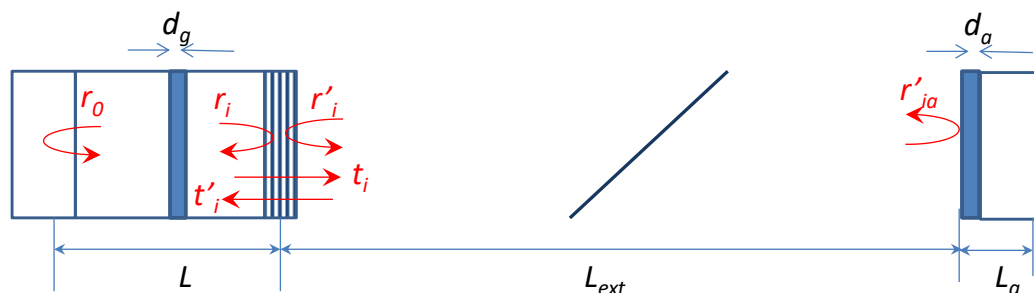


Figure 1. Mode-locked VECSEL consisting of vertical-cavity amplifier chip with two DBRs with reflectivities r_0 and r_1 and active region with thickness d_g and a SESAM chip with a single DBR and active region thickness d_a . L and L_a are their effective lengths and L_{ext} is the length of the external cavity.

The derivation of the model is a somewhat simplified version of that of [19] and is shown here for completeness. As in [19], we start with the frequency domain approach and then convert it into time domain. The equation for the reflected “field” (more accurately, wave amplitude) leaving the gain chip reads

$$E_r^{(g)} = r_g E_{inc} = \left(\frac{r_i^2 r_o \tilde{G} e^{-j2kL}}{1 - r_i r_o \tilde{G} e^{-j2kL}} + r_i' \right) E_{inc} = E_{rc} + r_i' E_{inc}, \quad (1)$$

In this equation:

E_{inc} is the complex amplitude of the incident field.

E_{rc} is the complex amplitude of the field exiting the active resonator chip into the passive compound cavity.

r_i and r_o are the (wavelength-dependent) reflectances of the mirrors of the resonator facing inside (i.e. the incident light) and outside the cavity r_i' is the reflectance seen by the light incident on the mirror from the external cavity side, which has the same amplitude as r_i but different phase, as usual. L is the geometric cavity length.

k is the complex wave vector. We can define a reference frequency and the corresponding wave vector $k_{ref} = \frac{n}{c} \omega_{ref}$ - for convenience it is easiest to assume that ω_{ref} is the frequency of one of the cold cavity modes. Then, $k = k_{ref} + \frac{n}{c} \Delta\omega - \frac{j}{2} \alpha_{int}$, α_{int} being the internal loss in the passive part of the resonator.

\tilde{G} is the single-pass dimensionless complex gain by all the QWs in the active layer of the resonator. Assigning the active layer a thickness L_a and introducing the equivalent distributed complex gain $\tilde{g} = g' + jg''$ we can write $\tilde{G} = e^{\xi_g \Gamma_{\perp} \tilde{g} d_g} = e^{\Gamma_{\perp} \tilde{g} L}$, where the total confinement factor, including the enhancement, or relative confinement, factor due to the standing wave profile ξ_g is

$$\Gamma = \xi_g \Gamma_{\perp} d_g / L \quad (2)$$

This formalism is most natural in the case of a relatively thick, distributed, gain region, in which case the standing wave factor is $\xi_g = 1$. In the case of one or several QWs, when $d_g \ll L$, the notion of ξ_g is somewhat artificial, but can be introduced heuristically alongside a ξ_g value of $1 < \xi_g < 2$ (see below). Using lumped gain per well, as in [19], is more rigorous (e.g. it gives $\xi_g > 1$ self-consistently), but also more complex, particularly in the case of multiple Quantum Well (QW) or Quantum Dot (QD) active layers separated by a substantial distance (e.g. located in different wave antinodes). The present formalism, in principle, applies to an arbitrary active layer thickness and location, though in this paper we shall concentrate on the most usual one using a thin active layer in a single resonant location.

The usual differential equation for an injected laser (i.e. a vertical cavity amplifier with two strongly reflecting mirrors, operated above or near lasing threshold) is obtained by taking the absolute value

of the denominator in eqn. (1) to be small (which means operating above or near threshold, and simultaneously with a small frequency detuning from the cold cavity mode frequency). In the more general case of a resonator with arbitrary reflectances (in electrically pumped VECSELs, reflectances of 70-90% can be used [19, 20]), we cannot assume the absolute value of the denominator in eqn. (1)

to be small but can assume small frequency detuning $\left| 2 \frac{nL}{c} \tilde{G}_{net} \Delta\omega \right| \ll 1$. Then,

$$1 - r_i r_o \tilde{G} e^{-j2kL} \approx 1 - \tilde{G}_{net} + jT_{rt} \tilde{G}_{net} \Delta\omega, \quad (3)$$

where

$$\tilde{G}_{net} = \exp(\tilde{g}_{net} L) = r_i r_o \exp[(\Gamma \tilde{g} - \alpha_{int}) L] = \mathcal{G}_c \tilde{G} \quad (4)$$

is the complex net roundtrip gain, with

$$\mathcal{G}_c = r_i r_o \exp(-\alpha_{int} L) \quad (5)$$

the (real) cavity attenuation factor. We have also introduced the round trip time of the cavity which,

as usual in the theory of vertical cavity structures, is evaluated as $T_{rt} = 2 \frac{n_g L_{eff}}{c}$, where $n_g = n + \omega \frac{dn}{d\omega}$

is the group refractive index, and $L_{eff} = L + \frac{c}{n_g} \frac{d}{d\omega} (|\arg r_o + \arg r_i|)$ is the effective cavity length.

Then, the resonator equation becomes

$$(1 - \tilde{G}_{net} + jT_{rt} \tilde{G}_{net} \Delta\omega) E_{rc} = t_i t_o \tilde{G} e^{-j2kL} E_{inc}. \quad (6)$$

The active layer in a VECSEL is always thin so $|\tilde{G}|$ is never high above one (indeed, the measured chip reflectance has been reported [29,30] as $R_g = |r_g|^2$ for $r_i \approx 0.9$ and $R_g \approx 1.55$ for $r_i \approx 0.96$ (notations as in Eq. 1)), from which the value of $|\tilde{G}| - 1$ can be estimated to be of the order of 10^{-2} at most, meaning it is safe to approximate in Eq. (6)

$$\tilde{G} \approx 1 + \delta\tilde{G}, \quad \delta\tilde{G} = \Gamma \tilde{g} L$$

Strictly speaking, the expression (6) includes the dispersion of both the VECSEL active subcavity and the complex gain $\tilde{G} = \tilde{G}(\Delta\omega)$. If (as is usually the case) the operating wavelength is near the gain peak, we can use a Lorentzian gain spectrum approximation with a width $\Delta\omega_g$.

Then, assuming as usual $\Delta\omega \ll \Delta\omega_g$, the usual substitution $j\Delta\omega \rightarrow \frac{d}{dt}$ gives a single differential equation for the determination of the field reflected from the cavity

$$\left(T_{rt} \mathcal{G}_c + \frac{f_g \delta\tilde{G}}{\Delta\omega_g} \right) \frac{dE_{rc}}{dt} = [\delta\tilde{G} - (1 - \mathcal{G}_c)] E_{rc} + t_i t_o \tilde{G} e^{-\alpha_{int} L} E_{inc} \quad (7)$$

where $\delta\tilde{G} = \Gamma \tilde{g} L$ is evaluated at the reference frequency ω_{ref} and $f_g = \frac{1}{1 + j(\omega_{ref} - \omega_p) / \Delta\omega_g}$

represents the carrier density dependent detuning between ω_{ref} and the spectral peak ω_p of gain. In a QW active material, the carrier density dependence of the detuning is weaker than in bulk material so we can take $f_g = 1 = \text{const.}$ The equation combines cavity selectivity and gain dispersion

and thus can, in general, describe the performance of a gain chip with arbitrarily small or large reflectances. In electrically pumped VECSEL designs, however, typically $|r_i| > \sim 0.5$ [19,30], so, for realistic semiconductor active media ($\Delta\omega_g \sim 10^{13} \text{ s}^{-1}$) we can comfortably assume that the spectral selectivity of the cavity dominates over the gain dispersion:

$$T_{rt} \mathcal{G}_c \gg \frac{\Gamma g L}{\Delta\omega_g}$$

Thus in the first approximation, we can neglect gain dispersion and write the equation in the simple form

$$T_{rt} \mathcal{G}_c \frac{dE_{rc}}{dt} = [\delta\tilde{G} - (1 - \mathcal{G}_c)] E_{rc} + t_i t_i' r_o e^{-\alpha_{\text{int}} L} E_{\text{inc}} \quad (8)$$

Equations (7) and (8) are the main result of this section.

2.2. The full mode-locked laser model: the linear cavity.

To consider the full cavity, we need to recall that with a single incident and single reflected beam in the linear cavity,

$$E_r^{(g)} = E_{rc} + r_i' E_{\text{inc}} \quad (9)$$

and note that

$$E_{\text{inc}} = \frac{\sqrt{\gamma}}{w'} E_r^{(a)} (t - T_{\text{ext}}) \quad (10)$$

where $T_{\text{ext}} = L_{\text{ext}}/c$ is half of the round-trip time of the external cavity, and E_{ra} is the field reflected from the absorber chip, γ is the dimensionless attenuation between the chips (including the out-coupling, if it is located between the chips, and the attenuation in the contact layer of an electrically pumped VCSEL), defined for the intensity as usual, hence square root in the equation for the field amplitude. Technically speaking, the value needs to be complex, with the phase dependent on the sub-wavelength variation in the length L_{ext} of the internal cavity, but in the linear cavity this can be set to zero with no loss of generality. The dimensionless parameter $w' > 1$ is the ratio of the beam cross-section diameters in the gain (broader) and absorber (tighter to ensure saturation). The absorber chip itself in the linear cavity can be described as in [19] by equations symmetric to those of the gain chip, with the incident field given by

$$E_{\text{inc}}^{(a)} = \sqrt{\gamma} w' E_r^{(g)} (t - T_{\text{ext}}) \quad (11)$$

$$E_r^{(a)} = r_{ia}' E_{\text{inc}}^{(a)} + E_{rc}^{(a)}. \quad (12)$$

Here, the field reflected from the inside of the chip is, assuming a (detuned) Lorentzian absorption spectrum, evaluated using an equation formally identical to (7):

$$\left(T_{rt}^{(a)} \mathcal{G}_{ca} - \frac{f_a \delta\tilde{A}}{\Delta\omega_a} \right) \frac{dE_{rc}^{(a)}}{dt} = -[\delta\tilde{A} + 1 - \mathcal{G}_{ca}] E_{rc}^{(a)} + t_{ia}' t_{ia}' r_{oa}' e^{-\alpha_{\text{int},a} L_a} E_{\text{inc}}^{(a)} \quad (13)$$

As in the case of the gain chip, $\mathcal{G}_{ca} = r_{ia} r_{oa} \exp(-\alpha_{\text{int}} L)$, r_{oa} and r_{ia} being the outer and inner reflectances of the absorber cavity, $T_{rt}^{(a)}$ is the SA cavity round-trip time, and the absorption in the cavity, evaluated at ω_{ref} , at is quantified as

$$\delta \tilde{A} = \Gamma_a \tilde{\alpha} L_a. \quad (14)$$

The detuning factor $f_a = \frac{1}{1 + j(\omega_{\text{ref}} - \omega_{pa}) / \Delta\omega_a}$ needs to take into account that the SA is typically operating at the spectral slope of the absorber $(\omega_{\text{ref}} - \omega_{pa}) / \Delta\omega_a \sim 1$. The complex gain and absorption in the case of bulk or QW active layers (QD layers may need more complex analysis) can be parametrized using the phenomenological concepts of gain and absorption compression coefficients ε_g , ε_a , and linewidth enhancement factors for the carrier-dependent gain and absorption α_H, α_{Ha} and the nonlinearities $\alpha_\varepsilon, \alpha_{\varepsilon a}$:

$$\tilde{g} = g(N_g) \left(\frac{1}{(1 + \varepsilon_g S_g)} + j(\alpha_H - \alpha_\varepsilon \varepsilon_g S_g) \right) \quad (15)$$

$$\tilde{\alpha} = \alpha(N_a) \left(\frac{1}{(1 + \varepsilon_a S_a)} + j(\alpha_{Ha} - \alpha_{\varepsilon a} \varepsilon_a S_a) \right) \quad (16)$$

where $S_{g,a}$ are the effective photon densities in the gain and absorption chip active layers. To write out the rate equations for carrier densities in both chips, we need the explicit expressions for these quantities, which depend on the geometry. Since $|\delta \tilde{G}| \ll 1$, $|\delta \tilde{A}| \ll 1$, we can estimate the field in the active layer of both chips in the passive resonator approximation. In the case of active layers in the form of (single or multiple) thin (QW or QD) layers very near the field antinodes, which we shall follow in the analysis below, we can write

$$S_g = \left| \overline{E}_{\text{int}}^{(g)} \right|^2, \quad S_a = \left| \overline{E}_{\text{int}}^{(a)} \right|^2, \quad (17)$$

where the fields inside the gain and SA active layers are evaluated assuming a resonant QW position as

$$E_{\text{int}}^{(g)} \approx \frac{1 + r_o}{t_i r_0} E_{rc}^{(g)}; \quad E_{\text{int}}^{(a)} \approx \frac{1 + r_{oa}}{t_{ia} r_{oa}} E_{rc}^{(a)} \quad (18)$$

From these expressions, the enhancement factors can be evaluated as

$$\xi^{(g)} \approx \frac{|1 + r_o|^2}{1 + |r_0|^2}; \quad \xi^{(a)} \approx \frac{|1 + r_{oa}|^2}{1 + |r_{0a}|^2} \quad (19)$$

which in the case of $|r_o| \sim 1$ gives $\xi^{(g)} \approx 2$, the well-known result for the wave enhancement factor in an isolated VCSEL cavity with the QW active layer at the resonant position.

In the case of distributed (multilayer of bulk) gain or absorbing layers occupying a substantial fraction of the cavity, the enhancement factors ξ could be taken as $\xi \approx 1$, with the intensities calculated as

$$S_g \approx \left(1 + |r_o|^2\right) \left|E_{rc}^{(g)} / t_i\right|^2, \quad S_a \approx \left(1 + |r_{oa}|^2\right) \left|E_{rc}^{(a)} / t_{ia}\right|^2 \quad \text{but that case is not considered here.}$$

The effective photon densities $S_{g,a}$ then are used in the carrier rate equations:

$$\frac{dN_g}{dt} = \frac{j}{ed_g} - \frac{N_g}{\tau_g(N_g)} - \frac{\nu_g g(N_g)}{1 + \varepsilon_g S_g} S_g \quad (20)$$

$$\frac{dN_a}{dt} = -\frac{N_a}{\tau_a(V_a)} + \frac{\nu_g \alpha_p(N_a)}{1 + \varepsilon_a S_a} S_a, \quad (21)$$

where as usual $\nu_g = c/n_g$, $\tau_a(V_a)$ is the absorber recovery time, V_a being the (reverse) bias applied to the chip, if any. For the carrier dependences of gain and absorption, in this paper we use the standard phenomenological expressions

$$g_p(N_g) = G_0 \ln \frac{N_g + N_s}{N_{tr} + N_s} \quad (22)$$

$$\alpha_p(N_a) = \alpha_0 - \sigma N_a \quad (23)$$

The dependences of gain and absorption bandwidths (BW) on respective carrier densities are estimated in the first approximation as linear, i.e.

$$\Delta\omega_g(N_g) = \frac{d\Delta\omega_g}{dN_g} (N_g - N_{g0}),$$

$$\Delta\omega_a(N_a) = \Delta\omega_{a0} + \frac{d\Delta\omega_a}{dN_a} N_a.$$

2.3. The main “observable” parameters.

It is useful to establish the relations between parameters used in the model and the measurable values typically quoted in experiment, such as the threshold of laser operation, the saturation fluence of the absorber, and the modulation contrast of the SA chip.

The threshold condition of the compound cavity is given by a transcendental equation which in our notations is written as

$$\left(\frac{t_i^2 r_o \tilde{G}_{th} e^{-j2kL}}{1 - \tilde{G}_{th} r_i r_o e^{-j2kL}} + r_i \right) \left(\frac{t_{ia}^2 r_{oa} \tilde{A}_0 e^{-j2kL_a}}{1 - \tilde{A}_0 r_{ia} r_{oa} e^{-j2kL_a}} + r_{ia} \right) \gamma e^{-j2k_0 L_{inrcavity}} = 1 \quad (24)$$

where $\tilde{G}_{th} = 1 + \delta \tilde{G}_{th}$ and $\tilde{A}_0 = 1 - \delta \tilde{A}_0$ are (complex) threshold gain and unsaturated absorption, and $k_0 = k_{ref} + \frac{\Delta\omega}{c}$ the wave vector in vacuum at the resonant (modal) frequency. The threshold condition is taken as the lowest gain of all the multiple solutions of the transcendental equation (24), which correspond to modes of the compound cavity. The numerical solution of essentially the same problem, though in different notations, illustrates [19] that, since the cavity length $L_{inrcavity} \gg L, L_a$, the modes are spaced closely enough for there always to be a few near the resonance of both chip resonators, essentially allowing us to count $e^{-j2k_0 L_{inrcavity}} \approx 1$. In that case, assuming that the gain chip and SESAM are resonant cavities, we can establish an analytical estimate for the threshold in the form

$$g_{th} = \frac{1}{\Gamma L} \ln G_{th} \approx \frac{1}{\Gamma L} (G_{th} - 1) \approx \frac{1}{\Gamma L} \left(\frac{(1 + r_i r_{oa} \gamma)(1 + \alpha_{int} L)}{(r_{oa} \gamma + r_i) r_o} - 1 \right) \quad (25)$$

201 where

$$r_{oa} = \left| \frac{t_{ia}^2 g_{ca} (1 - \Gamma_a a_0 f_{la} L_a)}{r_i (1 - g_{ca} (1 - \Gamma_a a_0 f_{la} L_a))} + r_{ia} \right| \quad (26)$$

202 is the unsaturated SA chip reflectance.

203 The saturation fluence of the absorber in the model we use (Eq.(23)) is

$$F_{sat} \approx \frac{\hbar \omega}{\sigma} \left| \frac{1 - \tilde{A}_0 r_{ia} r_{oa}}{t_{ia} (1 + r_{oa})} \right|^2 \quad (27)$$

204 The reflectance contrast is estimated most easily neglecting the self-phase modulation in the SA (since
205 the Henry factor in the absorber is usually believed to be smaller than in the amplifier) and assuming
206 small detuning from resonance, in which case

$$\Delta R \approx 2 |r_{sA}| (|r_{sA}| - |r_{oa}|) \approx 2 |r_{sA}| \frac{t_{ia}^2 g_{ca}}{r_{ia} (1 - g_{ca})^2} \Gamma_a a_0 L_a \quad (28)$$

207 where

$$r_{sA} = \frac{t_{ia}^2 g_{ca}}{r_i (1 - g_{ca})} + r_{ia} \quad (29)$$

208 is the amplitude reflectance of a fully saturated absorber.

209 2.4. Numerical Results.

210 The gain-chip and the saturable absorber parameters used in this section, unless specified
211 otherwise, are listed in tables I and II, respectively.

212

213

Table I. Gain-chip parameters

Parameter	Notation	Value	Units
back mirror amplitude reflectivity	r_o	0.9995	
front mirror amplitude reflectivity	r_i	0.7	
internal losses	α_i	0.001	μm^{-1}
effective length	L_a	1.5	μm
QWs cumulative thickness	d_g	0.024	μm
radius of the active region	ρ_g	3	μm
group refractive index	n_{rg}	3.5	
confinement factor	Γ_g	0.06	
linewidth enhancement factor	α_g	3	
carriers lifetime	τ_g	1	ns
gain compression factor	ε_g	$0.5 \cdot 10^{-5}$	μm^{-3}

parameter carrier density	N_s	$-0.4 \cdot 10^6$	μm^{-3}
transparency carrier density	N_{tr}	$1.6 \cdot 10^6$	μm^{-3}
gain coefficient	G_0	0.18	μm^{-1}
Coefficients of gain BW dependence	$d\Delta\omega_g/dN_g$	0.012	$\mu\text{m}^3/\text{n s}$
	N_{g0}	$7.5 \cdot 10^5$	μm^{-3}

Table II. Saturable absorber parameters

Parameter	Notation	Value	Units
back mirror amplitude reflectivity	r_{oa}	0.97	
front mirror amplitude reflectivity	r_{ia}	0.565	
internal losses	α_{ia}	0.001	μm^{-1}
effective length	L_a	1.5	μm
group refractive index	n_{ra}	3.5	
confinement factor	Γ_a	0.06	
linewidth enhancement factor	α_a	3	
carriers lifetime	τ_a	0.03	ns
compression factor	ε_a	$1.5 \cdot 10^{-5}$	μm^{-3}
absorber saturation cross-section	σ	$2 \cdot 10^{-7}$	μm^{-3}
absorption coefficient	α_0	0.5	μm^{-1}
Coefficients of absorption bandwidth dependence	$d\Delta\omega_a/dN_a$	0.048	$\mu\text{m}^3/\text{n s}$
	$\Delta\omega_{a0}$	15199	1/ns

The values of the external cavity parameters are: the time of flight between the gain and the absorber cavities $\tau=0.02$ ns, the transmission coefficient $\gamma=1$ and the ratio of the beam cross-section diameters onto the gain and the absorber chips $\omega' = 3$.

Figures 2-4 present an example of simulated mode-locked operation of a VECSEL – SESAM configuration. Long- and short-term time traces of photon density $|E_{rc}^{(a)}|^2$ are shown in Fig. 2 (a) and (b), respectively. Fig. 2(c) shows the transient of carrier densities N_a and N_g corresponding to the photon density transient of Fig. 2(b). The optical spectrum of the time trace of Fig. 2 (a) is shown in Fig.2 (c).

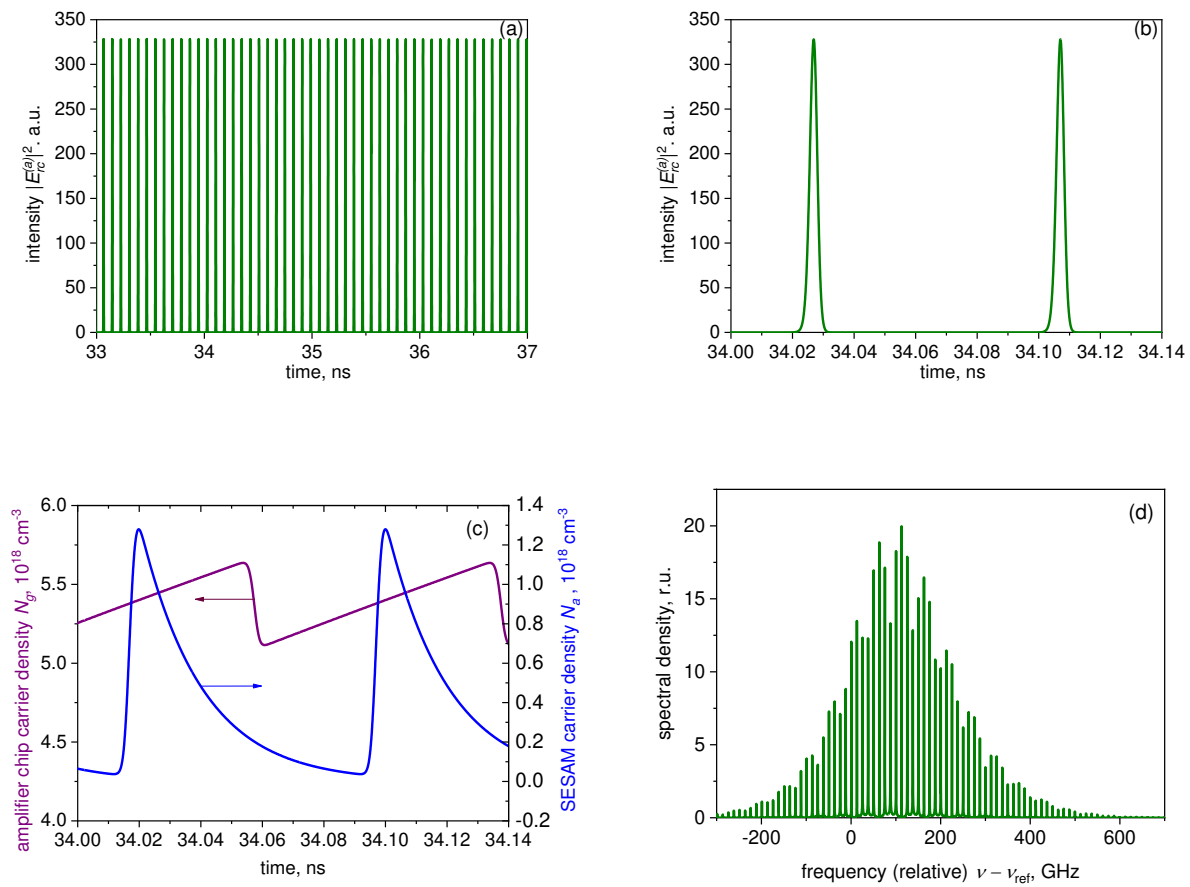


Figure 2. Time traces of the long-term (a) and short-term (b) evolution of the photon density reflected from the SESAM chip. (c) the corresponding evolution of the carrier densities; (d) the spectrum of (a). Gain chip current $i_c=0.6$ mA (stable mode locking).

As the modification of the pulse by a single round-trip is only moderate in the ML VECSEL, the pulse shape is fairly symmetric; however the up-chirp usual in passively mode locked semiconductor lasers is still present, if relatively modest, with the time-bandwidth product of $\Delta\nu\Delta\tau\approx 0.6$ (the pulse duration $\Delta\tau$ and the spectral width $\Delta\nu$ being evaluated at half maximum) at the current shown. The chirp also manifests itself in the asymmetry and some envelope modulation of the spectrum.

The evolution of the pulse duration and amplitude with current is illustrated in Fig. 3 a and b respectively. the pulse duration is in the picosecond range and, as in [19], decreases overall with current. As normal in mode-locked semiconductor lasers (see [32,33] and references therein), the pulses become longer with an increase in the absorber relaxation time.

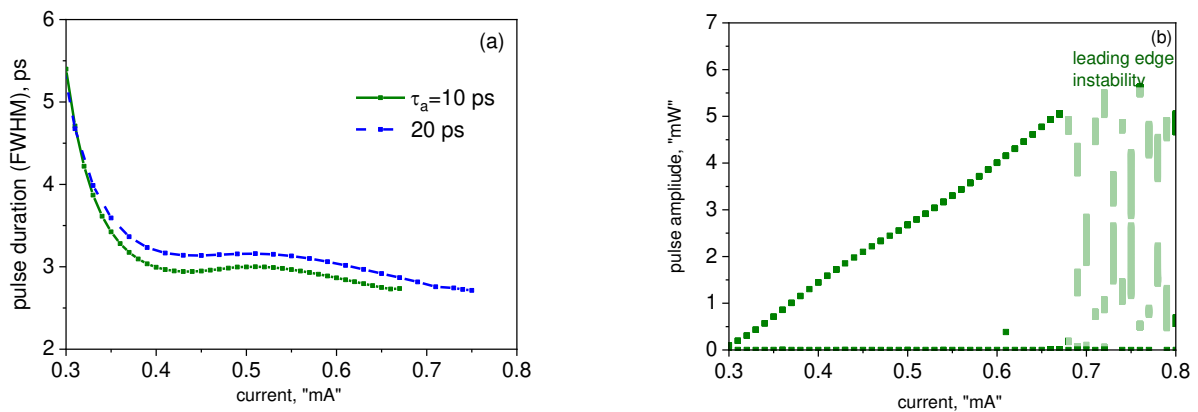


Figure 3. Current dependences of the pulse duration (a) and amplitude (b). In (b), the absorber recovery time is 10 ps.

As in [19], no trace of the “trailing edge” self-pulsing instability was observed in our simulations; this can be attributed to both the relatively low repetition frequency and the weak pulse modification per pulse. However, at high currents, the irregular “leading edge” instability, in the form of two or, at higher currents, several non-periodically competing pulse trails (Fig. 4a) is present; its onset has been chosen as the upper extent of curves in Figure 3a.

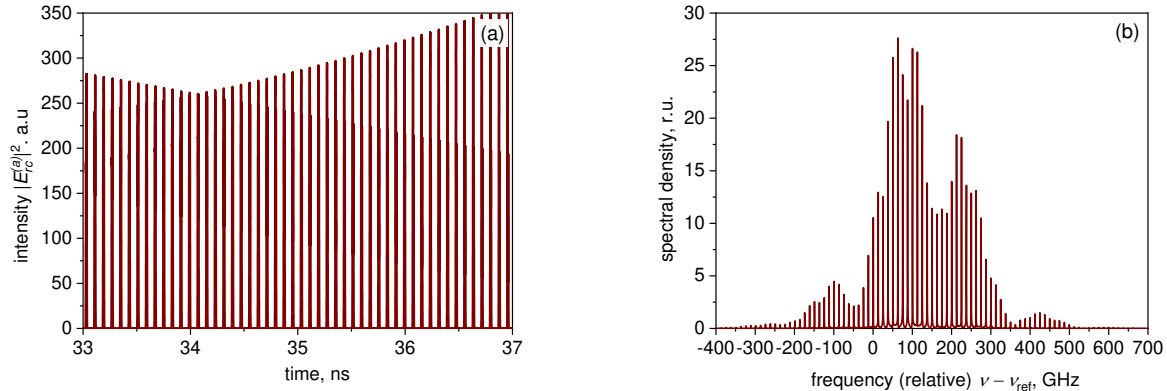


Figure 2. Time traces of the long-term evolution of the photon density reflected from the SESAM chip (a) and the corresponding spectrum (b). Gain chip current $i_c = 1.2$ mA (unstable operation)

As in edge-emitting ML lasers, the spectral signature of this unstable regime is the spectral shape (Fig. 4b) less regular and with more envelope modulation than the spectrum of stable ML (Fig. 2b).

3. VECSEL – SESAM in a folded geometry.

3.1. Formulation of delay-differential model for the folded cavity

In this section, we consider the case of geometry alternative to the linear one treated in [19] and the previous section: the folded geometry. In this case, the three “reference points” of the cavity (Fig. 5) are the output mirror (m), the gain chip (g) and the SESAM (a).

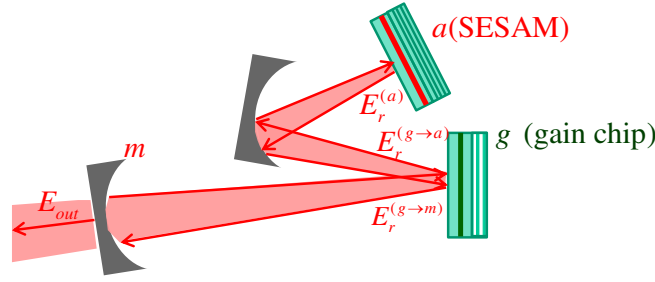


Figure 5. Mode-locked VECSEL –SESAM in folded geometry with an additional mirror.

The purpose of the intermediate fully reflecting mirror is essentially for establishing the correct value of the width ratio w' .

In the folded cavity designs realised so far [21] it is the gain chip that is located in the middle of the cavity (Fig. 5). In this case, the equation for the SESAM chip remains the same as Eq. (13),

$$T_{rt}^{(a)} \mathcal{G}_{ca} \frac{dE_{rc}^{(a)}}{dt} = -[\delta\tilde{A} + 1 - \mathcal{G}_{ca}] E_{rc}^{(a)} + t_{ia}' t_{ia}' r_{oa} e^{-\alpha_{int,a} L_a} E_{inc}^{(a)}, \text{ and we still have}$$

$$E_{inc}^{(a)} = \sqrt{\gamma w'} E_r^{(g \rightarrow a)} (t - T_{a-g}) \quad (30)$$

where $T_{a-g} = L_{a-g}/c$ is the flight time between the gain and absorber chips, and $E_r^{(g \rightarrow a)}$ is the field reflected from the absorber chip in the direction of the gain chip.

For the gain section, the equation is functionally different, taking into account reflections in two directions. For the field leaving the cavity towards the output mirror, we would have

$$T_{rt}^{(g)} \mathcal{G}_{ca} \frac{dE_{rc}^{(g \rightarrow m)}}{dt} = [\delta\tilde{G} + \mathcal{G}_c - 1] E_{rc}^{(g \rightarrow m)} + t_i' t_i' r_o e^{-\alpha_{int,g} L_g} E_{inc}^{(a \rightarrow g)} \quad (31)$$

The total field measured near the gain chip and propagating towards the output mirror then is

$$E_r^{(g \rightarrow m)} = r_{ia}' E_{inc}^{(a \rightarrow g)} + E_{rc}^{(g \rightarrow m)} \quad (32)$$

For the field leaving the cavity towards the SESAM, we have

$$T_{rt}^{(g)} \mathcal{G}_c \frac{dE_{rc}^{(g \rightarrow a)}}{dt} = [\delta\tilde{G} + \mathcal{G}_c - 1] E_{rc}^{(g \rightarrow a)} + t_i' t_i' r_o e^{-\alpha_{int,g} L_g} E_{inc}^{(m \rightarrow g)} \quad (33)$$

The total field travelling from the VECSEL gain chip towards the SESAM then is

$$E_r^{(g \rightarrow a)} = r_i' E_{inc}^{(m \rightarrow g)} + E_{rc}^{(g \rightarrow a)} \quad (34)$$

Finally, the field returning to the gain chip from the mirror is

$$E_{inc}^{(m \rightarrow g)} = r_m' \gamma_m e^{j\Delta\phi_{g-m}} E_r^{(g \rightarrow m)} (t - 2T_{g-m}) \quad (35)$$

with T_{g-m} the flight time between the gain chip and the mirror, and the factor $e^{j\Delta\phi_{g-m}}$ taking into account wavelength-scale cavity length variation. The field returning to the gain section from the SESAM will be the same as in the linear cavity:

$$E_{inc}^{(a \rightarrow g)} = \frac{\sqrt{\gamma_g}}{w'} E_r^{(a)}(t - T_{g-a}) \quad (36)$$

The output field at the time t then is given by

$$E_{out} = t_m \sqrt{\gamma_m} E_r^{(g \rightarrow m)}(t - T_{g-m}), \quad t_m = \sqrt{1 - r_m^2} \quad (37)$$

For the carriers in the VECSEL gain cavity we have the rate equation identical to (20), but the intensity in the cavity is now due to propagation in both directions. In the plane wave approximation and, as in [23,24], assuming in this study incoherent addition of the counter propagating signals (applicable given a wide enough aperture) the intensity within a thin resonantly positioned gain layer is

$$S_g \approx \left| \frac{1 + r_o}{t_i} \right|^2 \left(|E_{rc}^{(g \rightarrow a)}|^2 + |E_{rc}^{(g \rightarrow m)}|^2 \right) \quad (38)$$

3.2. Results of the simulations for the folded cavity.

Figure 6 illustrates the dynamics of the photon (a) and carrier (b) densities in a short folded cavity, with $T_{g-a} + T_{m-g} = 40$ ps, corresponding to the repetition rate of ≈ 12.5 GHz (in the example shown, $T_{g-a} = 25$ ps, $T_{m-g} = 15$ ps). As in the case of the linear cavity, there is only one pulse in the cavity per round trip; however the pulse is amplified in the gain chip twice per round-trip, which thus has substantially shorter time to recover than in a linear cavity with the same overall length.

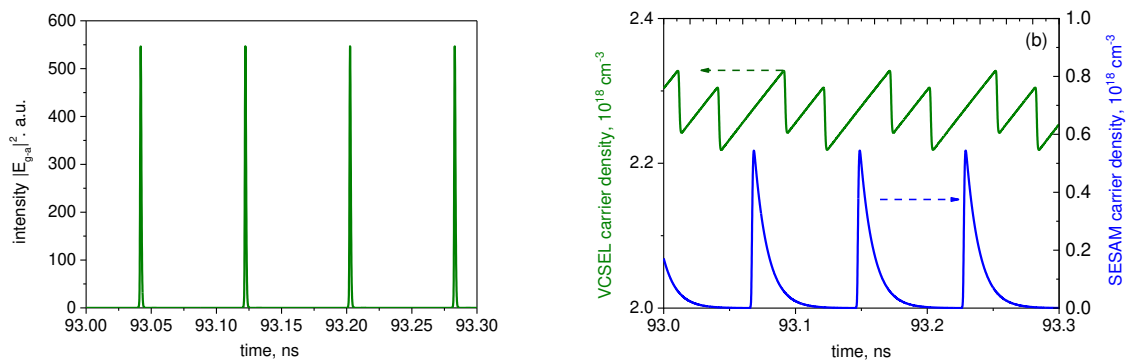


Figure 6. dynamics of the photon (a) and carrier (b) densities in a short folded cavity

Figure 7 shows the pulse duration and amplitude for the case of a short folded cavity as functions of the gain chip current. As in the linear cavity, and as is typical in all mode-locked semiconductor lasers, the pulse duration is somewhat longer for longer absorber recovery time. The current dependence of the pulse duration in this case is non-monotonic, decreasing with current at lower currents, as predicted also by [19] as well as by early generic theories of ML lasers with weak pulse modification per pulse (see e.g. [31]), but increasing at higher currents, when pulse modification per pulse is more significant, in common with most edge-emitting ML lasers [32,33]. As in Fig.3, the upper limit of the curves is set by the onset of leading-edge chaotic instability.

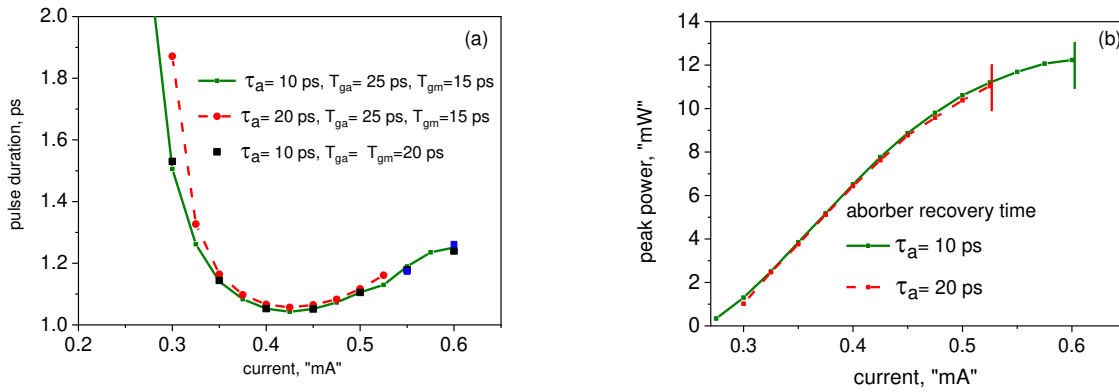


Figure 7. Current dependences of the pulse duration (a) and amplitude (b) in a short folded cavity.

For the relatively high repetition rate shown in Figures 6-7, the pulse parameters show almost no dependence on the relative length of the two branches of the cavity, so long as $T_{g-a} + T_{m-g}$ is kept constant (note the rectangular dots in Figure 7a). This is understandable, because given $T_{g-a}, T_{m-g} \ll \tau_g$, the recovery of the population inversion in gain chip (strictly speaking, exponential) is virtually linear and so the total depletion of the gain chip by both pulses does not depend on the relative magnitudes of the flight times T_{g-a}, T_{m-g} . This dependence becomes more pronounced in longer cavities, when the flight times approach τ_g by order of magnitude. This is illustrated in Fig. 8, calculated for $T_{g-a} + T_{m-g} = 200$ ps, or the repetition rate of ≈ 2.5 GHz. As seen in the figure, there is an optimal relation of the cavity branch lengths in this case yielding the shortest ML pulse width, which, at least for the values of reflectances studied, corresponds to the gain chip near the middle of the cavity.

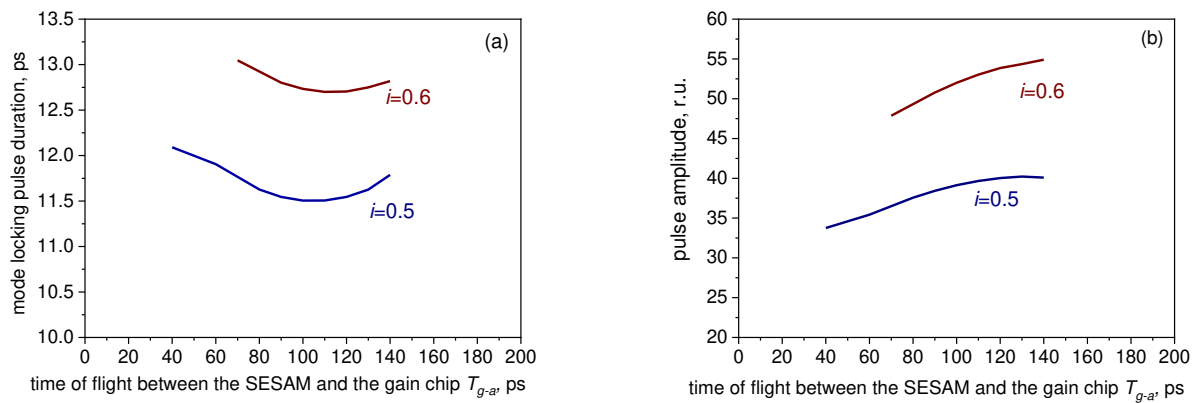


Figure 8. Dependences of the pulse duration (a) and amplitude (b) in a long folded cavity ($T_{g-a} + T_{m-g} = 200$ ps) for two values of current

At relatively high currents, close to the onset of the leading edge instability, the geometry affects the stability limits: with the lengths of the branches strongly unbalanced, the gain chip current limit of stability is lower (the extent of the curves in Fig. 8 corresponds to stable single-pulse emission limit).

4. Colliding-pulse mode locking configuration.

4.1. Time-delayed model

We consider last an alternative, and so far hypothetical, case of the central chip being the SESAM, with the gain chip and the mirror m terminating the cavity, which is more difficult to realise (and has not, to the best of our knowledge, been realised in this form so far) but offers greater functionality, potentially offering Colliding Pulse Mode locking (CPM) option. The equation system for this case is obtained from one for the folded cavity with the *gain chip* in the middle by simple permutation of the symbols g and a in the notations.

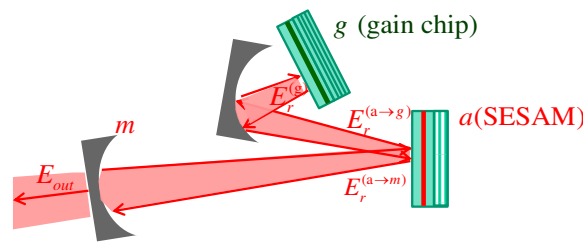


Figure 9. Colliding-pulse Mode-locking folded geometry.

Indeed, in a folded cavity with the SESAM in the “middle”, the equation for the gain chip remains the same as eqn. (8)

$$T_{rt} \mathcal{G}_c \frac{dE_{rc}}{dt} = [\delta \tilde{G} - (1 - \mathcal{G}_c)] E_{rc} + t_i t'_i r_o e^{-\alpha_{im} L} E_{inc}$$

and we still have

$$E_{inc} = \frac{\sqrt{\gamma}}{w'} E_r^{(a \rightarrow g)} (t - T_{a-g}) \quad (39)$$

where $T_{a-g} = L_{a-g}/c$ is the flight time between the gain and absorber chips, and $E_r^{(a \rightarrow g)}$ is the field reflected from the absorber chip in the direction of the gain chip.

For the SESAM, the equation is functionally different, taking into account reflections in two directions. For the field leaving the cavity towards the output mirror, we would have

$$T_{rt}^{(a)} \mathcal{G}_{ca} \frac{dE_{rc}^{(a \rightarrow m)}}{dt} = -[\delta \tilde{A} + 1 - \mathcal{G}_{ca}] E_{rc}^{(a \rightarrow m)} + t_{ia} t'_{ia} r_{oa} e^{-\alpha_{im} L} E_{inc}^{(g \rightarrow a)}. \quad (40)$$

The total field towards the output mirror then is

$$E_r^{(a \rightarrow m)} = r'_{ia} E_{inc}^{(g \rightarrow a)} + E_{rc}^{(a \rightarrow m)} \quad (41)$$

For the field leaving the cavity towards the gain (VECSEL) chip, we have

$$T_{rt}^{(a)} \mathcal{G}_{ca} \frac{dE_{rc}^{(a \rightarrow g)}}{dt} = -[\mathcal{G}_{ca} \delta \tilde{A} + 1 - \mathcal{G}_{ca}] E_{rc}^{(a \rightarrow g)} + t_{ia} t'_{ia} r_{oa} e^{-\alpha_{im} L} E_{inc}^{(m \rightarrow a)}. \quad (42)$$

The total field travelling from the SESAM towards the VECSEL chip then is

$$E_r^{(a \rightarrow g)} = r'_{ia} E_{inc}^{(m \rightarrow a)} + E_{rc}^{(a \rightarrow g)}. \quad (43)$$

Finally, the field returning to the SESAM from the mirror is

$$E_{inc}^{(m \rightarrow a)} = r_m \gamma_m e^{j\Delta\phi_{a-m}} E_r^{(a \rightarrow m)} (t - 2T_{a-m}) \quad (44)$$

whereas the field returning to the SESAM from the gain section will be the same as in a linear cavity:

$$E_{inc}^{(g \rightarrow a)} = \sqrt{\gamma_g} w' E_r^{(g)} (t - T_{g-a}). \quad (45)$$

The output field at the time t then is given by

$$E_{out} = t_m \sqrt{\gamma_m} E_r^{(a \rightarrow m)} (t - T_{a-m}), \quad t_m = \sqrt{1 - r_m^2} \quad (46)$$

Inside the SESAM cavity we still have the same rate equation but the fields exist due to propagation in both directions. In the plane wave approximation and with a thin resonantly positioned absorber,

$$S_a \approx \left| \frac{1 + r_{oa}}{t_{ia}} \right|^2 \left(|E_{rc}^{(a \rightarrow g)}|^2 + |E_{rc}^{(a \rightarrow m)}|^2 \right) \quad (47)$$

The absorber saturation fluence in the folded cavity, with either absorber position, would be the same as in the linear geometry (though effectively in the colliding pulse design it will become twice smaller with 2 pulses arriving simultaneously), and the threshold condition in the CPM cavity becomes

$$g_{th} \approx \frac{1}{\Gamma L} (G_{th} - 1) \approx \frac{1}{\Gamma L} \left(\frac{(1 + r_i r_m r_{oa}^2 \gamma_m)(1 + \alpha_{int} L)}{(r_m r_{oa}^2 \gamma_m + r_i) r_o} - 1 \right). \quad (48)$$

4.2. Calculations and results.

Fig. 10 presents the schematic of evolution of the output photon density in a CPM configuration (a, b) and the corresponding spectrum (c), for one operating current in a short ($T_{g-a} = T_{m-g} = 40$ ps) cavity. The time-domain pulse trail (Fig. 10a) shows complete repetition frequency doubling compared to a linear cavity (two pulses per round trip; note the identical amplitudes of adjacent pulses and the repetition period same as in Figure 2 despite a twice longer cavity), as expected for well developed CPM operation. However, in the spectrum, the doubling of frequency interval between modes is not complete; intermediate modes corresponding to the round-trip of the entire cavity are somewhat suppressed but still present (see inset to Fig. 10c). Similar performance was simulated for edge emitting mode locked lasers under certain conditions [34].

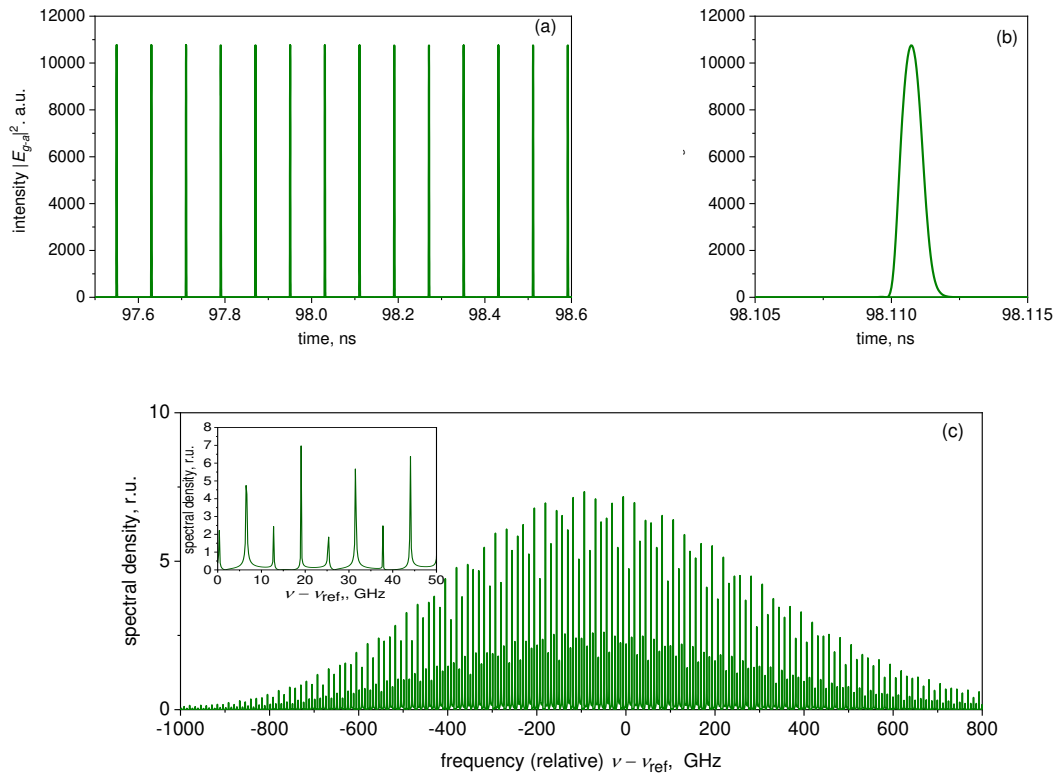


Figure 10 Mode-locked VECSEL–SESAM-output mirror structure time traces of $|E_{g-a}|^2$: (a) pulse trail and (b) single pulse. (c) shows the spectrum of the time trace of (a), with a fragment in an inset. Injection current is $j=1.1$ mA; absorber recovery time $\tau_a=10$ ps.

Figure 11 shows the evolution of the CPM pulse duration and amplitude with current. In this geometry, the simulated pulsewidth increases with current through the current range studied; as mentioned above this is typical for edge emitting lasers and can be associated with relatively strong modification of the pulse per round trip. In edge emitters, such a situation is associated with an asymmetric shape with the longer trailing edge, which indeed is observed also in our simulations (Figure 10b).

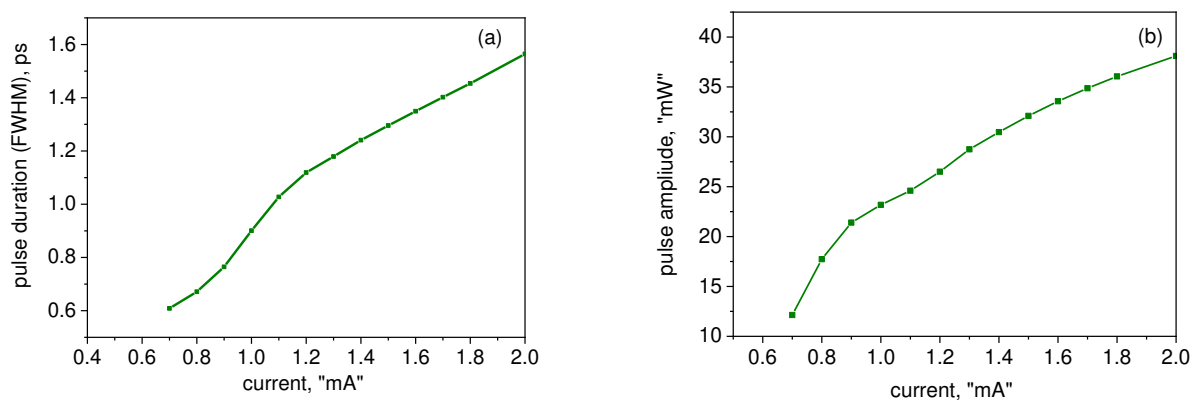


Figure 7. Current dependences of the pulse duration (a) and amplitude (b) in the CPM design. $\tau_a=10$ ps

The upper extent of the curve, as in Figures 3 and 7, is the onset of the leading edge instability. The stability range for this design, with two pulses saturating the absorber simultaneously, is substantially higher than in the case of a simple linear cavity with the same repetition rate, and the pulses, shorter, by virtue of more efficient absorber saturation, which is one of advantages of CPM [32]. The cavity thus looks suitable, in principle, for picosecond pulse generation. In the case of the femtosecond regime using a low-dispersion optically pumped active chip, the more complex, but also more reliable ring CPM geometry used in recent studies [35] may be preferable (the folded cavity studied here would need micrometer-scale balancing of subcavity lengths). More detailed investigation is reserved for future work.

5. Conclusions

We have presented a simple, versatile model for the dynamics of electrically and optically pumped vertical-external-cavity surface-emitting lasers mode locked by semiconductor saturable absorber mirror. Time delays in the external cavities formed by the VECSEL gain chip and the saturable absorber mirror and output mirror are accounted for. Analytical expressions for the experimentally accessible characteristics of the system are provided, namely, the threshold gain and saturation fluence and reflection contrast of the absorber. For realistic parameters of the semiconductor cavities, the model predicts fundamental mode locking with ps pulse duration. The dependences of the pulse width and pulse amplitude, as well as the frequency chirp are investigated as a function of injection current. The model is easily generalized for different VECSEL and SA configurations and examples for the case of folded geometry with central chip being either the gain section or the SESAM are presented. Future work can concentrate on perfecting the model for the folded cavities, including account of partly coherent addition of signals as in [35] and possibly the lateral effects, as well as polarization properties and more diverse geometries.

Author Contributions: E. Avrutin and K. Panajotov developed the model, wrote the software and carried out the simulations. Both authors participated in the writing, review and editing the manuscript.

Funding: This research was funded by Fonds Wetenschappelijk Onderzoek (FWO), grant number G0E5819N.

Acknowledgments: K. Panajotov acknowledges the Fonds Wetenschappelijk Onderzoek (FWO), grant number G0E5819N and Methusalem foundation for financial support.

Conflicts of Interest: The authors declare no conflict of interest.

References

1. Kuznetsov, M.; Hakimi, F.; Sprague, R.; Mooradian, A., "High-power (>0.5-W CW) diode-pumped vertical-external-cavity surface-emitting semiconductor lasers with circular TEM₀₀ beams", *IEEE Photon. Technol. Lett.*, **1997**, 9, 1063 - 1065
2. Tropper, A.C.; Foreman, H.D.; Garnache, A.; Wilcox, K.G.; Hoogland, S.H., Vertical-external-cavity semiconductor lasers, *J. Phys. D: Appl. Phys.* **2004**, 37, R75–R85.
3. Tropper, A.C. and Hoogland, S., Review: Extended cavity surface-emitting semiconductor lasers, *Prog. Quant. Electr.*, **2006**, 30, 1-43.
4. Holm, M. A.; Burns, D.; Ferguson, A. I.; Dawson, M. D., Actively Stabilized Single-Frequency Vertical-External-Cavity AlGaAs Laser, *IEEE Photon. Technol. Lett.* **1999**, 11, 1551-1552.
5. Lindberg, H.; Larsson, A.; Strassner, M., Single-frequency operation of a high-power, long-wavelength semiconductor disk laser, *Opt. Lett.*, **2005**, 30, 2260-2262.
6. Chang-Hasnain, C.; Harbison, J.; Hasnain, G.; Von Lehmen, A.; Florez, L.; Stoffel, N., Dynamic, polarization, and transverse mode characteristics of vertical-cavity surface-emitting lasers, *IEEE J. Quant. Electron.*, **1991**, 27, 1402-1409.
7. Panajotov, K.; Valle, A.; Thienpont, H.; Sciamanna, M., Polarization- and Transverse-Mode Dynamics in Optically Injected and Gain-Switched Vertical-Cavity Surface-Emitting Lasers emitting lasers, *IEEE Journ. Quant. Electr.*, **2009**, 45, 1473-1481.

8. Park, S. H. et al., Room-temperature GaN vertical-cavity surface-emitting laser operation in an extended cavity scheme, *Appl. Phys. Lett.*, **2003**, 83, 2121-2123.
9. Rahim, M., Felder, F., Fill, M., Zogg, H., Optically pumped 5 μm IV–VI VECSEL with Al-heat spreader, *Opt. Lett.*, **2008**, 33, 3010-3012.
10. Kaneda, Y., Yarborough, J. M., Li, L., Peyghambarian, N. et al., Continuous-wave all-solid-state 244 nm deep-ultraviolet laser source by fourth-harmonic generation of an optically pumped semiconductor laser using CsLiB₆O₁₀ in an external resonator, *Opt Lett.*, **2008**, 33, 1705-1707.
11. Wang, T.-L. et al, Quantum design strategy pushes high-power vertical-external-cavity surface-emitting lasers beyond 100W, *Las. Phot. Rev.*, **2012**, 6, 1-3.
12. Keller, U., Tropper, A. C., Passively modelocked surface-emitting semiconductor lasers, *Phys. Reports*, **2006**, 429, 67-120.
13. Maas, D.C., Bellancourt, A.R., Rudin, B., Golling M, Unold, H. et al., Vertical integration of ultrafast semiconductor lasers, *Appl. Phys. B*, **2007**, 88, 493-495.
14. Hoogland, S., Dhanjal, S., Tropper, A.C., Roberts, J.S., Haring, R., Paschotta, R., Morier-Genoud, F., Keller, U., Passively Mode-Locked Diode-Pumped Surface-Emitting Semiconductor Laser, *Phot. Techn. Lett.*, **2000**, 12, 1135-1137.
15. Klopp, P., Griebner, U., Zorn, M., Weyers, M., Pulse repetition rate up to 92 GHz or pulse duration shorter than 110 fs from a mode-locked semiconductor disk laser, *Appl. Phys. Lett.*, **2011**, 98, 071103.
16. Quarterman, A. H., Wilcox, K. G., Apostolopoulos, V., Mihoubi, Z., Elsmere, S. P., Farrer, I., Ritchie, D. A., Tropper, A., A passively mode-locked external-cavity semiconductor laser emitting 60-fs pulses, *Nature Phot.*, **2009**, 3, 729-731.
17. Rudin, B., Wittwer, V. J., Maas, D.C., Hoffmann, M., Sieber, O. D. et al., High-power MIXSEL: an integrated ultrafast semiconductor laser with 6.4 W average power, *Opt. Express*, **2010**, 18, 27582-27588.
18. Wilcox, K. G., Tropper, A. C., Beere, H. E., Ritchie, D.A., Kunert, B. et al., 4.35 kW peak power femtosecond pulse mode-locked VECSEL for supercontinuum generation, *Opt. Express*, **2013**, 21, 1599-1605.
19. Mulet J., and Balle, S., Mode locking dynamics in electrically driven vertical-external-cavity surface-emitting lasers, *IEEE J. Quantum Electron.*, **2005**, 41, 1148-1156.
20. Mulet J., and Balle, S., "Modeling and optimization of vertical-external-cavity surface-emitting diode lasers for passive mode-locking", *Proc. SPIE* **2006**, V. 6184 . article 6184B
21. M. Marconi, J. Javaloyes, S. Balle, M. Giudicci, "Passive Mode-Locking and Tilted Waves in Broad-Area Vertical-Cavity Surface-Emitting Lasers", *IEEE J. Select. Top. Quantum Electron.*, **2015**, 21, art. 1100609
22. C. Schelte, J.Javaloyes, S.V. Gurevich, "A Functional Mapping for Passively Mode-Locked Semiconductor Lasers", *Opt. Lett.*, **2018**, 43, pp. 2535-2538
23. D.Waldebuerger, C.G.E. Alfieri, S.M. Link, S.Meinecke, L. C. Jaurigue, K. Lüdge, U.Keller, "Multipulse instabilities of a femtosecond SESAM-modelocked VECSEL", *Opt. Expr.*, 2018, 17, 21872
24. J. Hausen, B.Lingnau, S.Meinecke, K. Lüdge, "Pulse Cluster Dynamics in Passively Mode-Locked Semiconductor Vertical-External-Cavity Surface-Emitting Lasers", *Phys. Rev Applied*, 2019, **11**, 044055
25. C.Campanario and E.Avrutin, "An Efficient Model for Dynamic Simulation of Mode-Locked Vertical External Cavity Surface Emitting Lasers", *Proc. 5th International Conference on Numerical Simulaion of Optoelectronic Devices, Berlin, 2005*. IEEE, 2005, p.85-86
26. M. Hoffmann, O. D. Sieber, D. J. H. C. Maas, V. J. Wittwer, M. Golling, T. Südmeyer, and U. Keller, "Experimental verification of soliton-like pulse-shaping mechanisms in passively mode-locked VECSELs", *Opt. Expr.*, 2010, 18, 10143
27. O.D. Sieber, M. Hoffmann, V. J. Wittwer, M. Mangold, M. Golling, B.W. Tilma, T. Südmeyer, and U. Keller, "Experimentally verified pulse formation model for high-power femtosecond VECSELs", *Appl.Phys.B.*, 2013, 113, 133-145
28. E.g. E.A.Avrutin and K. Panajotov, "Modelling dynamics of high bit rate mode-locked VECSELs with different cavity geometries", *Proc. SPIE 10682, Semiconductor Lasers and Laser Dynamics VIII*, 106820L, 2017
29. Barbarin, J., et al., *IEEE J. Select. Top. Quant. Electron.*, **2005**, 17, 1148-1156
30. Pallman, W.P., "Passively modelocked electrically pumped VECSELS", PhD Thesis, ETH, Zurich 2013.
31. Dubbeldam, JLA; Leegwater, JA; Lenstra, D, "Theory of mode-locked semiconductor lasers with finite absorber relaxation times", *Appl. Phys.Lett.*, **1997**, 70, pp. 1938-1940

32. E A Avrutin, J H Marsh, and E L Portnoi, "Monolithic and multi-gigahertz mode-locked semiconductor lasers: constructions, experiment, models and applications", *IEE Proc. -Optoelectronics*, **2000**, **147**, No.4, pp. 251-278
33. E. Avrutin and J. Javaloyes, "Mode-Locked Semiconductor Lasers". In: Handbook of Optoelectronic Device Modeling and Simulation (CRC press, Taylor and Francis, United Kingdom, 2017).
34. Jones DJ, Zhang LM, Carroll JE, Marcenac DD, "Dynamics of monolithic passively mode-locked semiconductor lasers", *IEEE J Quantum Electron* 1995, 31, pp. 1051-1058
35. A. Laurain R. Rockmore, H.-T. Chan, J. Hader, S. W. Koch, A. R. Perez, W. Stolz, and J. V. Moloney, "interactions in a colliding pulse mode-locked vertical external cavity surface emitting laser," *J. Opt. Soc. Am. B*, 2017, 34, 329-337



© 2019 by the authors. Submitted for possible open access publication under the terms and conditions of the Creative Commons Attribution (CC BY) license (<http://creativecommons.org/licenses/by/4.0/>).