



Deposited via The University of Sheffield.

White Rose Research Online URL for this paper:

<https://eprints.whiterose.ac.uk/id/eprint/160840/>

Version: Accepted Version

Article:

Kodrasi, I., Cauchi, B., Goetze, S. et al. (2017) Instrumental and perceptual evaluation of dereverberation techniques based on robust acoustic multichannel equalization. *Journal of the Audio Engineering Society*, 65 (1/2). pp. 117-129. ISSN: 1549-4950

<https://doi.org/10.17743/jaes.2016.0047>

© 2020 Audio Engineering Society. This is an author-produced version of a paper subsequently published in *Journal of the Audio Engineering Society*. Uploaded in accordance with the publisher's self-archiving policy.

Reuse

Items deposited in White Rose Research Online are protected by copyright, with all rights reserved unless indicated otherwise. They may be downloaded and/or printed for private study, or other acts as permitted by national copyright laws. The publisher or other rights holders may allow further reproduction and re-use of the full text version. This is indicated by the licence information on the White Rose Research Online record for the item.

Takedown

If you consider content in White Rose Research Online to be in breach of UK law, please notify us by emailing eprints@whiterose.ac.uk including the URL of the record and the reason for the withdrawal request.

INSTRUMENTAL AND PERCEPTUAL EVALUATION OF DEREVERBERATION TECHNIQUES BASED ON ROBUST ACOUSTIC MULTICHANNEL EQUALIZATION

INA KODRASI^{1*}, BENJAMIN CAUCHI²,
 STEFAN GOETZE², *AES Member*, SIMON DOCLO^{1,2} *AES Associate Member*
 {ina.kodrasi, simon.doclo}@uni-oldenburg.de, {benjamin.cauchi, s.goetze}@idmt.fraunhofer.de

¹*Department of Medical Physics and Acoustics and Cluster of Excellence Hearing4All, University of Oldenburg*
²*Fraunhofer Institute for Digital Media Technology IDMT, Project group Hearing, Speech and Audio Technology Oldenburg, Germany*

Dereverberation techniques based on acoustic multichannel equalization, such as the relaxed multichannel least squares (RMCLS) technique and the partial multichannel equalization technique based on the multiple-input/output inverse theorem (PMINT), are known to be sensitive to room impulse response perturbations. In order to increase their robustness, several methods have been proposed, e.g., using a shorter reshaping filter length, incorporating regularization, or incorporating a sparsity-promoting penalty function. This paper focuses on evaluating the performance of these methods for single-source multi-microphone scenarios, both using instrumental performance measures as well as using subjective listening tests. While commonly used instrumental performance measures indicate that the regularized RMCLS technique yields the largest reverberant energy suppression, subjective listening tests show that the regularized and sparsity-promoting PMINT techniques yield the best perceptual speech quality. By analyzing the correlation between the instrumental and the perceptual results, it is shown that signal-based performance measures are more advantageous than channel-based performance measures to evaluate the perceptual speech quality of signals dereverberated by equalization techniques. Furthermore, this analysis also demonstrates the need to develop more reliable instrumental performance measures.

1 INTRODUCTION

Speech signals recorded in an enclosed space by microphones placed at a distance from the speaker are often corrupted by reverberation, which arises from the superposition of many delayed and attenuated copies of the clean signal. Reverberation causes signal degradation, typically leading to decreased speech quality and intelligibility [1–3] and performance deterioration in automatic speech recognition systems [4, 5]. With the continuously growing demand for high-quality hands-free communication in tele-

conferencing applications, voice-controlled systems, and hearing aids, speech enhancement techniques aiming at dereverberation have become indispensable.

In the last decades, many single and multichannel dereverberation techniques have been proposed [6], with multichannel techniques being generally preferred since they exploit both the spectro-temporal and the spatial characteristics of the received microphone signals. Existing multichannel dereverberation techniques can be broadly classified into spectral enhancement techniques [7,8], probabilistic modeling-based techniques [9, 10], and acoustic multichannel equalization techniques [11–14]. Acoustic multichannel equalization techniques aim to reshape the available room impulse responses (RIRs) between the speaker and the microphone array. They can in theory achieve perfect dereverberation performance [11], and hence comprise an attractive approach to speech dereverberation.

*Correspondence should be addressed to Ina Kodrasi: ina.kodrasi@uni-oldenburg.de

This work was supported in part by the Cluster of Excellence 1077 “Hearing4All”, funded by the German Research Foundation (DFG), and the Marie Curie Initial Training Network DREAMS (Grant no. 316969).

A well-known multichannel equalization technique aiming at acoustic system inversion is the multiple-input/output inverse theorem (MINT) technique [11], which however suffers from drawbacks in practice. Since the available RIRs typically differ from the true RIRs due to, e.g., temperature or position variations [15–17] or due to the sensitivity of blind and supervised system identification methods to near-common zeros or background noise [13, 18–21], MINT fails to invert the true RIRs. This may lead to perceptually severe distortions in the output signal [13, 14]. In order to increase the robustness against RIR perturbations, partial multichannel equalization techniques such as relaxed multichannel least-squares (RMCLS) [13] and partial multichannel equalization based on MINT (PMINT) [14] have been proposed. Since early reflections tend to improve speech intelligibility [22] and late reflections are the major cause of speech intelligibility degradation, the objective of these techniques is to suppress only the late reflections.

Although partial equalization techniques are significantly more robust than MINT, their performance still remains susceptible to RIR perturbations [14]. Hence, several methods have been proposed to further increase the robustness of the RMCLS and PMINT techniques against RIR perturbations. In [23] it has been proposed to use a shorter reshaping filter length than conventionally used, resulting in a better-conditioned optimization criterion. In [14] it has been proposed to incorporate regularization in the filter design such that the distortion energy due to RIR perturbations is reduced. In [24, 25] it has been proposed to incorporate a signal-dependent sparsity-promoting penalty function in the filter design such that the output signal exhibits spectro-temporal characteristics of a clean signal. While simulation results in [14, 23–25] have shown using instrumental performance measures that all proposed methods effectively increase the robustness of the RMCLS and PMINT techniques, an extensive instrumental and perceptual comparison of the performance of all these methods is lacking.

The objective of this paper is threefold. First, using channel-based and signal-based instrumental performance measures, the reverberant energy suppression and the perceptual speech quality of the different robust extensions of the RMCLS and PMINT techniques are compared for various RIR perturbation levels. While instrumental performance measures indicate that the regularized RMCLS technique yields the largest reverberant energy suppression, different conclusions can be drawn about the perceptual speech quality based on different instrumental performance measures. Second, in order to determine the most perceptually advantageous technique, the overall speech quality is evaluated using subjective listening tests, showing that the regularized and sparsity-promoting PMINT techniques yield the best perceptual speech quality. Third, the correlation between the instrumental and the perceptual results is analyzed, showing the advantage of signal-based performance measures over channel-based performance measures as well as the necessity to develop more reliable instrumental performance measures to evaluate the

perceptual speech quality of signals dereverberated using equalization techniques.

The paper is organized as follows. In Section 2 the RMCLS and PMINT techniques for acoustic multichannel equalization as well as the different proposed methods to increase their robustness against RIR perturbations are briefly reviewed. In Section 3 the considered acoustic scenarios and the algorithmic settings are described. In Sections 4 and 5 the performance of the different techniques is compared using instrumental performance measures and subjective listening tests. Finally, Section 6 discusses the correlation between the instrumental and the perceptual results.

2 ROBUST ACOUSTIC MULTICHANNEL EQUALIZATION

2.1 Configuration and Notation

Consider the acoustic system depicted in Fig. 1, consisting of a single speech source in a reverberant room and M microphones. The m th microphone signal $y_m(n)$, $m = 1, \dots, M$, at time index n is given by

$$y_m(n) = \underbrace{\sum_{l=0}^{L_h-1} h_m(l)s(n-l)}_{x_m(n)} + v_m(n) = x_m(n) + v_m(n), \quad (1)$$

where $h_m(l)$, $l = 0, \dots, L_h - 1$, are the coefficients of the L_h -taps long time-invariant RIR between the speech source and the m th microphone, $s(n)$ is the clean speech signal, $x_m(n)$ is the reverberant speech component, and $v_m(n)$ is the additive noise component. Since this paper deals with acoustic multichannel equalization techniques for speech dereverberation, in the following it is assumed that $v_m(n) = 0$, hence $y_m(n) = x_m(n)$.

Using the filter-and-sum structure in Fig. 1, the output signal $z(n)$ is equal to the sum of the filtered microphone signals, i.e.,

$$z(n) = \sum_{m=1}^M \sum_{l=0}^{L_w-1} w_m(l)x_m(n-l), \quad (2)$$

where $w_m(l)$, $l = 0, \dots, L_w - 1$, are the coefficients of the L_w -taps long filter applied to the m th microphone signal. In vector notation, the RIR \mathbf{h}_m and the filter \mathbf{w}_m can be described as

$$\mathbf{h}_m = [h_m(0) \dots h_m(L_h-1)]^T, \mathbf{w}_m = [w_m(0) \dots w_m(L_w-1)]^T.$$

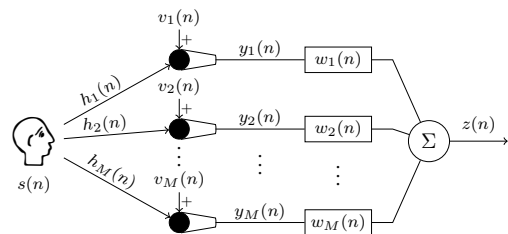


Fig. 1: Acoustic system configuration.

Using the ML_w -dimensional stacked filter vector $\mathbf{w} = [\mathbf{w}_1^T \dots \mathbf{w}_M^T]^T$, the equalized impulse response (EIR) vector \mathbf{c} of length $L_c = L_h + L_w - 1$, i.e., $\mathbf{c} = [c(0) \dots c(L_c - 1)]^T$, can be expressed as

$$\mathbf{c} = \mathbf{H}\mathbf{w}, \quad (3)$$

where \mathbf{H} denotes the $L_c \times ML_w$ -dimensional multichannel convolution matrix of the RIRs, i.e., $\mathbf{H} = [\mathbf{H}_1 \dots \mathbf{H}_M]$, and

$$\mathbf{H}_m = \begin{bmatrix} h_m(0) & 0 & \dots & 0 \\ h_m(1) & h_m(0) & \ddots & \vdots \\ \vdots & h_m(1) & \ddots & 0 \\ h_m(L_h - 1) & \vdots & \ddots & h_m(0) \\ 0 & h_m(L_h - 1) & \ddots & h_m(1) \\ \vdots & \ddots & \ddots & \vdots \\ 0 & \dots & 0 & h_m(L_h - 1) \end{bmatrix}. \quad (4)$$

Defining the L_c -dimensional clean speech vector $\mathbf{s}(n) = [s(n) \dots s(n - L_c + 1)]^T$ and the L_w -dimensional m th reverberant signal vector $\mathbf{x}_m(n) = [x_m(n) \dots x_m(n - L_w + 1)]^T$, with $\mathbf{x}_m(n) = \mathbf{H}_m^T \mathbf{s}(n)$, the output signal $z(n)$ can be expressed as

$$z(n) = \sum_{m=1}^M \mathbf{w}_m^T \mathbf{x}_m(n) = \sum_{m=1}^M \mathbf{w}_m^T \mathbf{H}_m^T \mathbf{s}(n) = \underbrace{\mathbf{w}^T \mathbf{H}^T}_{\mathbf{c}^T} \mathbf{s}(n). \quad (5)$$

As indicated by (5), the dereverberation performance of the speech enhancement system fully depends on the EIR vector \mathbf{c} . For conciseness, the time index n will be omitted when possible in the remainder of this paper.

2.2 Acoustic Multichannel Equalization

Acoustic multichannel equalization techniques assume that measurements or estimates of the RIRs are provided. Such techniques aim at speech dereverberation by designing a reshaping filter \mathbf{w} such that the (weighted) EIR in (3) is equal to a (weighted) dereverberated target EIR. Since the true RIRs are typically not available in practice, the reshaping filter is designed using the perturbed multichannel convolution matrix $\hat{\mathbf{H}}$ constructed from the available RIRs $\hat{\mathbf{h}}_m$. This matrix is equal to $\hat{\mathbf{H}} = \mathbf{H} + \mathbf{E}$, where \mathbf{E} represents the convolution matrix of the RIR perturbations arising due to, e.g., temperature fluctuations [15], source-microphone geometry mismatches [16, 17], RIR estimation errors from blind and supervised system identification methods [18, 19], or microphone transfer function mismatches. It should be noted that microphone transfer function mismatches result in convolutive RIR perturbations instead of additive ones. However, the techniques discussed in the remainder of this paper are independent of the type of RIR perturbations present in the system, as long as a model can be developed to characterize these perturbations.

In this paper, we will focus on the RMCLS [13] and PMINT [14] techniques, which compute the filter \mathbf{w} as the solution to

$$\mathbf{W}\hat{\mathbf{H}}\mathbf{w} = \mathbf{W}\mathbf{c}_t, \quad (6)$$

with \mathbf{W} an $L_c \times L_c$ -dimensional diagonal weighting matrix and \mathbf{c}_t the L_c -dimensional target EIR. The definition of the weighting matrix \mathbf{W} and the target EIR \mathbf{c}_t for the RMCLS and PMINT techniques is presented in Tables 1 and 2 respectively, where τ denotes a delay, L_d denotes the length of the direct path and early reflections, \mathbf{I} denotes the $L_c \times L_c$ -dimensional identity matrix, and $p \in \{1, \dots, M\}$, i.e., for the PMINT technique, the direct path and the early reflections of the target EIR are controlled by the first part of one of the available RIRs. Without loss of generality, other desired EIRs could also be used instead, as long as they are perceptually close to the true RIRs. From these definitions of \mathbf{W} and \mathbf{c}_t , it can be observed that on the one hand, the RMCLS technique does not constrain all taps of the EIR, aiming only at suppressing the reverberant tail, while on the other hand, the PMINT technique constrains all taps of the EIR, aiming at suppressing the reverberant tail and preserving the perceptual speech quality. For more details on these techniques, we refer to [13, 14].

The filter solving (6) is computed by minimizing the least-squares cost function¹

$$J_{\text{LS}} = \|\mathbf{W}(\hat{\mathbf{H}}\mathbf{w} - \mathbf{c}_t)\|_2^2. \quad (7)$$

As shown in [11, 14], assuming that the RIRs $\hat{\mathbf{h}}_m$ do not share any common zeros and using $L_w \geq \left\lceil \frac{L_h - 1}{M - 1} \right\rceil$, with $\lceil \cdot \rceil$ the ceiling operator, the filter minimizing (7) is equal to

$$\mathbf{w}_{\text{LS}} = (\mathbf{W}\hat{\mathbf{H}})^+ \mathbf{W}\mathbf{c}_t, \quad (8)$$

where $\{\cdot\}^+$ denotes the matrix pseudo-inverse. When the true RIRs are available, i.e., $\hat{\mathbf{H}} = \mathbf{H}$, this filter yields perfect dereverberation performance, i.e., $\mathbf{W}\mathbf{H}\mathbf{w}_{\text{LS}} = \mathbf{W}\mathbf{c}_t$ [14]. However, in the presence of RIR perturbations, i.e., $\hat{\mathbf{H}} \neq \mathbf{H}$, this filter typically fails to achieve dereverberation, i.e., $\mathbf{W}\mathbf{H}\mathbf{w}_{\text{LS}} \neq \mathbf{W}\mathbf{c}_t$, possibly even causing large distortions in the output signal [14].

Table 1: Definition of the weighting matrix \mathbf{W} in (6) for the RMCLS and PMINT techniques.

Technique	Weighting matrix \mathbf{W}
RMCLS	$\text{diag}[\underbrace{1 \dots 1}_{\tau} \underbrace{1 \ 0 \dots 0}_{L_d} \ 1 \dots 1]^T$
PMINT	\mathbf{I}

Table 2: Definition of the target EIR \mathbf{c}_t in (6) for the RMCLS and PMINT techniques.

Technique	Target EIR \mathbf{c}_t
RMCLS	$[0 \dots 0 \ 1 \ 0 \dots 0]^T$
PMINT	$[\underbrace{0 \dots 0}_{\tau} \hat{h}_p(0) \dots \hat{h}_p(L_d - 1) \ 0 \dots 0]^T$

¹Strictly speaking, the cost function in (7) is a weighted least-squares cost function for $\mathbf{W} \neq \mathbf{I}$.

2.3 Increasing Robustness Against RIR Perturbations

In this section, several methods that have been proposed to increase the robustness of the RMCLS and PMINT techniques are briefly reviewed. Furthermore, insights on the computational complexity of these different methods are provided.

Decreasing the reshaping filter length: In [23] it was analytically shown that using a shorter reshaping filter length than conventionally used, i.e., $L_w < \left\lceil \frac{L_h-1}{M-1} \right\rceil$, decreases the condition number of the matrix $\mathbf{W}\hat{\mathbf{H}}$. As analytically shown in [26], a smaller condition number yields a better-conditioned least-squares optimization criterion, with the resulting least-squares solution \mathbf{w}_{LS} in (8) being less sensitive to perturbations in $\mathbf{W}\hat{\mathbf{H}}$.

Incorporating regularization: In [14] it was proposed to increase the robustness of the RMCLS and PMINT techniques by incorporating regularization in the filter design, such that the distortion energy due to RIR perturbations is reduced. The regularized least-squares cost function is given by

$$J_{RLS} = \|\mathbf{W}(\hat{\mathbf{H}}\mathbf{w} - \mathbf{c}_t)\|_2^2 + \delta \mathbf{w}^T \mathbf{R}_e \mathbf{w}, \quad (9)$$

with \mathbf{R}_e denoting the matrix modeling the perturbations, i.e., $\mathbf{R}_e = \mathcal{E}\{\mathbf{E}^T \mathbf{E}\}$, where \mathcal{E} denotes the expected value operator, and δ is a regularization parameter providing a trade-off between the minimization of the least-squares error J_{LS} and the distortion energy due to RIR perturbations $\mathbf{w}^T \mathbf{R}_e \mathbf{w}$. The regularized least-squares filter minimizing (9) is given by

$$\mathbf{w}_{RLS} = [(\mathbf{W}\hat{\mathbf{H}})^T (\mathbf{W}\hat{\mathbf{H}}) + \delta \mathbf{R}_e]^{-1} (\mathbf{W}\hat{\mathbf{H}})^T \mathbf{W} \mathbf{c}_t. \quad (10)$$

Incorporating sparsity-promoting penalty functions: In [24, 25] it was proposed to increase the robustness of the RMCLS and PMINT techniques by incorporating penalty functions that promote sparsity of the output signal in the short-time Fourier transform (STFT) domain, such that the output signal exhibits characteristics of a clean speech signal. The L_z -dimensional output signal vector $\mathbf{z} = [z(n) \dots z(n - L_z + 1)]^T$ can be expressed as

$$\mathbf{z} = \mathbf{X} \mathbf{w}, \quad (11)$$

where \mathbf{X} denotes the $L_z \times ML_w$ -dimensional multichannel convolution matrix of the microphone signals, i.e., $\mathbf{X} = [\mathbf{X}_1 \mathbf{X}_2 \dots \mathbf{X}_M]$, and

$$\mathbf{X}_m = \begin{bmatrix} x_m(n) & \dots & x_m(n - L_w + 1) \\ x_m(n - 1) & \dots & x_m(n - L_w) \\ \vdots & \ddots & \vdots \\ x_m(n - L_z + 1) & \dots & x_m(n - L_w - L_z + 2) \end{bmatrix}. \quad (12)$$

The sparsity-promoting least-squares cost function is then given by

$$J_{SLS} = \|\mathbf{W}(\hat{\mathbf{H}}\mathbf{w} - \mathbf{c}_t)\|_2^2 + \eta f_{SP}(\Psi \mathbf{z}), \quad (13)$$

where f_{SP} denotes a sparsity-promoting penalty function and η is a weighting parameter providing a trade-off between the minimization of the least-squares error

J_{LS} and the penalty function value $f_{SP}(\Psi \mathbf{z})$. The operator Ψ denotes the STFT operator transforming the L_z -dimensional time-frequency domain vector \mathbf{z} into the L_z -dimensional time-frequency domain vector $\tilde{\mathbf{z}}$ consisting of the STFT coefficients of the output signal, with $\tilde{\mathbf{z}} = \Psi \mathbf{z}$. Since no closed-form expression is available for the filter minimizing the cost function in (13), the sparsity-promoting least-squares filter can be computed using, e.g., the iterative alternating direction method of multipliers (ADMM) algorithm [27]. Introducing the auxiliary variable \mathbf{a} such that the optimization problem in (13) is split into simpler sub-problems, the ADMM algorithm computes the sparsity-promoting least-squares filter using the following update rules [24, 25] until a termination criterion is satisfied (cf. Section 3):

$$\mathbf{w}^{(i+1)} = [2(\mathbf{W}\hat{\mathbf{H}})^T (\mathbf{W}\hat{\mathbf{H}}) + \rho \mathbf{X}^T \mathbf{X}]^{-1} \times [2(\mathbf{W}\hat{\mathbf{H}})^T (\mathbf{W} \mathbf{c}_t) + \rho \mathbf{X}^T \Psi^H (\mathbf{a}^{(i)} - \boldsymbol{\lambda}^{(i)})], \quad (14)$$

$$\mathbf{a}^{(i+1)} = S_{\eta/\rho}(\Psi \mathbf{X} \mathbf{w}^{(i+1)} + \boldsymbol{\lambda}^{(i)}), \quad (15)$$

$$\boldsymbol{\lambda}^{(i+1)} = \boldsymbol{\lambda}^{(i)} + \Psi \mathbf{X} \mathbf{w}^{(i+1)} - \mathbf{a}^{(i+1)}. \quad (16)$$

In (14)-(16), $\{\cdot\}^{(i)}$ denotes the variable in the i th iteration, $\boldsymbol{\lambda}$ is the so-called dual (splitting) variable, $\rho > 0$ is the ADMM penalty parameter, and $S_{\eta/\rho}$ denotes the proximal mapping of the used sparsity-promoting penalty function [28]. Simulation results in [25] have shown that incorporating an l_0 -norm, l_1 -norm, or weighted l_1 -norm sparsity-promoting penalty function significantly increases the robustness of the RMCLS and PMINT techniques, with the weighted l_1 -norm penalty function yielding the best performance. Hence, in this paper we only consider the weighted l_1 -norm penalty function, defined as

$$f_{SP}(\tilde{\mathbf{z}}) = \|\text{diag}\{\mathbf{u}\} \tilde{\mathbf{z}}\|_1 = \sum_{q=0}^{L_z-1} |u(q) \tilde{z}(q)|, \quad (17)$$

with $u(q) > 0$, $q = 0, \dots, L_z - 1$, denoting user-defined scalar weights. In order to preserve the spectro-temporal structure of a typical speech signal, the weights $u(q)$ are defined as [25]

$$u(q) = \frac{1}{|\tilde{x}_p(q)| + \zeta}, \quad q = 0, \dots, L_z - 1, \quad (18)$$

with $\tilde{x}_p(q)$ the STFT coefficients of the p -th microphone signal, where $p \in \{1, \dots, M\}$, and $\zeta > 0$ a small positive scalar used to avoid division by 0.

While simulation results in [14, 23-25] have shown that all proposed methods are effective in increasing the robustness of the RMCLS and PMINT techniques against RIR perturbations, an extensive instrumental and perceptual comparison of the performance of all these methods to determine the most robust and perceptually advantageous technique is lacking.

Computational complexity considerations: The computational complexity of all considered methods is cubic, since matrix multiplication and matrix inversion account for the dominant operation in all reshaping filter computations, cf. (8), (10), and (14)-(16). The complexity of using a shorter reshaping filter length is $O(n_r^3)$, where n_r denotes the number of rows of the matrix $\mathbf{W}\hat{\mathbf{H}}$

when $L_w < \left\lceil \frac{L_h-1}{M-1} \right\rceil$. The complexity of using regularization is $O(n_c^3)$, where n_c denotes the number of columns of the matrix $\mathbf{W}\hat{\mathbf{H}}$ when $L_w = \left\lceil \frac{L_h-1}{M-1} \right\rceil$. Finally, the complexity of using a sparsity-promoting penalty function is $O(L_z^3)$, where L_z denotes the length of the output signal vector. Since typically $n_r < n_c \ll L_z$, it can be said that decreasing the reshaping filter length results in the lowest computational complexity, whereas incorporating a sparsity-promoting penalty function results in the highest computational complexity. In addition, the execution of the sparsity-promoting method takes a significantly longer time than the execution of the other methods due to the multiple number of iterations. However, since the number of iterations is constant, this is not reflected in the computational complexity of the sparsity-promoting method.

3 ACOUSTIC SCENARIOS AND ALGORITHMIC SETTINGS

This section describes the considered acoustic scenarios and the algorithmic settings for which the performance of the robust extensions of the RMCLS and PMINT techniques is evaluated.

Acoustic scenarios: We considered 2 different reverberant acoustic systems with a single speech source and $M = 4$ omni-directional microphones. For each acoustic system, Table 3 presents the reverberation time T_{60} , the source-microphone distance d_{sm} , the inter-microphone distance d_{im} , and the RIR length L_h at a sampling frequency $f_s = 8$ kHz. The RIRs between the speech source and the microphones were measured using the swept-sine technique [29] and the reverberant signals were generated by convolving 2 sentences of clean speech (approximately 4 s long) from the HINT database [30] with the measured RIRs. In order to simulate RIR perturbations, the measured RIRs were perturbed by proportional Gaussian distributed errors as proposed in [31], such that a desired normalized projection misalignment (NPM), defined as

$$\text{NPM} = 10 \log_{10} \frac{\left\| \mathbf{h}_m - \frac{\mathbf{h}_m^T \hat{\mathbf{h}}_m}{\hat{\mathbf{h}}_m^T \hat{\mathbf{h}}_m} \hat{\mathbf{h}}_m \right\|_2^2}{\|\mathbf{h}_m\|_2^2}, \quad (19)$$

is obtained. The considered NPMs are $\text{NPM}_1 = -33$ dB and $\text{NPM}_2 = -15$ dB, with NPM_1 representing a moderate perturbation level and NPM_2 representing a high perturbation level. Hence, the performance of all considered techniques is evaluated for 4 different acoustic scenarios, i.e., S_1 - NPM_1 , S_2 - NPM_1 , S_1 - NPM_2 , and S_2 - NPM_2 .

Table 3: Characteristics of the considered acoustic systems.

System	T_{60} [ms]	d_{sm} [m]	d_{im} [m]	L_h
S_1	450	3	0.05	3600
S_2	610	2	0.04	4880

Algorithmic settings: As previously mentioned, we investigate the performance of the following techniques (cf. Section 2.2):

- L-RMCLS, i.e., the RMCLS technique using a shorter reshaping filter length,
- R-RMCLS, i.e., the regularized RMCLS technique,
- S-RMCLS, i.e., the weighted l_1 -norm sparsity-promoting RMCLS technique,
- L-PMINT, i.e., the PMINT technique using a shorter reshaping filter length,
- R-PMINT, i.e., the regularized PMINT technique, and
- S-PMINT, i.e., the weighted l_1 -norm sparsity-promoting PMINT technique.

For the R-RMCLS, S-RMCLS, R-PMINT, and S-PMINT techniques the reshaping filter length is set to $L_w = \left\lceil \frac{L_h-1}{M-1} \right\rceil$ which is the minimum length required for perfect dereverberation performance (cf. Section 2.2), i.e., $L_w = 1200$ for the system S_1 and $L_w = 1627$ for the system S_2 . For all techniques, the delay is set to $\tau = 90$ and the length of the direct path and early reflections is set to $L_d = 0.01 \times f_s$ (i.e., 10 ms), cf. Tables 1 and 2. The target EIR \mathbf{c}_t for the robust extensions of the PMINT technique is set to the direct path and early reflections of the first RIR $\hat{\mathbf{h}}_1$, i.e., $p = 1$. For the regularized techniques, the matrix \mathbf{R}_e modeling the RIR perturbations is set to $\mathbf{R}_e = \mathbf{I}$. For the sparsity-promoting techniques, the STFT is computed using a 32 ms Hamming window with 50% overlap between successive frames. As in [24], the variables \mathbf{w} , \mathbf{a} , and $\boldsymbol{\lambda}$ are initialized with $[1 \ 0 \ \dots \ 0]^T$ and the termination criterion is set to either the number of iterations exceeding 150 or the change in the filter norm dropping below 10^{-3} . The weights in (18) are computed using the STFT coefficients of the first microphone signal $\tilde{x}_1(q)$, i.e., $p = 1$.

The considered reshaping filter lengths L_w for the L-RMCLS and L-PMINT techniques, regularization parameters δ for the R-RMCLS and R-PMINT techniques, and weighting and penalty parameters η and ρ for the S-RMCLS and S-PMINT techniques are

$$L_w \in \{500, 600, \dots, \left\lceil \frac{L_h-1}{M-1} \right\rceil\}, \quad (20)$$

$$\delta \in \{10^{-7}, 10^{-6}, \dots, 10^{-1}, 1, 3, 5, 7, 10\}, \quad (21)$$

$$\eta \in \{10^{-7}, 10^{-6}, 10^{-5}, 10^{-4}\}, \quad (22)$$

$$\rho \in \{10^{-7}, 10^{-6}, \dots, 10^{-1}\}. \quad (23)$$

As in [14, 23], the optimal reshaping filter length, the optimal regularization parameter, and the optimal weighting and penalty parameters used in the following simulations are intrusively selected from (20)-(23) as the parameters maximizing the perceptual evaluation of speech quality (PESQ) score [32] for each technique and each acoustic scenario (cf. Section 4 for details on the PESQ score computation). It should be noted that the computation of the PESQ score for selecting the optimal parameters is an intrusive procedure that is not applicable in practice, since

knowledge of the true RIRs is required in order to compute the reference signal and the resulting EIR.

4 INSTRUMENTAL EVALUATION

In this section, the performance of the different considered techniques is evaluated by means of commonly used instrumental performance measures, i.e., direct-to-reverberant ratio (DRR) [6], speech-to-reverberation modulation energy ratio (SRMR) [33], log likelihood ratio (LLR) [34], and PESQ [32]. The channel-based DRR measure has been shown to correlate well with the perceived amount of reverberation for unprocessed signals [35], whereas the signal-based SRMR, LLR, and PESQ measures have been shown to correlate well with the perceived overall quality of signals processed by speech enhancement algorithms for dereverberation and noise reduction [36]. While the SRMR measure is a non-intrusive measure, the LLR and PESQ measures are intrusive measures comparing the output signal to a (dereverberated) reference signal. The reference signal employed in this evaluation is the clean speech signal convolved with the direct path and the early reflections (up to 10 ms) of the true RIR \mathbf{h}_1 . Note that a higher DRR, a higher SRMR, a lower LLR, and a higher PESQ score indicate a better performance.

Fig. 2a depicts the obtained DRR for the input RIR \mathbf{h}_1 and for the EIRs \mathbf{c} obtained using the robust extensions of the RMCLS and PMINT techniques. The following conclusions can be drawn by comparing the presented DRR values:

- All techniques improve the DRR in comparison to the input RIR \mathbf{h}_1 .
- The robust extensions of the RMCLS technique generally yield a similar or higher DRR than the robust extensions of the PMINT technique. This is to be expected since the robust extensions of the RMCLS technique relax the constraints on the filter design and aim only at suppressing the late reverberation, whereas the robust extensions of the PMINT technique also aim at preserving the perceptual speech quality (which is not reflected by the DRR measure).
- The R-RMCLS technique typically yields the highest DRR for the considered scenarios (except for the scenario $S_2\text{-NPM}_1$, where the S-RMCLS technique yields the highest DRR).
- The R-PMINT technique typically yields a higher DRR than the S-PMINT technique (except for the scenario $S_1\text{-NPM}_1$, where the R-PMINT and S-PMINT techniques yield a similar DRR).
- The L-RMCLS and L-PMINT techniques yield the lowest DRR out of all considered robust extensions. This is not surprising since these techniques simply use a shorter reshaping filter length, without explicitly taking into account the structure of the RIR perturbations or the characteristics of the output speech signal.
- The performance of all considered techniques is generally higher for the system S_1 than for the system S_2 . This

can be explained by the higher reverberation time of the system S_2 , leading to a larger number of perturbed RIR taps to be reshaped, and hence, an increased sensitivity of all considered techniques to RIR perturbations.

Figs. 2b-2d depict the obtained SRMR, LLR, and PESQ scores for the reverberant microphone signal $x_1(n)$ and for the output signals $z(n)$ obtained using the robust extensions of the RMCLS and PMINT techniques. The following conclusions can be drawn by comparing the presented instrumental measures:

- Not all techniques improve the overall quality in comparison to the reverberant signal $x_1(n)$, e.g., the L-RMCLS technique yields a lower SRMR for scenarios $S_2\text{-NPM}_1$ and $S_2\text{-NPM}_2$, the L-PMINT technique yields a lower SRMR for the scenario $S_2\text{-NPM}_2$, and the R-PMINT technique is the only technique consistently improving the LLR for all scenarios.
- The robust extensions of the PMINT technique generally yield a similar or better SRMR and LLR than the robust extensions of the RMCLS technique. Surprisingly, the robust extensions of the RMCLS technique generally yield a similar or better PESQ score than the robust extensions of the PMINT technique, implying that PESQ does not appear to reflect the better preservation of the early reflections achieved by the robust extensions of the PMINT technique but puts more emphasis instead on the better reverberant tail suppression achieved by the robust extensions of the RMCLS technique.
- The R-PMINT technique typically yields the best SRMR and LLR (except for the scenario $S_2\text{-NPM}_2$, where the S-RMCLS technique yields the best SRMR), whereas the R-RMCLS technique typically yields the best PESQ score.
- As expected, the L-RMCLS and L-PMINT techniques typically yield the lowest performance in terms of all instrumental performance measures.
- The performance of all considered techniques is generally higher for the system S_1 than for the system S_2 .

In summary, based on instrumental performance measures it can be said that incorporating regularization and sparsity-promoting penalty functions is more advantageous to increase the robustness of equalization techniques than using a shorter reshaping filter length. Furthermore, as expected, the robust extensions of the RMCLS technique achieve a larger reverberant energy suppression (as evaluated using the DRR measure) than the robust extensions of the PMINT technique, with the R-RMCLS technique typically yielding the best performance. However, when comparing the perceptual speech quality achieved by the different techniques, different conclusions can be derived depending on the used instrumental performance measure, highlighting the necessity of conducting subjective listening tests.

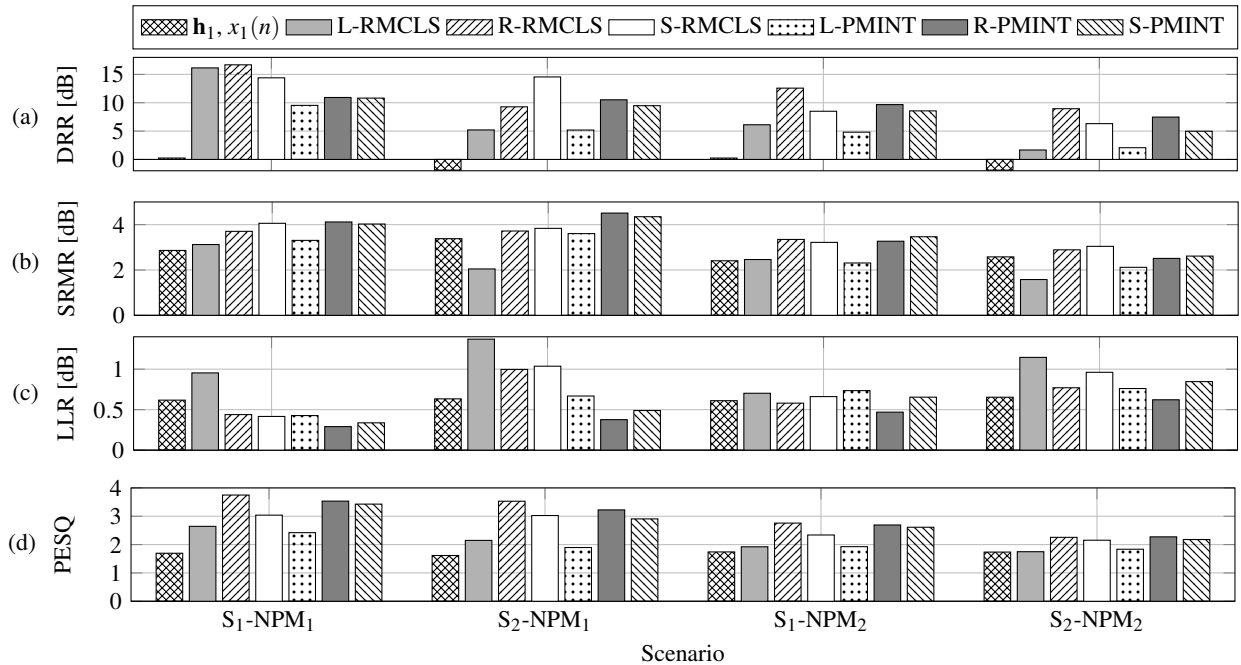


Fig. 2: Instrumental measures for the robust extensions of the RMCLS and PMINT techniques for all considered acoustic scenarios: (a) DRR, (b) SRMR, (c) LLR, and (d) PESQ.

5 PERCEPTUAL RESULTS

The perceptual evaluation is based on a multi stimulus test with hidden reference and anchor (MUSHRA) using the specifications given in [37]. The evaluation is conducted for the reverberant microphone signal $x_1(n)$ and for the output signals $z(n)$ obtained using all considered techniques. In addition to these signals, a hidden reference and an anchor are presented to the subjects. The hidden reference has been generated as the clean speech signal convolved with the direct path and the early reflections (up to 10 ms) of the true RIR \mathbf{h}_1 . The anchor has been generated as the low-pass filtered microphone signal $x_1(n)$ with a cut-off frequency of 3 kHz. Sound samples for each considered acoustic scenario can be found at bit.ly/mushrasamples. The signals are diotically presented to the subjects through headphones (Sennheiser HDA 200) using an RME Fireface UFX sound card, with all signals normalized in amplitude. A total of 21 self-reported normal hearing subjects who are familiar with speech processing participated in the listening tests. The subjects evaluated the signals in terms of the attribute “overall speech quality” on a scale from 0 to 100. Prior to the actual evaluation, the subjects were trained to familiarize themselves with the task and the signals under test. Furthermore, they could adjust the sound volume to a comfortable level. The order of presentation of signals and scenarios were randomized between all subjects.

Fig. 3 depicts the obtained MUSHRA scores for the reverberant microphone signal and for the output signals obtained using the robust extensions of the RMCLS and PMINT techniques. For completeness, the obtained MUSHRA scores for the reference and the anchor are also depicted, illustrating that the reference is correctly identi-

fied for all scenarios and that the anchor is typically rated as having the worst perceptual speech quality (except for the scenario $S_2\text{-NPM}_1$, where the L-RMCLS technique yields a worse quality). In general it can be observed that the rating variability between subjects (as shown by the whiskers in each boxplot) is rather large. This is commonly the case for listening tests evaluating the overall speech quality achieved by dereverberation algorithms, e.g., [2, 3, 38]. Since the artifacts and distortions produced by the considered techniques are quite different, the perception of these artifacts and distortions by different subjects is also rather different.

For the moderate RIR perturbation level ($\text{NPM}_1 = -33$ dB), it can be observed that all proposed techniques typically improve the perceptual speech quality in comparison to the reverberant microphone signal (except for the L-RMCLS technique yielding a worse perceptual speech quality and the L-PMINT technique yielding a similar perceptual speech quality for the system S_2). Furthermore, out of the different methods proposed to increase the robustness of equalization techniques, incorporating a sparsity-promoting penalty function yields the best perceptual speech quality, whereas using a shorter reshaping filter length yields the worst perceptual speech quality. Finally, it can be observed that due to the better preservation of the early reflections, the robust extensions of the PMINT technique yield a better perceptual speech quality than the robust extensions of the RMCLS technique, with the S-PMINT technique yielding the best perceptual speech quality.

For the higher RIR perturbation level ($\text{NPM}_2 = -15$ dB), it can be observed that more techniques fail to improve the perceptual speech quality in comparison to the reverberant microphone signal, i.e., the L-RMCLS, S-RMCLS,

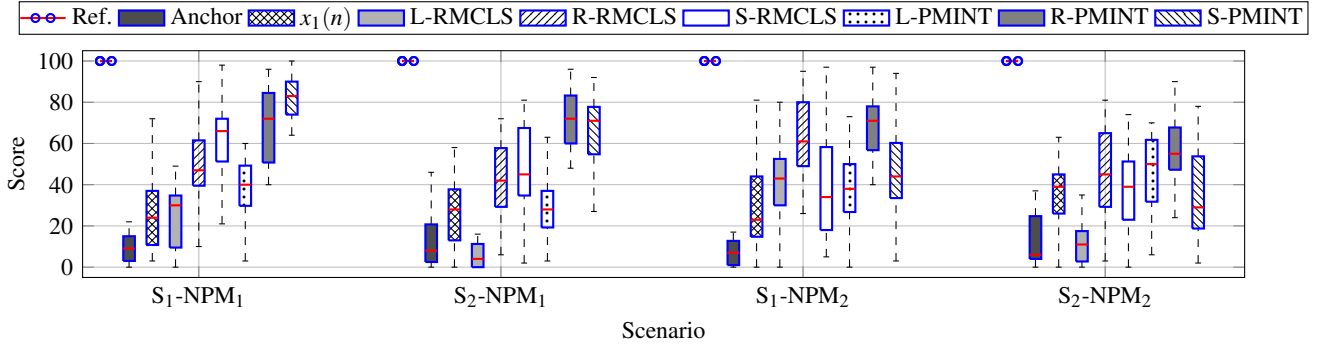


Fig. 3: MUSHRA scores for the reverberant microphone signal $x_1(n)$ and for the output signals $z(n)$ obtained using the robust extensions of the RMCLS and PMINT techniques for all considered acoustic scenarios. In addition, the scores of the hidden reference and the anchor are displayed. For each box, the central mark is the median, the edges of the box are the 25-th and the 75-th percentiles, and the whiskers extend to 1.5 times the interquartile range from the median.

and S-PMINT techniques yield a similar or worse quality for the system S_2 . Furthermore, it can be observed that, similarly as before, the robust extensions of the PMINT technique yield a similar or better perceptual speech quality than the robust extensions of the RMCLS technique (except for the S-PMINT technique yielding a worse quality than the S-RMCLS technique for the system S_2). However, unlike for $NPM_1 = -33$ dB, it can now be observed that the R-PMINT technique results in the best perceptual speech quality, outperforming the S-PMINT technique. Incorporating regularization in the RMCLS and PMINT techniques yields the best perceptual speech quality, whereas incorporating sparsity-promoting penalty functions typically yields the worst perceptual speech quality. Hence, while incorporating sparsity-promoting penalty functions seems to be very advantageous to increase the robustness and the perceptual speech quality in the presence of moderate RIR perturbation levels, the performance of sparsity-promoting techniques seems to deteriorate more rapidly with increasing perturbation levels than the performance of regularized techniques. This is not unexpected, since sparsity-promoting penalty functions only rely on general spectro-temporal characteristics of clean speech signals, whereas regularization aims at explicitly modeling and suppressing the level of RIR perturbations.

To determine whether the previously discussed results are statistically significant, a statistical analysis has been conducted. Since the data are not normally distributed, a Friedman’s test [39] with the factor “technique” has been performed for the different considered scenarios.

As summarized in Table 4, the statistical analysis shows a significant influence of the factor “technique” for all scenarios. To determine the sources of significance, a Wilcoxon signed-rank test [40] has been separately conducted for each scenario. The obtained results for each acoustic scenario are presented in Tables 5-8, with the ticks representing a statistically significant difference, i.e., $p < 0.05$, and the crosses representing no statistically significant difference, i.e., $p \geq 0.05$. The presented results are obviously symmetric across the diagonal since such entries correspond to the same pair comparison. Table 5 shows that

Table 4: Results of the Friedman’s test for all considered scenarios. The variable χ^2 denotes the Friedman’s chi square statistic and the value $\rho < 0.001$ indicates the significance of the results.

Scenario	χ^2	ρ
S_1 - NPM_1	140	$\rho < 0.001$
S_2 - NPM_1	88	$\rho < 0.001$
S_1 - NPM_2	119	$\rho < 0.001$
S_2 - NPM_2	83	$\rho < 0.001$

for the system S_1 and the moderate RIR perturbation level NPM_1 only the regularized and the sparsity-promoting techniques yield a statistically significant improvement in comparison to the reverberant microphone signal. Furthermore, it can be observed that the S-PMINT technique is the only technique yielding a statistically significant improvement in comparison to all other techniques. Table 6 shows that for the system S_2 and the moderate RIR perturbation level NPM_1 only the R-PMINT, S-PMINT, and R-RMCLS techniques yield a statistically significant improvement in comparison to the reverberant microphone signal. Furthermore, it can be observed that these techniques yield the most statistically significant improvements in comparison to other techniques. Table 7 shows that for the system S_1 and the high RIR perturbation level NPM_2 the R-PMINT technique and the robust extensions of the RMCLS technique yield a statistically significant improvement in comparison to the reverberant microphone signal. Furthermore, it can be observed that the R-PMINT and the R-RMCLS techniques yield the most statistically significant improvements in comparison to other techniques. Finally, Table 8 shows that for the system S_2 and the high RIR perturbation level NPM_2 only the R-PMINT technique yields a statistically significant improvement in comparison to the reverberant microphone signal. Furthermore, the R-PMINT technique also yields the most statistically significant improvements in comparison to other techniques.

Table 5: Wilcoxon signed-rank test for scenario S_1 -NPM₁. The ticks represent a statistically significant difference and the crosses represent no statistically significant difference.

	$x_1(n)$	L-RMCLS	R-RMCLS	S-RMCLS	L-PMINT	R-PMINT	S-PMINT
$x_1(n)$		×	✓	✓	×	✓	✓
L-RMCLS	×		✓	✓	×	✓	✓
R-RMCLS	✓	✓		×	×	✓	✓
S-RMCLS	✓	✓	×		✓	×	✓
L-PMINT	×	×	×	✓		✓	✓
R-PMINT	✓	✓	✓	×	✓		✓
S-PMINT	✓	✓	✓	✓	✓	✓	

Table 6: Wilcoxon signed-rank test for scenario S_2 -NPM₁. The ticks represent a statistically significant difference and the crosses represent no statistically significant difference.

	$x_1(n)$	L-RMCLS	R-RMCLS	S-RMCLS	L-PMINT	R-PMINT	S-PMINT
$x_1(n)$		×	✓	×	×	✓	✓
L-RMCLS	×		✓	×	×	✓	×
R-RMCLS	✓	✓		✓	✓	×	✓
S-RMCLS	×	×	✓		×	✓	×
L-PMINT	×	×	✓	×		✓	×
R-PMINT	✓	✓	×	✓	✓		✓
S-PMINT	×	×	✓	×	×	✓	

Table 7: Wilcoxon signed-rank test for scenario S_1 -NPM₂. The ticks represent a statistically significant difference and the crosses represent no statistically significant difference.

	$x_1(n)$	L-RMCLS	R-RMCLS	S-RMCLS	L-PMINT	R-PMINT	S-PMINT
$x_1(n)$		✓	✓	✓	×	✓	×
L-RMCLS	✓		✓	✓	✓	✓	✓
R-RMCLS	✓	✓		×	✓	✓	✓
S-RMCLS	✓	✓	×		✓	✓	✓
L-PMINT	×	✓	✓	✓		✓	✓
R-PMINT	✓	✓	✓	✓	✓		×
S-PMINT	×	✓	✓	✓	✓	×	

Table 8: Wilcoxon signed-rank test for scenario S_2 -NPM₂. The ticks represent a statistically significant difference and the crosses represent no statistically significant difference.

	$x_1(n)$	L-RMCLS	R-RMCLS	S-RMCLS	L-PMINT	R-PMINT	S-PMINT
$x_1(n)$		✓	×	×	×	✓	×
L-RMCLS	✓		✓	✓	✓	✓	✓
R-RMCLS	×	✓		×	×	×	×
S-RMCLS	×	✓	×		×	✓	×
L-PMINT	×	✓	×	×		×	×
R-PMINT	✓	✓	×	✓	×		✓
S-PMINT	×	✓	×	×	×	✓	

In summary, even though the statistical significance criterion is not always satisfied, the trend of the results confirm that the robust extensions of the PMINT technique yield a better perceptual speech quality than the robust extensions of the RMCLS technique. Furthermore, the S-PMINT technique results in the best perceptual speech quality for moderate RIR perturbation levels, whereas the R-PMINT technique results in the best perceptual speech quality for high RIR perturbation levels.

6 CORRELATION ANALYSIS BETWEEN INSTRUMENTAL AND PERCEPTUAL RESULTS

When comparing the instrumental evaluation results in Section 4 with the perceptual evaluation results in Section 5, it can be observed that not all perceptual results can be well predicted by the instrumental performance measures. On the one hand, the instrumental performance measures accurately predicted that 1) the regularized and

sparsity-promoting techniques generally outperform the techniques using a shorter reshaping filter length and that 2) the performance of all considered techniques for the system S_1 is typically better than for the system S_2 . On the other hand, the instrumental performance measures failed to predict 1) the consistent perceptual advantage of the robust extensions of the PMINT technique over the robust extensions of the RMCLS technique as well as 2) the perceptual advantage of the S-PMINT technique over the R-PMINT technique for moderate RIR perturbation levels.

Table 9 shows the correlation between the perceptual ratings and the instrumental performance measures as determined by the Pearson product-moment correlation coefficient (PPMCC), computed as

$$\text{PPMCC} = \frac{\sum_j (a_j - \bar{a})(b_j - \bar{b})}{\sqrt{\sum_j (a_j - \bar{a})^2 (b_j - \bar{b})^2}}, \quad (24)$$

where a_j and b_j denote the perceptual and instrumental ratings for the j -th sound sample and \bar{a} and \bar{b} denote the respective mean values. It can be observed that for each scenario at least one instrumental performance measure yields a high correlation to the perceptual ratings, with the signal-based performance measures typically yielding a higher correlation than the channel-based DRR measure. Furthermore, it can be observed that except for the LLR measure, the correlation for all other measures strongly depends on the considered scenario. The correlation for the DRR measure varies between 0.25 and 0.81, which is to be expected since a purely energy-based measure cannot always reflect how the remaining distortions in the late reverberant tail are perceived. For the moderate RIR perturbation level NPM_1 , the SRMR measures shows a very high correlation to the perceptual ratings, whereas for the higher perturbation level NPM_2 , the correlation values significantly decrease. Hence, it appears that the SRMR measure, which has been primarily developed and optimized on unprocessed reverberant signals, can very well predict the quality of signals with little or no distortions but does not reflect the distortions introduced by equalization techniques. Furthermore, the auditory-based PESQ measure does not always appear to reflect the distortions introduced by equalization techniques, e.g., yielding a low correlation of 0.56 for the scenario with most distortions in the output signal, i.e., $S_2\text{-NPM}_2$. Finally, it appears that a relatively simple linear prediction coefficient based distance measure such as LLR reflects the distortions introduced by equalization

Table 9: Absolute value of the Pearson product-moment correlation coefficient between the perceptual ratings and the instrumental performance measures.

Measure	$S_1\text{-NPM}_1$	$S_2\text{-NPM}_1$	$S_1\text{-NPM}_2$	$S_2\text{-NPM}_2$
DRR	0.25	0.61	0.81	0.44
SRMR	0.93	0.97	0.62	0.52
LLR	0.77	0.71	0.75	0.87
PESQ	0.76	0.69	0.82	0.56

techniques more reliably than all other measures over all considered scenarios, with correlation values varying between 0.71 and 0.87.

In summary, while instrumental performance measures are certainly a valuable tool when designing speech dereverberation techniques, the impact of distortions and artifacts caused by acoustic multichannel equalization techniques can only be truly assessed using subjective listening tests. Since the considered instrumental measures are incapable of accurately predicting the perceptual ratings, further development of instrumental performance measures is required.

7 CONCLUSION

In this paper we have evaluated the performance of several robust extensions of acoustic multichannel equalization based on RMCLS and PMINT by means of instrumental performance measures and subjective listening tests. Instrumental performance measures show that the regularized RMCLS technique yields the largest reverberant energy suppression. Subjective listening tests show that the robust extensions of the PMINT technique yield the best perceptual speech quality, with the sparsity-promoting PMINT technique yielding the best quality for moderate RIR perturbation levels and the regularized PMINT technique yielding the best quality for high RIR perturbation levels. A correlation analysis between the instrumental and perceptual results shows that signal-based performance measures typically yield a higher correlation than channel-based performance measures when evaluating the perceptual quality of signals processed by acoustic multichannel equalization techniques. Furthermore, the provided correlation analysis highlights the need to develop more accurate instrumental performance measures, reliably reflecting the distortions introduced by acoustic multichannel equalization techniques.

8 REFERENCES

- [1] R. Beutelmann and T. Brand, "Prediction of speech intelligibility in spatial noise and reverberation for normal-hearing and hearing-impaired listeners," *Journal of the Acoustical Society of America*, vol. 120, no. 1, pp. 331–342, Jul. 2006.
- [2] A. Warzybok, I. Kodrasi, J. O. Jungmann, E. A. P. Habets, T. Gerkmann, A. Mertins, S. Doclo, B. Kollmeier, and S. Goetze, "Subjective speech quality and speech intelligibility evaluation of single-channel dereverberation algorithm," in *Proc. International Workshop on Acoustic Echo and Noise Control*, Antibes, France, Sep. 2014, pp. 333–337.
- [3] S. Goetze, E. Albertin, J. Rannies, E. Habets, and K.-D. Kammeyer, "Speech quality assessment for listening-room compensation," *Journal of the Audio Engineering Society*, vol. 62, no. 6, pp. 386–399, June 2014.
- [4] T. Yoshioka, A. Sehr, M. Delcroix, K. Kinoshita, R. Maas, T. Nakatani, and W. Kellermann, "Making machines understand us in reverberant rooms: Robustness

against reverberation for automatic speech recognition,” *IEEE Signal Processing Magazine*, vol. 29, no. 6, pp. 114–126, Nov. 2012.

[5] F. Xiong, B. Meyer, N. Moritz, R. Rehr, J. Anemüller, T. Gerkmann, S. Doclo, and S. Goetze, “Front-end technologies for robust ASR in reverberant environments - spectral enhancement-based dereverberation and auditory modulation filterbank features,” *EURASIP Journal on Advances in Signal Processing*, vol. 2015, no. 1, 2015.

[6] P. A. Naylor and N. D. Gaubitch, Eds., *Speech dereverberation*. London, UK: Springer, 2010.

[7] E. A. P. Habets, S. Gannot, and I. Cohen, “Late reverberant spectral variance estimation based on a statistical model,” *IEEE Signal Processing Letters*, vol. 16, no. 9, pp. 770–774, Sep. 2009.

[8] A. Kuklasiński, S. Doclo, T. Gerkmann, S. H. Jensen, and J. Jensen, “Multi-channel PSD estimators for speech dereverberation - a theoretical and experimental comparison,” in *Proc. IEEE International Conference on Acoustics, Speech, and Signal Processing*, Brisbane, Australia, Apr. 2015, pp. 91–95.

[9] T. Nakatani, T. Yoshioka, K. Kinoshita, M. Miyoshi, and B.-H. Juang, “Speech dereverberation based on variance-normalized delayed linear prediction,” *IEEE Transactions on Audio, Speech, and Language Processing*, vol. 18, no. 7, pp. 1717–1731, Sep. 2010.

[10] A. Jukić, T. Van Waterschoot, T. Gerkmann, and S. Doclo, “Multi-channel linear prediction-based speech dereverberation with sparse priors,” *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, vol. 23, no. 9, pp. 1509–1520, Sep. 2015.

[11] M. Miyoshi and Y. Kaneda, “Inverse filtering of room acoustics,” *IEEE Transactions on Acoustics, Speech, and Signal Processing*, vol. 36, no. 2, pp. 145–152, Feb. 1988.

[12] M. Kallinger and A. Mertins, “Multi-channel room impulse response shaping - a study,” in *Proc. IEEE International Conference on Acoustics, Speech, and Signal Processing*, Toulouse, France, May 2006, pp. 101–104.

[13] F. Lim, W. Zhang, E. A. P. Habets, and P. A. Naylor, “Robust multichannel dereverberation using relaxed multichannel least squares,” *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, vol. 22, no. 9, pp. 1379–1390, Jun. 2014.

[14] I. Kodrasi, S. Goetze, and S. Doclo, “Regularization for partial multichannel equalization for speech dereverberation,” *IEEE Transactions on Audio, Speech, and Language Processing*, vol. 21, no. 9, pp. 1879–1890, Sep. 2013.

[15] G. W. Elko, E. Diethorn, and T. Gänsler, “Room impulse response variation due to thermal fluctuation and its impact on acoustic echo cancellation,” in *Proc. International Workshop on Acoustic Echo and Noise Control*, Kyoto, Japan, Sep. 2003, pp. 67–70.

[16] D. Cole, M. Moody, and S. Sridharan, “Position-independent enhancement of reverberant speech,” *Journal of the Audio Engineering Society*, vol. 45, no. 3, pp. 142–147, 1997.

[17] B. D. Radlovic, R. C. Williamson, and R. A. Kennedy, “Equalization in an acoustic reverberant environment: robustness results,” *IEEE Transactions on Speech and Audio Processing*, vol. 8, no. 3, pp. 311–319, May 2000.

[18] M. A. Haque and T. Hasan, “Noise robust multi-channel frequency-domain LMS algorithms for blind channel identification,” *IEEE Signal Processing Letters*, vol. 15, pp. 305–308, Feb. 2008.

[19] L. Xiang, A. W. H. Khong, and P. A. Naylor, “A forced spectral diversity algorithm for speech dereverberation in the presence of near-common zeros,” *IEEE Transactions on Audio, Speech, and Language Processing*, vol. 20, no. 3, pp. 888–899, Mar. 2012.

[20] F. Lim and P. Naylor, “Statistical modelling of multichannel blind system identification errors,” in *Proc. International Workshop on Acoustic Echo and Noise Control*, Antibes, France, Sep. 2014, pp. 119–123.

[21] S. Goetze, “On the combination of systems for listening-room compensation and acoustic echo cancellation in hands-free telecommunication systems,” Ph.D. dissertation, Dept. of Telecommunications, University of Bremen, Bremen, Germany, 2013.

[22] I. Arweiler and J. M. Buchholz, “The influence of spectral characteristics of early reflections on speech intelligibility,” *Journal of the Acoustical Society of America*, vol. 130, no. 2, pp. 996–1005, Aug. 2011.

[23] I. Kodrasi and S. Doclo, “The effect of inverse filter length on the robustness of acoustic multichannel equalization,” in *Proc. European Signal Processing Conference*, Bucharest, Romania, Aug. 2012.

[24] I. Kodrasi, A. Jukić, and S. Doclo, “Robust sparsity-promoting acoustic multi-channel equalization for speech dereverberation,” in *Proc. IEEE International Conference on Acoustics, Speech, and Signal Processing*, Shanghai, China, Mar. 2016, pp. 166–170.

[25] I. Kodrasi and S. Doclo, “Signal-dependent penalty functions for robust acoustic multi-channel equalization,” *IEEE Transactions on Audio, Speech, and Language Processing*, 2016, submitted.

[26] P. Wedin, “Perturbation theory for pseudo-inverses,” *BIT Numerical Mathematics*, vol. 13, no. 2, pp. 217–232, Jun. 1973.

[27] S. P. Boyd, N. Parikh, E. Chu, B. Peleato, and J. Eckstein, “Distributed optimization and statistical learning via the alternating direction method of multipliers,” *Foundations and Trends in Machine Learning*, vol. 3, no. 1, pp. 1–122, Jan. 2011.

[28] N. Parikh and S. P. Boyd, “Proximal algorithms,” *Foundations and Trends in Optimization*, vol. 1, no. 3, Jan. 2014.

[29] A. Farina, “Simultaneous measurement of impulse response and distortion with a swept-sine technique,” in *Proc. Audio Engineering Society Convention*, Paris, France, Feb. 2000, pp. 18–22.

[30] M. Nilsson, S. D. Soli, and A. Sullivan, “Development of the Hearing in Noise Test for the measurement of speech reception thresholds in quiet and in noise,” *Jour-*

nal of the Acoustical Society of America, vol. 95, no. 2, pp. 1085–1099, Feb. 1994.

[31] W. Zhang and P. A. Naylor, “An algorithm to generate representations of system identification errors,” *Research Letters in Signal Processing*, vol. 2008, Jan. 2008.

[32] ITU-T, *Perceptual evaluation of speech quality (PESQ), an objective method for end-to-end speech quality assessment of narrowband telephone networks and speech codecs P.862*, International Telecommunications Union (ITU-T) Recommendation, Feb. 2001.

[33] J. F. Santos, M. Senoussaoui, and T. H. Falk, “An improved non-intrusive intelligibility metric for noisy and reverberant speech,” in *Proc. International Workshop on Acoustic Echo and Noise Control*, Antibes, France, Sep. 2014, pp. 55–59.

[34] Y. Hu and P. C. Loizou, “Evaluation of objective quality measures for speech enhancement,” *IEEE Transactions on Audio, Speech, and Language Processing*, vol. 16, no. 1, pp. 229–238, Jan. 2008.

[35] B. Cauchi, H. Javed, T. Gerkmann, S. Doclo, S. Goetze, and P. Naylor, “Perceptual and instrumental evaluation of the perceived level of reverberation,” in *Proc. IEEE International Conference on Acoustics, Speech, and Signal Processing*, Shanghai, China, Mar. 2016, pp. 629–633.

[36] K. Kinoshita, M. Delcroix, S. Gannot, E. A. P. Habets, R. Haeb-Umbach, W. Kellermann, V. Leutnant, R. Maas, T. Nakatani, B. Raj, A. Sehr, and T. Yoshioka, “A summary of the REVERB challenge: state-of-the-art and remaining challenges in reverberant speech processing research,” *EURASIP Journal on Advances in Signal Processing*, vol. 2016, no. 7, 2016.


[37] ITU-T, *Method for the subjective assessment of intermediate quality levels of coding systems*, International Telecommunications Union (ITU-T) Recommendation, Jan. 2003.

[38] B. Cauchi, I. Kodrasi, R. Rehr, S. Gerlach, A. Jukić, T. Gerkmann, S. Doclo, and S. Goetze, “Combination of MVDR beamforming and single-channel spectral processing for enhancing noisy and reverberant speech,” *EURASIP Journal on Advances in Signal Processing*, vol. 2015, no. 1, 2015.


[39] M. Friedman, “The use of ranks to avoid the assumption of normality implicit in the analysis of variance,” *Journal of the American Statistical Association*, vol. 32, no. 200, pp. 675–701, Dec. 1937.

[40] J. D. Gibbons and S. Chakrabort, *Nonparametric statistical inference*. New York, USA: Marcel Dekker, Inc., 2003.


THE AUTHORS




Ina Kodrasi



Benjamin Cauchi



Stefan Goetze



Simon Doclo

