



Deposited via The University of Leeds.

White Rose Research Online URL for this paper:

<https://eprints.whiterose.ac.uk/id/eprint/153852/>

Version: Accepted Version

Proceedings Paper:

Joint, F, Gay, G, Vigneron, PB et al. (2019) Highly Sensitive and Compact THz heterodyne receiver based on HEB and QCL at 2.7 THz. In: 2019 44th International Conference on Infrared, Millimeter, and Terahertz Waves (IRMMW-THz). 44th International Conference on Infrared, Millimeter, and Terahertz Waves, 01 Sep - 06 Nov 2019, Paris, France. IEEE. ISBN: 9781538682852. ISSN: 2162-2027. EISSN: 2162-2035.

<https://doi.org/10.1109/IRMMW-THz.2019.8874310>

© 2019, IEEE. Personal use of this material is permitted. Permission from IEEE must be obtained for all other uses, in any current or future media, including reprinting/republishing this material for advertising or promotional purposes, creating new collective works, for resale or redistribution to servers or lists, or reuse of any copyrighted component of this work in other works.

Reuse

Items deposited in White Rose Research Online are protected by copyright, with all rights reserved unless indicated otherwise. They may be downloaded and/or printed for private study, or other acts as permitted by national copyright laws. The publisher or other rights holders may allow further reproduction and re-use of the full text version. This is indicated by the licence information on the White Rose Research Online record for the item.

Takedown

If you consider content in White Rose Research Online to be in breach of UK law, please notify us by emailing eprints@whiterose.ac.uk including the URL of the record and the reason for the withdrawal request.

Highly Sensitive and Compact THz heterodyne receiver based on HEB and QCL at 2.7 THz

F. Joint^{1,2}, G. Gay¹, P-B. Vigneron², T. Vacelet¹, S. Pirotta², R. Lefevre¹, Y. Jin²,
L. H. Li³, A.G. Davies³, E. H. Linfield³, Y. Delorme¹, R. Colombelli²

¹LERMA, Observatoire de Paris, PSL Research University, CNRS, Sorbonne Universités, UPMC Univ. Paris 06, F-75014 Paris, France

²Centre de Nanosciences et de Nanotechnologies / C2N, CNRS UMR 9001, Univ. Paris-Sud, Université Paris-Saclay, 91120 Palaiseau, France

³School of Electronic and Electrical Engineering, University of Leeds, Woodhouse Lane, Leeds LS2 9JT, UK

Abstract— We present the development of a highly sensitive and compact HEB/QCL heterodyne detection system. The HEB mixer is a NbN nano-bridge mounted in an integrated lens-antenna configuration. The local oscillator is a low power consumption and low beam divergence 3rd order distributed feedback quantum cascade laser with single mode emission at the target frequency of 2.7 THz. A new quasi-optical coupling scheme between the mixer and the local oscillator has been developed that allows the removal of the beam splitter and therefore a better transmission of the RF signal and a more compact detection system. The lowest uncorrected double side band receiver noise temperature of this system is about 880 K.

I. INTRODUCTION

Highly sensitive heterodyne receivers at THz frequencies are of particular interest for astronomical observations since they are able to detect weak emissions of molecular and atomic lines of multiple species and to provide important information about the cosmic background, the formation of stars and galaxies.

Superconducting Hot Electron Bolometer (HEB) mixers are currently the most sensitive solution for operating frequencies beyond 1.4 THz and QCL (quantum cascade laser) sources offer a great potential as local oscillators for heterodyne detections in the THz range.

We have undertaken the development of custom-tailored QCLs operating around 2.7 THz and experimented with an original quasi-optical coupling scheme to couple the LO power to the HEB. An uncorrected double side band receiver noise temperature of 880 K at 2.7 THz has been obtained, confirming the potential of this concept for future space missions.

II. RESULTS

We have designed and fabricated 3rd order DFB lasers [1] with the target single mode emission around 90 cm^{-1} (2.7 THz). Both pulsed and continuous wave (CW) laser operation was achieved. Lasing was observed up to 90 K in pulsed operation, with a typical single-mode laser spectrum at the target frequency [2]. The operating currents are in the 30-50 mA range and the power dissipation is <200 mW, thus enabling a compact integration of these devices with our HEB heterodyne mixer in the same cryostat.

The HEB mixer consists of a superconducting NbN nano-bridge connected to a gold log spiral planar antenna on a silicon substrate [3]. The ultra-thin NbN film with a thickness of 5 nm was provided by the Russian company SCONTEL. The device is mounted on the flat side of an extended hemispherical high resistivity silicon lens to increase the directivity of the antenna in the dielectric side.

We have developed a new quasi-optical coupling system (Fig.1) in order to increase the compactness of the HEB/QCL

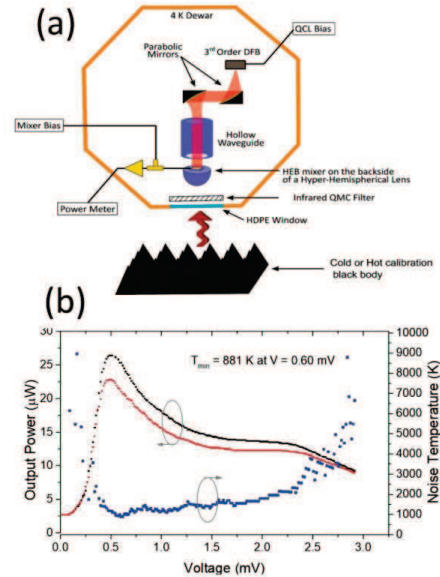


Figure 1 – (a) Experimental setup for heterodyne measurements with the new quasi-optical coupling scheme between HEB and QCL. (b) IF output power as a function of the HEB bias voltage (black and red dots) and the corresponding receiver noise temperature T_{REC} (blue dots) measured with the Y-factor method.

based receiver. The coupling onto the HEB of the RF signal to be detected is made through the extended hemispherical lens with an anti-reflection coating. The 3rd order DFB QCL, our LO, is instead directly coupled, from the flat side of the lens, to the HEB’s planar antenna via a dielectric hollow waveguide. This original optical arrangement permits to forgo the beam splitter usually used to overlay the RF and LO signals on the HEB. The IF output signal is amplified then recorded by a sub-mm wave range power-meter.

We have obtained the lowest noise temperature of 880 K at 2.7 THz for a HEB’s bias voltage around 0.6 mV (Fig. 2b), thus confirming the potential for ultra-high sensitive heterodyne detection of this scheme. This receiver concept has allowed us to maximize the transmission of the RF signal and to increase the receiver compactness while providing excellent detection sensitivity. We believe its high potential for future space missions where high sensitivity and compactness are crucial.

REFERENCES

- [1]. M. Amanti, M. Fischer, G. Scalari, M. Beck, and J. Faist, “Low-divergence single-mode terahertz quantum cascade laser,” *Nature Photonics* 3, 586 (2009)
- [2]. F. Joint, G. Gay, T. Vacelet, L. Li, E. Linfield, Y. Delorme, R. Colombelli, “Low power consumption quantum cascade lasers at 2.7 THz for compact and sensitive heterodyne detectors”, *Proc. ISSTT*, 124, 2018
- [3]. Y. Delorme, R. Lefevre, W. Miao, A. Feret, W. Zhang, T. Vacelet, F. Dauplay, L. Pelay, J. Spatazza, M. B. Trung, et al., “A quasi-optical NbN HEB mixer with 800k DSB noise temperature at 2.5 THz”, *Proc. 22nd ISSTT*, 135–138, 2011