



UNIVERSITY OF LEEDS

This is a repository copy of *Three-well, resonant-phonon depopulation, quantum cascade lasers with thinned active regions and surface-plasmon waveguides*.

White Rose Research Online URL for this paper:

<https://eprints.whiterose.ac.uk/80521/>

Version: Accepted Version

---

**Proceedings Paper:**

Salih, M, Dean, P, Cunningham, JE et al. (5 more authors) (2010) Three-well, resonant-phonon depopulation, quantum cascade lasers with thinned active regions and surface-plasmon waveguides. In: IQCLSW 2010. International Quantum Cascade Lasers School & Workshop, 30 Aug - 03 Sep 2010, Villa Finaly, Florence. . (Unpublished)

---

**Reuse**

Items deposited in White Rose Research Online are protected by copyright, with all rights reserved unless indicated otherwise. They may be downloaded and/or printed for private study, or other acts as permitted by national copyright laws. The publisher or other rights holders may allow further reproduction and re-use of the full text version. This is indicated by the licence information on the White Rose Research Online record for the item.

**Takedown**

If you consider content in White Rose Research Online to be in breach of UK law, please notify us by emailing [eprints@whiterose.ac.uk](mailto:eprints@whiterose.ac.uk) including the URL of the record and the reason for the withdrawal request.



[eprints@whiterose.ac.uk](mailto:eprints@whiterose.ac.uk)  
<https://eprints.whiterose.ac.uk/>

# Three-well, resonant-phonon depopulation, quantum cascade lasers with thinned active regions and surface-plasmon waveguides

Mohammed Salih,<sup>1</sup> Paul Dean, John Cunningham, Suraj P. Khanna, Lianhe Li, Alexander Valavanis, A. Giles Davies, and Edmund H. Linfield

School of Electronic and Electrical Engineering, University of Leeds, Leeds UK, LS2 9JT


<sup>1</sup> elms@leeds.ac.uk

**Abstract:** We report, for the first time, high performance three-well, resonant-phonon depopulation, terahertz quantum cascade lasers with thinned active regions. Lasers operated at 3.1 THz in a surface plasmon waveguide. The variation of output power, maximum operating temperature, and threshold current density is presented for active regions of 10  $\mu\text{m}$ , 7.5  $\mu\text{m}$ , 6  $\mu\text{m}$ , and 5  $\mu\text{m}$  thickness, and in each case results are presented as a function of duty cycle.

Terahertz (THz) frequency quantum cascade lasers (QCLs) [1] have many potential applications in fields ranging from security imaging, biomedicine, and spectroscopy through to astronomy [2–4]. However, a number of barriers still remain to commercial exploitation. For example: THz QCLs typically use active regions of  $\sim 10$   $\mu\text{m}$  thickness, which is both demanding for the molecular beam epitaxy (MBE) growth technology [5], but also requires high operating voltages to achieve the requisite threshold electric fields. The latter leads to a large total injected electrical power into the active region, resulting in device heating. This affect is compounded further, in high-performance phonon-depopulation QCLs, as a result of the large parasitic current channels inherent to such active region designs. This makes continuous-wave (cw) operation difficult to attain – a requirement for many applications.

We have studied THz QCLs with thin active regions, basing our work on GaAs/AlGaAs three-quantum well, resonant phonon-depopulation structures [6]. Such structures have recently led to lasing, in pulsed mode, up to a maximum operating temperature of 186 K for 10  $\mu\text{m}$  thick active regions with double-metal waveguide confinement [7].

We present experimental results from four THz QCLs, which have active region thicknesses of 10  $\mu\text{m}$ , 7.5  $\mu\text{m}$ , 6  $\mu\text{m}$  and 5  $\mu\text{m}$ . Each active region was incorporated into a surface plasmon waveguide, and had an emission frequency of  $\sim 3.1$  THz. The output powers, threshold current densities, maximum operating temperatures, and operating dynamic range of these designs were compared over a range of duty cycles from 0.5 – 100%. For each laser, the active region doping level ( $\sim 5 \times 10^{16} \text{ cm}^{-3}$ ) and barrier thicknesses were kept constant. All devices were processed into ridge waveguides,

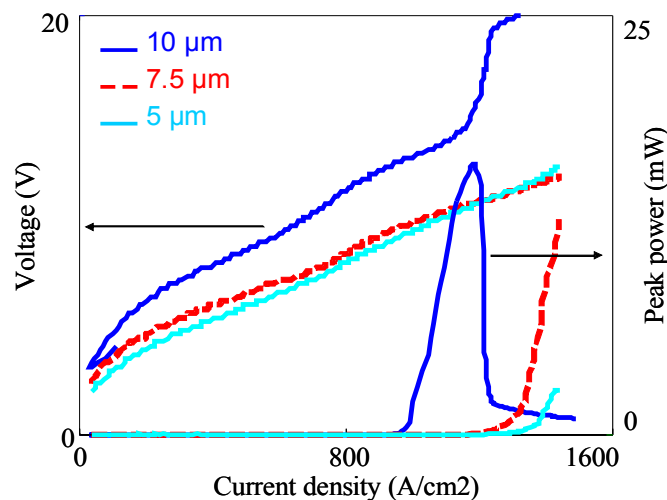

**Figure 1** Voltage and output power as a function of current density for THz QCLs with 10  $\mu\text{m}$ , 7.5  $\mu\text{m}$ , and 5  $\mu\text{m}$  thick active regions.

It was found that the threshold current density increased from  $\sim 900$   $\text{A/cm}^2$  to  $\sim 1200$   $\text{A/cm}^2$ , as the active region thickness decreased from 10  $\mu\text{m}$  to 5  $\mu\text{m}$ . The maximum operating temperature correspondingly fell from 115 K to 66 K, with the

<sup>1</sup>) Electronic mail: elms@leeds.ac.uk

maximum peak output power decreasing from  $\sim 20$  mW to  $\sim 2.5$  mW. The dynamic range for the  $10\ \mu\text{m}$  thick active region was  $\sim 6.6$  V, whereas for the  $5\ \mu\text{m}$  active region, the value was  $\sim 3.5$  V. Figure 1 shows typical power-current density-voltage (*LIV*) characteristics for  $10\ \mu\text{m}$ ,  $7.5\ \mu\text{m}$ , and  $5\ \mu\text{m}$  active region thicknesses.

However, as the thickness of the active region is reduced, the required threshold voltage also falls, leading to less heating in the device and make cw operation possible. We will show how the duty cycles can be increased towards continuous-wave operation for all active region thicknesses. We will also show that the threshold current density increases less strongly with increased duty cycle for the THz QCLs with thinner active regions, which we interpret as resulting from a lower lattice temperature.

In summary, we have demonstrated the fabrication of THz QCLs, three-well, resonant-phonon depopulation, surface plasmon waveguide, for four different thicknesses of active region ( $10\ \mu\text{m}$ ,  $7.5\ \mu\text{m}$ ,  $6\ \mu\text{m}$  and  $5\ \mu\text{m}$ ) and compared their performances. This work suggests that the thinner active region makes continuous-wave (cw) operation possible to obtain from three-well, resonant-phonon depopulation, which is a requirement for many applications.

We acknowledge support from the EPSRC (UK) and the European Research Council programme 'NOTES'.

#### REFERENCES

- [1] R. Köhler *et al*, *Nature (London)* **417**, 156 (2002).
- [2] D. C. Larrabee *et al*, *Optics Express* **29**, 122 (2004).
- [3] P. H. Siegel, *IEEE Trans. Micro. Theory and Tech.* **50**, 910 (2002).
- [4] A. G. Davies *et al*, *Phys. Med. Biol.* **47**, 3679-3689 (2002).
- [5] Y. Chassagneux *et al*, *Electronic letters*, **43**, 5 (2007).
- [6] H. Luo, *et al*, *Appl. Phys. Lett.* **90**, 041112 (2007).
- [7] S. Kohen *et al*, *Appl. Phys. Lett.* **97**, 053106 (2005).