



This is a repository copy of *Thermodynamic Comparison of alternative Biomass Gasification Techniques for producing Syngas for Gas Turbine Application*.

White Rose Research Online URL for this paper:
<http://eprints.whiterose.ac.uk/130223/>

Version: Published Version

Proceedings Paper:

Aneke, M. and Wang, M. orcid.org/0000-0001-9752-270X (2017) Thermodynamic Comparison of alternative Biomass Gasification Techniques for producing Syngas for Gas Turbine Application. In: Energy Procedia. 9th International Conference of Applied Energy, ICAE2017, 21-24 Aug 2017, Cardiff, UK. Elsevier , pp. 829-834.

<https://doi.org/10.1016/j.egypro.2017.12.133>

Reuse

This article is distributed under the terms of the Creative Commons Attribution-NonCommercial-NoDerivs (CC BY-NC-ND) licence. This licence only allows you to download this work and share it with others as long as you credit the authors, but you can't change the article in any way or use it commercially. More information and the full terms of the licence here: <https://creativecommons.org/licenses/>

Takedown

If you consider content in White Rose Research Online to be in breach of UK law, please notify us by emailing eprints@whiterose.ac.uk including the URL of the record and the reason for the withdrawal request.



eprints@whiterose.ac.uk
<https://eprints.whiterose.ac.uk/>



9th International Conference on Applied Energy, ICAE2017, 21-24 August 2017, Cardiff, UK

Thermodynamic Comparison of alternative Biomass Gasification Techniques for producing Syngas for Gas Turbine Application

Mathew Aneke^a, Meihong Wang^{a*}

^aDepartment of Chemical and Biological Engineering, The University of Sheffield, S1 3JD, United Kingdom

Abstract

In this paper, Aspen Plus® models of biomass gasification process combined with plasma reactor for tar removal and plasma gasification process were developed respectively, validated and analyzed thermodynamically. The analysis shows that plasma technology is capable of producing syngas with acceptable tar content for gas turbine application. However, this comes with a huge energy penalty. For example, within the context of the analysis carried out in this paper, the thermodynamic efficiency of the biomass gasification process combined with plasma tar cleaning was found to be 43.6% while that of the plasma gasification process was 37.3% despite its higher bio-syngas calorific value. The lower efficiency recorded for the plasma gasification process occurs as a result of the higher electrical energy required to attain the high temperature needed for the gasification of the biomass material. As a result of the low efficiency, plasma tar cleaning of raw bio-syngas or plasma gasification, although technologically feasible, may not be a viable route for producing bio-syngas for gas turbine application. However, it may be a viable option for energy storage if the plasma reactor will be powered with electricity from wind and other renewable energy resources during off peak period.

© 2017 The Authors. Published by Elsevier Ltd.

Peer-review under responsibility of the scientific committee of the 9th International Conference on Applied Energy.

Keywords: Biomass; Gasification; Plasma; Tar removal; Process Simulation; Thermodynamic analysis

1. Introduction

The growing concern on safeguarding the environment from the harmful effect of global warming caused by the release of large quantities of CO₂ into the environment; mainly from fossil fuels utilization for energy production;

* Corresponding author. Tel.: +44114 222 7160

E-mail address: Meihong.Wang@sheffield.ac.uk

has triggered a renewed interest in the use of renewable energy resources. One of the areas in which biomass can help to reduce CO₂ emission into the environment is in gas turbine application by replacing natural gas with bio-syngas.

1.1. Bio-syngas Production from Biomass

Bio-syngas is produced from biomass through the thermochemical conversion route. During the process, thermal energy is applied to biomass material at elevated temperature and controlled oxygen and/or steam to produce permanent gases, char and tars. The process involves three main stages which include: drying, pyrolysis and gasification [1]. During the drying stage the free water contained in the biomass is evaporated. This is followed by a pyrolysis which occurs at around 400 °C to release pyrolytic volatiles, pyrolytic water (chemically bond water), char and primary tar which consist of mainly oxygenated compounds. The pyrolytic water, primary tar and moisture are generally referred to as the bio-oil. The pyrolysis products are further gasified to produce raw bio-syngas otherwise known as product gas or permanent gas. The gasification process occurs at a higher temperature (about 700 – 850 °C) and is mainly characterized by further cracking of pyrolysis (primary) tar in order to produce permanent gases (raw bio-syngas) as well as secondary and tertiary tar compounds [2]. Alternatively, syngas can be produced from biomass material using plasma gasification technology. In this process, plasma is used to decompose the biomass material to produce syngas.

1.2. Raw Bio-syngas Tar Cleaning

Tar is a term generally used to describe a complex mixture of condensable hydrocarbons which includes single ring to multiple ring aromatics and other oxygen containing hydrocarbons [3]. It is an undesirable component in the bio-syngas due to the problems associated with its condensation as it causes blockage in process equipment and devices [3]. Gas turbines have a maximum tar tolerance of no more than 0.5 mg/Nm³. However, raw bio-syngas usually contain high tar concentration which makes it unsuitable for gas turbine and other high end applications without prior tar removal. Tar removal is carried out by either chemical or physical treatment. Detailed research on the different tar cleaning techniques are well covered in the literature [5-8,9, 10] and thus will not be repeated here. This work will focus on the use of plasma technology for tar removal from bio-syngas.

Plasma technology can generate active species which initiates the chemical reactions that can lead to tar reduction. There are many discussions, especially in the patent literature, on the possibilities of using both thermal and non-thermal plasma technology for waste gasification, dry reforming and tar reduction from gasifier [11-13]. This paper will compare via modelling; the thermodynamic performance of biomass gasification process combined with ex-situ plasma tar cleaning against that of a plasma gasification process. The modelling will be carried out using Aspen Plus coupled with FORTRAN subroutines.

1.4 Novel contribution of this study

Although several studies have been carried out in literature, both experimental and modelling, in the area of biomass gasification and plasma reforming of various gaseous species such as methane, ethylene, naphthalene, to the authors knowledge, no work has been reported in the literature on the integration of plasma reactor downstream of a biomass gasification process for tar removal from the raw bio-syngas stream for gas turbine application. Furthermore, most works on plasma uses a model tar compound in their analysis instead of a real syngas composition from biomass gasification process. However, in this paper, the thermodynamic analysis was based on a typical bio-syngas composition instead of a model tar compound which makes it a more realistic.

2. Process Description

2.1. Biomass gasification process

The biomass gasification technology adopted in this paper is based on the technology proposed in [14, 15]. The

process comprises of dual fluidized bed reactor which utilises steam as the gasification agent. During the process, biomass is gasified in a steam blown bubbling fluidised bed reactor. Residual char leaves the gasification zone with the bed material (usually sand) and enters the circulating fluidised bed riser where it is combusted with air [15].

2.3 Plasma gasification and Plasma Tar Cleaning process

The plasma gasification process presented in this work is based on the non-transferred arc DC plasma torch technology proposed in [16]. The pulse corona plasma reactor modelled in this paper is based on the experimental work carried out in [3]. The system consists of a cylindrical tubular flow reactor which is a wire-cylinder type corona and a pulsed-power source.

3. System Modeling with Aspen Plus

The Aspen Plus® process flow diagram of the proposed biomass gasification combined with ex-situ plasma tar cleaning process and the plasma gasification process are shown in Figures 1a and 1b. The biomass gasification process is modelled using detailed kinetic mechanism [14] while the plasma gasification and plasma tar cleaning processes are modelled using complete equilibrium approach [17]. In the process, the biomass material (stream 1) undergoes pyrolysis in an isothermal reactor (PYROLY) which is coupled to a FORTRAN subroutine to predict the pyrolysis product yield (stream 2) based on pyrolysis correlation given in [14]. The pyrolysis yield (stream 2) is then mixed with steam (stream S1) (the gasifying agent) and introduced into the gasifier (GASIFY (process a) or HTZPLAS (process b)) where gasification takes place according to either the gasification kinetics presented in [14] (process a) or chemical equilibrium (process b) to produce gasification products (stream 4). The solid products are separated from the volatiles in the SPLITTER. In process a, the volatiles (stream 5) are sent to the plasma reactor (PLASMA) where tar cleaning operation takes place to produce low tar syngas (stream 7) while in process b, the high temperature syngas from the High Temperature Zone (HTZ) of the gasifier is quenched at Low Temperature Zone (LTZ) by preheating the incoming biomass feed. In both cases, the char is decomposed and combusted with air to produce flue gas (stream 10) and ash (stream 11) respectively. The following assumptions were made while modelling the biomass gasification in Aspen Plus [3].

- In process a, gasification and the plasma processes take place at atmospheric pressure and 760 °C
- In process b, the HTZ and the LTZ are assumed to be at 2500 °C and 1250 °C respectively [16].
- The main components of the pyrolysis products include CO, H₂, CO₂, CH₄, C₂H₄, C₂H₆, water and tar.
- The plasma process is modelled using Gibbs minimization approach [16]
- As naphthalene is regarded as one of the most stable tar compounds [3], the empirical correlation for tar conversion used in this model is based on naphthalene conversion in a pulsed corona discharge.
- Steam is used as the gasifying agent with steam to biomass ratio of 0.75 [15]
- The steam is assumed to be generated from saturated liquid water removed from the raw bio-syngas.
- In the plasma gasification process, the steam from the plasma torch is assumed to be at 4000 °C [16]
- The plasma torch efficiency for the plasma gasification process is assumed to be 86% [16]

3.1. Pyrolysis and Gasification Process

For both processes, the pyrolysis volatile mass yield is modelled using equation 1 [3] while the char yield is obtained through material balance. The correlation parameters (*a*, *b* and *c*) in equation 1 were obtained from [14]. The thermal gasification process was modelled using the reaction kinetics obtained from [14] while the plasma gasification process was modelled using Gibbs equilibrium technique. Tables 1 shows the input parameters used in the entire model.

$$Y_i = aT^2 + bT + c \quad (1)$$

where Y_i = mass yield of pyrolysis product based on dry biomass, T = pyrolysis temperature in K

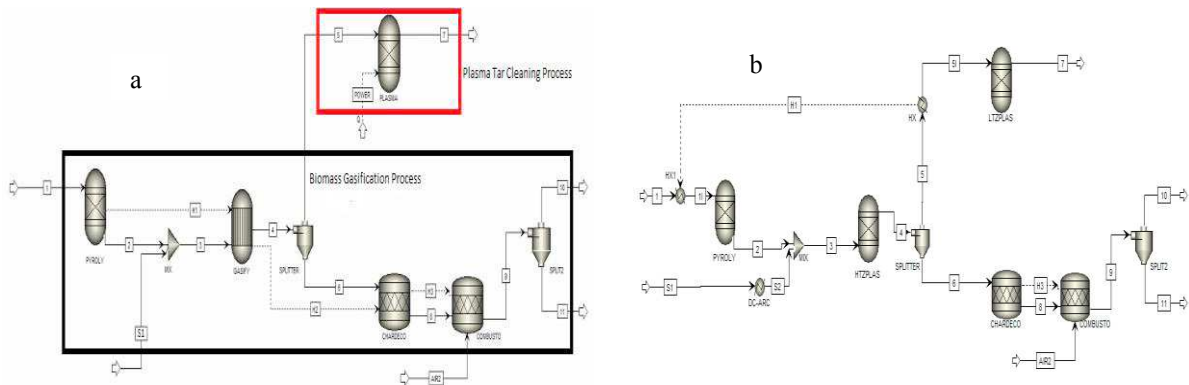


Fig. 1. Aspen Plus Process Flow Diagram of (a) Biomass Gasification combined with Ex-Situ Plasma Tar Cleaning and (b) Biomass Plasma Gasification

Table 1: Process input parameters

Biomass Composition and Plasma Tar Cleaning Process		
Gasification Process		
Biomass mass flowrate	1 kg/s	
Proximate analysis (wt% dry basis)	Ultimate analysis (wt% dry basis)	
Volatile matter	Carbon	53.60
Fixed carbon	Hydrogen	5.90
Ash	Oxygen	40.30
Pulse Corona Plasma Process		
Input stream	Raw bio-syngas	

3.2. Pulse Corona Plasma Process

The pulse corona process was modelled using empirical correlation generated from the experimental work of [3] together with the Gibbs free energy minimization approach presented in [16]. The correlation was used to evaluate the tar conversion based on the energy density of the pulse corona while the Gibbs reactor is used to simulate the equilibrium composition of gaseous species from the plasma reactor. The correlation for the tar conversion is shown in equation 2.

$$x(\%) = -9.53 \times 10^{-15} \beta^6 + 1.85 \times 10^{-11} \beta^5 - 1.33 \times 10^{-8} \beta^4 + 4.71 \times 10^{-6} \beta^3 - 1.266 \times 10^{-3} \beta^2 + 4.56 \times 10^{-1} \beta + 1.56 \quad (2)$$

where $x(\%)$ = tar conversion, β = Energy density (J/l) of the plasma reactor given as shown in equation 3

$$\beta = \frac{P}{v} \quad (3)$$

where P = power input to the reactor (W) and v = volumetric flowrate of the raw bio-syngas.

The syngas produced during the gasification process (raw bio-syngas) and the one obtained after the tar removal with plasma (treated bio-syngas) were evaluated to estimate the tar content using the ideal gas equation while the specific calorific value (cv) (MJ/kg) of the biomass and bio-syngas were evaluated using equations 4 and 5 respectively.

$$CV_{biomass} = 33.83 C + 144.45 \left(H - \frac{O}{8} \right) + 9.38 S \quad (4)$$

where C, H, O, S = mass fraction of carbon, hydrogen, oxygen and sulphur in the biomass

$$CV_{syngas} = \sum_i m_i HV_i \quad (5)$$

where m_i and HV_i = mass flowrate of combustible gas components in the syngas (kg/s) and specific heating value of the combustible gas components respectively

4. Results and Discussions

The analyses of the simulation results show that the tar content of the raw bio-syngas from the biomass gasification process was about 2.97 mg/Nm³ which makes it unsuitable for gas turbine application. The plasma tar cleaning reduces the tar content of the raw bio-syngas to 0.266 mg/Nm³ which is within the acceptable range (<0.5 mg/Nm³) for gas turbines. Plasma treatment of the raw bio-syngas also improved the caloric value of the syngas due to the increase in hydrogen and CO yield. The thermodynamic analysis presented in Table 3 shows that the efficiency of the combined plasma gasification with plasma tar cleaning process is about 43.6 %. On the other hand, the plasma gasification process produces syngas with higher calorific value due to the higher hydrogen and CO and no tar (see Table 2). This occurs as a result of the high temperature of the HTZ and LTZ of the plasma gasification process. However, despite the improvement in syngas caloric value, the thermodynamic efficiency of the plasma gasification process was found to be 37.3% which is lower than that of the combined gasification and plasma tar cleaning process. The lower efficiency can be attributed to the higher electrical energy required for the plasma gasification process to raise the temperature of the gasifying agent (steam) to 4000 °C so as to maintain the HTZ and the LTZ of the non-transferred arc plasma reactor at 2500 °C and 1250 °C respectively.

Table 2: Raw/Treated Bio-syngas composition (mole fraction dry basis)

Component	Raw bio-syngas (760 °C)	Plasma treated bio-syngas (760 °C)	Plasma Gasification (1250 °C)
CH ₄	0.206	3.07E-5	1.07E-8
H ₂	0.127	0.6270	0.5912
CO	0.518	0.0922	2.07E-1
CO ₂	0.093	0.281	2.01E-1
C ₂ H ₄	0.049	9.70E-13	4.81E-16
C ₂ H ₆	0.005	3.62E-13	7.42E-19
^a C ₆ H ₆	0.001	2.52E-5	0
^a C ₇ H ₈	1.38E-4	4.73E-6	0
^a C ₆ H ₆ O	0	0	0
^a C ₁₀ H ₈	1.91E-5	6.56E-7	0

^a = Tar

Table 3: Thermodynamic analysis

Process results	Plasma treatment at 760 °C	Plasma Gasification at 1250 °C
Treated syngas calorific value (MW)	9.857	10.929
Thermal energy requirement for steam generation (MW)	1.693	0
Electrical power requirement (MW)	1.526	9.927
Biomass calorific value (MW)	19.38	19.38
Total energy input (MW)	22.599	29.307
Process efficiency η	0.436	0.373

Conclusion

The thermodynamic analysis of biomass gasification process combined with tar removal using plasma technology and the plasma gasification process presented in this paper shows that plasma technology is capable of producing bio-syngas with acceptable tar concentration for gas turbine application. However, this comes with a huge energy penalty. Based on the analysis presented in this work, it can be concluded that plasma tar cleaning of raw bio-syngas and plasma gasification, although technologically feasible, may not be an attractive option for tar removal from raw bio-syngas especially if the syngas is to be utilized in gas turbines for power generation. However, it may be an attractive option for the storage of wind and other renewable electricity during off peak period.

Acknowledgement

The authors would like to acknowledge financial support from UK EPSRC Bio-Energy Challenge II (Ref: EP/M013162/1) and EU RISE Flexi-Pyrocat (Ref: 643322-FLEXI-PYROCAT).

References

- [1] Neves D, Thunman H, Matos A, Tarelho L, Gomez-Barea A. Characterization and Prediction of Biomass Pyrolysis Products. *Progress in Energy and Combustion Science*. 2011;37:611 - 30.
- [2] Vreugdenhil BJ, Zwart RWR. Tar formation in pyrolysis and gasification. ECN Energy Research Centre of the Netherlands; 2009. p. 1-37.
- [3] Devi L, Nair SA, Pemen AJM, Yan K, van Heesch EJM, Ptasinski KJ, et al. Tar Removal from Biomass Gasification Processes. In: Brenes MD, editor. *Biomass and Bioenergy: New Research*. New York: Nova Science Publishers, Inc.; 2006.
- [4] Neeft JPA, Knoef NAM, Onaji P. Behaviour of tar in biomass gasification system. Tar related problems and their solutions. Novem: Novem, The Netherlands. Report No. 9919; 1999.
- [5] BTG. Cleaning of hot producer gas in a catalytic reverse flow reactor. Novem Report no. 9605. 1995.
- [6] Narvaez I, Correla J, Orio A. Fresh tar (from biomass gasifier) elimination over a commercial steam-reforming catalyst. Kinetics and effect of different variables of operation. *Industrial and Engineering Chemistry Research*. 1997;36:317 - 27.
- [7] Narvaez I, Orio A, Aznar MP, Corella J. Biomass gasification with air in an atmospheric bubbling fluidized bed. Effect of six operational variables on the quality of produced raw gas. *Industrial and Engineering Chemistry Research*. 1996;35:2110 - 20.
- [8] Rapagna S, Jand N, Foscolo PU. Utilisation of suitable catalyst for the gasification of biomasses. In: Kopetz H, Weber T, Palz W, Chartier P, Ferrero GI, editors. *Proceedings of 10th European Conference and Technology Exhibition on Biomass for Energy and Industry*. Wuerzburg, Germany 1998. p. 1720 - 3.
- [9] Mitchell DH, Mudge LK, Robertus RJ, Weber SL, Jr, Sealock LJ. Methane/Methanol by catalytic gasification of biomass. *Chemical Engineering Progress*. 1980;76:53 - 7.
- [10] Baker EG, Mudge LK, Brown MD. Methanol and ammonia from biomass. *Chemical Engineering Progress*. 1984;80:43 - 6.
- [11] Tu X, Whitehead JC. Plasma dry reforming of methane in an atmospheric pressure AC gliding arc discharge: Co-generation of syngas and carbon nanomaterials. *Hydrogen Energy*. 2014;39:9658 - 69.
- [12] Fabry F, Rehmet C, Rohani V-J, Fulcheri L. Waste gasification by Thermal Plasma: A Review. *Waste and Biomass Valorization*. 2013;4:421 - 39.
- [13] Snoeckx R, Zeng YX, Tu X, Bogaerts A. Plasma-based dry reforming: improving the conversion and energy efficiency in a dielectric barrier discharge. *Royal Society of Chemistry*. 2015;5:29799 - 808.
- [14] Abdelouahed L, Authier O, Mauviel G, Corriou JP, Verdier G, Dufour A. Detailed Modeling of Biomass Gasification in Dual Fluidized Bed Reactor under Aspen Plus. *Energy and Fuels*. 2012;26:3840 - 55.
- [15] Doherty W, Reynolds A, Kennedy D. Process simulation of biomass gasification integrated with a solid oxide fuel cell stack. *Journal of Power Sources*. 2015;277:292 - 303.
- [16] Valmundsson A, Janajreh I. Plasma gasification process modeling and energy recovery from solid waste. *Proceedings of the ASME 2011 5th International Conference on Energy Sustainability*, Washington, USA 2011. p.1 - 8.
- [17] Odeyemi F, Rabinovich A, Fridman A. Gliding Arc Plasma-Stimulated Conversion of Pyrogas into Synthesis Gas. *IEEE Transactions on Plasma on Plasma Science*. 2012;40:1124 - 30.