



UNIVERSITY OF LEEDS

This is a repository copy of *Integration of a 2.1-THz Quantum Cascade Laser within an IEEE WM-130 Rectangular Metallic Waveguide*.

White Rose Research Online URL for this paper:

<https://eprints.whiterose.ac.uk/210092/>

Version: Accepted Version

Proceedings Paper:

Salih, M. orcid.org/0009-0001-6882-4642, Kondawar, S.S. orcid.org/0000-0003-3918-9472, Brewster, N. et al. (7 more authors) (2023) Integration of a 2.1-THz Quantum Cascade Laser within an IEEE WM-130 Rectangular Metallic Waveguide. In: Proceedings of 2023 48th International Conference on Infrared, Millimeter, and Terahertz Waves (IRMMW-THz). 2023 48th International Conference on Infrared, Millimeter, and Terahertz Waves (IRMMW-THz), 17-22 Sep 2023, Montreal, Canada. IEEE ISBN 9798350336603

<https://doi.org/10.1109/irmmw-thz57677.2023.10299333>

© 2023 IEEE. Personal use of this material is permitted. Permission from IEEE must be obtained for all other uses, in any current or future media, including reprinting/republishing this material for advertising or promotional purposes, creating new collective works, for resale or redistribution to servers or lists, or reuse of any copyrighted component of this work in other works.

Reuse

This article is distributed under the terms of the Creative Commons Attribution (CC BY) licence. This licence allows you to distribute, remix, tweak, and build upon the work, even commercially, as long as you credit the authors for the original work. More information and the full terms of the licence here:

<https://creativecommons.org/licenses/>

Takedown

If you consider content in White Rose Research Online to be in breach of UK law, please notify us by emailing eprints@whiterose.ac.uk including the URL of the record and the reason for the withdrawal request.



eprints@whiterose.ac.uk
<https://eprints.whiterose.ac.uk/>

Integration of a 2.1-THz Quantum Cascade Laser within an IEEE WM-130 Rectangular Metallic Waveguide

M. Salih^{1*}, S. S. Kondawar¹, N. Brewster², L. H. Li¹, E. H. Linfield¹, H. Wang², P. G. Huggard², J. R. Freeman¹, D. Gerber², and A. Valavanis¹

¹School of Electronic and Electrical Engineering, University of Leeds, Leeds LS2 9JT, United Kingdom

²RAL Space, STFC Rutherford Appleton Laboratory, Harwell Campus, Didcot, OX11 6QX, UK

*Correspondance e-mail: m.salih@leeds.ac.uk

Abstract — A 2.1-THz quantum cascade laser (QCL) has been integrated into an IEEE standard rectangular metallic waveguide for the first time. A $(130 \times 65)\text{-}\mu\text{m}^2$ precision micromachined channel within a metallic module was used to form a fundamental WM-130 waveguide, in accordance with IEEE standard 1785.1-2012. We show that single-mode continuous-wave laser emission is obtained, with a Gaussian far-field divergence angle of 9° .

I. INTRODUCTION

TERAHERTZ-FREQUENCY quantum-cascade lasers (THz QCLs) are very attractive $\sim 2\text{--}5\text{-THz}$ sources for industrial or satellite-based sensing applications, owing to their compact size, high output power and narrow linewidth. One key potential application is in local oscillators (LOs) for heterodyne radiometric sounding of gas species in the upper atmosphere [1]. A significant challenge, however, is in the poor quality of the far-field beam, and QCLs are typically coupled to other system elements using bulky arrangements of free-space quasi-optical components.

We have previously partially overcome this limitation by integrating $3.4\text{--}5.0\text{-THz}$ QCLs within precision-micromachined metallic waveguides [2]–[4]. This approach underpins future guided-mode coupling between LOs, mixers and detectors, and improves the mechanical robustness and reproducibility of THz systems. However, at these frequencies, the manufacturing tolerances for waveguides are extremely tight and it has, to date, not been possible to develop fundamental-mode waveguides.

In this work, we demonstrate the first such integration of a 2.1-THz QCL into a fundamental waveguide. This frequency band is of particular interest for atmospheric radiometry, owing to its proximity to several important atmospheric gas species (e.g., O, O₃, CO and HO₂ at 2060.0, 2060.2, 2070.6 and 2070.5 GHz respectively). The relatively low QCL emission frequency eases manufacturing tolerances, and enables the use of a fundamental WM-130 waveguide. This represents the first integration of a QCL within a waveguide meeting the IEEE 1785.1-2012 standard for rectangular metallic waveguides.

II. RESULTS

The QCL was based on a bound-to-continuum active region design [5], operating at $\sim 2.1\text{ THz}$, with a $14\text{-}\mu\text{m}$ active region height. A $90\text{-}\mu\text{m}$ -wide laser ridge was defined, using a gold-gold double-metal waveguide configuration. A $150\text{-}\mu\text{m}$ thick gold overlayer was deposited and the chip was thinned to $100\text{ }\mu\text{m}$ using mechanical and chemical etching. Finally, a 2-mm-long device was cleaved, and the ridge was diced into a $\sim 200\text{-}\mu\text{m}$ -wide section using a wafer-saw.

Rectangular channels with cross-sectional dimensions of

$(130 \times 32.5)\text{ }\mu\text{m}^2$ were precision CNC-milled into a pair of brass blocks, such that these co-registered to form an IEEE WM-130 rectangular waveguide with $(130 \times 65)\text{-}\mu\text{m}^2$ cross-section. The waveguide was coupled into free-space using a pair of diagonal feedhorns with a $(1.525 \times 1.525)\text{-mm}^2$ cross-diagonal aperture at either end, and a slant angle of 5.5° . The QCL was connected to an external d.c. bias through a standard SMA connector and mounted in a liquid-helium-cooled Janis ST-100 cryostat for characterization.

Figure 1(a) shows the continuous-wave light-current-voltage (LIV) characteristics of the waveguide-integrated QCL, with a peak output power of $\sim 40\text{ }\mu\text{W}$ and a maximum operating temperature of 60 K. Figure 1(b) shows the spectrum of the same device, indicating single-mode operation at 2.1 THz, while Figure 1(c) shows a knife-edge measurement of the far-field beam profile, obtained 39 mm from the feedhorn aperture. A Gaussian function with 9° full-width divergence is shown to give a good fit to the experimental measurement (c.f. 7° predicted for an ideal square aperture with a uniform field). Figure 1 (d) shows the assembled waveguide module attached to the coldfinger of a cryostat.

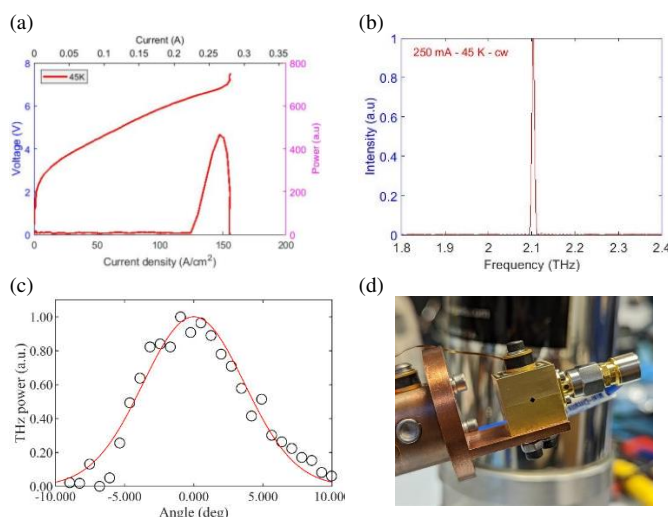


Fig. 1: (a) Voltage-current/current density and peak power-current density characteristics of THz QCLs at 45 K. (b) The spectrum of the device is at 250 mA and 45 K. (c) The far field beam profile. (d) Assembled module on cryostat cold-finger.

III. SUMMARY

We have demonstrated the first integration of a THz QCL within a rectangular waveguide meeting the IEEE 1785.1-2012 standard. The single-mode emission, within the 1400–2200 GHz bandwidth of the waveguide, and the single-lobed, narrow far-field emission indicate that the waveguide is

operating within its intended fundamental mode. This underpins the capability for future development of fully integrated receiver systems, in which a QCL local oscillator will be coupled with a mixer for satellite radiometry applications.

ACKNOWLEDGMENTS

This work was supported financially by the UK Space Agency (Centre for Earth Observation Instrumentation Fast-Track contract RP10G0435A504) and UK Research and Innovation (Future Leader Fellowship MR/S016929/1). For the purpose of open access, the authors have applied a Creative Commons Attribution (CC BY) license to any Author Accepted Manuscript version arising from this submission.

DATA AVAILABILITY

The data associated with this paper are openly available from the University of Leeds Data Repository <http://doi.org/10.5518/1319>.

AUTHOR DECLARATIONS

Conflict of interest

The authors have no conflicts to disclose.

Author contributions

M. Salih: writing — original draft preparation; investigation (lead); methodology (equal). S. S. Kondawar: investigation (supporting). N. Brewster: investigation (supporting). L. H. Li: investigation (supporting). E. H. Linfield: funding acquisition (supporting); conceptualization (supporting). H. Wang: funding acquisition (supporting); conceptualization (supporting); methodology (equal); supervision (supporting). P Huggard: funding acquisition (supporting); conceptualization (supporting); methodology (equal); supervision (supporting). J. R. Freeman: funding acquisition (supporting); conceptualization (supporting); methodology (equal); supervision (supporting). D. Gerber: funding acquisition (supporting); conceptualization (supporting); methodology (equal); supervision (supporting). A. Valavanis: funding acquisition (lead); conceptualization (lead); methodology (equal); writing — reviewing & editing (lead); supervision (lead).

REFERENCES

- [1] S. P. Rea *et al.*, ‘The Low-Cost Upper-Atmosphere Sounder (LOCUS)’, in *26th international symposium on space terahertz technology*, Cambridge, MA, Mar. 2015. [Online]. Available: <https://www.cfa.harvard.edu/events/2015/isst2015/proceedings/>
- [2] A. Valavanis *et al.*, ‘Mechanically robust waveguide-integration and beam shaping of terahertz quantum cascade lasers’, *Electron. Lett.*, vol. 51, no. 12, pp. 919–921, Jun. 2015, doi: 10.1049/el.2015.1137.
- [3] B. N. Ellison *et al.*, ‘3.5 THz quantum-cascade laser emission from dual diagonal feedhorns’, *Int. J. Microw. Wirel. Technol.*, vol. 11, no. 9, pp. 909–917, Nov. 2019, doi: 10.1017/S175907871900028X.
- [4] E. Nuttall *et al.*, ‘Waveguide integration of a >4.7-THz quantum-cascade laser’, *Electron. Lett.*, vol. 59, no. 2, p. e12703, 2023, doi: 10.1049/el12.12703.
- [5] C. Worrall *et al.*, ‘Continuous wave operation of a superlattice quantum cascade laser emitting at 2 THz’, *Opt. Express*, vol. 14, no. 1, pp. 171–181, Jan. 2006, doi: 10.1364/OPEX.14.000171.