



This is a repository copy of *The effect of alternative fuels on gaseous and particulate matter (PM) emission performance in an auxiliary power unit (APU)*.

White Rose Research Online URL for this paper:
<https://eprints.whiterose.ac.uk/145912/>

Version: Accepted Version

Article:

Khandelwal, B. orcid.org/0000-0001-9295-188X, Cronly, J., Ahmed, I.S. et al. (2 more authors) (2019) The effect of alternative fuels on gaseous and particulate matter (PM) emission performance in an auxiliary power unit (APU). *The Aeronautical Journal*, 123 (1263). pp. 617-634. ISSN 0001-9240

<https://doi.org/10.1017/aer.2019.16>

This article has been published in a revised form in *The Aeronautical Journal* [<http://doi.org/10.1017/aer.2019.16>]. This version is free to view and download for private research and study only. Not for re-distribution, re-sale or use in derivative works. © Royal Aeronautical Society.

Reuse

This article is distributed under the terms of the Creative Commons Attribution-NonCommercial-NoDerivs (CC BY-NC-ND) licence. This licence only allows you to download this work and share it with others as long as you credit the authors, but you can't change the article in any way or use it commercially. More information and the full terms of the licence here: <https://creativecommons.org/licenses/>

Takedown

If you consider content in White Rose Research Online to be in breach of UK law, please notify us by emailing eprints@whiterose.ac.uk including the URL of the record and the reason for the withdrawal request.



eprints@whiterose.ac.uk
<https://eprints.whiterose.ac.uk/>

The Effect of Alternative Fuels on Gaseous and Particulate Matter (PM) Emission Performance in an APU

B. Khandelwal, J. Cronly, I. S. Ahmed, C. J. Wijesinghe, C. Lewis

Abstract

There is a growing interest in the use of alternative fuels in gas turbine engines to reduce emissions. Testing of alternative fuels is expensive when done on a large-scale gas turbine engine. In this study a re-commissioned small gas turbine Auxiliary Power unit (APU), has been used to test various blends of Jet A-1 and Synthetic Paraffinic Kerosene (SPK), diesel with eight other novel fuels. A detailed analysis of performance, gaseous emissions and particulate emissions has been presented in this study. It is observed that aromatic content in general as well as the particular chemical composition of the aromatic compound plays a vital role in particulate emissions generation. SPK fuel shows substantially lower particulate emissions with respect to Jet A. However, not all the species of aromatics negatively impact particulate emissions. Gaseous emissions measured are comparable for all the fuels tested in this study.

Introduction

There is a growing interest in decreasing the net emissions produced by gas turbines. This has led to research and development towards operating gas turbines using alternative fuels. The driving factors for this increased interest towards alternative fuels and decreasing emissions comes from rising fuel cost [1], decreasing crude oil resources and increasing environmental consideration [2–4]. There is also a growing concern about local air quality around airports and steps are being taken by industry to reduce emissions. The aviation industry is growing at a rate of approximately 4% each year and is predicted to rise at this rate for decades to come [1]. It is estimated that aviation currently accounts for about 3% of total global warming gases produced and is therefore continuously rising due to growth in the aviation industry. Alternative fuels

derived by Fischer-Tropsch (F-T) process from biomass, coal and gas draws a interest of researchers and industry due to their drop-in capability [5]. Another reason for this interest is to improve the security of energy supply as alternative fuel sources can be obtained domestically.

While oil shale and F-T fuels offer increased energy security, bio-derived fuels are renewable and claimed to reduce carbon emissions in their life-cycle [6]. FT fuels can be derived from a wide range of feedstocks such as natural gas, used cooking oil (UCO), fuel crops, coal etc. FT Fuels have the potential to provide better combustion properties and lower emissions. Fuel derived from oil shale, gas and coal are non-renewable sources of fuels, but are readily available and viable as these are obtained using existing technologies. Commercial production of fuel from shale, gas and coal has been accomplished in several countries to date. In 1999, Sasol produced a Semi Synthetic Jet Fuel (SSJF), which was a blend of up to 50% of synthetic fuel, made from coal by F-T synthesis and conventional jet fuel. From that time onwards SSJF has been supplied to the Johannesburg Airport, South Africa for use for gas turbines [7].

According to present regulations, restrictions placed on commercial flights on use of alternative fuels are stringent. This is due to economical and logistic issues and partly to provide safe and reliable fuel that can perform in the arduous conditions in which gas turbines work [8]. Since the aviation industry tends to keep its assets for around 40 years [9], the ability to be used as a drop-in fuels in legacy aircrafts is very important along with their ability to meet future fuel standards. The present aviation fuel specifications are laid out in the ASTM D 1655[10]. Any new fuel has to meet the specifications and has to go through a rigorous approval process as shown in the Fig. 1 [11]. Any new alternate fuel development program must consider all other aspects of airframe, fuel handling and fuel processing as well [12].

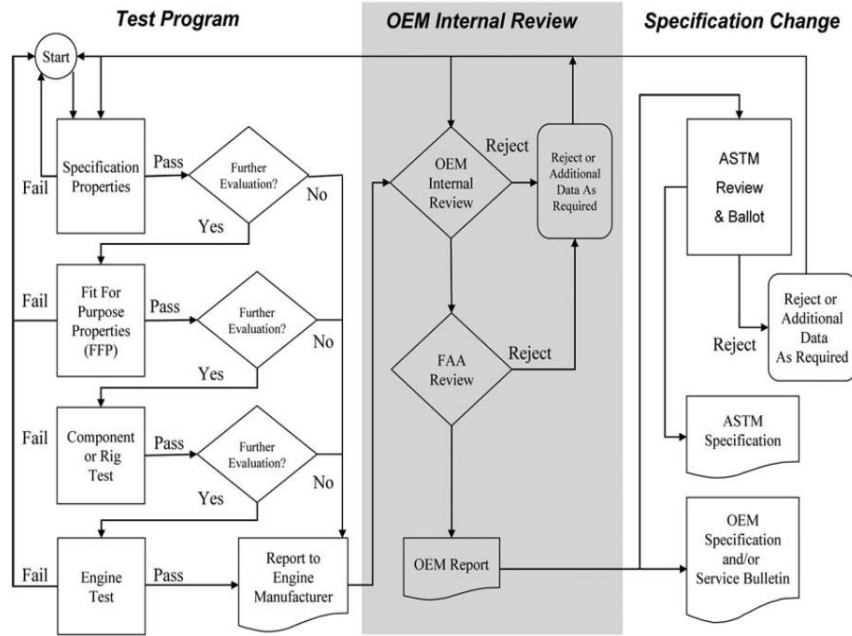


Figure 1. Flowchart of the Approval Process for New Aviation Turbine Fuels [11].

In recent years several commercial aircrafts have performed flight demonstrations burning various blends of novel alternative fuels and conventional jet fuels. The American Society for Testing and Materials (ASTM) has approved blends of up to 50% synthetic blend stocks to be used with conventional jet fuel [13]. Researchers have done various studies on use of alternative fuels in gas turbines, both for military and commercial aviation [14–26]. It has also been observed in various studies that there is an advantage in using alternative blends for gas turbines as the use of paraffinic alternative fuels aids in reducing net carbon footprint, particulate and smoke emissions [27–32]. This can also contribute to improving the local air quality [14, 15, 19–25]. Rye and Wilson [27] studied the effect of alternative fuel composition on gas turbine ignition performance. Lobo et al. [28] studied the effect of fuels derived from alternative sources on non-volatile particulate matter emissions. In recent years studies have presented results on vibrational and noise production while using alternative fuels [29, 30, 33].

There are various studies in the literature regarding the overall environmental impact, global warming potential and use of alternative fuels in gas turbines [28–31, 34–48]. One of the recent study by Christie et

al. [47] and Brem et al. [48] shows impact of hydrogen content in the fuel on PM emissions. Results of experimental tests related to impact of gas turbine engines on environment are not evident in literature and not fully explored. One of the reasons for fewer studies and tests on use of alternative fuels with gas turbines is the high cost and fuel requirement for a gas turbine engine for completing these tests. APU's, however, are well suited to perform studies and critical evaluations of alternative fuels for use in gas turbines.

This paper reports the results of an experimental campaign to evaluate the gaseous and PM emissions characteristics of an aircraft APU burning various blends of synthetic fuels with Jet A-1 and several other alternative fuels. The study was partially conducted FAA CLEEN project at the University of Sheffield's Low Carbon Combustion Centre and involved teams from the University of Sheffield, British Airways and Rolls-Royce. Gas phase emissions and PM emissions were measured at the engine exit plane.

Properties of Fuels Tested

Properties and list of the fuels tested in this study are presented in Table 1. The blending was carried out using grade A glassware. The uncertainty in the volumetric blending was calculated to be approximately $\pm 1\%$. For ease of data representation, all the fuels have been named fuels 1 to 6 and fuel A to H as shown in the table below. Fuels 1 to 4 are different blends of SPK and Baseline Jet A-1, whereas fuels A to D are different ASTM approved novel jet fuels to be blended with conventional jet fuel, sourced from different companies. Fuel 5 is commercially available diesel, and fuel E-H are novel fuels sources from different sources, not currently approved under ASTM.

Table 1. Pertinent properties of fuels used

Fuel	Representation Name	Density (g/l)	Energy Content (MJ/kg)	Fuel Aromatic Content (% vol)
Baseline Jet A-1	Fuel 1	801.9	43.23	17.3
50% Jet A-1 and 50% SPK	Fuel 2	781.9	43.66	8.6

25% Jet A-1 and 75% SPK	Fuel 3	771.8	43.88	4.4
SPK	Fuel 4	761.7	44.10	0.1
Diesel	Fuel 5	832	45.0	23.6
Straight Run Jet A	Fuel 6			
Novel Fuel 1	Fuel A	791.0	43.57	9.4
Novel Fuel 2	Fuel B	756.2	43.67	13.4
Novel Fuel 3	Fuel C	756.2	43.47	19.7
Novel Fuel 4	Fuel D	804.4	43.26	15.8
Novel Fuel 5	Fuel E			
Novel Fuel 6	Fuel F			
Novel Fuel 7	Fuel G			
Novel Fuel 8	Fuel H			

Experimental Set-up

A re-commissioned APU gas turbine (Honeywell GTCP85 APU engine) has been used in this study to examine the effect of different fuel blends on emissions and performance. Figure 2 shows a schematic of the experimental setup used in this study. Real time data acquisition system and control mechanisms have been used for conducting these experiments. Performance parameters including exhaust gas temperatures, bleed air flow, fuel flow, inlet air flow, engine RPM, pressure and temperature at various core locations have been measured and examined. This APU gas turbine has a two-stage centrifugal compressor. The compressed air, mixed with fuel and ignited, drives a radial inward-flow turbine wheel. The rotating shaft power of the turbine wheel drives the compressor, which also provides bleed air, and generator.

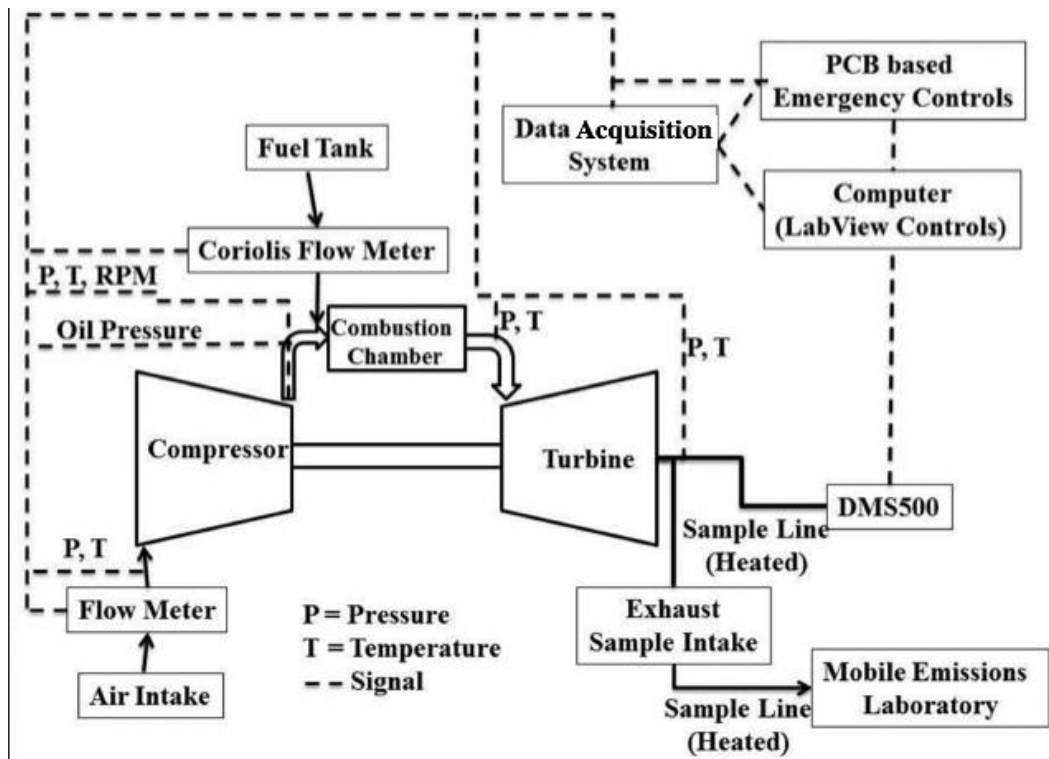


Figure 2. Experimental Set-up

The APU control panel is used to change the bleed flow rate to a predefined value for reaching a set operating condition. Fig. 3 below shows the actual picture of the APU, inlet duct, generator, transducers and bleed valve mounted on the test bed. All the relevant performance parameters are measured with the help of pressure transducers, flow meters and thermocouples fixed on the engine bed and engine. The bleed duct is connected to a variable solenoid operated valve before the exhaust to control the flow of bleed air, as bleed air is used for loading the APU (changing operating conditions). This APU also houses a 32 KW generator, which is conventionally used to control the operating conditions of the APU. The generator on the APU is not able to change the operating conditions of the engine, since power generated by the APU is substantially higher than generator and no noticeable change in fuel flow and exhaust gas temperature is observed when the generator is fully loaded or when the load on the generator load is changed. Calibration of all the transducers used in the experimental set-up has been carried out regularly to maintain measurement accuracy. The operation panel (PCB based control panel) is used to monitor exhaust gas

temperature, engine operating speed (RPM) and bleed flow rate. This is installed to act as a safety control mechanism in case the more complex control software based on LabVIEW stops responding. The operation panel also provides control of fuel solenoid, starter motor and ignition system. The starter motor is used to spool the engine to 50% speed of engine RPM (Maximum) before being cut off. The ignition system is cut off when the engine RPM reaches 95% speed of engine RPM. This is done to avoid any damage to igniter. Boolean data on status of ignition system, fuel and oil systems are also fed from the APU to the operation panel for the purpose of operator feedback and emergency shutdown.

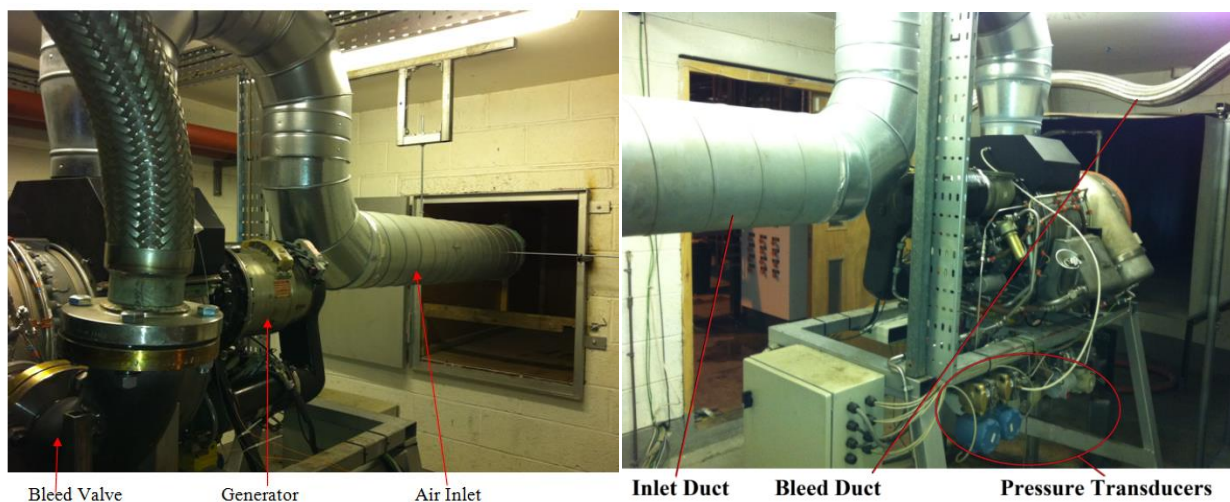


Figure 3. Gas Turbine Experimental Set-up

Continuous sampling and measurement of gaseous emission have been carried out as per SAE ARP1256D testing standards. The University of Sheffield's Mobile Emissions Laboratory has been set-up to comply with the SAE ARP1256D standard [41], and has been used to take measurements in this study. The Experiments were conducted using the Mobile Emission Laboratory. The same mobile emission laboratory has also been used for measuring emissions in various other test campaigns available in literature [19,27–31].

A stainless-steel sampling probe is fixed in place with bolts behind the APU for extractive sampling of exhaust gases. The probes themselves do not conform to the aforementioned ARP standard. A cross-section traverse of the engine exhaust has been done, and it was found that two locations where these probes were placed had same AFR and PM. The conditioned exhaust sample is drawn through a ¼ inch heated sample line into Mobile Emissions Laboratory for analysis. The sample lines are maintained at $160\pm 5^{\circ}\text{C}$ per ARP1256D [41] with a minimum bend radius of 10x the line diameter. A constant sampling flow rate (and system pressure) was maintained in the gaseous analysis equipment by using a metal bellows pump, with excess sample flow being exhausted through a back-pressure regulator. Gaseous emissions (Unburned Hydrocarbon ‘UHC’, Carbon Monoxide ‘CO’ and Nitrous Oxides ‘NO_x’) were measured per ARP1256D [41]. A Flame Ionization Detector (FID), namely a Signal 3000HM hydrocarbon analyser, are used to measure unburned hydrocarbons in the exhaust stream. The concentration of CO and CO₂ emissions in the exhaust stream were characterized using a Rosemount Binos 1000 analyser. The unit is a dual channel Non-Dispersive Infrared Analyzer (NDIR), the principle of which is based on the absorption of infrared radiation in the CO and CO₂ frequency band. In order to reduce the interference effect of water in the exhaust sample, a chiller was installed upstream of the NDIR analyser to dry the sample. Figure 4 shows the location of sampling probes with reference to the exhaust of engine.



Figure 4. Sampling Probe

An Eco Physics CLA EL ht (chemiluminescence) analyser was used to record NO_x in this experiment. Oxygen levels in the exhaust sample were also monitored, as a redundant measurement to assess data

quality. The analysers were zeroed and then spanned using appropriate gas concentrations just prior to the beginning of each experiment, with the zero and span drift established at engine shutdown. The Span gas cylinders were accurate to $\pm 2\%$. Instrument linearity and interference effects were assessed and corrected for as per the aerospace recommended practices [42]. The experimental error associated with the measurement of gaseous emissions is estimated to be approximately $\pm 4\%$ of the reading.

A separate sampling probe was fixed in close proximity to the gaseous emissions sampling probe for measurement of particulates by DMS500. Smoke emissions were measured using the gaseous emissions probe. PM size distribution and mass were tested using a DMS 500 supplied by Cambustion. A separate sampling line heated at $160\pm 5^\circ\text{C}$ was used to supply exhaust gases to the DMS 500. For uniformity with gaseous emission sample lines, the line was fabricated with a minimum bend radius of 10x the line diameter in the sampling line for both DMS 500 and gas sampling line to avoid any error in the readings taken. The DMS500 analysers use electrical mobility measurements to produce particle size/number spectra between 5 nanometres and 1000 nanometres. Since the classification of particles according to their differing electrical mobility takes place in parallel (rather than in series as in a scanning instrument) the DMS series is able to offer the fastest available size/number spectral measurement of its type. The DMS500 uses a high sample flow rate (8 litres per minute) and unique multiple sheath flows in the charger, resulting in low diffusion losses even of small particles. Figure 5 below shows schematic of particulate measurement instrument principle. Particles are introduced in the instrument from left hand side of the tube; particulates are provided charge by Unipolar Corona Charger and passed through tube of electrometer detectors to detect the size, weight and number of particulate emissions.

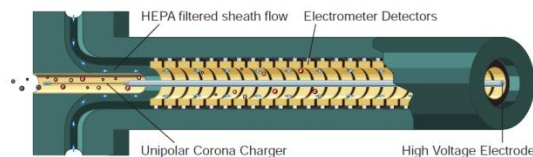


Fig 5. Principle of particulate emission measurement instrument (DMS 500) [43].

SAE smoke number was established using a Richard Oliver smoke meter, Whatman no. 4 filter paper and a reflectometer (EEL43M Smokestain Reflectometer, Diffusion Systems Ltd.) per ARP1179c [44]. The technique involves passing a set volume of sample through the conditioned filter paper and measuring the change in the absolute reflectance of the filter paper due to the PM collected. Figure 6 below shows four different filter papers with varying SAE smoke number for representation purpose. Details of measurement instruments deployed in this study are shown in Table 2.

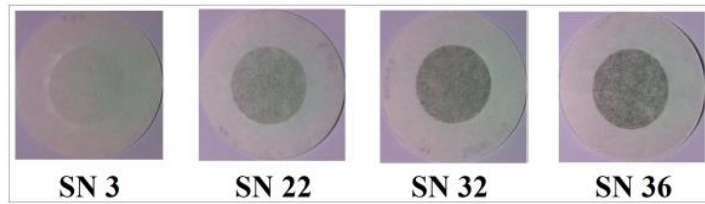


Figure 6. Actual pictures of Whatman no. 4 filter paper with varying SAE smoke number.

Table 2. Details of Measurement Instruments

Species Measured	Analyser	Detection Range
Unburned Hydrocarbon	Signal 3000HM FID Hydrocarbon Analyzer	0-100 ppm
NO, NO ₂ , NO _x	EcoPhysics CLA 700 EL ht	0-100 ppm
CO	NDIR Rosemount Binos 1000	0-1500 ppm
CO ₂	NDIR Rosemount Binos 1000	0-5 %
O ₂	MAG	0-100 %
SMOKE	Richard Oliver smoke meter	0-100
Particulate	Cambustion DMS500	5-1000 nm

Three different test windows were selected to determine the performance of the APU for a range of conditions. Sampling at the selected test condition was conducted over a six-minute experimental window

once the APU had appeared to stabilize. Figure 7 shows exhaust temperature profile measured at the exit of the gas turbine with time. One test window is at full RPM when the engine is without any load at an EGT of $300\pm 10^{\circ}\text{C}$ and AFR of 130 ± 2 , second is with the bleed on at EGT of $445\pm 10^{\circ}\text{C}$ and AFR of 75 ± 2 and third with the bleed on at EGT of $580\pm 10^{\circ}\text{C}$ and AFR of 50 ± 2 test windows, before returning the engine to a full power condition prior to shut down. Full RPM window is stable when EGT remains constant at $300\pm 5^{\circ}\text{C}$ for three minutes. The second and third window is stable when EGT remains constant at $445\pm 10^{\circ}\text{C}$ and $580\pm 10^{\circ}\text{C}$ respectively in addition to the bleed mass flow for three minutes.

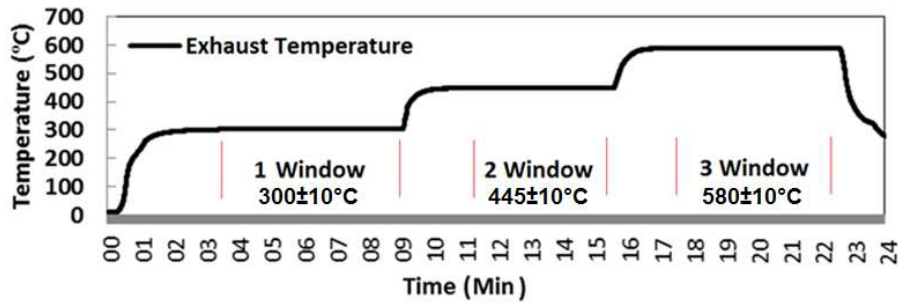


Fig 7. Exhaust Temperature profile for illustration of engine test windows.

Results and Discussion

Emissions data concentrations have been converted into emission indices to aid in the quantification of emissions per kilogram of fuel burned. The conversion to emission indices is done as per standard calculation methods [19, 42].

Gaseous Emissions Analysis

Table 3 below shows gaseous emissions data collected at maximum RPM with EGT of $300\pm 10^{\circ}\text{C}$ and AFR of 130 ± 2 for different fuels. CO_2 , CO, NO_x and NO emissions are represented in form of emission index (EI), whereas NO_2 , THC is represented as PPM.

Table 3. Gaseous emissions data at condition 1.

	Uncertainty	Fuel 1	Fuel 2	Fuel 3	Fuel 4	Fuel 5	Fuel 6	Fuel A	Fuel B	Fuel C	Fuel D	Fuel G	Fuel H
		[45]	[45]	[45]	[45]			[45]	[45]	[45]	[45]		
CO ₂ (EI)	± 10	3171	3178	3182	3182	3165	3175	3188	3192	3189	3189	3201	3185
CO (EI)	± 2	34.1	33.2	31.9	31.6	37.5	33.8	33.6	30.5	33.0	33.3	30.2	35.4
NO _x (EI)	± 0.1	4	4.1	4.2	4.2	3.88	4.0	4	4	3.9	4	4.2	4.1
NO (EI)	± 0.1	1.5	1.6	1.6	1.5	1.98	1.7	1.5	1.6	1.7	1.6	1.6	1.8
NO ₂ (PPM)	± 0.1	7.0	7.5	7.4	6.9	9.94	8.1	7.0	7.4	7.9	7.2	7.3	8.8
THC (PPM)	± 3	25	23	21	22	72.4	8	10	6	1	5	3	6
Oxygen (%)	± 0.2	18.4	18.4	18.4	18.5	18.3	18.4	18.4	18.4	18.4	18.4	18.5	18.4

It is observed that all the fuels give similar range of emissions. Table 4 represents gaseous emissions data collected at EGT of 450±10°C and AFR of 75±2 for different fuels.

Table 4. Gaseous emissions data at condition 2.

	Uncertainty	Fuel 1	Fuel 2	Fuel 3	Fuel 4	Fuel 5	Fuel 6	Fuel A	Fuel B	Fuel C	Fuel D	Fuel G	Fuel H
		[45]	[45]	[45]	[45]			[45]	[45]	[45]	[45]		
CO ₂ (EI)	± 10	3169	3172	3172	3174	3162	3170	3171	3171	3170	3170	3172	3162
CO (EI)	± 2	23.9	22.9	21.3	22.1	26.3	22.8	23.2	21.5	23.5	23.7	21.4	24.3
NO _x (EI)	± 0.1	4	4.1	4.2	4.2	4	4	4	4	3.9	4.1	4	3.9

NO (EI)	± 0.1	2	2.1	2.2	2.1	2.5	2.2	2.1	2.2	2.1	2.1	2.1	2.2
NO ₂ (PPM)	± 0.1	16.4	16.8	18.1	16.2	21	18.8	16.5	17.7	17.2	16.7	16.6	17.0
THC PPM)	± 3	1	0	0	0	3	48	3	2	0	1	25	55
Oxygen (%)	± 0.2	16.7	16.8	16.7	16.9	16.5	16.7	16.7	16.8	16.7	16.8	16.9	16.7

Table 5. Gaseous emissions data at condition 3.

	Uncert ainty	Fuel 1 [45]	Fuel 2 [45]	Fuel 3 [45]	Fuel 4 [45]	Fuel 5	Fuel 6	Fuel A [45]	Fuel B [45]	Fuel C [45]	Fuel D [45]	Fuel G	Fuel H
CO ₂ (EI)	± 10	3169	3171	3172	3172	3164	3171	3170	3171	3170	3171	3173	3169
CO (EI)	± 2	14.1	13.4	13.0	12.8	17.4	14.1	14	13.0	14.0	13.9	12.7	14.4
NO _x (EI)	± 0.1	4.1	4.2	4.2	4.2	4.1	4.1	4.4	4.1	4.0	4.2	4.1	4
NO (EI)	± 0.1	2.9	2.9	3.0	2.9	3	3.0	2.8	2.9	2.8	2.9	2.9	2.8
NO ₂ (PPM)	± 0.1	34.1	33.4	33.6	47.9	35.0	33.2	32.4	33.2	32.3	33.3	33.1	33.4
THC (PPM)	± 3	0	0	0	0	0	0	1	1	0	0	0	0
Oxygen (%)	± 0.2	14.9	15.1	15.1	15.2	14.9	15.2	15.1	15.2	15.0	15.1	15.2	15.0

Table 5 represents gaseous emissions data collected at EGT of 580±10°C and AFR of 50±2 for different fuels. Gaseous emissions analysis (CO, CO₂, NO, NO_x and THC) conducted on fuels studied in this work showed similar performance for all fuels and were within the uncertainty of instruments. It can be seen that for all fuel's NO_x remains relatively the same hovering around 4 and also does not appear to change with the engine condition. Moreover, it can be seen that THC for Fuel 6 is extremely high with respect to the other fuels in the first two conditions. With a high point of 78 ppm in the first condition then reducing to 48 ppm in the second condition. Eventhough total NO_x remains relatively constant with respect to engine condition the amount of NO increases with engine condition. The amount of NO₂ also increases as engine condition increases. This phenomenon can be attributed to the higher engine peak flame temperatures reached as more power is extracted from the engine.

Smoke Number

SAE smoke numbers for all the fuels tested in this study are presented in Fig. 8. The accepted accuracy of the method is ± 3 smoke numbers and average of three different samples have been presented in Fig. 8. It is observed that fuels 1-4 produces substantially lower smoke as compared to fuels with Jet A. Fuel 5 has the highest smoke number of all for all three conditions, this can be expected as fuel 5 is Diesel has a highest aromatic content as compared to the other fuels tested in this study. Diesel's higher smoke results are in-line with other published literature. Fuel's E and H have the lowest smoke number of all the fuels tested. Fuel A, B, C and D have significantly lower smoke as compared to Jet A-1. It can be observed from the figure that at third power condition smoke emissions goes down, this could be due to thermophoretic losses.

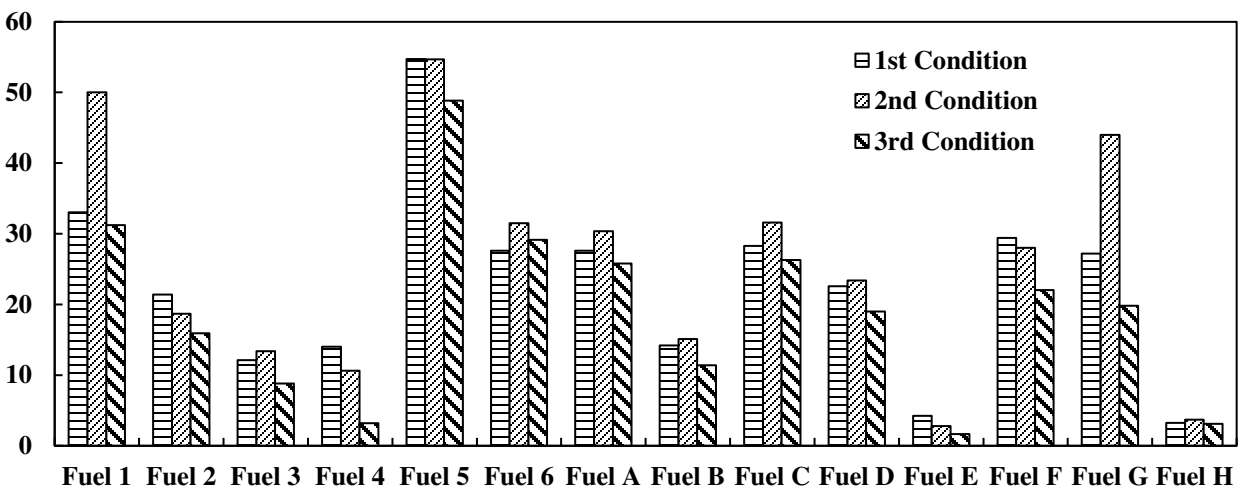


Figure 8. SAE smoke number distribution for all fuels and conditions. Fuels 1-4 and A-D [45]

PM Emissions

Figure 9 shows size spectral density comparison for first, second and third condition for all fuels considered in this study. It can be clearly observed from the figure that particulates emissions decrease with a decline in aromatic content from Fuel 1 to 4. This is consistent with the smoke measurements as shown in Fig. 9. Fuel A, B, C and D follows similar trend to that of Baseline Jet-A1 fuel. Overall Similar trends are observed

at engine operating conditions 2 and 3 as shown in Fig. 11 and 12. It is also observed that at condition 1, fuels with higher aromatic content produces substantially larger particulates as compared to fuels with a lower proportion of aromatics.

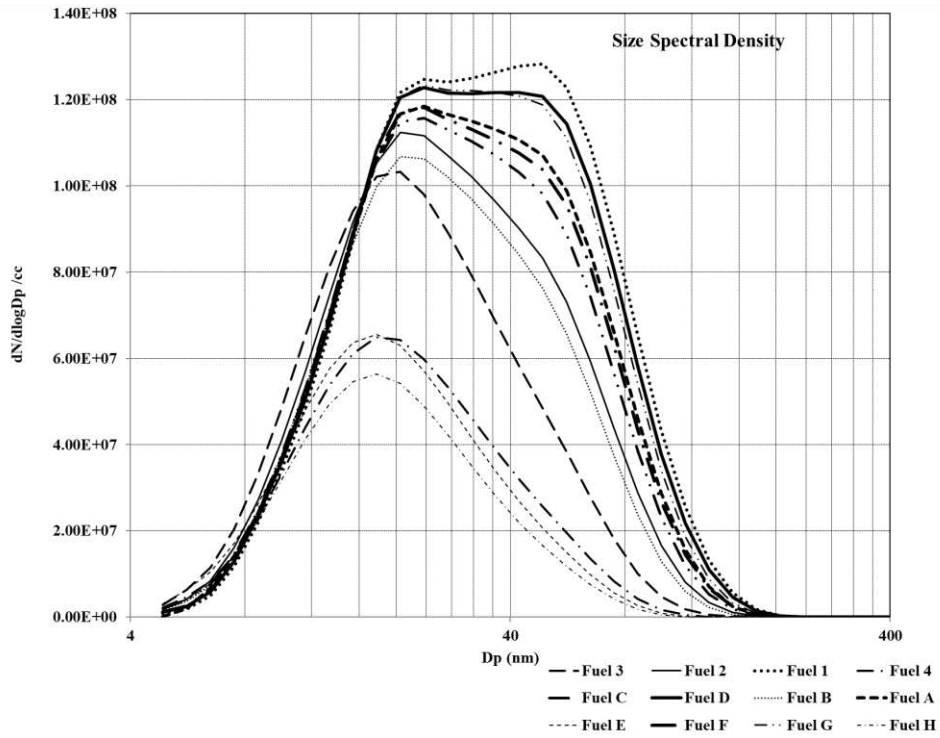


Figure 9. Number and Size distribution of Particulates measured for 1st condition

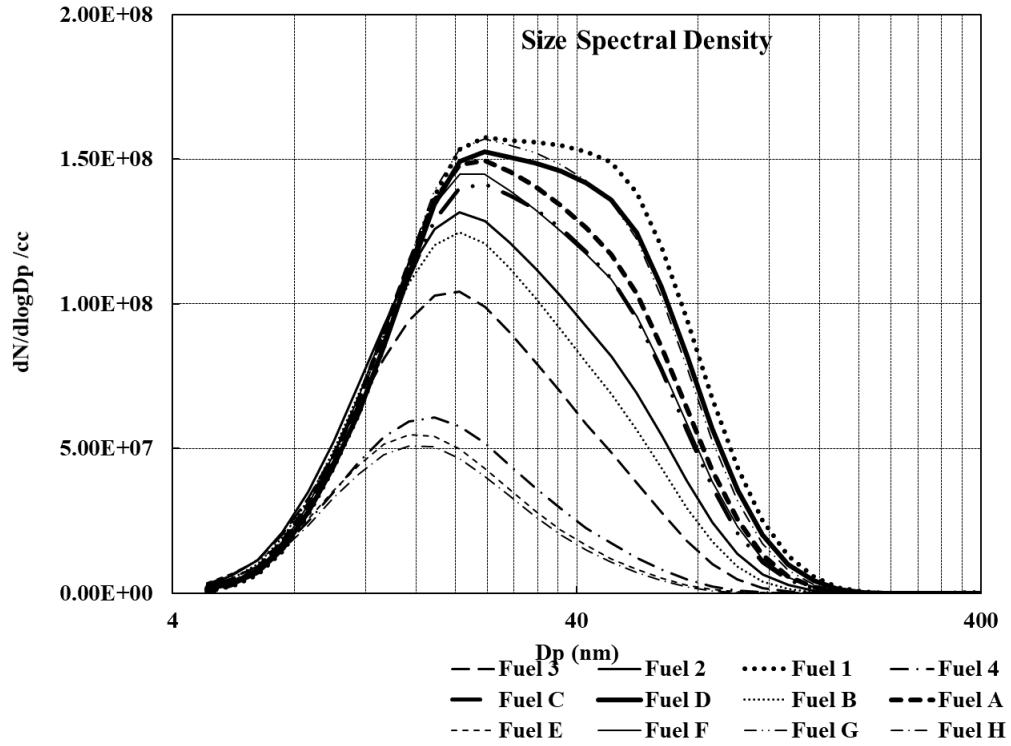


Figure 10. Number and Size distribution of Particulates measured for 2nd condition

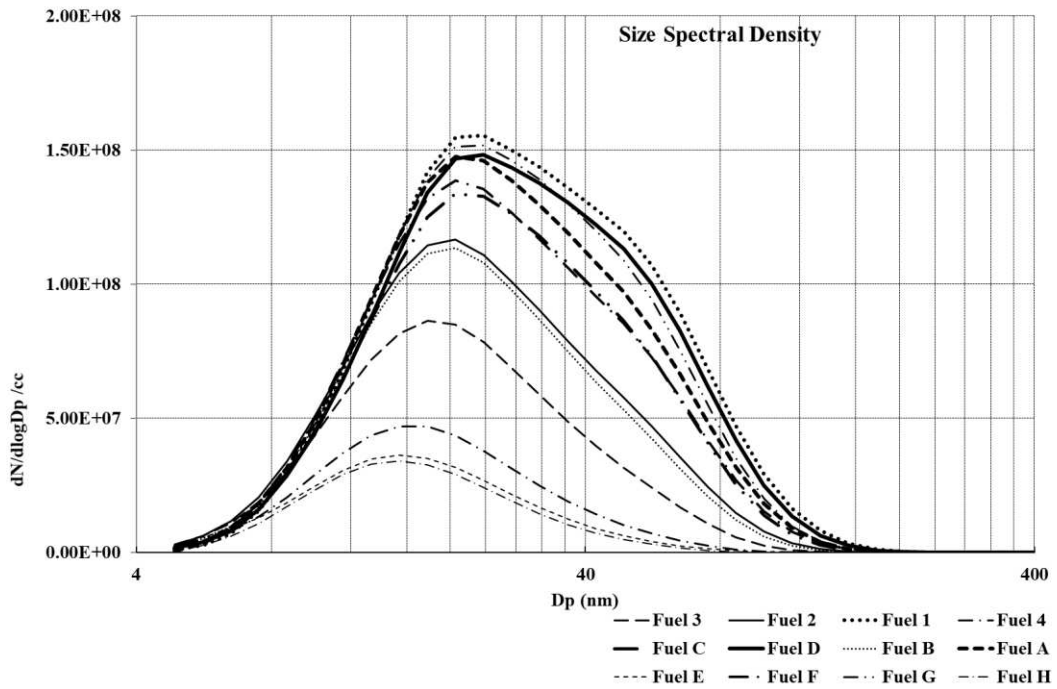


Figure 11. Number and Size distribution of Particulates measured for 3rd condition

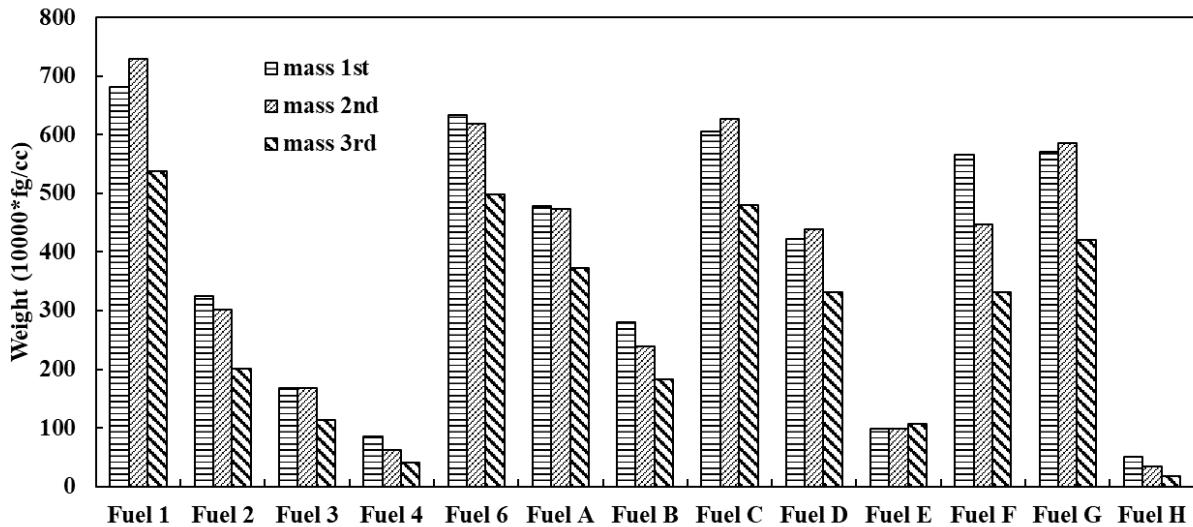


Figure 12. Particulates measured for fuels at size of ~27 nm.

Figure 12 shows the distribution of particulate mass for all the fuels and conditions tested in this study. To calculate the mass of the particulates coming out of the test engine, effective density of baseline Jet A-1 fuel was used [46]. It can be clearly observed that particulate mass follows the same trend as of particulate number when aromatics are decreased from Fuel 1 to 4 (shown in Fig. 10, 11 and 12). Fuel 1 and Fuel B has 24.6% and 21.7 % aromatic content respectively by weight, whereas their mass and particulate size distribution differs substantially. Fuel B gave a substantially better performance in terms of particulate mass and size emissions. The probable reason for reduction in particulate emissions in the case of Fuel B is due to its aromatic content composition. This result is in line with one of our other studies where it was found that different aromatic composition behaves in a different manner when it interacts with seals and produces different PM [22, 41]. Though it is to be noted that seals could lead to production of small number of volatiles in the exhaust and this aspect has not been covered in this study. Decreasing the number of aromatics in the fuel would lead to reduction in energy density per litre of the fuel, which could eventually lead to reduction in range of the aircraft. Not all aromatics have a direct effect on smoke and particulate

emissions; it is just that right aromatics species need to be selected for reduction in particulate emissions and appropriate seal swell.

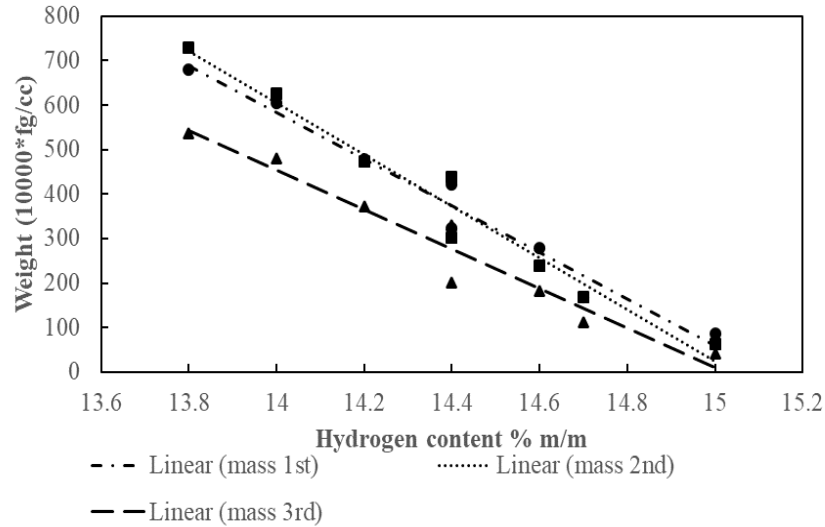


Figure 13. Particulate mass concentration against hydrogen contents of fuels

Figure 13 above shows the particulate mass concentration against the hydrogen content (mass percentage % m/m). It can be observed from Fig. 13 that the particulate concentration is reduced as the hydrogen content is increased. This can be fundamentally explained by the fact that the more the hydrogen content is, the less the number of carbon-carbon bonds present in the fuel. This observation is in-line with other literature Christie et al. [47] and Brem et al. [48].

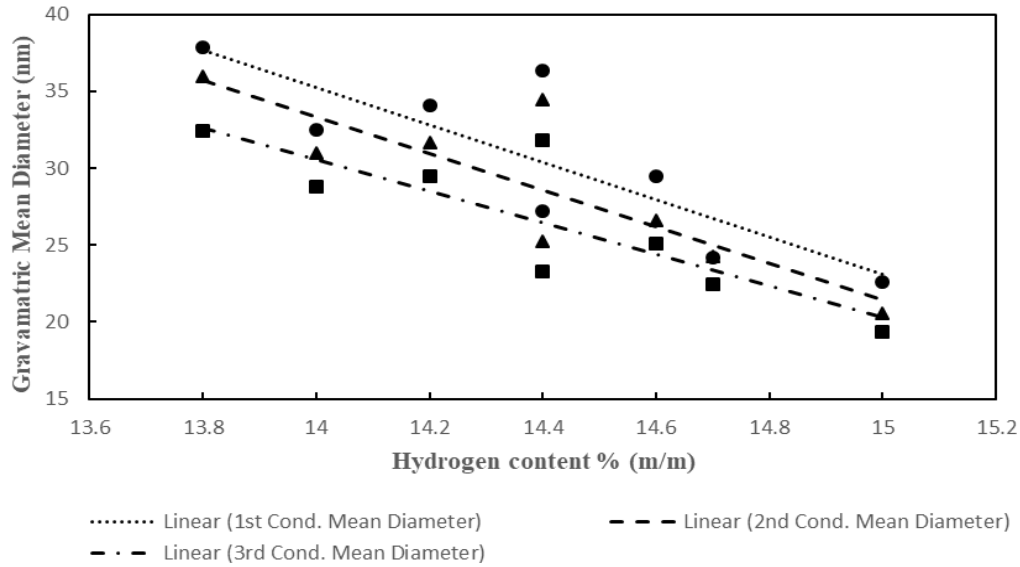


Figure 14. Particulate mean gravimetric diameter against hydrogen content of fuels tested

Figure 14 shows the particulate mean gravimetric diameter against the hydrogen content (mass percentage % m/m). It can be observed from the figure that the gravimetric diameter of particulates is reduced as the hydrogen content is increased. These findings are corroborated by Christie et al. [47] and Brem et al. [48].

Conclusions

Gaseous emissions analysis (CO, CO₂, NO, NO_x and THC) conducted on fuels studied in this work showed similar performance and were within the uncertainty of instruments. The smoke and particulate emissions of the SPK fuel were substantially lower than other fuels tested in this study. It is observed from the results that smoke and particulate emissions are decreased with a reduction in aromatic content of the fuel. It has also been observed that PM emissions also depends on hydrogen content of the fuel. Particulate mass emissions of Fuel B are substantially lower than other comparative fuels, due to different types of aromatics, even though fuel B contains more aromatic content by volume than Fuel A. Further study is required to evaluate the effect of different types of aromatics on particulate emissions, some investigation into the composition of aromatics and their specific impact on emissions has been studied by Corporan et al. [22].

Acknowledgements

The Honeywell GTCP85 APU used in this test campaign was kindly donated by British Airways. Part of this work was funded by the US Federal Aviation Administration (FAA) Office of Environment and Energy as a part of CLEEN Program under FAA Award Number: DTFAWA-10-C-00006. Any opinions, findings, and conclusions or recommendations expressed in this material are those of the authors and do not necessarily reflect the views of the FAA or other CLEEN Sponsors.

References

- [1] Airbus Global Market Forecast 2012-2031 - The Air Blog..., Air Blog. (2013).
<http://theairblog.weebly.com/pilot-blog/airbus-global-market-forecast-2012-2031> (accessed February 13, 2019).
- [2] J. Žarnovský, V. Petková, R. Drlička, J. Dobránský, Air Quality Improvement by Reduction of Gas Turbines Emissions, *Appl. Mech. Mater.* 308 (2013) 159–164.
doi:10.4028/www.scientific.net/AMM.308.159.
- [3] U. Schumann, H. Schlager, F. Arnold, J. Ovarlez, H. Kelder, Hov, G. Hayman, I.S.A. Isaksen, J. Staehelin, P.D. Whitefield, Pollution from aircraft emissions in the North Atlantic flight corridor: Overview on the POLINAT projects, *J. Geophys. Res. Atmos.* 105 (2000) 3605–3631.
doi:10.1029/1999JD900941.
- [4] H.L. Rogers, D.S. Lee, D.W. Raper, P.M. de F. Foster, C.W. Wilson, P.J. Newton, The impacts of aviation on the atmosphere, *Aeronaut. J.* 106 (2002) 521–546. doi:10.1017/s0001924000018157.
- [5] S. Blakey, L. Rye, C.W. Wilson, Aviation gas turbine alternative fuels: A review, *Proc. Combust. Inst.* 33 (2011) 2863–2885. doi:10.1016/j.proci.2010.09.011.
- [6] A. Murugesan, C. Umarani, R. Subramanian, N. Nedunchezian, Bio-diesel as an alternative fuel

- for diesel engines—A review, *Renew. Sustain. Energy Rev.* 13 (2009) 653–662.
doi:10.1016/J.RSER.2007.10.007.
- [7] G. Hemighaus, T. Boval, C. Bosley, R. Organ, J. Lind, R. Brouette, T. Thompson, J. Lynch, J. Jones, *Alternative Jet Fuels A supplement to Chevron’s Aviation Fuels Technical Review*, Chevron, 2006. <https://skybrary.aero/bookshelf/books/2479.pdf> (accessed February 13, 2019).
- [8] U. Yildirim, S. Abanteriba, *Manufacture, qualification and approval of new aviation turbine fuels and additives*, *Procedia Eng.* 49 (2012) 310–315. doi:10.1016/j.proeng.2012.10.142.
- [9] R. Parker, M. Lathoud, *Green aero-engines: Technology to mitigate aviation impact on environment*, *Proc. Inst. Mech. Eng. Part C J. Mech. Eng. Sci.* 224 (2010) 529–538.
doi:10.1243/09544062jmes1515.
- [10] ASTM, *ASTM D1655 18a Standard Specification for Aviation Turbine Fuels*, 2018.
- [11] ASTM, *ASTM D4054 Standard Practice for Evaluation of New Aviation Turbine Fuels and Fuel Additives*, n.d.
- [12] W.S. Blazowski, *Combustion considerations for future jet fuels*, *Symp. Combust.* 16 (1977) 1631–1639. doi:10.1016/S0082-0784(77)80442-6.
- [13] ASTM, *D7566 – 17a Standard Specification for Aviation Turbine Fuel Containing Synthesized Hydrocarbons 1*, (2017). doi:10.1520/D7566-17A.
- [14] E. Corporan, M.J. DeWitt, V. Belovich, R. Pawlik, A.C. Lynch, J.R. Gord, T.R. Meyer, *Emissions characteristics of a turbine engine and research combustor burning a Fischer-Tropsch jet fuel*, *Energy and Fuels.* 21 (2007) 2615–2626. doi:10.1021/ef070015j.
- [15] B.E. Anderson, A.J. Beyersdorf, C.H. Hudgins, J. V Plant, K.L. Thornhill, E.L. Winstead, L.D. Ziemba, P.D. Whitefield, D. Hagen, P. Lobo, R. Howard, W.B. Knighton, D. Bulzan, K. Tacina,

- C. Wey, E. Corporan, R. Vander Wal, R.C. Miake-Lye, S.C. Herndon, A. Bhargava, W. Dodds, J. Kinsey, B. Lee, G. Santori, D.S. Liscinsky, Alternative Aviation Fuel Experiment (AAFEX), 2011. <http://www.sti.nasa.gov> (accessed February 14, 2019).
- [16] R.H. Moore, M. Shook, A. Beyersdorf, C. Corr, S. Herndon, W.B. Knighton, R. Miake-Lye, K.L. Thornhill, E.L. Winstead, Z. Yu, L.D. Ziemba, B.E. Anderson, Influence of jet fuel composition on aircraft engine emissions: A synthesis of aerosol emissions data from the NASA APEX, AAFEX, and ACCESS missions, *Energy and Fuels*. 29 (2015) 2591–2600. doi:10.1021/ef502618w.
- [17] R.H. Moore, K.L. Thornhill, B. Weinzierl, D. Sauer, E. D’ascoli, J. Kim, M. Lichtenstern, M. Scheibe, B. Beaton, J. Beyersdorf, J. Barrick, D. Bulzan, C.A. Corr, E. Crosbie, T. Jurkat, R. Martin, D. Riddick, M. Shook, G. Slover, C. Voigt, R. White, E. Winstead, R. Yasky, L.D. Ziemba, A. Brown, H. Schlager, B.E. Anderson, Biofuel blending reduces particle emissions from aircraft engines at cruise conditions, (2017). doi:10.1038/nature21420.
- [18] L. Zheng, C. Ling, E.A. Ubogu, J. Cronly, I. Ahmed, Y. Zhang, B. Khandelwal, Effects of Alternative Fuel Properties on Particulate Matter Produced in a Gas Turbine Combustor, *Energy & Fuels*. 32 (2018) 9883–9897. doi:10.1021/acs.energyfuels.8b01442.
- [19] P. Lobo, D.E. Hagen, P.D. Whitefield, Comparison of PM emissions from a commercial jet engine burning conventional, biomass, and fischer-tropsch fuels, *Environ. Sci. Technol.* 45 (2011) 10744–10749. doi:10.1021/es201902e.
- [20] P.I. Williams, J.D. Allan, P. Lobo, H. Coe, S. Christie, C. Wilson, D. Hagen, P. Whitefield, D. Raper, L. Rye, Impact of Alternative Fuels on Emissions Characteristics of a Gas Turbine Engine – Part 2: Volatile and Semivolatile Particulate Matter Emissions, *Environ. Sci. Technol.* 46 (2012) 10812–10819. doi:10.1021/es301899s.

- [21] P. Lobo, L. Rye, P.I. Williams, S. Christie, I. Uryga-Bugajska, C.W. Wilson, D.E. Hagen, P.D. Whitefield, S. Blakey, H. Coe, D. Raper, M. Pourkashanian, Impact of Alternative Fuels on Emissions Characteristics of a Gas Turbine Engine – Part 1: Gaseous and Particulate Matter Emissions, *Environ. Sci. Technol.* 46 (2012) 10805–10811. doi:10.1021/es301898u.
- [22] E. Corporan, T. Edwards, L. Shafer, M.J. Dewitt, C. Klingshirn, S. Zabarnick, Z. West, R. Striebich, J. Graham, J. Klein, Chemical, thermal stability, seal swell, and emissions studies of alternative jet fuels, *Energy and Fuels.* 25 (2011) 955–966. doi:10.1021/ef101520v.
- [23] S. Christie, D. Raper, D.S. Lee, P.I. Williams, L. Rye, S. Blakey, C.W. Wilson, P. Lobo, D. Hagen, P.D. Whitefield, Polycyclic Aromatic Hydrocarbon Emissions from the Combustion of Alternative Fuels in a Gas Turbine Engine, *Environ. Sci. Technol.* 46 (2012) 6393–6400. doi:10.1021/es300301k.
- [24] P. Lobo, D.E. Hagen, P.D. Whitefield, Measurement and analysis of aircraft engine PM emissions downwind of an active runway at the Oakland International Airport, *Atmos. Environ.* 61 (2012) 114–123. doi:10.1016/J.ATMOSENV.2012.07.028.
- [25] B.H. Lee, G.W. Santoni, E.C. Wood, S.C. Herndon, R.C. Mlake-Lye, M.S. Zahniser, S.C. Wofsy, J.W. Munger, Measurements of Nitrous Acid in Commercial Aircraft Exhaust at the Alternative Aviation Fuel Experiment, *Environ. Sci. Technol.* 45 (2011) 7648–7654. doi:10.1021/es200921t.
- [26] B.T. Brem, L. Durdina, F. Siegerist, P. Beyerle, K. Bruderer, T. Rindlisbacher, S. Rocci-Denis, M. Gurhan Andac, J. Zelina, O. Penanhoat, J. Wang, Effects of Fuel Aromatic Content on Nonvolatile Particulate Emissions of an In-Production Aircraft Gas Turbine, *Environ. Sci. Technol.* 49 (2015) 13149–13157. doi:10.1021/acs.est.5b04167.
- [27] L. Rye, C. Wilson, The influence of alternative fuel composition on gas turbine ignition performance, *Fuel.* 96 (2012) 277–283. doi:10.1016/j.fuel.2011.12.047.

- [28] P. Lobo, S. Christie, B. Khandelwal, S.G. Blakey, D.W. Raper, Evaluation of Non-volatile Particulate Matter Emission Characteristics of an Aircraft Auxiliary Power Unit with Varying Alternative Jet Fuel Blend Ratios, *Energy & Fuels*. 29 (2015) 7705–7711. doi:10.1021/acs.energyfuels.5b01758.
- [29] B. Khandelwal, S. Roy, C. Lord, S. Blakey, Comparison of Vibrations and Emissions of Conventional Jet Fuel with Stressed 100% SPK and Fully Formulated Synthetic Jet Fuel, *Aerospace*. 1 (2014) 52–66. doi:10.3390/aerospace1020052.
- [30] B. Khandelwal, S. Roy, C. Lord, Effect of novel alternative fuels and compositions on vibrations of a gas turbine engine, in: 50th AIAA/ASME/SAE/ASEE Jt. Propuls. Conf., American Institute of Aeronautics and Astronautics, Reston, Virginia, 2014. doi:10.2514/6.2014-3410.
- [31] M. Ruslan, I. Ahmed, B. Khandelwal, Evaluating Effects of Fuel Properties on Smoke Emissions, in: Vol. 4A Combust. Fuels Emiss., 2016: p. V04AT04A046. doi:10.1115/GT2016-56791.
- [32] B. Khandelwal, C.J. Wijesinghe, S. Sriraman, Effect of Alternative Fuels on Emissions and Engine Compatibility, in: A.K. Runchal, A.K. Gupta, A. Kushari, A. De, S.K. Aggarwal (Eds.), *Energy Propuls. A Sustain. Technol. Approach*, Springer Singapore, Singapore, 2018: pp. 27–50. doi:10.1007/978-981-10-7473-8_2.
- [33] C.J. Wijesinghe, B. Khandelwal, Impact of alternative fuel on gas turbine noise, vibration and instability, in: AIAA Scitech 2019 Forum, American Institute of Aeronautics and Astronautics, 2019. doi:doi:10.2514/6.2019-0240.
- [34] S. Blakey, C.W. Wilson, M. Farmery, R. Midgley, Fuel effects on range versus payload for modern jet aircraft, *Aeronaut. J.* 115 (2011) 627–634. doi:10.1017/S000192400000631X.
- [35] S. Roy, B. Khandelwal, Comparison of Gaseous Emissions between Jet A-1 and Severely Hydro-Processed Jet Fuel from Conventional sources, in: 13th Int. Energy Convers. Eng. Conf.,

- American Institute of Aeronautics and Astronautics, Reston, Virginia, 2015. doi:10.2514/6.2015-4014.
- [36] I. Uryga-Bugajska, M. Pourkashanian, D. Borman, E. Catalanotti, C.W. Wilson, Theoretical investigation of the performance of alternative aviation fuels in an aero-engine combustion chamber, *Proc. Inst. Mech. Eng. Part G J. Aerosp. Eng.* 225 (2011) 874–885.
doi:10.1177/0954410011402277.
- [37] D.E. Hagen, P.D. Whitefield, H. Schlager, Particulate emissions in the exhaust plume from commercial jet aircraft under cruise conditions, *J. Geophys. Res.* 101 (1996) 19551.
doi:10.1029/95JD03276.
- [38] C.C. Wey, B.A. Anderson, C. Wey, R.C. Miake-Lye, P. Whitefield, R. Howard, Overview on the Aircraft Particle Emissions Experiment (APEX), *J. Propuls. Power.* 23 (2007) 898–905.
doi:10.2514/1.26406.
- [39] B. Khandelwal, E. Ubogu, M. Akram, S. Blakey, C.W. Wilson, Experimental Analysis on Emission Production and Performance of Stressed 100 % SPK, Stressed Fully Formulated Synthetic Jet Fuel, Jet A-1 in a Small Gas Turbine Engine, in: 11th Int. Energy Convers. Eng. Conf., American Institute of Aeronautics and Astronautics, Reston, Virginia, 2013.
doi:10.2514/6.2013-3936.
- [40] V.S.B. Shankar, B. Khandelwal, Comparison of Jet Fuel produced by Nonconventional Sources: Manufacturing, Emission and Performance, in: 11th Int. Energy Convers. Eng. Conf., American Institute of Aeronautics and Astronautics, Reston, Virginia, 2013. doi:10.2514/6.2013-3937.
- [41] SAE, ARP1256 Procedure for the Continuous Sampling and Measurement of Gaseous Emissions from Aircraft Turbine Engines, (1971). doi:<https://doi.org/10.4271/ARP1256>.
- [42] SAE, ARP1533A Procedure for the Analysis and Evaluation of Gaseous Emissions from Aircraft

- Engines, (2004). doi:<https://doi.org/10.4271/ARP1533A>.
- [43] Cambustion, DMS Instrument Principle | Cambustion, (n.d.).
<https://www.cambustion.com/products/dms> (accessed February 15, 2019).
- [44] SAE, ARP1179C Aircraft Gas Turbine Engine Exhaust Smoke Measurement, (1997).
doi:<https://doi.org/10.4271/ARP1179C>.
- [45] Rolls-Royce, FAA, Rolls-Royce Alternative Fuels Program-Final Report (CLEEN), 2015.
- [46] T.J. Johnson, J.S. Olfert, J.P.R. Symonds, M. Johnson, T. Rindlisbacher, J.J. Swanson, A.M. Boies, K. Thomson, G. Smallwood, D. Walters, Y. Sevcenco, A. Crayford, R. Dastanpour, S.N. Rogak, L. Durdina, Y.K. Bahk, B. Brem, J. Wang, Effective Density and Mass-Mobility Exponent of Aircraft Turbine Particulate Matter, *J. Propuls. Power.* 31 (2015) 573–582.
doi:10.2514/1.B35367.
- [47] S. Christie, P. Lobo, D. Lee, D. Raper, Gas turbine engine nonvolatile particulate matter mass emissions: Correlation with smoke number for conventional and alternative fuel blends, *Environ. Sci. Technol.* 51 (2017) 988–996. doi:10.1021/acs.est.6b03766.
- [48] B.T. Brem, L. Durdina, F. Siegerist, P. Beyerle, K. Bruderer, T. Rindlisbacher, S. Rocci-Denis, M.G. Andac, J. Zelina, O. Penanhoat, J. Wang, Effects of Fuel Aromatic Content on Nonvolatile Particulate Emissions of an In-Production Aircraft Gas Turbine, *Environ. Sci. Technol.* 49 (2015) 13149–13157. doi:10.1021/acs.est.5b04167.