



Deposited via The University of Sheffield.

White Rose Research Online URL for this paper:

<https://eprints.whiterose.ac.uk/id/eprint/162760/>

Version: Accepted Version

Monograph:

Hajirasouliha, I. and Nabid, N. (2020) A novel friction-wall system for seismic strengthening of substandard RC buildings. Report. RCUK-TUBITAK Research Partnership Project on "Rapid Earthquake Risk Assessment and Post-Earthquake Disaster Management Framework for Substandard Buildings in Turkey" . The University of Sheffield

© 2020 The Author(s). For re-use permissions, please contact the Author(s).

Reuse

Items deposited in White Rose Research Online are protected by copyright, with all rights reserved unless indicated otherwise. They may be downloaded and/or printed for private study, or other acts as permitted by national copyright laws. The publisher or other rights holders may allow further reproduction and re-use of the full text version. This is indicated by the licence information on the White Rose Research Online record for the item.

Takedown

If you consider content in White Rose Research Online to be in breach of UK law, please notify us by emailing eprints@whiterose.ac.uk including the URL of the record and the reason for the withdrawal request.



The
University
Of
Sheffield.

Department of Civil and Structural Engineering

A Novel Friction-wall System for Seismic Strengthening of Substandard RC Buildings

Iman Hajirasouliha


Senior Lecturer

Leader of Earthquake Engineering Group (EEG)

Neda Nabid

PhD Researcher

February 2020

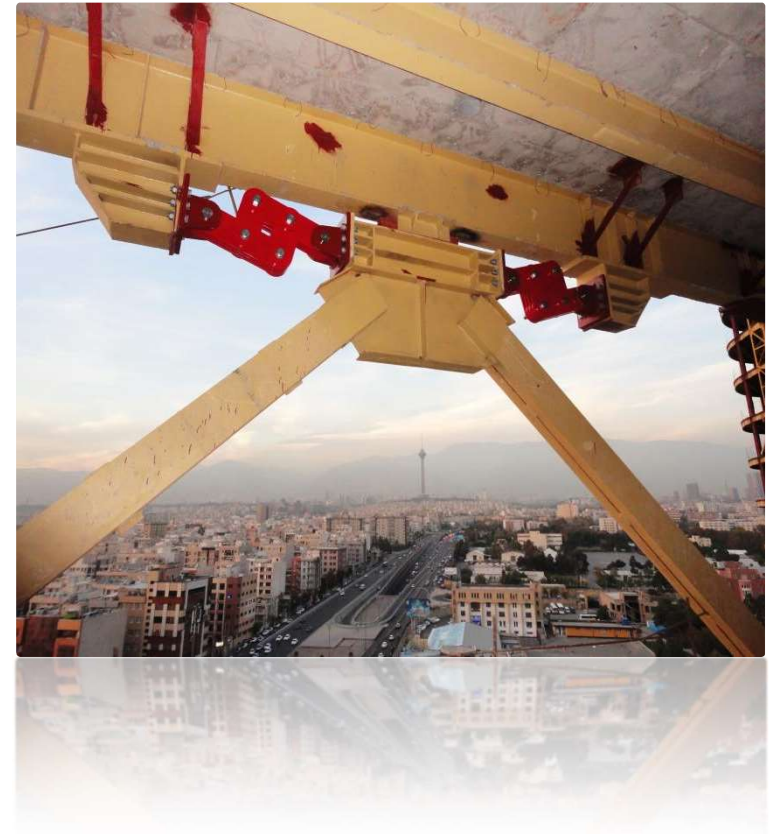


Progress Report



- Introduction
- Proposed Friction-Wall System
- Practical Design Solution
- Performance-based Optimisation
 - Single-objective optimisation
 - Multi-objective optimisation
- Summary and Conclusions



Bam Earthquake 2003, Iran

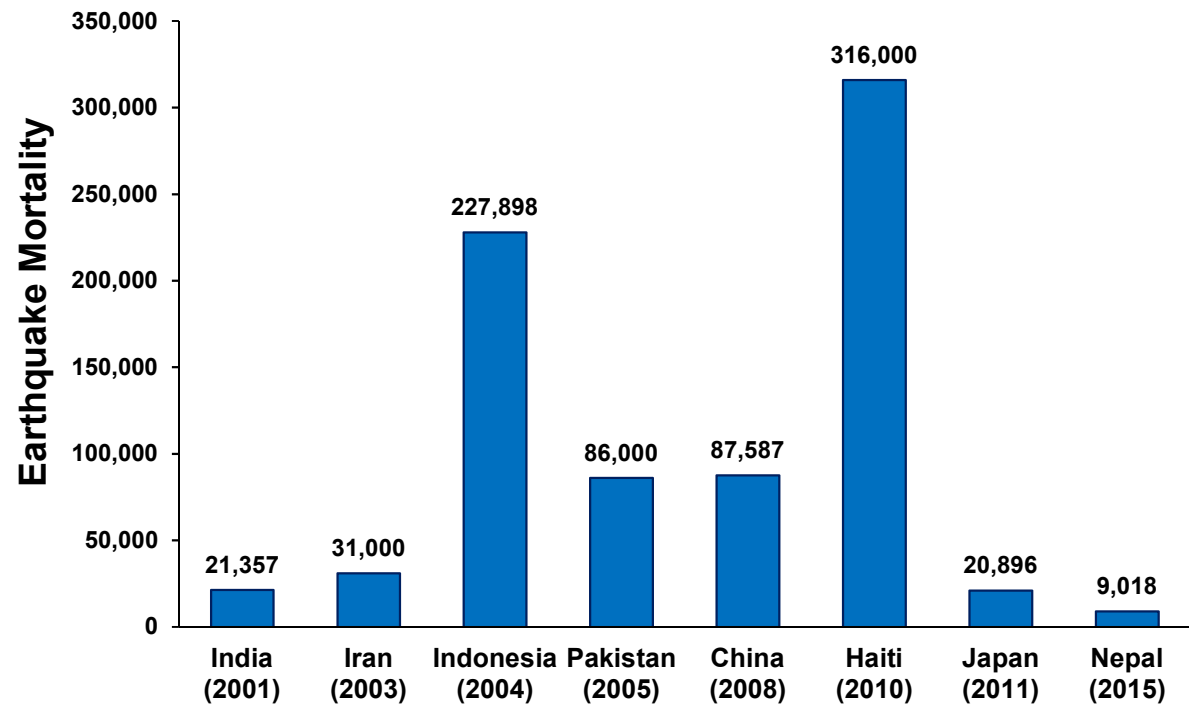

- Severe damage and extensive mortality
- Need for efficient and cost-effective strengthening solutions

Friction-based Energy Dissipation Systems

➤ Brace-type dampers

- Stress concentration
- Blocking the openings



➤ Wall-type dampers

- Less stress concentration
- Higher energy dissipation
- Larger Opening
- More adjustable





Proposed Friction Wall Damper:


➤ Components:

- Concrete wall panel
- Vertical supports to columns
- Horizontal support to lower floor beam
- Friction connection to upper floor beam

➤ Advantages:

- No brittle shear failure
- No stress concentration
- Easy assembly
- Easy adjustment

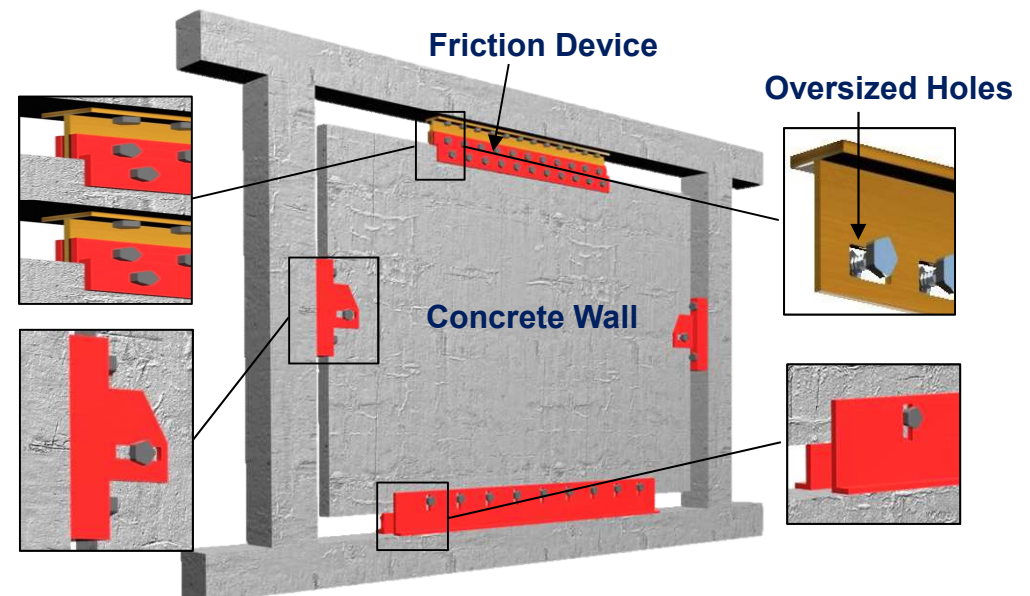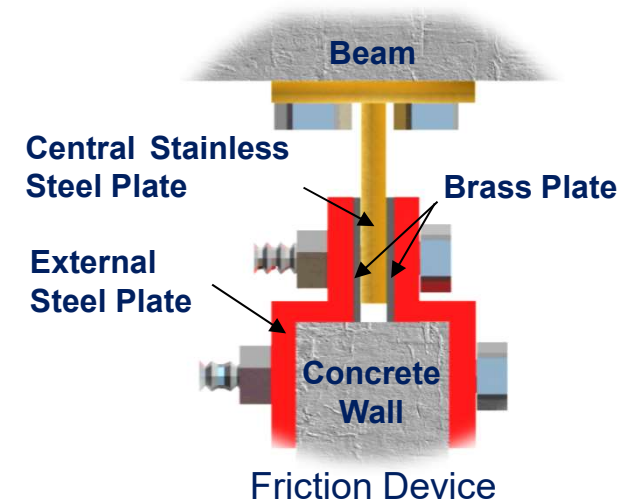

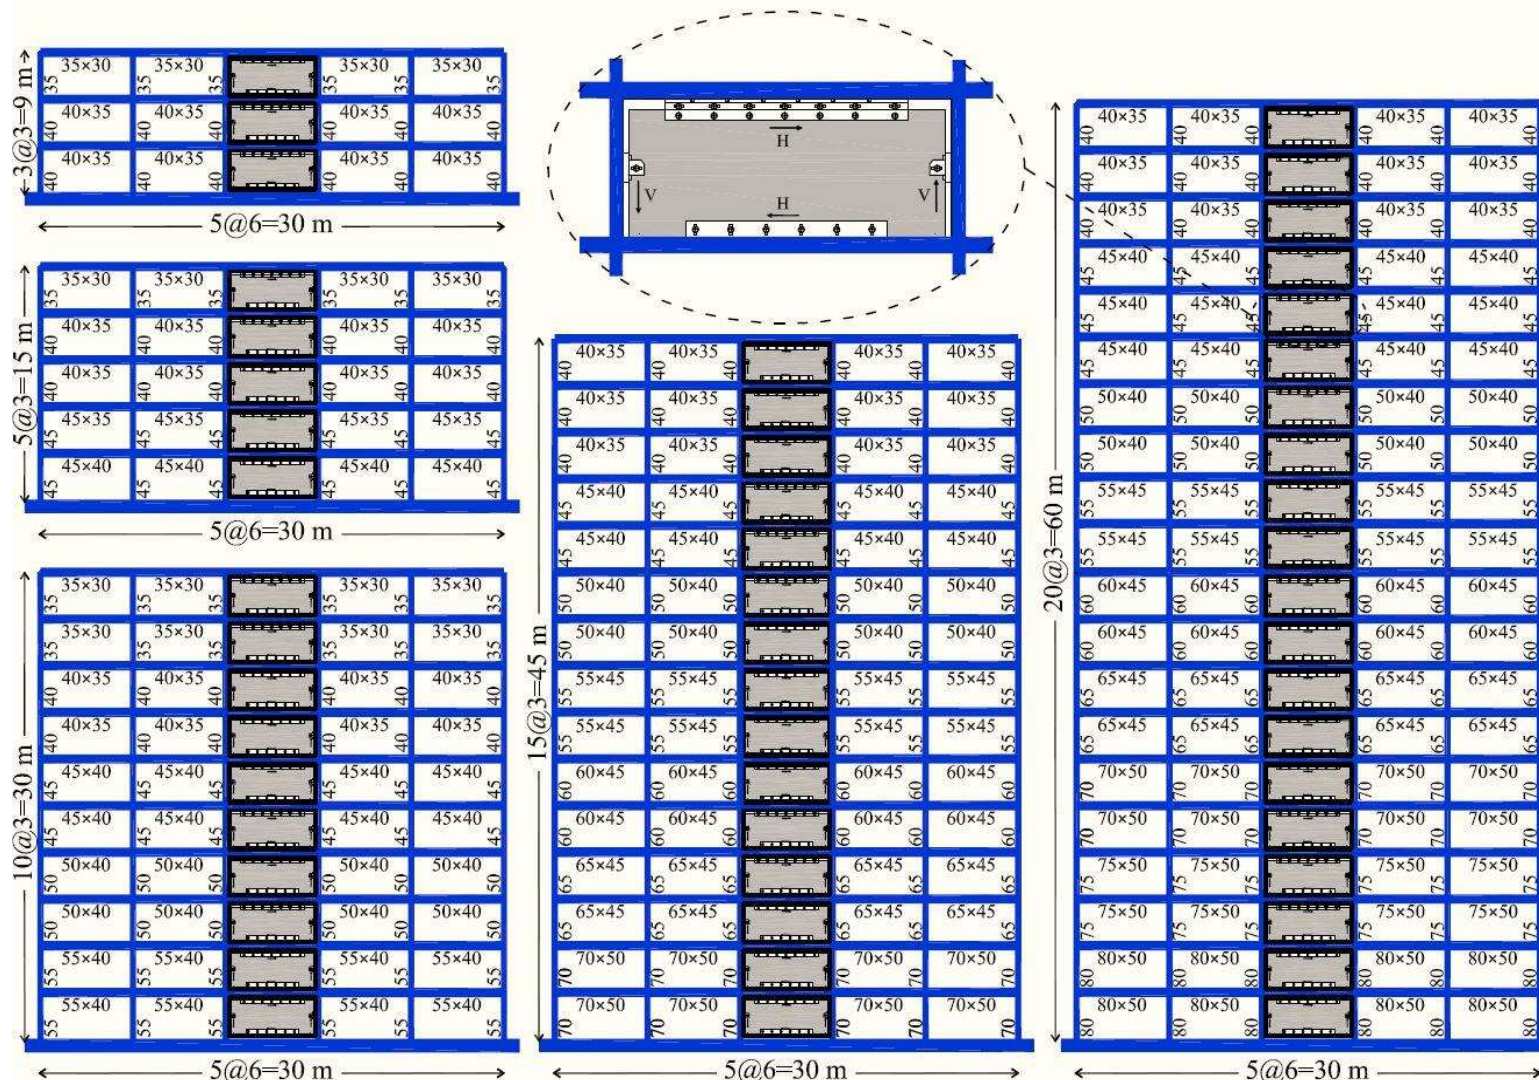

Geometry of the reference RC frames equipped with friction wall dampers

Prototype Slip Load Distribution Patterns:



1) Uniform (Conventional design)

2) Uniform Cumulative

3) Triangular Cumulative


4) Inverted Triangular Cumulative

5) Proportional to the Storey Shear Strength ($F_{y,i}$)

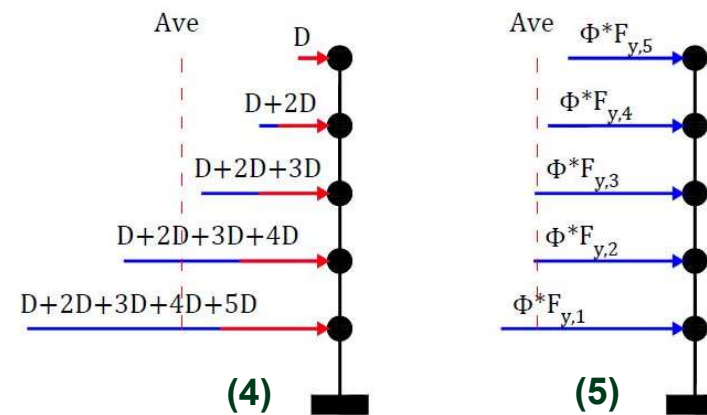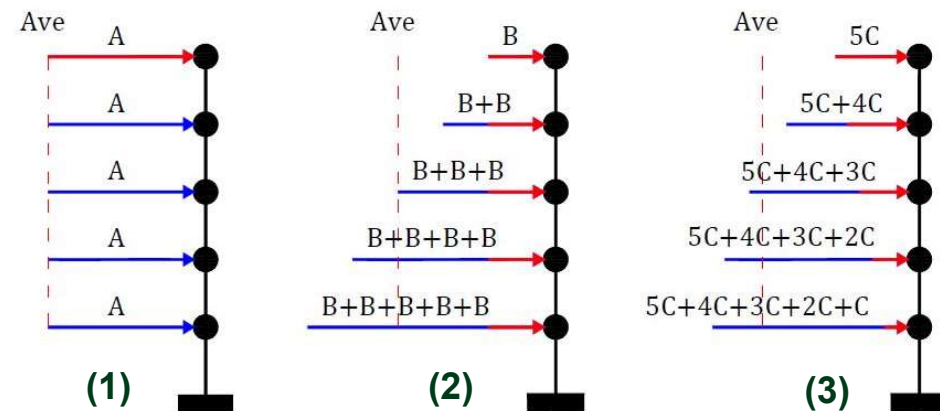



Displacement Demand

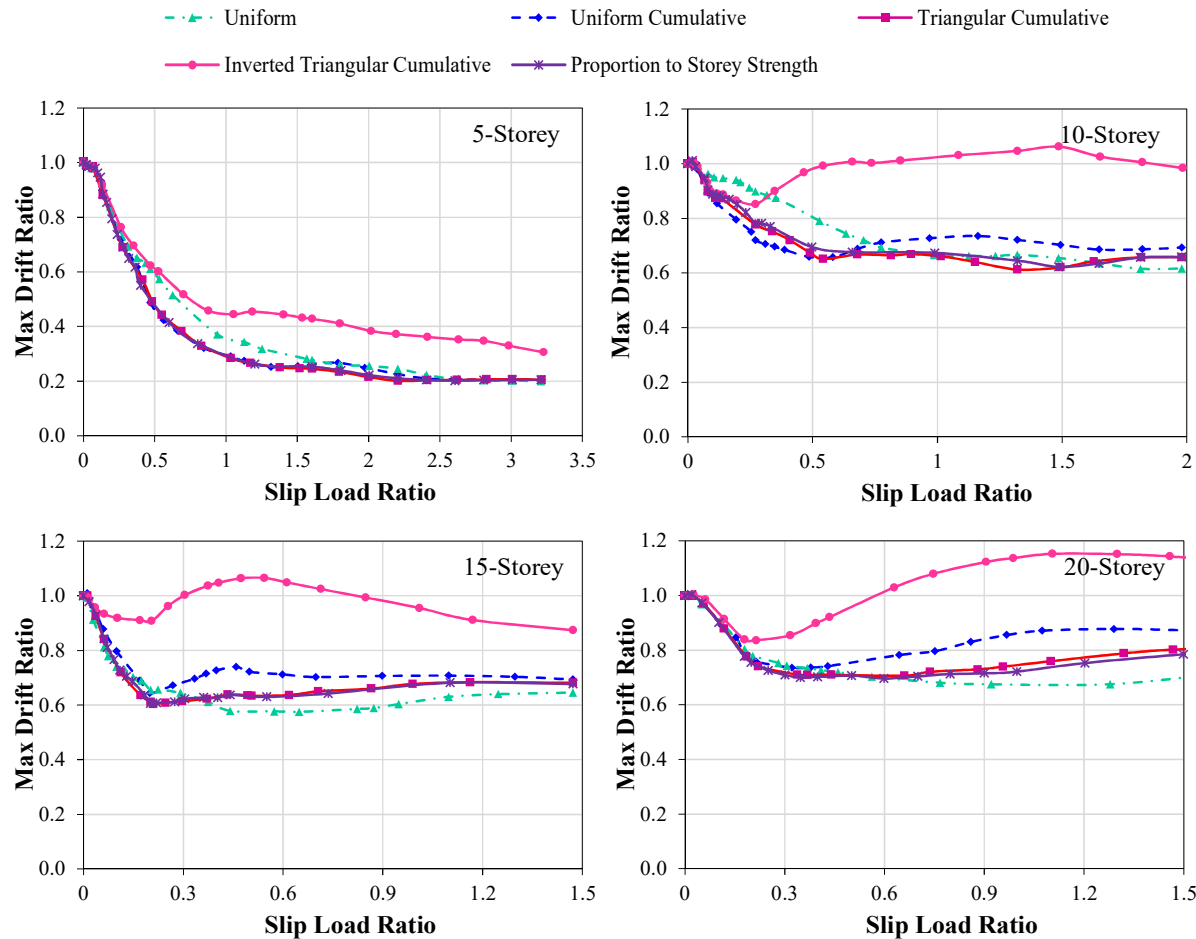

Slip load ratio:

$$F_{SR} = \frac{\sum_{i=1}^n F_{s,i}}{\sum_{i=1}^n F_{y,i}}$$


F_{SR} : slip Load Ratio

$F_{s,i}$: slip load of the i^{th} storey

$F_{y,i}$: storey shear strength

Optimum range?

Energy Dissipation Capacity

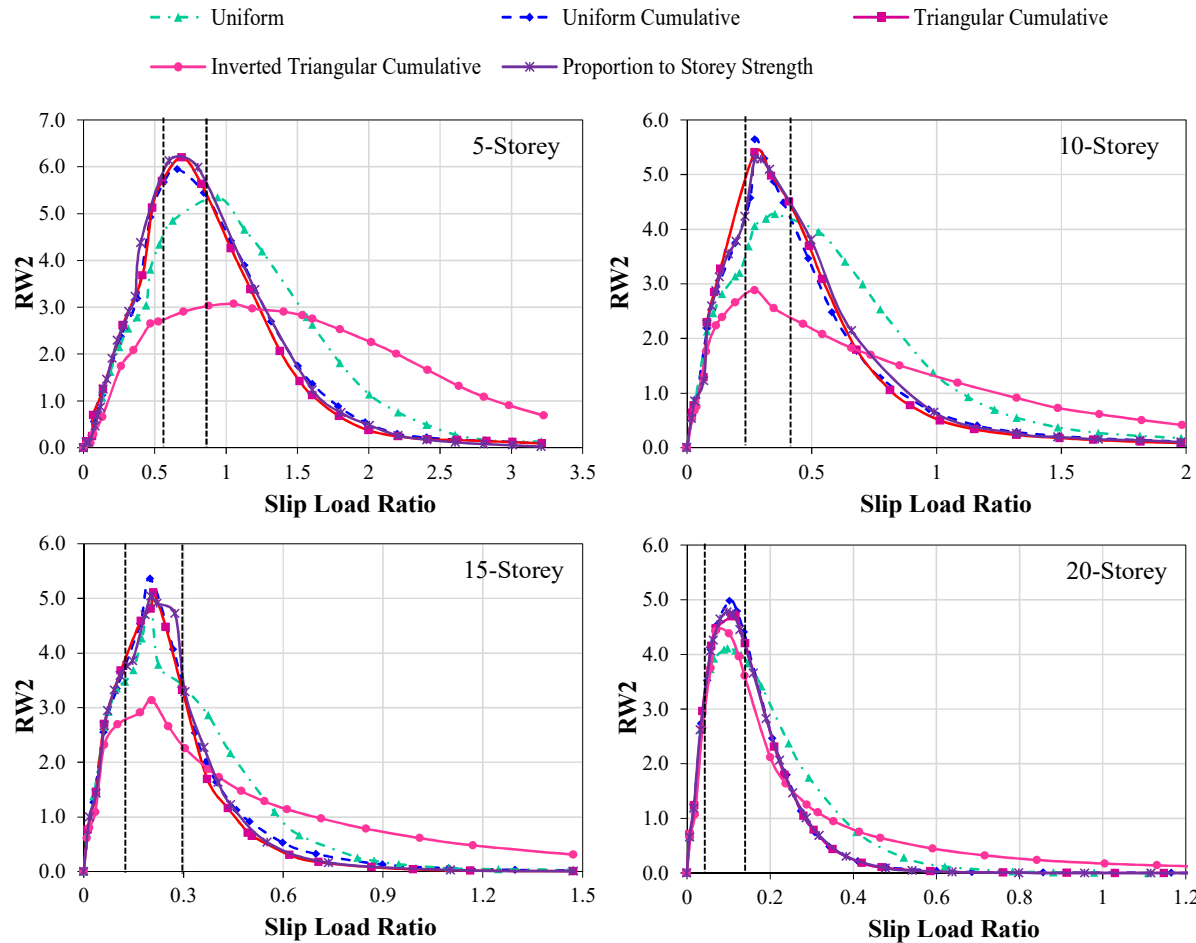

Energy parameter:

$$R_{w2} = \frac{W_{sf}}{(W_{sb} + W_{sc})_{cs}}$$


W_{sf} : work of friction devices
 W_{sb} : static work of beams
 W_{sc} : static work of columns

There is an optimum range for slip load ratios that, on average, leads to maximum energy dissipation.

Variation of R_{w2} as a function of slip load ratio, average of six selected earthquakes

Design Equation

Based on the optimum slip load ranges obtained from different seismic performance indices, an empirical equation is proposed for more efficient design of friction-based wall dampers.

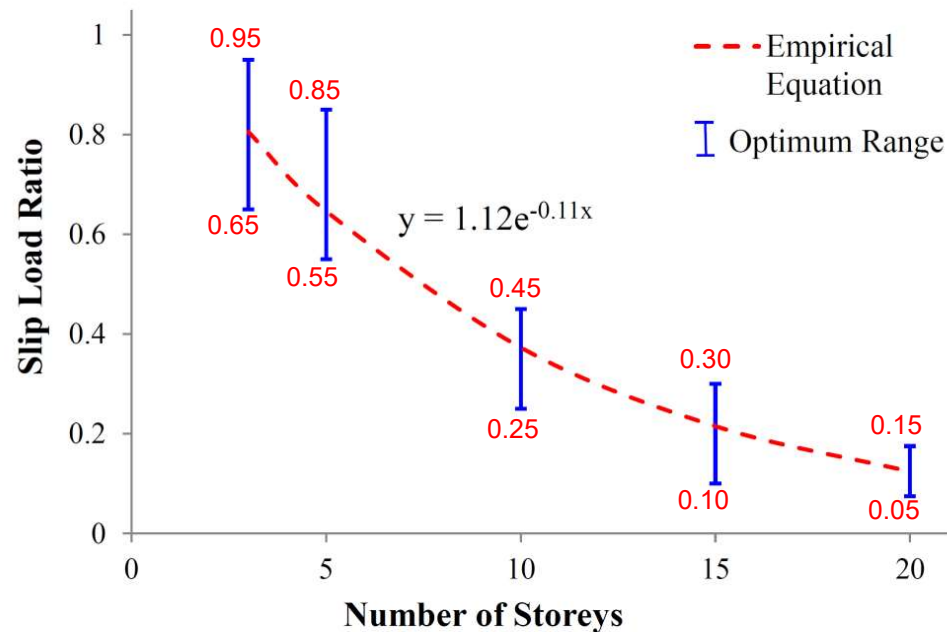

Best Slip Load Ratio

$$R = 1.12e^{-0.11n}$$



R : best slip load ratio
 n : number of storeys

Load Distribution

$$F_{s,i} = \frac{1.12e^{-0.11n} \times (n+1-i)}{n(n+1)/2} \times \sum_{j=1}^n F_{y,i}$$

$F_{s,i}$: slip load of the i^{th} storey
 $F_{y,i}$: storey shear strength


Efficiency of the proposed practical design solution:

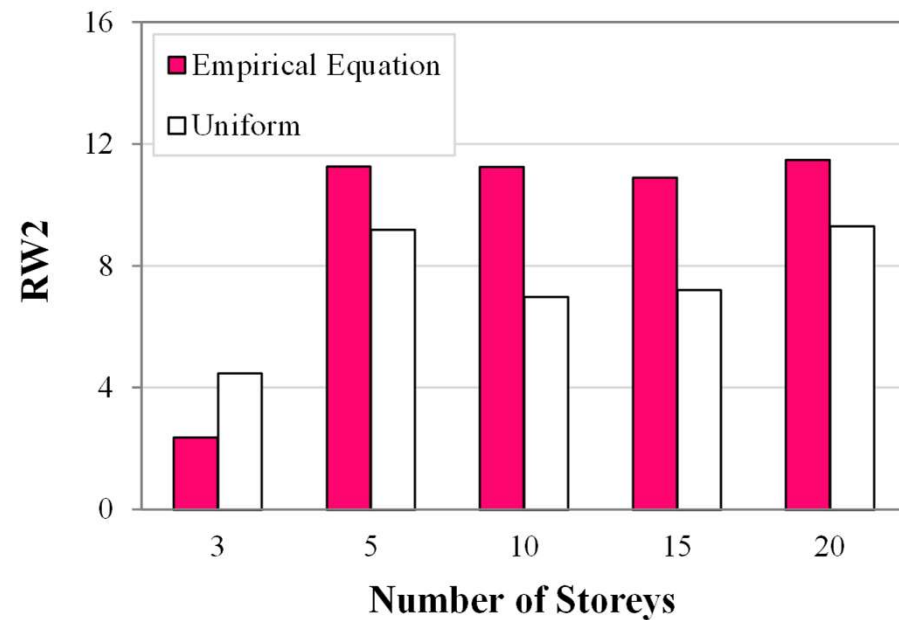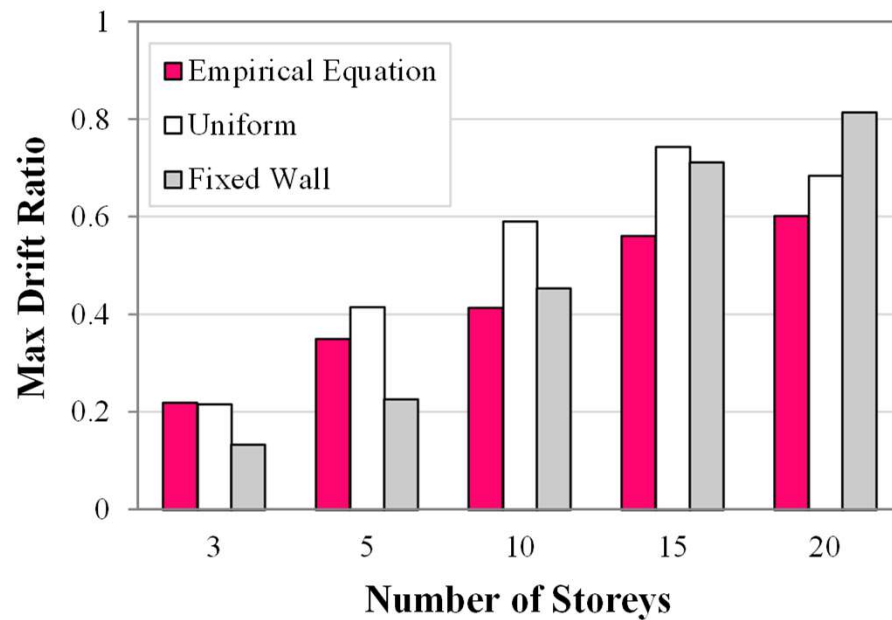

By increasing the energy dissipation, maximum inter-storey drift is reduced compared to conventional design method




Efficiency of the proposed practical design solution:

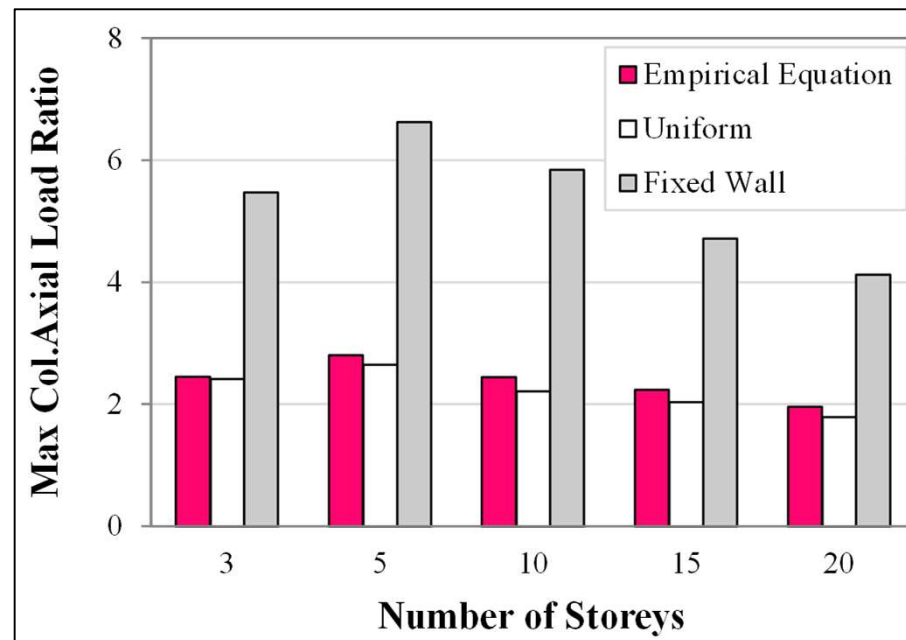


Axial load in the columns is significantly reduced

Cumulative Damage Index

- Using the proposed design solution leads to significant reduction (up to 83%) in the global damage index compared to the conventional design.
- The proposed equation is efficient at all PGA levels.

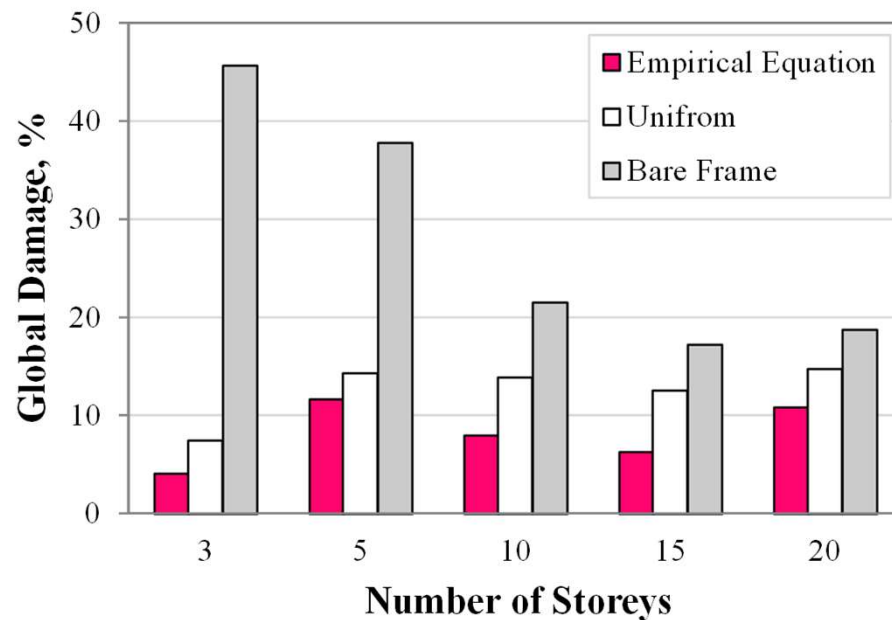

10-storey frame, A set of six synthetic spectrum compatible earthquakes

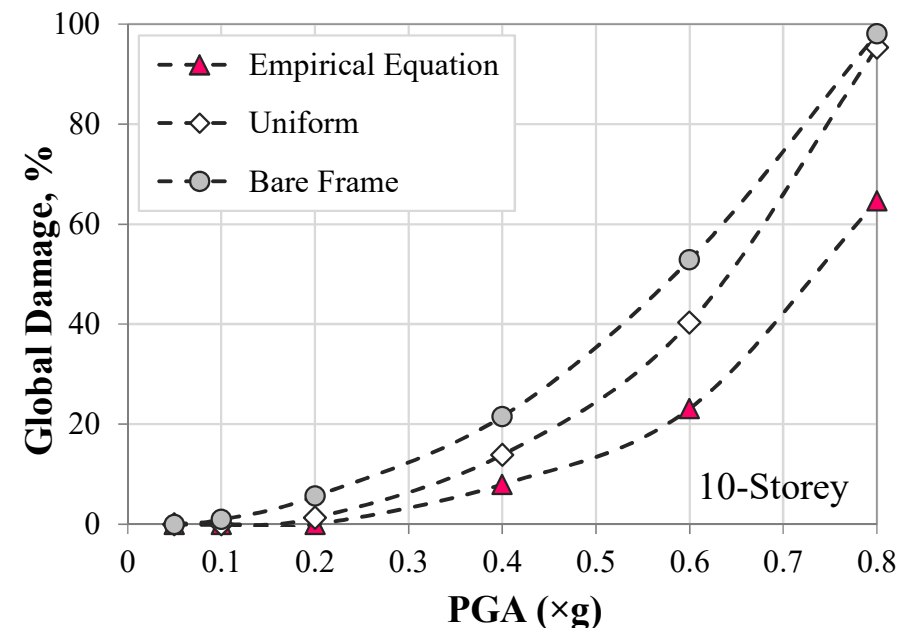



An optimisation method based the concept of **Uniform Damage Distribution** was adopted to obtain the best slip load distribution.

Proposed algorithm:


- 1) Initial slip load
$$F_{s,i} = \frac{1.12e^{-0.11n}}{n} \times \sum_1^n F_{y,i}$$

n: Number of storeys
i: Storey number
- 2) $(m + 1)^{\text{th}}$ slip loads
$$(F_{s,i})_{m+1} = (F_{s,i})_m \times \left(\frac{\Delta_i}{\Delta_{ave}} \right)_m^\alpha$$


Δ : Maximum drift
m: Number of steps
 α : Convergence factor
- 3) Scaled to the average
$$\left[(F_{s,i})_{m+1} \right]_{scaled} = \left(\frac{\sum (F_{s,i})_0}{\sum (F_{s,i})_{m+1}} \right) \times (F_{s,i})_{m+1}$$
- 4) Covariance of drift
$$(COV_\Delta)_m = \left(\frac{\sqrt{(Var_\Delta)_m}}{(Ave_\Delta)_m} \right) \times 100$$



➤ Effect of convergence parameter:

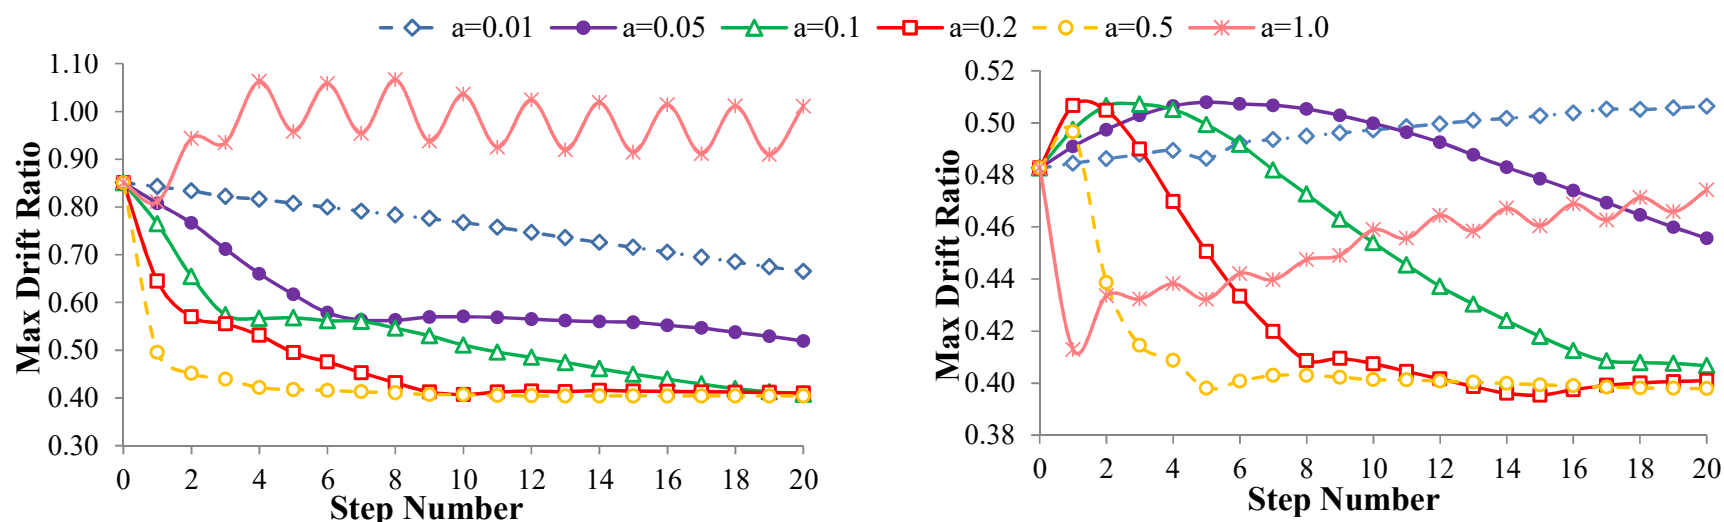


➤ Effect of initial slip load distribution:

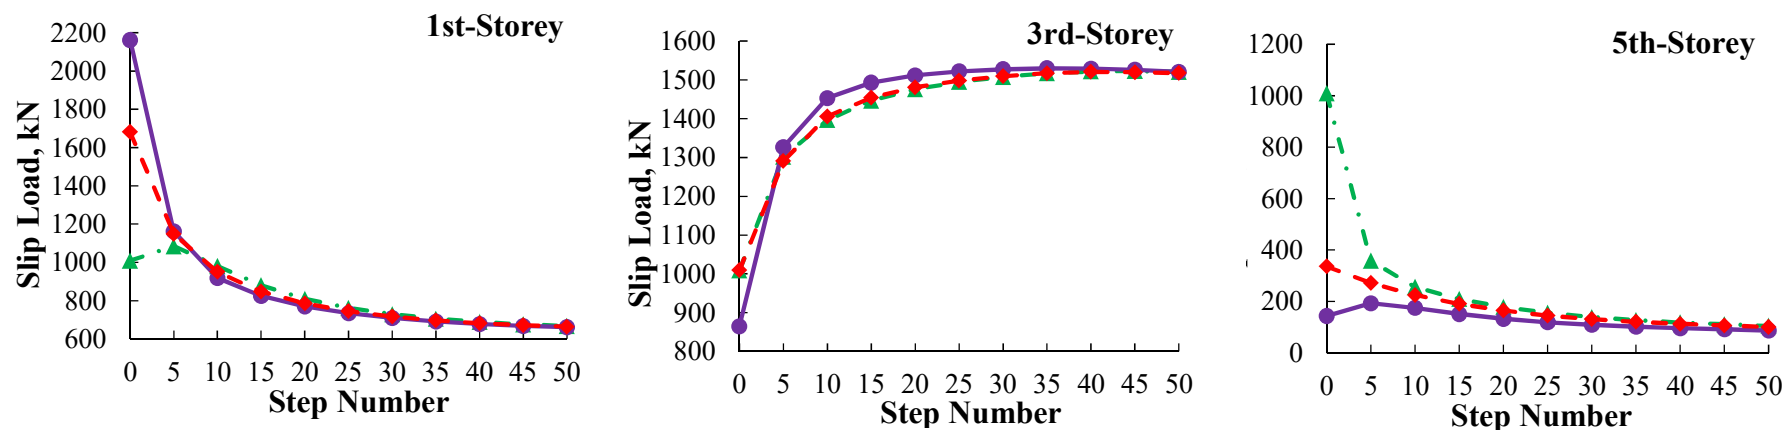




Optimum design for synthetic spectrum-compatible earthquakes:

- 1) Up to 45% less maximum drift ratio
- 2) Avoiding damage localisation and soft-storey failure
- 3) Removing unnecessary friction wall dampers

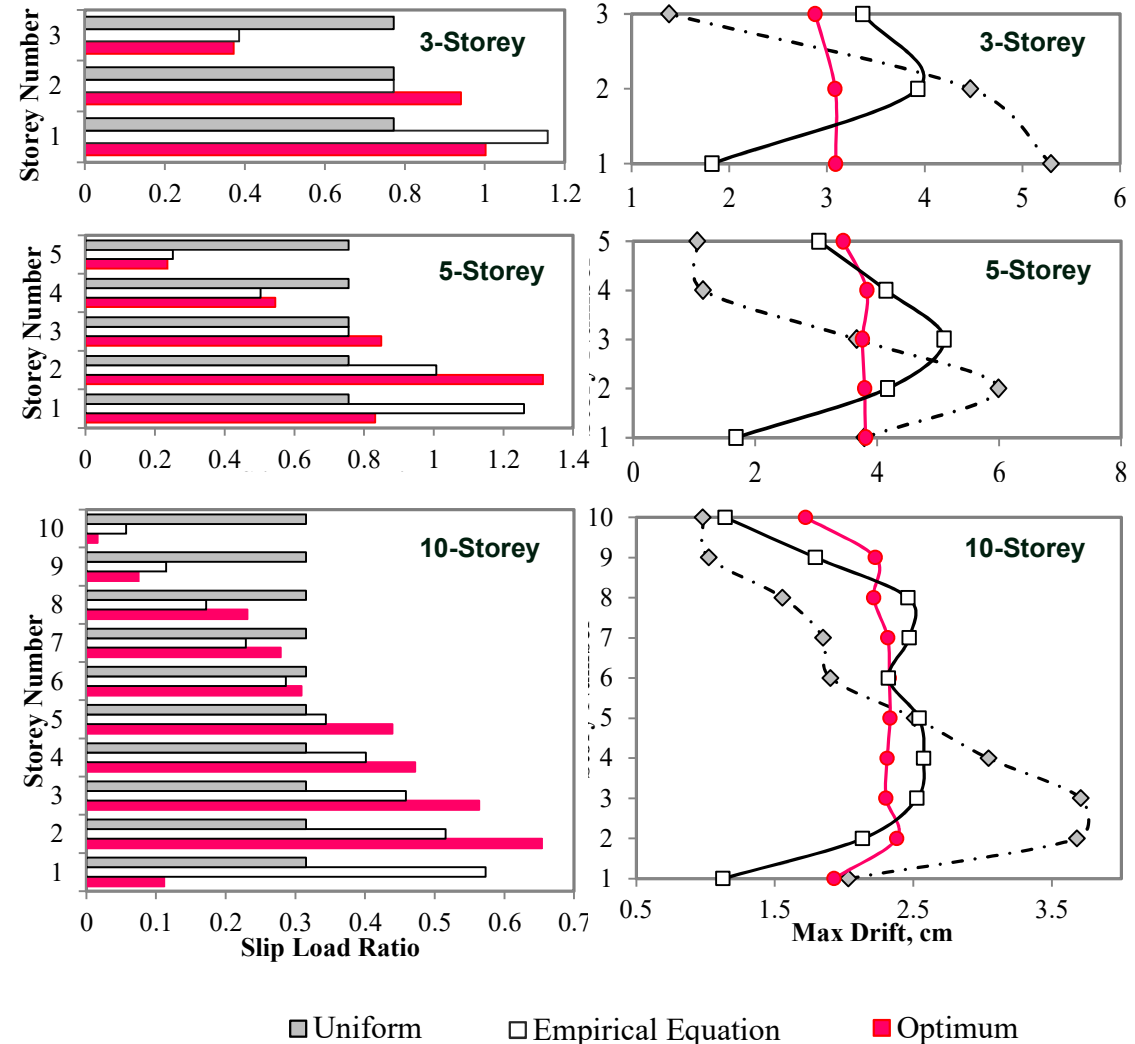

➤ Effect of design earthquake:

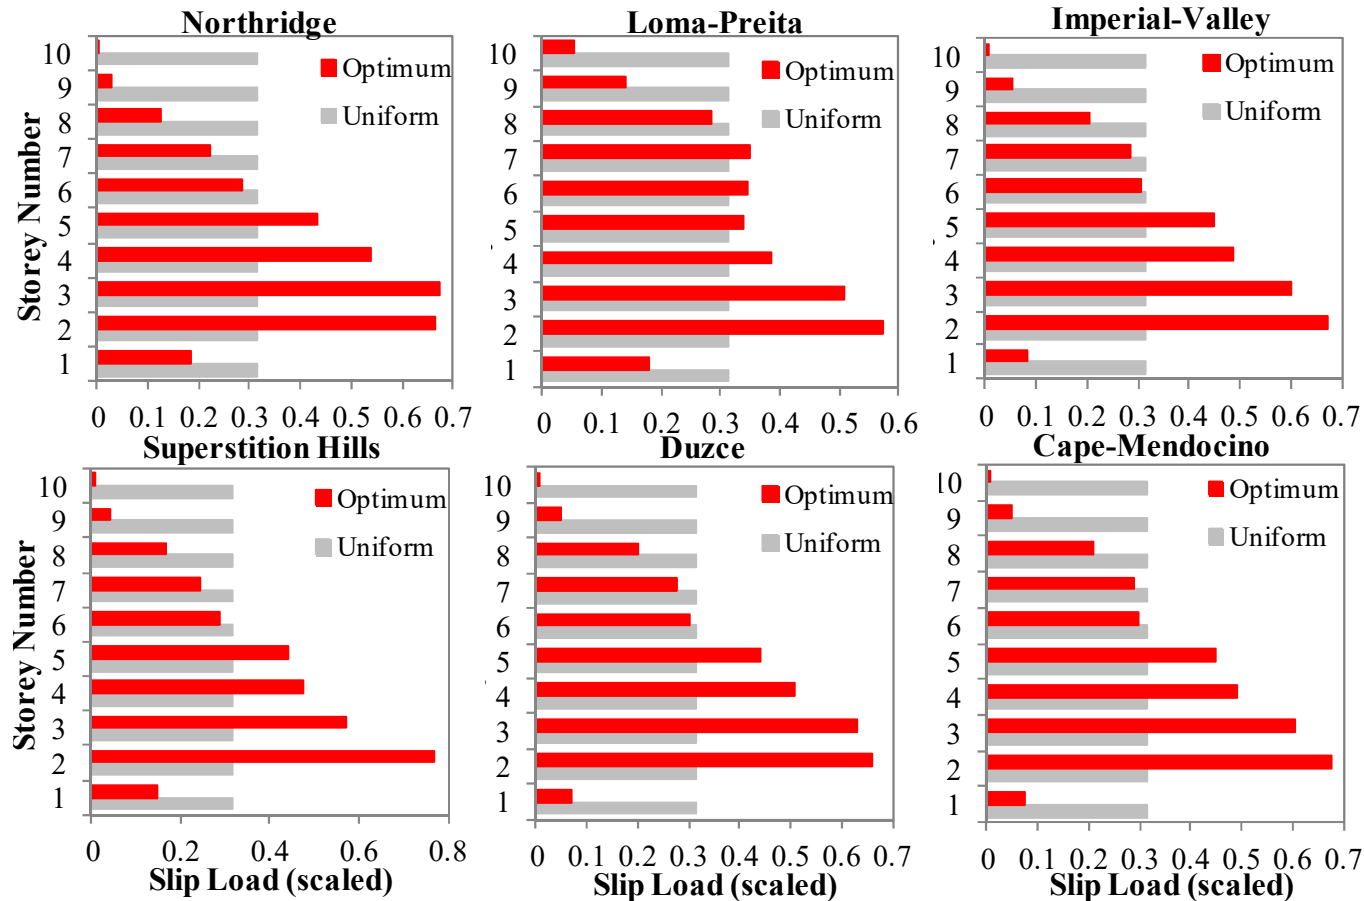


Comparison between optimum and uniform distribution of slip loads (scaled to the average storey shear strength) for 10-storey frames under six natural earthquakes




➤ Optimum Design Solution for a Code Design Spectrum

The optimum slip load distributions corresponding to the natural and synthetic earthquakes are almost identical. This implies that there is a unique optimum design solution for each frame subjected to the design spectrum.

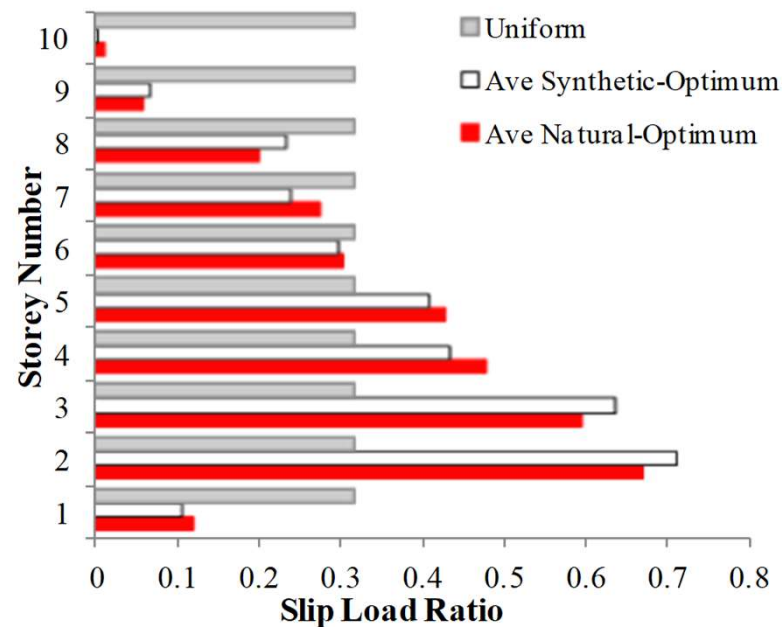



➤ Optimum Design Solution for a Code Design Spectrum

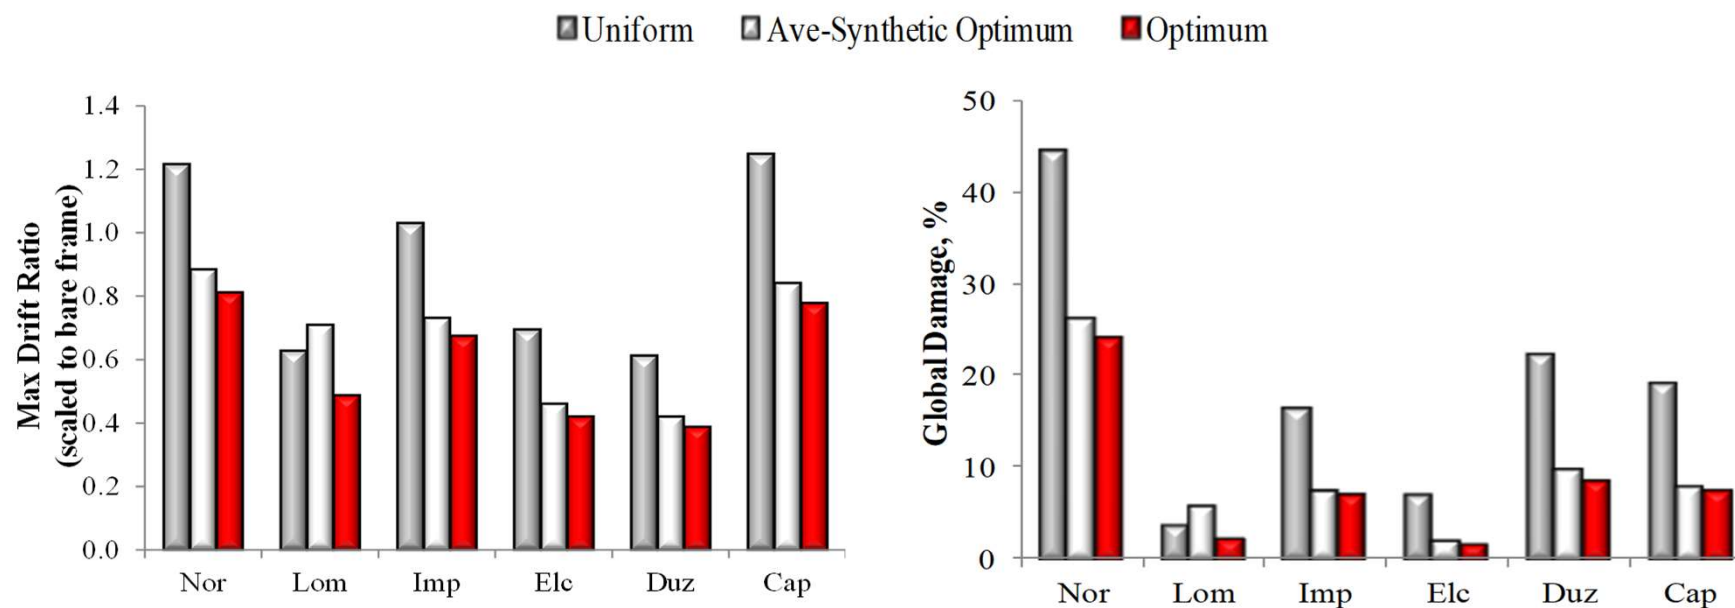

Average of optimum slip load patterns for a set of a spectrum compatible earthquakes can be used for practical design purposes



- A practical performance-based design methodology was proposed for optimum design of RC frames using friction-based wall dampers and the computational efficiency of the method was demonstrated.
- Optimum design friction-based dampers could increase the energy dissipation capacity (by up to 61%) and decrease the maximum drift ratio (by up to 30%) compared to the conventional design solutions.
- Using the proposed practical design equation resulted in up to 50% lower global damage compared to the conventional design solutions.
- The seismic load uncertainty can be efficiently managed by using the average of optimum load patterns corresponding to a set of synthetic earthquakes representing the design spectrum.

Optimum Design of Friction-Walls

Nabid N, Hajirasouliha I & Petkovski M (2020) “Multi-criteria performance-based optimization of friction energy dissipation devices in RC frames”, *Earthquake and Structures*, 2, 185-199.

Nabid N, Hajirasouliha I & Petkovski M (2019) “Adaptive low computational cost optimisation method for performance-based seismic design of friction dampers”, *Engineering Structures*, 198, 109549.

Nabid N, Hajirasouliha I & Petkovski M (2019) “Simplified Method for Optimal Design of Friction Damper Slip Loads by Considering Near-Field and Far-Field Ground Motions”, *Journal of Earthquake Engineering*.

Nabid N, Hajirasouliha I & Petkovski M (2018) “Performance-based optimisation of RC frames with friction wall dampers using a low-cost optimisation method”, *Bulletin of Earthquake Engineering*, 16(10), 5017-5040.

Nabid N, Hajirasouliha I & Petkovski M (2017) “A Practical Method for Optimum Seismic Design of Friction Wall Dampers”, *Earthquake Spectra*, 33(3), 1033-1052.

Uniform Damage Distribution (UDD) Optimisation

Asadi P & Hajirasouliha I (2020) “A practical methodology for optimum seismic design of RC frames for minimum damage and life-cycle cost”, *Engineering Structures*, 202, 109896.

Mohammadi RK, Garoosi MR & Hajirasouliha I (2019) “Practical method for optimal rehabilitation of steel frame buildings using buckling restrained brace dampers”, *Soil Dynamics and Earthquake Engineering*, 123, 242-251.

Moghaddam H, Hajirasouliha I & Gelekolai SMH (2018) “More efficient lateral load patterns for seismic design of steel moment-resisting frames”, *Proceedings of the Institution of Civil Engineers: Structures and Buildings*, 171(6), 472-486.

Ganjavi B, Hajirasouliha I & Bolourchi A (2016) “Optimum Lateral Load Distribution for Seismic Design of Nonlinear Shear-Buildings Considering Soil-Structure Interaction”, *Soil Dynamics and Earthquake Engineering*, 88, 356-368.

Hajirasouliha I, Pilakoutas K & Mohammadi RK (2016) “Effects of uncertainties on seismic behaviour of optimum designed braced steel frames”, *Steel and Composite Structures*, 20(2), 317-335.

Hajirasouliha I, Asadi P & Pilakoutas K (2012) “An efficient Performance-Based Seismic Design of Reinforced Concrete Frames”, *Earthquake Engineering and Structural Dynamics*, 41, 663-679.

Uniform Damage Distribution (UDD) Optimisation (continued)

Hajirasouliha I & Pilakoutas K (2012) “General Seismic Load Distribution for Optimum Performance-Based Design of Shear-Buildings”, Journal of Earthquake Engineering, 16(4), 443-462.

Hajirasouliha I, Pilakoutas K & Moghaddam H (2011) “Topology optimization for the seismic design of truss-like structures”, Computers and Structures, 89(7-8), 702-711.

Hajirasouliha I & Moghaddam H (2009) “New Lateral Force Distribution for Seismic Design of Structures”, Journal of Structural Engineering (ASCE), 135(8), 906-915.

Moghaddam H & Hajirasouliha I (2008) “Optimum strength distribution for seismic design of tall buildings”, Structural Design of Tall and Special Buildings, 17(2), 331-349.

Moghaddam H & Hajirasouliha I (2006) “Toward more rational criteria for determination of design earthquake forces”, International Journal of Solids and Structures, 43(9), 2631-2645.

Moghaddam H & Hajirasouliha I (2005) “Fundamentals of optimum performance-based design for dynamic excitations”, Scientia Iranica, 12(4), 368-378.

Moghaddam H, Hajirasouliha I & Doostan A (2005) “Optimum seismic design of concentrically braced steel frames: concepts and design procedures”, Journal of Constructional Steel Research, 61(2), 151-166.

Moghaddam H & Hajirasouliha I (2004) A new approach for optimum design of structures under dynamic excitation. Asian Journal of Civil Engineering, 1-2(5), 69-84.