

This is a repository copy of *Modified null broadening adaptive beamforming: constrained optimisation approach*.

White Rose Research Online URL for this paper:

<https://eprints.whiterose.ac.uk/id/eprint/3422/>

---

**Article:**

Xu, Z. and Zakharov, Y. [orcid.org/0000-0002-2193-4334](https://orcid.org/0000-0002-2193-4334) (2007) Modified null broadening adaptive beamforming: constrained optimisation approach. *Electronics Letters*. pp. 145-146. ISSN: 0013-5194

<https://doi.org/10.1049/el:20073561>

---

**Reuse**

Items deposited in White Rose Research Online are protected by copyright, with all rights reserved unless indicated otherwise. They may be downloaded and/or printed for private study, or other acts as permitted by national copyright laws. The publisher or other rights holders may allow further reproduction and re-use of the full text version. This is indicated by the licence information on the White Rose Research Online record for the item.

**Takedown**

If you consider content in White Rose Research Online to be in breach of UK law, please notify us by emailing [eprints@whiterose.ac.uk](mailto:eprints@whiterose.ac.uk) including the URL of the record and the reason for the withdrawal request.



**Universities of Leeds, Sheffield and York**  
**<http://eprints.whiterose.ac.uk/>**

---

This is an author produced version of a paper to be/subsequently published in **Electronics Letters**. (This paper has been peer-reviewed but does not include final publisher proof-corrections or journal pagination.)

White Rose Research Online URL for this paper:  
<http://eprints.whiterose.ac.uk/3422>

---

**Published paper**

Xu, Zhengyi and Zakharov, Yuriy (2007) Modified null broadening adaptive beamforming: a constrained optimisation approach. *Electronics Letters*, 43 (3). 145-146.

---

# Modified Null Broadening Adaptive Beamforming: A Constrained Optimisation Approach

Zhengyi Xu and Yuriy Zakharov

## Abstract

A constrained optimisation approach for null broadening adaptive beamforming is proposed. This approach improves the robustness of the traditional MVDR beamformer by broadening nulls for interference direction and the mainlobe for the desired direction. This optimisation is efficiently solved by semidefinite programming. The proposed approach, when applied to high altitude platform (HAP) communications using a vertical linear antenna array, provides significantly better coverage performance than a previously reported null broadening technique.

*Introduction:* Antenna beampattern optimisation is widely used to improve the system capacity in wireless communications. Adaptive beamformers are well known for their high resolution and sidelobe suppression [1]. Among them, the Minimum Variance Distortionless Response (MVDR) beamformer [2] is one of the most traditional techniques. However, the performance of the MVDR beamformer significantly degrades if the steering information is inaccurate [3]. The most common technique to improve the robustness of the MVDR beamformer is the diagonal loading [3], [4]. The drawback is that there is currently no reliable method to select the optimal loading factor [5]. Null broadening [6], [7] is another robust approach. In [6], a cluster of equal-strength incoherent sources are artificially distributed around each original source in order to generate a trough like pattern. However, the mainlobe is not broadened. This may result in a poor coverage performance when the system is suffering high steering errors while the mainlobe of the beampattern is narrow. Furthermore, arranging equal number of additive sources for each interferer evidently limits the coverage performance.

In this letter, we propose an improved null broadening method. In particular, the following refinements are introduced to improve the robustness of null broadening techniques: 1) a new constrained optimisation problem is formulated to broaden both nulls and mainlobe; 2) the optimisation problem is solved using semidefinite programming (SDP) [8], [9]; 3) non-equal number of additive sources are assigned to different users to reduce the total number of optimisation parameters, which makes the SDP solution more efficient. The proposed approach is compared with the conventional null broadening technique proposed in [6] for downlink communications from high altitude platforms (HAPs) [10]. The performance improvement due to the modified null broadening approach is significant.

*Null broadening techniques:* MVDR adaptive beamforming places nulls in the direction of interferers whilst assigning unit power to the desired user. The  $N \times 1$  MVDR weight vectors for the  $m$ th desired user is given by [2]

$$\mathbf{w}_m = \frac{\mathbf{R}^{-1}\mathbf{u}(\theta_m)}{\mathbf{u}^H(\theta_m)\mathbf{R}^{-1}\mathbf{u}(\theta_m)}, \quad m = 1 \cdots M, \quad (1)$$

where:  $[\cdot]^H$  denotes the Hermitian transpose;  $M$  is the total number of users;  $\mathbf{u}(\theta_m)$  is the  $N \times 1$  steering vector pointing  $\theta_m$  degrees from the broadside;  $N$  is the number of antenna elements;  $\mathbf{R}$  is an  $N \times N$  covariance matrix whose entries can be written in an analytical form as [7]

$$R_{qp} = N_p \delta_{qp} + \sum_{m=1}^M P_m e^{jk_0(x_q - x_p) \sin \theta_m}, \quad q, p = 1 \cdots N, \quad (2)$$

where  $N_p$  is the noise variance,  $\delta_{qp}$  is the Kronecker delta function,  $P_m$  is the received power of the  $m$ th user,  $j = \sqrt{-1}$ ,  $k_0 = 2\pi/\lambda$  is the wave number,  $\lambda$  the wavelength, and  $x_q$  represents the element location. In order to produce a trough pattern in each of the interference direction, Mailloux proposed to distribute  $U$  equal-strength incoherent sources around each original interference source [6]. Fig.1 illustrates the null broadening approach in the scenario of HAP communications [10] with a vertical linear antenna array mounted on a HAP at an altitude  $H$ , providing the coverage over a circular area of radius  $r$ . In this case, the modified covariance matrix  $\tilde{R}$  has entries [6]

$$\tilde{R}_{qp} = \frac{\sin(U\Lambda_{qp})}{U \sin(\Lambda_{qp})} R_{qp}, \quad q, p = 1 \cdots N, \quad (3)$$

where  $\Lambda_{qp} = \pi(x_q - x_p)\xi/\lambda$ ,  $\xi = \varepsilon/(U - 1)$  and  $\varepsilon$  represents the trough width, shown in Fig.1.

An improvement of Mailloux's method can be achieved by broadening the mainlobe in addition to broadening the nulls. Let's denote

$$\Theta = [\Theta_1, \Theta_2, \cdots, \Theta_M] \quad (4)$$

and

$$\Theta_m = [\theta_m^{(-\frac{U-1}{2})}, \theta_m^{(-\frac{U-1}{2}+1)}, \cdots, \theta_m^{(0)}, \cdots, \theta_m^{(\frac{U-1}{2}+1)}, \theta_m^{(\frac{U-1}{2})}], \quad m = 1, \cdots, M, \quad (5)$$

where  $\theta_m^{(0)} = \theta_m$  represents the original user position. The set  $\Theta$  contains all user positions including the additive sources around each original user. We denote  $\bar{\Theta}_m$  as the complementary set of  $\Theta_m$  with respect to  $\Theta$ , that is  $\bar{\Theta}_m \cup \Theta_m = \Theta$ . The improved null broadening approach is based on minimising the total power of all original interferers and their respective additive sources, while assigning unity received power to the desired user and its additive sources. Then, the beamformer weight vector  $\mathbf{w}_m = [w_m^{(1)}, \cdots, w_m^{(N)}]^T$  providing a beampattern for the  $m$ th user can be found by solving the following constrained optimisation problem

$$\mathbf{w}_m = \arg \min_{\mathbf{w}} \sum_{\theta_i \in \bar{\Theta}_m} |\mathbf{w}^H \mathbf{u}(\theta_i)|^2 \quad \text{subject to} \quad \sum_{\theta_n \in \Theta_m} |\mathbf{w}^H \mathbf{u}(\theta_n)|^2 = 1, \quad (6)$$

where  $[\cdot]^T$  denotes the transpose,  $i = 1, \cdots, (M - 1)U$ ,  $n = 1, \cdots, U$ . Different from assigning a unit power to the desired user, as in the case of the MVDR beamformer [2] and the null broadening method in [6], the problem (6) sets a constraint to the total received power of a cluster of 'desired users' in order to broaden the mainlobe. The problem (6) can be described as a minimisation problem, consisting of an objective function and one equality constraint function. Such optimisation problem is especially appropriate for an SDP solver (by using the interior point method) [11]. SDP creates a smooth convex nonlinear barrier function for the constraints and makes it practical to solve convex problems of a large size [8], [9]. However, the performance of SDP is affected by the total number of optimisation parameters, that is  $M \times U$  in the problem (6). Therefore, in order to obtain more efficient SDP solutions, the total number of optimisation parameters should be reduced and this can be achieved by assigning non-equal number of additive sources for different users. In particular, the number of additive sources required can be made inversely proportional to the beamwidth of the beampattern projected to the desired user. For a vertical linear array, it can be found that the number of additive sources for the  $m$ th original user  $U_m$  can be made proportional to  $\sin(\theta_m)$ . We now rewrite (4) as

$$\Theta = [\Theta_1^{(U_1)}, \Theta_2^{(U_2)}, \cdots, \Theta_M^{(U_M)}], \quad (7)$$

and

$$U_m = [a \sin(\theta_m) + b], \quad (8)$$

where,  $[\cdot]$  denotes the rounding integer. For a given number of antenna elements, the coeffi-

cients  $a$  and  $b$  can be found by computer simulations to maximize the signal to interference ratio (SIR), which is defined below.

*Numerical results:* Assume that  $M$  users are uniformly distributed over the coverage area. The  $m$ th user receives signals of powers  $\{P_1, \dots, P_M\}$  from all  $M$  beams of the HAP antenna. Downlink SIR for the  $m$ th user is given by [10]

$$\eta_m = \frac{P_m}{\sum_{u=1, u \neq m}^M P_u}. \quad (9)$$

The coverage performance is represented by the probability distribution function  $C(\gamma) = \Pr\{\eta_m > \gamma\}$ . Fig.2 compares the coverage performance of the following four adaptive beamforming methods in the downlink HAPs communication scenario: 1) MVDR beamformer (1); 2) null broadening method in [6]; 3) proposed null broadening method using equal number of additive sources (6) for all users; and 4) proposed null broadening method using non-equal number of additive sources.

The communication scenario is defined as:  $r = 32.7$  km;  $H = 20$  km;  $N = 171$ ;  $M = 60$ . The users position errors are random with uniform distribution within the interval  $[-60\text{m}, +60\text{m}]$ . Coefficients in (8) are set to  $a = 5$  and  $b = 3$ . The number of additive sources in method 2 is  $\hat{U} = \frac{1}{M} \sum_{m=1}^M U_m$ . We assume a noise free scenario for simplicity and use SIR (9) to estimate the coverage performance. Fig.2 shows the comparison results. It can be seen that the MVDR beamformer has a poor performance in such a scenario. The null broadening method in [6] significantly improves the performance when compared to the MVDR beamformer. Method 3, using constrained optimisation, however, can achieve better coverage performance. Further improvement is obtained by method 4, using non-equal number of additive sources; in total, a 4.5 dB SIR improvement is achieved for 95% coverage, compared with the Mailloux's null broadening method proposed in [6].

*Conclusions:* A constrained optimisation approach is proposed to improve the performance of null broadening adaptive beamforming. This approach broadens the pattern for the desired user as well as the interferers. The constrained optimisation problem is solved by semidefinite programming and its efficiency and performance are further improved when non-equal number of additive sources are distributed among users to reduce the total number of optimisation parameters. Simulation results show that the proposed approach achieves significant improvement in the coverage performance, compared with the previous null broadening method and the MVDR beamformer.

## REFERENCES

- [1] C. G. Lal, "Application of antenna arrays to mobile communications, part II: beam-forming and direction-of-arrival considerations," *IEEE Proceeding.*, vol. 85, no. 8, pp. 1195–1245, Aug 1997.
- [2] J. Capon, "High-resolution frequency-wavenumber spectrum analysis," *Proc. IEEE.*, vol. 57, pp. 1408–1418, 1969.
- [3] J. Li, P. Stoica, and Z. Wang, "On robust Capon beamforming and diagonal loading," *IEEE Trans. Signal Processing.*, vol. 51, no. 7, pp. 1702–1715, July 2003.
- [4] R.G. Lorenz and S.P. Boyd, "Robust minimum variance beamforming," *IEEE Trans. Signal Processing.*, vol. 53, no. 5, pp. 1648–1696, May 2005.
- [5] S.A. Vorobyov, A.B. Gershman, and Z.Q. Luo, "Robust adaptive beamforming using worst-case performance optimization: a solution to the signal mismatch problem," *IEEE Trans. Signal Processing.*, vol. 51, no. 2, pp. 313–324, Feb. 2003.
- [6] R. J. Mailloux, "Covariance matrix augmentation to produce adaptive array pattern troughs," *Electron. Lett.*, vol. 31, 1995.
- [7] H. Song, W. A. Kuperman, P. Gerstoft, and J. S. Kim, "Null broadening with snapshot-deficient covariance matrices in passive sonar," *IEEE Oceanic Eng.*, vol. 28, no. 2, pp. 250–261, 2003.
- [8] M. Lobo, "Applications of second-order cone programming," *Linear Algebra Applicat.*, pp. 193–228, Nov 1998.
- [9] L. Vandenberghe and S. Boyd, "Semidefinite programming," *SIAM Review.*, , no. 38(1), pp. 49–95, Mar 1996.
- [10] Z. Xu, Y. Zakharov, and G. White, "Vertical antenna array and spectral reuse for ring-shaped cellular coverage from high altitude platform," *Loughborough Antennas and Propagation Conference (LAPC2006)*, pp. 209–212, April 2006.
- [11] Z. Luo and W. Yu, "An introduction to convex optimization for communications and signal processing," *IEEE Selected Area Comms.*, vol. 24, no. 8, pp. 1426–1438, Aug 2006.

**Authors' affiliations:**

Zhengyi Xu and Yuriy Zakharov are with the Communication Research Group, Department of Electronics, University of York, York YO10 5DD, UK, (email: zx500, yz1@ohm.york.ac.uk).

**Figure captions**

Fig.1 The use of null broadening approach for HAPs communications.


Fig.2 Coverage performance comparison of MVDR beamformer, null broadening method [6] and the improved null broadening method in the HAPs communications scenario:  $H = 20$  km;  $r = 32.7$  km; 0.06 km maximum user position error;  $M = 60$ .

dotted: MVDR beamformer;


dashed: null broadening approach proposed in [6];

dash-dotted: improved null broadening approach using constrained optimisation, uniform distribution for the number of additive sources;

solid: improved null broadening method using constrained optimisation, non-uniform distribution for the number of additive sources.

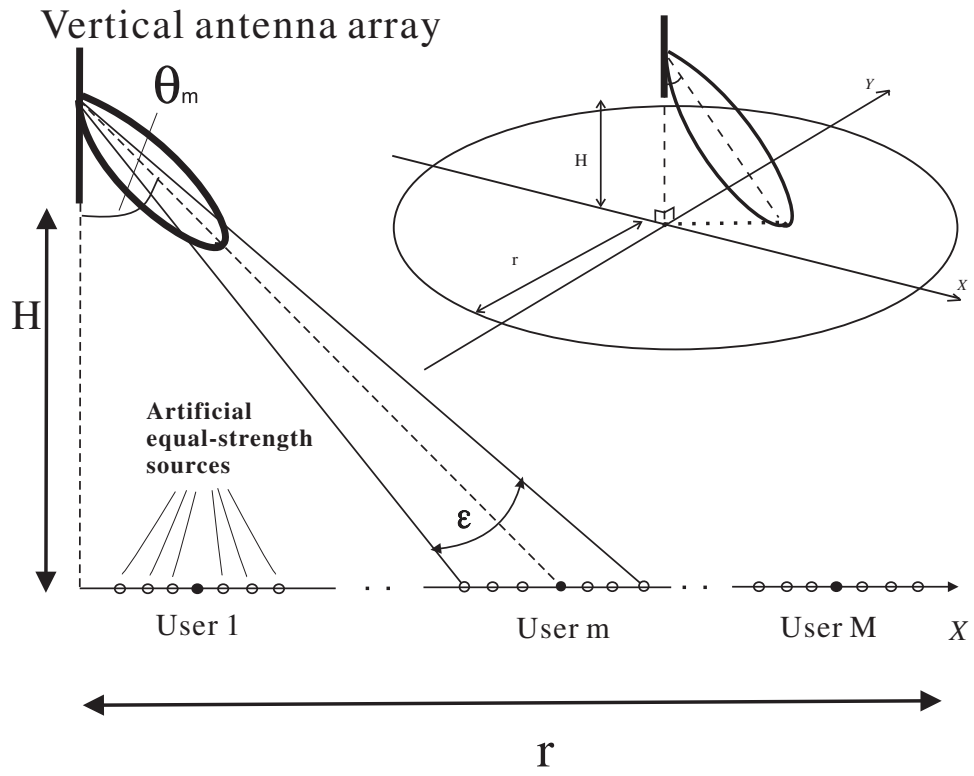

*Fig. 1.*

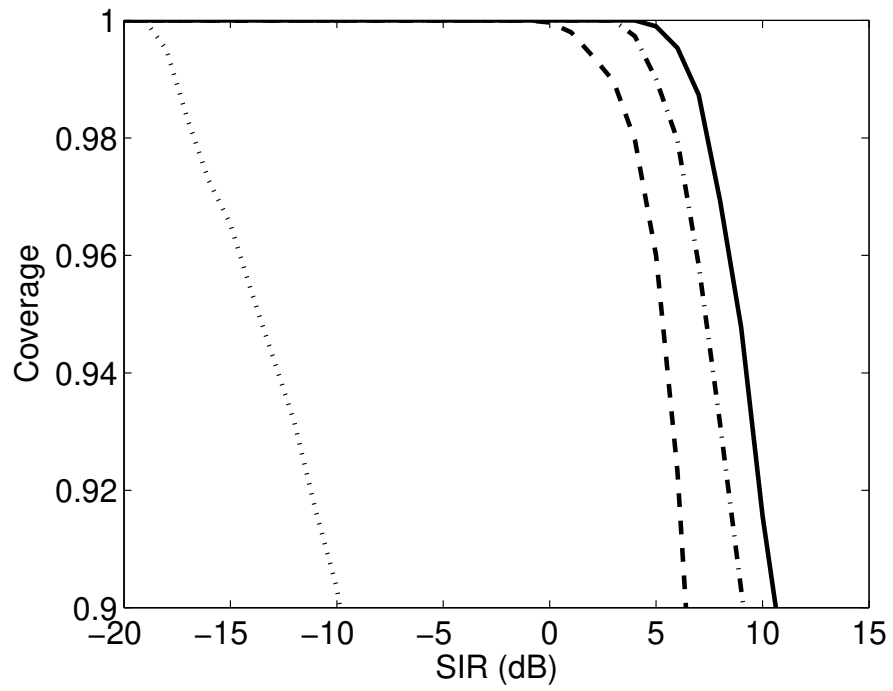

*Fig. 2.*