

promoting access to White Rose research papers



Universities of Leeds, Sheffield and York
<http://eprints.whiterose.ac.uk/>

This is an author produced version of a paper published in **Geomorphology**
White Rose Research Online URL for this paper:

<http://eprints.whiterose.ac.uk/id/eprint/77442>

Paper:

Grayson, R, Holden, J, Jones, RR, Carle, JA and Lloyd, AR (2012) *Improving particulate carbon loss estimates in eroding peatlands through the use of terrestrial laser scanning*. *Geomorphology*, 179. 240 - 248. ISSN 0169-555X

<http://dx.doi.org/10.1016/j.geomorph.2012.08.015>

1 **Improving particulate carbon loss estimates in eroding peatlands through the**
2 **use of terrestrial laser scanning**

3 Grayson, R^{1*}., Holden, J¹., Jones, R.R²., Carle, J.A²., Lloyd, A³.

4 ¹ School of Geography, University of Leeds, Leeds, LS2 9JT

5 ² Geospatial Research Ltd., Dept. of Earth Sciences, University of Durham, Durham, DH1
6 3LE

7 ³ North Pennines AONB Partnership, Weardale Business Centre, The Old Co-op Building, 1
8 Martin Street, Stanhope, Bishop Auckland, County Durham, DL13 2UY.

9 *r.grayson@leeds.ac.uk; 0113 343 3373

10
11 **Abstract**

12 Blanket bogs act as the largest terrestrial store of carbon within the UK.
13 Unfortunately many are degraded with exacerbated erosion being common.
14 Although considerable efforts have been made to quantify carbon fluxes across
15 blanket bogs less attention has focussed on quantifying losses associated with
16 erosion. Traditional approaches to measuring erosion have relied on erosion pins
17 and sediment traps. However, both methods suffer from several problems and are
18 unable to provide data over large areas. Terrestrial laser scanning has been used
19 widely in geomorphology to create detailed 3D topographic maps in a range of
20 environments. A pilot study was carried out over winter 2010-2011 to test the
21 applicability of terrestrial laser scanning to measure erosion across a blanket bog
22 within the North Pennines, UK. The technique was found to be superior to traditional
23 methods providing high resolution spatial data on surface elevation change. A net
24 increase in the peat surface height of 2.5 mm was calculated from the terrestrial
25 laser scans between October 2010 and March 2011. This compares with a net
26 surface lowering of 38 mm measured using pins. These results suggest that previous
27 erosion data from peatland sites based on pin measurements ought to be treated
28 with caution. However, several improvements are required to the laser scanning
29 technique before it is fully implemented in peatland environments including the
30 development of a filter to remove vegetation from the scan results, and taking
31 account of 'mire-breathing' which can cause surface level rise and fall in peatlands. It
32 is clear that once these factors are dealt with, regular repeated ground based laser
33 scanning will vastly improve our understanding of the role of processes that affect
34 the surface elevation of peatlands including the relative roles of storm events and
35 long-term seasonal cycles, and 'roughening' of the peat surface as a result of
36 needle-ice formation, desiccation and wind-scouring.

39 **1. Introduction and aims**

40 Blanket bogs cover approximately 8% of the UK (Taylor, 1983) and support a wide
41 range of ecosystem services. Within the UK they are the largest terrestrial carbon
42 store (Cannell et al., 1993; Cannell and Milne, 1995), supply c. 70% of all drinking
43 water (Watts et al., 2001), and are important for grazing and game sports (Holden et
44 al., 2007a), they also support a diverse range of flora and fauna. Blanket bog only
45 forms under certain conditions. Within the UK the majority occurs in uplands with
46 high annual rainfall totals (> 1000 mm), a high number of annual rainfall days (> 160
47 days) and low average temperatures (warmest month 9-15°C) (Lindsay et al., 1988).

48 At the global scale peat soils account for 30 - 50 % of all the carbon stored in soils
49 (Holden, 2005; Limpens et al., 2008). Therefore, efforts are being made to improve
50 our understanding of carbon dynamics in such systems (Holden, 2005; Waddington
51 et al., 2008; Dinsmore et al., 2010; Grayson and Holden, 2011). Blanket bog erosion
52 can result in significant export of particulate organic carbon (POC) with erosion
53 studies in upland bogs having a long history (Bower, 1960; Bower, 1961; Bower,
54 1962; Radley, 1962; Tallis, 1964; Gore, 1965; Tallis, 1965). Despite 'natural'
55 revegetation having occurred over the past few decades (Evans and Warburton,
56 2007; Grayson et al., 2010) large areas of bare peat remain throughout the UK
57 Pennines, with enhanced erosion continuing at many sites (Evans and Warburton,
58 2005; Evans et al., 2006; Evans and Warburton, 2007).

59 Fluvial processes drive the majority of erosion in UK blanket bogs (Bower, 1961;
60 Tallis, 1965), although wind erosion can also be significant (Warburton, 2003). Other
61 erosion processes include rainsplash, desiccation of the peat surface and the
62 impacts of frost and ice, particularly needle-ice formation and damage to gully walls
63 as a result of freeze-thaw cycles (Imeson, 1971; Evans and Warburton, 2007). Peat,
64 when vegetated is relatively stable (Tallis, 1998) yet widespread erosion has been
65 observed across blanket bogs. Hypotheses forwarded to explain the onset of
66 accelerated erosion in UK blanket bogs, include: over grazing (Evans, 1977);
67 changes in land management, including burning and drainage (Mackay and Tallis,
68 1996; Holden et al., 2007b); air pollution and atmospheric deposition linked to
69 industrialisation (Evans and Warburton, 2007).

70 Much of the early work examining erosion in UK peatlands estimated the total area
71 of eroding peat and attempted to classify the type of erosion occurring (Bower, 1960;
72 Bower, 1961; Eddy et al., 1969) with few attempts to quantify the rate of erosion.
73 Subsequently studies have estimated erosion rates across UK blanket bogs, typically
74 through the use of erosion pins to directly measure erosion rates (Evans et al., 2006;
75 Evans and Warburton, 2007); while the number of studies remains relatively small
76 observed erosion rates vary from 5.4 to 40.9 mm per year (Table 1) .

77 While erosion pins can provide detailed data allowing erosion rates to be calculated
78 their use is not straightforward. Erosion pins act as a fixed datum and soil erosion
79 rates are calculated by repeating measurements of the distance from the top of the
80 pin to the surface through time. Therefore erosion pins need to remain stable

81 through time to accurately calculate erosion rates (Couper et al., 2002). However
82 they can be affected by frost heave, and surface movement resulting from wetting-
83 drying cycles and freeze-thaw cycles (Labadz, 1988). Where a peat becomes
84 saturated the whole of the peat can expand, while during dry periods where the
85 water table falls, the upper peat can dry out, shrink and become desiccated. This
86 process of expansion and contraction of the peat surface between dry and wet
87 periods is known as 'mire-breathing' (Kellner and Halldin, 2002). Other problems
88 relate to the interpolation of individual measurements of erosion at pin sites as
89 erosion rates can vary significantly even over very small areas, this is not unique to
90 upland peats. Erosion pins can also directly affect erosion, either increasing erosion
91 or acting to trap eroded material (Benito et al., 1992; Couper et al., 2002) and are
92 also a relatively intrusive measurement technique due to repeat measurements at
93 the same site.

94 Within geomorphology ground-based laser scanning using LiDAR (light detection
95 and ranging) is increasingly being used to create high-resolution 3D maps of
96 topography (Nagihara et al., 2004; Rosser et al., 2005; Jones et al., 2009). This
97 technique offers a number of clear advantages over traditional techniques for
98 measuring erosion in peatland catchments, primarily the ability to accurately
99 measure total erosion losses across a large area of the land surface (e.g. whole
100 gullies or peat flats) within a short period of time, but also the ability to include
101 relatively fixed datum points within a scan to allow increased accuracy during repeat
102 measurements. LiDAR may offer a major improvement when estimating the volume
103 of peat lost (or gained), with a survey across a 100 m² site being the equivalent of
104 measuring several million pins over the same area. Repeat measurements over time
105 allow 3D models of erosion and deposition over time to be constructed. Therefore,
106 the use of ground-based LiDAR to measure peat erosion and accumulation has the
107 potential to offer a unique insight into current peat erosion rates and allow accurate
108 measurements of the volume of peat lost (or gained) over time. The technique is also
109 less intrusive than erosion pins as scans can be made at a distance without
110 disturbing eroding areas.

111 As a pilot study this project sought to:

- 112 1. Develop a detailed 3D model of topographical changes in the peat surface over a
113 six month period to allow an accurate estimate of the total peat volume lost
114 through erosion.
- 115 2. Compare this estimate with measurements made using traditional methods to
116 examine the errors associated with traditional techniques.
- 117 3. Determine the issues to be resolved when using LiDAR in peat erosion
118 measurements.

119 **2. Site selection and methods**

120 The North Pennines AONB (Area of Outstanding Natural Beauty) Peatscapes project
121 aims to conserve and enhance the peatland resource within the North Pennines,

122 where 27% of England's blanket bog resource occurs. Severe gully erosion has
123 been identified at the Valence Lodge Farm site, located on Harthope Moor in County
124 Durham (54°42'28.21N 2°12'43.61W) (Fig 1); however, no quantitative erosion rate
125 measurements have been made. Two parallel erosion surveys were carried out at
126 Valence Lodge Farm over winter 2010/2011 to provide 'typical' baseline erosion
127 rates across a single winter. One survey used erosion pins to measure changes in
128 surface height which were interpolated to give erosion rates. The other used
129 terrestrial laser scanning to produce a highly detailed 3D topographic model of
130 erosion and accumulation.

131 **2.1 Erosion pins**

132 Five sets of erosion pins were installed across Valence Lodge Farm on 29/09/10 (Fig
133 1). Pins were constructed from 6 mm diameter stainless steel threaded rods and
134 were 50 cm long. At each site 25 pins was manually inserted into the peat using a
135 grid formation; pins were spaced either 50 (PS 2, 4 and 5) or 100 cm apart. All five
136 sets were south or southeast facing with the average slope varying between 11.4°
137 (PS5) and 34.4° (PS4) (Table 2). The actual extent of the LiDAR scan in a gully
138 system is difficult to determine without post processing of the data. Therefore, to
139 minimise disturbance of the peat surface, four of the pin sets were installed towards
140 the limit of the area included in the LiDAR survey with only PS5 being installed within
141 the main scan area to allow a direct comparison between the techniques.

142 The height from the top of the pin to the surface of the peat was measured on the
143 downslope side of the pin. A dGPS survey of the site was carried out using a Leica
144 530 RTK GPS to identify pin movement through time; six of the pins were not
145 measured to prevent unnecessary damage to the peat surface. Local benchmarks
146 were measured using a feature on the nearby road to provide local fixed datum
147 points. The site was revisited in April 2011 (08/04/11) and the height from the top of
148 each pin to the peat surface was re-measured. A full dGPS survey was again carried
149 out across the site. Erosion rates were calculated for each pin by subtracting the pin
150 height measured during the second survey from the height measured during the first
151 survey to give an erosion rate for each pin in mm. Although previous studies have
152 ignored decreases in pin heights on slopes above 30° (Evans et al., 2006; Evans
153 and Warburton, 2005) all data were included in this study as deposition at some sites
154 was clearly visible across the surface and had not just occurred on the pin itself.

155 When using erosion pins an assumption is made that erosion/deposition measured
156 at an individual pin is representative of the erosion or deposition occurring in the
157 area surrounding the pin. The use of a grid of erosion pins allows the larger area to
158 be broken down into a series of cells each with an erosion pin in the centre,
159 therefore, the erosion rate for each cell is given as the rate measured at the pin in
160 the centre of that cell. The area of each individual cell was calculated using equation
161 1.

$$162 \quad 2D \text{ area} = \frac{1}{2}a \times \frac{1}{2}b \times \frac{1}{2}c \times \frac{1}{2}d$$

163

164 where a is the distance to the next pin above, b is the distance to the next pin to the
165 right, c is the distance to the next pin below and d is the distance to the next pin to
166 the left. For pins located at the edge of the set of pins the cell area was calculated
167 using the distance to any surrounding pins only and did not extend outwards from
168 the edge of the set of erosion pins.

169 Total erosion losses for each cell were calculated by multiplying the cell's area by the
170 erosion rate measured at the pin in the centre of that cell. The total volume of peat
171 lost across each pin set was calculated by adding together the losses for the
172 individual cells; this was then divided by the total area to give a volume of peat lost
173 per m^2 to allow clear comparisons between pin sets.

174 **2.2 Terrestrial laser scanning**

175 Terrestrial laser scanning (ground-based LiDAR) is a surveying method in which the
176 precise geometry of a topographic surface is measured in detail by recording the 3D
177 position of many millions of points across the surface. The method is non-
178 penetrative, and therefore the output of the survey is typically a "surface 3D dataset"
179 rather than a "volumetric 3D dataset" (Jones et al., 2008).

180

181 Scans were carried out using a Riegl LMS-Z420i terrestrial laser scanning system.
182 This is a long range time-of-flight scanner with a typical range of up to 1000m, a
183 maximum angular resolution of 0.004° , and acquisition rates of ca. 12,000 points per
184 second. Such scanners currently cost around c. US \$50,000–180,000 to buy but
185 once users are trained, they are simple to use. The scanners can be hired within the
186 UK at commercial rates of around £800–2,500 per day. The lower end is just for the
187 hire of the equipment, while the higher end includes skilled operator(s), data
188 acquisition, and all spatial pre-processing.). During each survey 360° scans were
189 carried out at six locations across the site, these separate scans were combined
190 using 9 semi-permanent reference points which were included within the dGPS.

191 Low cloud and fog prevented an initial attempt to carry out a survey, with the
192 moisture in the air acting to reflect the laser thus producing a false return. The site
193 was revisited on the 05/10/2010 to carry out a complete survey; a follow-up survey
194 was carried out on 08/04/2011. Each scan underwent a series of processing stages;
195 first the six scans were merged and georeferenced using six of the reference points.
196 The high precision of the LiDAR scans allowed a slight improvement in the precision
197 of the dGPS data. The overall spatial error of the merge was $<1\text{cm}$. The merged
198 scans were clipped to provide a regular edged rectangular area totalling 2655 m^2 (59
199 $\times 45\text{ m}$) (Fig 1). The resultant data were filtered to remove a small number of
200 extraneous points caused by reflection of the laser beam from airborne particles
201 such as dust. Photographs taken during the scanning process were stitched to
202 provide a 360° image of the scan area, and combined with the LiDAR data to give a
203 true-colour point cloud showing the 3D geometry of the topographic surface. The
204 high precision of the LiDAR scans result in very large data files, often with redundant
205 data (i.e. points next to each other with the same height). This redundant data was
206 removed using an octree filter; two filters were used to produce a low (20 cm) and
207 high (2 cm) spatial resolution dataset (2.5 million and 25,000 measurements

208 respectively), equivalent to average point densities of approximately 940 and 9.4
209 measurements per m² respectively. The output of each LiDAR survey was an ASCII
210 file of XYZ point locations. Each dataset was meshed to form a terrain surface within
211 ArcGIS before being converted to a raster format to allow statistical analysis.

212

213 **2.3 Site-wide erosion and carbon loss estimate**

214 As vegetation limits susceptibility to erosion, an estimate of the area of bare and
215 eroding peat is needed if total losses/gains for the site are to be calculated. Remote
216 sensing techniques offer automatic identification and isolation of objects and features
217 in aerial imagery using pixel values, but their success relies on individual features
218 having unique values which allow them to be isolated from the wider features. The
219 diverse nature of vegetation and features across peatlands means that complex
220 algorithms are often required to isolate individual features (Yallop et al., 2006; Yallop
221 and Clutterbuck, 2009; Clutterbuck and Yallop, 2010). Aerial imagery for Valence
222 Lodge Farm indicates that bare/eroding peat areas are spatially restricted,
223 vegetation remains similar and there are no anthropogenic features present.
224 Therefore, a basic pixel analysis could be employed to identify eroding and bare
225 areas.

226 An analysis of the spectral bands of the particular set of RGB aerial photos used in
227 this study showed that for the blue spectral band the majority of areas of eroded/bare
228 peat had pixel values below 15, with vegetated areas having values above 15. The
229 blue spectral band was therefore extracted and reclassified so that pixels/cells with a
230 value of less than 15 were coded 1 and all those above were coded 0. Fig 2 shows
231 the original image and the reclassified image side by side to illustrate the
232 effectiveness of the technique in identifying bare/eroded peat at this site.

233 The carbon content of a volume of peat differs, both with depth and between sites,
234 for various reasons, not least due to variations in bulk density. This makes it difficult
235 to calculate the carbon loss associated with erosion without direct measurements of
236 the carbon content and bulk density of the peat. The carbon content of UK blanket
237 bog peat has been found to vary between 40 and 90% (Table 3) (Milne and Brown,
238 1997; Frogbrook et al., 2009) being highest in the upper 15 cm (Frogbrook et al.,
239 2009). As erosion across Valence Lodge occurs within gullies the carbon content will
240 vary across the slope as peat from all depths is exposed and eroded. Therefore,
241 indicative carbon loss estimates were calculated using the site-wide erosion estimate
242 and a number of published peat carbon contents to show the potential range of
243 carbon losses likely to result from erosion at Valence Lodge Farm.

244

245 **3. Results**

246 **3.1 Erosion pins**

247 Erosion rates varied widely between pins (Table 4), with 110 experiencing erosion
248 and 15 experiencing deposition. The highest erosion rate of 150 mm was observed
249 at pin 7 in PS1 and the highest deposition of 35 mm occurred at pin 20 in PS1. The
250 largest number of pins where deposition had taken place occurred at PS2 (10 pins),

251 while only a single pin in both PS1 and PS5 experienced deposition. Many pins
252 exhibited little change over time; where the difference in pin height over time was
253 less than 5 mm the angle of many of the slopes and the difficulty in measuring in
254 exactly the same location means that measurement error may account for the
255 changes observed.

256 The area of PS1 and PS3 (16 m²) was much larger than the other three pin sets (4
257 m²). Therefore, the total volume of peat lost was higher for these two pin sets; the
258 largest loss of 0.976 m³ occurred at PS1 (Table 5). Of the three pin sets with the
259 smaller area (4 m²) the largest peat loss of peat occurred at PS4 at 0.209 m³; more
260 than double that rate observed at PS2 and PS5. When area is taken into account,
261 the highest the lowest erosion rates were observed at PS1 (0.061 m³ per m²) and
262 PS2 (0.0146 m³ per m²) respectively. The mean erosion rate for all five pin sets was
263 0.0383 m³ per m² equating to an average surface peat loss of 38.3 mm.

264

265 **3.2 LiDAR**

266 To identify surface changes through time for both the high and low resolution
267 datasets the relevant 2011 scan raster dataset was subtracted from the 2010 scan to
268 create two new raster datasets (diff_2010-2011_02 and diff_2010-2011_20), both of
269 which show large changes in surface topography across the site (Fig 3); however,
270 not all of these changes relate to erosion. Well vegetated areas are unlikely to
271 experience significant erosion while standing water acts as a reflecting surface, and
272 therefore both need removing. Fig 4 illustrates how vegetation impacts the LiDAR
273 scans results, with the difference between the two scans and one of the photographs
274 taken during the scan clearly illustrating how the presence of vegetated areas can
275 result in apparently large changes in topography. The photographs collected during
276 scanning were used to digitise vegetated areas and the main channels where water
277 was present. This raster was then used to remove any vegetated areas and
278 channels from both the diff_2010-2011_02 and diff_2010-2011_20 raster datasets to
279 create two new raster datasets (clip_diff_20102011_02 and clip_diff_20102011_20)
280 each showing differences in surface topography across only those areas exhibiting
281 bare/eroding peat (Fig 5). Slope and aspect were calculated for the clipped area to
282 allow statistical analysis of the significance of these two variables on erosion.

283 The average erosion/deposition rate across the scanned area was calculated for
284 both the 2 cm and 20 cm datasets. The high (2 cm) and low (20 cm) resolution
285 LiDAR results indicate that excluding those cells with vegetation or standing water
286 there was a net gain in the peat surface level of 2.5 and 6.6 mm respectively.
287 Erosion and deposition varied significantly across the scanned area (Fig 5 and 6)
288 with erosion being highest in the northeast section of the scan area (Fig 5). A small
289 sub dataset was extracted from this area and even here the net surface lowering
290 was only 4.3 mm.

291 A direct comparison between the two techniques can be made using data from PS5.
292 The average erosion rate for PS5 was 26.8 mm, compared with a net deposition rate
293 of 10.8 mm calculated using LiDAR.

294

295 **3.3 Site wide erosion estimate**

296 Pixel analysis of aerial photos indicates that within the main area of actively
297 eroding/bare peat there is 26433m² (35%) of eroded/bare peat and 49464 m² (65%)
298 of vegetated peat (Table 6). Based on the average erosion pin rate of 38.3 mm from
299 a single winter (27 week period), the total loss equates to 1012 m³ of peat. Assuming
300 erosion rates remain constant throughout the year this is equivalent to an annual
301 loss of 72 mm or approximately 1903 m³ of peat. As only 35% of the area is actually
302 eroding/bare the average rate of erosion across the site was 13.0 mm over the
303 period between surveys, again assuming a constant erosion rate this equates to 24.6
304 mm yr⁻¹.

305 The LiDAR results indicate an average increase in the peat surface of 2.5 mm
306 between the two surveys; this suggests that there was a c. 66 m³ deposition of peat
307 across the site. This equates to an average site wide deposition rate of 0.87 mm or
308 an estimated annual deposition rate of 1.6 mm yr⁻¹.

309 **3.4 Carbon loss estimate**

310 Indicative carbon loss estimates were calculated for Valence Lodge Farm using the
311 data in Table 7. The erosion loss calculated from erosion pins equates to a loss of c.
312 41 to 93 tons C. Assuming constant erosion rates, annual losses would range from
313 76 to 176 t C yr⁻¹. However, the LiDAR results indicate a net increase in the peat
314 mass for the survey area. If this increase is solely attributable to the accumulation of
315 new peat this equates to a net gain of carbon of between 2.7 and 6.1 tons or a gain
316 of between 5.1 and 11.5 t C yr⁻¹.

317

318 **4. Discussion**

319 The two techniques for measuring erosion across Valence Lodge Farm produce very
320 different erosion rates. Between September 2010 and April 2011 the erosion pin data
321 indicate an erosion rate of 38 mm while the higher resolution terrestrial laser
322 scanning method indicates a net deposition of 2.5-6.6 mm. Only PS5 was completely
323 captured by the LiDAR survey with the results from this site clearly illustrating the
324 differences between the two techniques. Here pin data indicated a decrease in the
325 peat surface of c. 27 mm while LiDAR data indicated an increase of c. 11 mm. The
326 standard deviation for the changes in surface topography using the 2 cm resolution
327 data is 13.3 mm which is still significantly lower than the erosion rates calculated
328 using the erosion pins. Approximately 88% of the total area included in the analysis
329 exhibited vertical change less than ± 20 mm, decreasing to 58% for ± 10 mm (Fig 6).

330 These measured erosion rates equate to a carbon loss of between 41 and 93 t C
331 based on the erosion pin data but a net increase of between 5.1 and 11.5 t C based
332 on the LiDAR method. It is improbable that there was such a large net gain of carbon
333 over this time particularly during winter, however the LiDAR results do suggest that
334 estimates of carbon losses associated with blanket bog erosion measured using
335 erosion pins may be large overestimates.

336 The average erosion rates for each pin set are within the range of annual erosion
337 rates observed using erosion pins at other blanket bog sites across the UK (Evans
338 and Warburton, 2007), albeit at the higher end of the range (Table 1) and are
339 noticeably higher than those measured at Moor House also in the North Pennines,
340 (10.5 and 19.3 mm yr⁻¹) (Philips et al., 1981; Evans and Warburton, 2005). However,
341 much of Moor House has been naturally revegetating since the 1970s (Grayson et
342 al., 2010). The erosion rates measured as part of this study are rates over a six
343 month period, and therefore annual rates may well be higher. It should be borne in
344 mind that the winter of 2010/11 was very cold with long periods of snow and ice
345 particularly during late November and much of December, with December 2010
346 being the coldest December in more than 100 years (Met Office, 2011). The spring
347 of 2011, however, was relatively dry, particularly during March. Hence, in addition to
348 variability in erosion during any given year there will be inter-annual variability in
349 erosion due to weather conditions.

350 The precision of LiDAR scans was constrained by use of semi-permanent reflector
351 sites, with little movement occurring over the study period. In contrast, erosion pins
352 can be subject to a number of processes which can result in vertical and horizontal
353 movement over time (Labadz, 1988). This movement can be reduced by driving the
354 erosion pins into the soil underlying the peat (Evans and Warburton, 2005).
355 However, blanket bogs are often deep (several metres). Although full dGPS surveys
356 of the erosion pins were carried out the accuracy of these is limited both by the small
357 head of the pins, which make it difficult to accurately place the measurement staff,
358 and by a desire to minimise any disturbance and damage to the peat during
359 measurement.

360 The extremely low temperatures observed across much of the UK in December 2010
361 were accompanied by significant snow and ice which can have a direct impact on
362 erosion pins through heave processes (Labadz, 1988). The weight of snow and ice
363 on the surface could also potentially push pins further into the peat. This may explain
364 some of the high erosion rates observed. Cold conditions may have resulted in
365 significant erosion on steep, less stable gully sides via freeze-thaw processes, but
366 had little impact on shallower slopes where low winter rainfall totals may have limited
367 the removal of any loose material. Although fluvial erosion is likely to account for the
368 majority of erosion across Valence Lodge Farm, visible wind-blown erosion features
369 were observed across a number of peat surfaces and many pins had peat deposits
370 stuck to the upslope side of the pin and slight scouring on the downslope side.
371 However, no quantitative assessment was made of how much peat was separately

372 eroded by wind processes. This wind scouring on the downslope side of the pin may
373 have exaggerated actual erosion rate estimates across the wider peat surface.

374 Needle-ice formation within the upper peat layers during cold conditions can result in
375 changes to the peat surface which could explain the increase in the peat surface
376 identified by the LiDAR survey. Surface changes in a Canadian bog have been
377 linked to needle-ice, with consolidation after melting resulting in bog-surface lowering
378 (Campbell et al., 2002). It is possible that at Valence Lodge Farm any subsidence
379 linked to consolidation after melting had not fully occurred, resulting in the surface
380 being elevated relative to measurements made prior to winter. Alternatively,
381 expansion of needle-ice during formation at or just below the peat surface results in
382 the breakup of the peat, forming loose individual and aggregated peat particles on
383 the peat surface. These individual particles are likely to be less well consolidated and
384 have a higher volume per mass unit compared to peat not subject to needle-ice
385 erosion. The effect on the peat surface would be a 'roughening' of the loose
386 aggregates as larger voids are likely to occur between each aggregate than would
387 be the case in an intact peat surface. This 'roughening' would be seen as an
388 increase in the peat surface despite no actual deposition and no overall increase in
389 the peat mass. Desiccation of the peat surface after long dry periods results in the
390 peat surface drying and cracking, again resulting in loose particles and aggregates
391 on the peat surface. While not particularly warm, the early months of 2011 were
392 characterised by low rainfall totals and possible desiccation of the peat surface. This
393 may also suggest that 'mire-breathing' (Kellner and Halldin, 2002) where the whole
394 peat expands under wet conditions is unlikely to be the cause of the increased
395 surface levels observed in the LiDAR scans – although this is a factor which should
396 be accounted for in future LiDAR studies. The most likely explanation of the apparent
397 increase in peat surface elevation over the winter is that both winter needle-ice
398 formation and desiccation of the peat in spring resulted in the presence of loose
399 particles and aggregates on the surface of the peat leading to a 'roughening' of the
400 peat surface, but with little being removed due to the lack of rainfall.

401 This pilot exercise suggests caution must be taken when interpreting erosion rates
402 based on both erosion pins and LiDAR in peatland sites. However, the effectiveness
403 of the LiDAR scanning technique for measuring potential erosion losses in the long-
404 term is clear as long as seasonal surface roughening effects, vegetation change and
405 mire-breathing are accounted for.

406

407 **5. Conclusions and recommendations**

408 This pilot study demonstrated that use of LiDAR offers considerable potential for
409 measuring erosion rates on peatlands. Terrestrial LiDAR reduces the need to
410 interpolate results between pins and removes any potential impacts of pins on
411 erosion processes as well as any damage caused during installation and repeated
412 pin measurements. It provides high resolution spatial data on erosion and deposition
413 through time. In addition the study emphasises the need for great caution when

414 interpreting or upscaling erosion pin measurements across study sites as results
415 from the two techniques were very different.

416 Despite having overcome a number of problems associated with the application of
417 LiDAR to measure erosion in blanket bogs further research is needed. The following
418 would significantly enhance the application of the terrestrial laser scanning technique
419 in blanket bogs:

420 1. The development of a filter to remove any vegetation from the scan data and allow
421 the peat surface to be mapped would offer real advantages and greatly improve
422 erosion and deposition measurements across blanket bogs, particularly in transition
423 zones where vegetation cover is patchy or changing. Similar methods have
424 previously been developed for aerial LiDAR data (James et al., 2006).

425 2. Once reference markers have been installed and the scan locations identified,
426 repeat scans can be carried out relatively quickly enabling erosion measurements at
427 a range of timescales. Regular LiDAR surveys offer the ability to examine changes
428 through time including changes to surface roughness caused by frost action or
429 desiccation and changes to surface height due to mire breathing. The high precision
430 of the LiDAR technique and the large number of individual measurements (> 1
431 million points per m²) means that with the right controls the LiDAR technique could
432 greatly improve our understanding of the above processes. Thus regular surveys
433 using LiDAR would allow:

- 434 • Quantification of the effects of roughness processes on peat surface levels
435 and enable these processes to be accounted for so that actual erosion or
436 deposition rates can be calculated more effectively over longer time periods.
- 437 • The opportunity to calculate erosion rates at various temporal scales such as
438 changes due to individual storm events and changes over weeks, months,
439 seasonally, annually and in the longer-term.
- 440 • The importance of different peat erosion processes to be identified which
441 would improve understanding of the spatial nature of erosion processes in
442 peatlands which impact landform development.

443

444 **Acknowledgements**

445 This project was funded by the North Pennines AONB (Area of Outstanding Natural
446 Beauty) Peatscapes project. We are grateful to the Raby Estate and Mr Bell for
447 granting land access permission. Max Wilkinson helped with acquisition of the LiDAR
448 data.

449 **References**

- 450 Anderson, P., 1986. Accidental moorland fires in the Peak District, Peak Park Joint Planning Board,
451 Bakewell.
- 452 Anderson, P., Tallis, J.H., Yalden, D., 1997. Restoring Moorland: Peak District Moorland Management
453 Project Phase III report, Peak District Moorland Management Project, Bakewell.
- 454 Benito, G., Gutie´rrez, M., Sancho, C., 1992. Erosion rates in badland areas of the central Ebro Basin
455 (NE-Spain). *Catena* 19, 269-286.
- 456 Bower, M.M., 1960. Peat erosion in the Pennines. *Advancement of Science* 64, 323-331.
- 457 Bower, M.M., 1961. Distribution of erosion in blanket peat bogs in the Pennines. *Transactions of the*
458 *Institute of British Geographers* 29, 17-30.
- 459 Bower, M.M., 1962. The cause of erosion in blanket peat bogs. *Scottish Geographical Magazine* 78,
460 33-43.
- 461 Campbell, D.R., Lavoie, C., Rochefort, L., 2002. Wind erosion and surface stability in abandoned milled
462 peatlands. *Canadian Journal of Soil Science* 82, 85-95.
- 463 Cannell, M.G.R., Dewar, R.C., Pyatt, D.G., 1993. Conifer Plantations on Drained Peatlands in Britain - A
464 Net Gain or Loss of Carbon. *Forestry* 66, 353-369.
- 465 Cannell, M.G.R., Milne, R., 1995. Carbon Pools and Sequestration in Forest Ecosystems in Britain.
466 *Forestry* 68, 361-378.
- 467 Clutterbuck, B., Yallop, A.R., 2010. Land management as a factor controlling dissolved organic carbon
468 release from upland peat soils 2 Changes in DOC productivity over four decades. *Science of the Total*
469 *Environment* 408, 6179-6191.
- 470 Couper, P., Stott, T., Maddock, I., 2002. Insights into river bank erosion processes derived from
471 analysis of negative erosion-pin recordings: observations from three recent UK studies. *Earth Surface*
472 *Processes and Landforms* 27, 59-79.
- 473 Davison, P., Hutchins, M.G., Anthony, S.G., Betson, M., Johnson, C., Lord, E.I., 2005. The relationship
474 between potentially erosive storm energy and daily rainfall quantity in England and Wales. *Science*
475 *of the Total Environment* 344, 15-25.
- 476 Dinsmore, K.J., Billett, M.F., Skiba, U.M., Rees, R.M., Drewer, J., Helfter, C., 2010. Role of the aquatic
477 pathway in the carbon and greenhouse gas budgets of a peatland catchment. *Global Change Biology*
478 16, 2750-2762.
- 479 Eddy, A., Welch, D., Rawes, M., 1969. The vegetation of the Moor House National Nature Reserve.
480 *Vegetatio* 16, 239-284.
- 481 Evans, M., Warburton, J., 2005. Sediment budget for an eroding peat-moorland catchment in
482 northern England. *Earth Surface Processes and Landforms* 30, 557-577.
- 483 Evans, M., Warburton, J., 2007. *The Geomorphology of Upland Peat: Erosion, Form and Landscape*
484 *Change*. Wiley-Blackwell, Oxford.
- 485 Evans, M., Warburton, J., Yang, J., 2006. Eroding blanket peat catchments: Global and local
486 implications of upland organic sediment budgets. *Geomorphology* 79, 45-57.
- 487 Evans, R., 1977. Overgrazing and soil erosion on hill pastures with particular reference to the Peak
488 District. *Grass and Forage Science* 32, 65-76.
- 489 Francis, I.S., 1990. Blanket peat erosion in a mid-wales catchment during two drought years. *Earth*
490 *Surface Processes and Landforms* 15, 445-456.
- 491 Francis, I.S., Taylor, J.A., 1989. The effect of forestry drainage operations on upland sediment yields: A
492 study of two peat-covered catchments. *Earth Surface Processes and Landforms* 14, 73-83.
- 493 Frogbrook, Z.L., Bell, J., Bradley, R.I., Evans, C., Lark, R.M., Reynolds, B., Smith, P., Towers, W., 2009.
494 Quantifying terrestrial carbon stocks: examining the spatial variation in two upland areas in the UK
495 and a comparison to mapped estimates of soil carbon. Blackwell Publishing Ltd, pp. 320-332.
- 496 Gore, A.J.P., 1965. Water, peat and erosion in the northern Pennines. *Proceedings of the Northern*
497 *England Soils Discussion Group* 1, 41-44.

498 Grayson, R., Holden, J., 2011. Continuous measurement of spectrophotometric absorbance in
499 peatland streamwater in northern England: implications for understanding fluvial carbon fluxes.
500 *Hydrological Processes* 15, 289-303.

501 Grayson, R., Holden, J., Rose, R., 2010. Long-term change in storm hydrographs in response to
502 peatland vegetation change. *Journal of Hydrology* 389, 336-343.

503 Holden, J., 2005. Peatland hydrology and carbon release: why small-scale process matters.
504 *Philosophical Transactions of the Royal Society A-Mathematical Physical and Engineering Sciences*
505 363, 2891-2913.

506 Holden, J., Burt, T.P., Cox, N.J., 2001. Macroporosity and infiltration in blanket peat: the implications
507 of tension disc infiltrometer measurements. *Hydrological Processes* 15, 289-303.

508 Holden, J., Gascoign, M., Bosanko, N.R., 2007b. Erosion and natural revegetation associated with
509 surface land drains in upland peatlands. *Earth Surface Processes and Landforms* 32, 1547-1557.

510 Holden, J., Shotbolt, L., Bonn, A., Burt, T.P., Chapman, P.J., Dougill, A.J., Fraser, E.D.G., Hubacek, K.,
511 Irvine, B., Kirkby, M.J., Reed, M.S., Prell, C., Stagl, S., Stringer, L.C., Turner, A., Worrall, F., 2007a.
512 Environmental change in moorland landscapes. *Earth-Science Reviews* 82, 75-100.

513 Imeson, A.C., 1971. Heather Burning and Soil Erosion on the North Yorkshire Moors. *Journal of*
514 *Applied Ecology* 8, 537-542.

515 Imeson, A.C., 1974. The origin of sediment in a moorland catchment with particular reference to the
516 role of vegetation. In: K.J. Gregory, D.E. Walling (Editors), *Fluvial processes in instrumented*
517 *catchments*. Institute of British Geographers Special Publication, pp. 59-72.

518 James, T.D., Barr, S.L., Lane, S.N., 2006. Automated correction of surface obstruction errors in digital
519 surface models using off-the-shelf image processing. Blackwell Publishing Ltd, pp. 373-397.

520 Jones, R.R., Kokkalas, S., McCaffrey, K.J.W., 2009. Quantitative analysis and visualization of nonplanar
521 fault surfaces using terrestrial laser scanning (LIDAR)--The Arkitsa fault, central Greece, as a case
522 study. *Geosphere* 5, 465-482.

523 Jones, R.R., Wawrzyniec, T.F., Holliman, N.S., McCaffrey, K.J.W., Imber, J., Holdsworth, R.E., 2008.
524 Describing the dimensionality of geospatial data in the earth sciences--Recommendations for
525 nomenclature. *Geosphere* 4, 354-359.

526 Kellner, E., Hallin, S., 2002. Water budget and surface-layer water storage in a Sphagnum bog in
527 central Sweden. *Hydrological Processes* 16, 87-103.

528 Labadz, J.C., 1988. Runoff and sediment production in blanket peat moorland: studies in the
529 southern Pennines, Huddersfield Polytechnic.

530 Lawler, D.M., 1988. A bibliography of needle ice. *Cold Regions Science and Technology* 15, 295-310.

531 Limpens, J., Berendse, F., Blodau, C., Canadell, J.G., Freeman, C., Holden, J., Roulet, N., Rydin,
532 H., Schaepman-Strub, G., 2008. Peatlands and the carbon cycle: from local processes to global
533 implications - a synthesis. *Biogeosciences* 5, 1475-1491.

534 Lindsay, R., Charman, D.J., F., E., O'Reilly, R.M., Palmer, M.A., Rowell, T.A., Stroud, D.A., 1988. *The*
535 *Flow Country: The peatlands of Caithness and Sutherland*. Joint Nature Conservation Committee
536 (JNCC), Peterborough.

537 Mackay, A.W., 1993. The recent vegetational history of the Forest of Bowland, Lancashire, University
538 of Manchester.

539 Mackay, A.W., Tallis, J.H., 1996. Summit-type blanket mire erosion in the Forest of Bowland,
540 Lancashire, UK: Predisposing factors and implications for conservation. *Biological Conservation* 76,
541 31-44.

542 Milne, R., Brown, T.A., 1997. Carbon in the Vegetation and Soils of Great Britain. *Journal of*
543 *Environmental Management* 49, 413-433.

544 Nagihara, S., Mulligan, K.R., Xiong, W., 2004. Use of a three-dimensional laser scanner to digitally
545 capture the topography of sand dunes in high spatial resolution. John Wiley & Sons, Ltd., pp. 391-
546 398.

547 Philips, J., Tallis, J.H., Yalden, D., 1981. Peak District Moorland erosion study: Phase 1 report. Peak
548 Park Joint Planning Board, Bakewell.

549 Radley, J., 1962. Peat erosion on the high moors of Derbyshire and West Yorkshire. *East Midland*
550 *Geographer* 3, 40-50.

551 Robinson, M., Newson, M.D., 1986. Comparison of forest and moorland hydrology in an upland area
552 with peat soils. *International Peat Journal* 1, 46-48.

553 Rosser, N.J., Petley, D.N., Lim, M., Dunning, S.A., Allison, R.J., 2005. Terrestrial laser scanning for
554 monitoring the process of hard rock coastal cliff erosion. *Quarterly Journal of Engineering Geology*
555 *and Hydrogeology* 38, 363-375.

556 Tallis, J.H., 1964. Studies on Southern Pennine Peats .2. The Pattern of Erosion. *Journal of Ecology*
557 52, 333-344.

558 Tallis, J.H., 1965. Studies on Southern Pennine Peats .4. Evidence of Recent Erosion. *Journal of*
559 *Ecology* 53, 509-520.

560 Tallis, J.H., 1998. Growth and degradation of British and Irish blanket mires. *Environmental Reviews*
561 6, 81-122.

562 Tallis, J.H., Yalden, D., 1983. District moorland restoration project phase II report: Re-vegetation trials.
563 Peak Park Joint Planning Board, Bakewell.

564 Taylor, J.A., 1983. The peatlands of Great Britain and Ireland. *Ecosystems of the World. Mires:*
565 *Swamp, Bog, Fen and Moor, 4A, General Studies.* Elsevier Scientific Publishers, Amsterdam.

566 Waddington, J.M., Toth, K., Bourbonniere, R., 2008. Dissolved organic carbon export from a cutover
567 and restored peatland. *Hydrological Processes* 22, 2215-2224.

568 Warburton, J., 2003. Wind-splash erosion of bare peat on UK upland moorlands. *Catena* 52, 191-207.

569 Watts, C.D., Naden, P.S., Machell, J., Banks, J., 2001. Long term variation in water colour from
570 Yorkshire catchments. *The Science of The Total Environment* 278, 57-72.

571 Yallop, A.R., Clutterbuck, B., 2009. Land management as a factor controlling dissolved organic carbon
572 release from upland peat soils 1: Spatial variation in DOC productivity. *Science of the Total*
573 *Environment* 407, 3803-3813.

574 Yallop, A.R., Thacker, J.I., Thomas, G., Stephens, M., Clutterbuck, B., Brewer, T., Sannier, C.A.D., 2006.
575 The extent and intensity of management burning in the English uplands. *Journal of Applied Ecology*
576 43, 1138-1148.

577

578

579 Table 1: Peat erosion rates for England and Wales calculated using erosion pins,
 580 from Evans and Warburton (2007).
 581

Location	Context	Period (Years)	Surface Retreat Rate (mm yr ⁻¹)	Reference
Moor House, N. Pennines	Gully walls	4	19.3	(Evans and Warburton, 2005)
Plynlimon	Hagg Faces	5	30.0	(Robinson and Newson, 1986)
Snake Pass, S Pennines	Gully walls	1	7.8	(Philips et al., 1981)
Moor House, N Pennines.	Gully walls	1	10.5	(Philips et al., 1981)
Holme Moss, S Pennines	Low angled peat margin	2	33.5	(Tallis and Yalden, 1983)
Holme Moss, S Pennines	Peat Margin	1	73.8	(Philips et al., 1981)
Harrop Moss, Pennines	Bare peat surface	7	13.2	(Anderson et al., 1997)
Snake Pass, S Pennines	Peat margin	1	5.4	(Philips et al., 1981)
Mid Wales	Ditch walls	1.4	23.4	(Francis and Taylor, 1989)
North York Moors, S Pennines	Low angled bare peat surfaces	2	40.9	(Imeson, 1974)
S Pennines	Low angled flats	1	18.4 – 24.2	(Anderson, 1986)
Cabin Clough, S Pennines	Low angled eroded face	2	18.5	(Tallis and Yalden, 1983)
Doctors Gate, S Pennines	Low angled eroded face	2	9.6	(Tallis and Yalden, 1983)
Plynlimon, Wales	Peat faces	2	16.0	(Francis, 1990)
Forest of Bowland	Summit Peat	1	20.4	(Mackay, 1993)

582

583 Table 2: Site details for each set of erosion pins including the spacing used, total
 584 area, average, maximum and minimum slope across the set of pins and the average
 585 aspect and orientation of the set of pins.

Pin Set	Pin Spacing (m)	Area	Average Slope (degrees)	Max Slope (degrees)	Min Slope (degrees)	Average Aspect (degrees)	Orientation
1	1	16	18.00	32.75	0.04	170	S
2	0.5	4	17.88	49.13	5.44	172	S
3	1	16	28.63	40.27	16.32	179	S
4	0.5	4	34.36	52.52	21.62	152	SE
5	0.5	4	11.35	17.79	1.51	174	S

586

587 Table 3: Carbon content per m³ of blanket bog peat within the UK from Milne and
 588 Brown (1997) and Frogbrook et al. (2009)

Reference	Site Location	Depth (cm)	kg C m ³
Milne and Brown (1997)	Scotland		47
Frogbrook et al. (2009)	Wales	0-15	79.59
Frogbrook et al. (2009)	Wales	15-30	60.57
Frogbrook et al. (2009)	Wales	50-65	40.08
Frogbrook et al. (2009)	Scotland	0-15	92.2
Frogbrook et al. (2009)	Scotland	15-30	68.6
Frogbrook et al. (2009)	Scotland	50-65	58.02

589

590

591 Table 4: Heights from peat surface to top of pin measured for each pin during
 592 surveys 1 and 2 and the difference between the two heights; negative numbers
 593 indicate erosion and positive numbers deposition.

Pin	Set 1			Set 2			Set 3			Set 4			Set 5		
	1st	2nd	+/-	1st	2nd	+/-	1st	2nd	+/-	1st	2nd	+/-	1st	2nd	+/-
1	15	35	-20	56	37	+19	58	66	-8	80	129	-49	68	140	-72
2	50	100	-50	100	108	-8	39	56	-17	49	150	-101	58	75	-17
3	62	143	-81	69	65	+4	35	85	-50	88	160	-72	70	100	-30
4	60	169	-109	53	74	-21	45	57	-12	66	81	-15	109	155	-46
5	54	170	-116	34	110	-76	60	156	-96	265	264	+1	70	93	-23
6	71	104	-33	48	60	-12	56	154	-98	193	266	-73	39	46	-7
7	35	185	-150	60	59	+1	104	168	-64	68	128	-60	56	74	-18
8	48	148	-100	75	82	-7	92	128	-36	51	75	-24	37	61	-24
9	43	90	-47	50	46	+4	69	125	-56	65	165	-100	53	44	+9
10	43	66	-23	43	35	+8	85	92	-7	85	86	-1	49	79	-30
11	49	69	-20	65	62	+3	35	42	-7	59	60	-1	50	63	-13
12	33	159	-126	35	43	-8	48	60	-12	30	120	-90	66	79	-13
13	44	66	-22	55	49	+6	40	58	-18	67	166	-99	60	93	-33
14	68	110	-42	28	28	0	35	45	-10	49	95	-46	74	102	-28
15	40	89	-49	85	137	-52	43	64	-21	93	110	-17	62	71	-9
16	95	130	-35	45	79	-34	50	103	-53	36	50	-14	34	46	-12
17	47	107	-60	30	84	-54	50	173	-123	50	75	-25	65	70	-5
18	47	132	-85	54	96	-42	55	109	-54	62	150	-88	64	81	-17
19	50	73	-23	64	70	-6	60	115	-55	40	90	-50	39	49	-10
20	35	0	+35	48	38	+10	74	45	+29	72	81	-9	60	115	-55
21	33	63	-30	29	17	+12	57	53	+4	40	60	-20	65	110	-45
22	115	127	-12	88	104	-16	50	83	-33	50	130	-80	54	102	-48
23	40	124	-84	50	96	-46	105	135	-30	32	136	-104	43	117	-74
24	30	103	-73	27	91	-64	60	121	-61	23	11	+12	28	48	-20
25	48	98	-50	49	59	-10	55	154	-99	44	48	-4	35	64	-29

594

595 Table 5: Erosion rates for each set of erosion pins, including the average change in
 596 surface height, the total volume of peat lost and the erosion rate for 29/10/10 to
 597 8/4/11

Pin Set	Total volume loss (m ³)	Erosion Rate (m ³ per m ²)
1	0.976	0.0610
2	0.058	0.0146
3	0.658	0.0411
4	0.209	0.0523
5	0.090	0.0226
Mean		0.0383
Median		0.0411

598

599

600

601

602 Table 6: Results from the pixel analysis to identify bare/eroded areas of peat,
 603 including the total number of cells classed as eroded/bare or vegetated and the total
 604 area of each across the area outlined in red in Figure 2.

	No. of Cells	Cell Size (m ²)	Total Area		% of Area
			m ²	Hectares	
Eroded/bare	857426	0.030828	26433	2.64	34.83
Vegetated	1604505	0.030828	49464	4.95	65.17
Total			75897	7.59	100.00

605
 606 Table 7: Indicative carbon loss/gain estimates due to blanket bog erosion/deposition
 607 at Valence Lodge Farm based on the erosion pin and LiDAR survey results and peat
 608 carbon content estimates from Milne and Brown (1997) and Frogbrook et al. (2009)

Reference	kg C m ³	C loss/gains from Valence Lodge (tons)	
		Erosion Pins	LiDAR
Milne and Brown (1997)	47	-47.6	+8.7
Frogbrook et al. (2009)	79.6	-80.6	+14.7
Frogbrook et al. (2009)	60.6	-61.3	+11.2
Frogbrook et al. (2009)	40.1	-40.6	+7.4
Frogbrook et al. (2009)	92.2	-93.3	+17.1
Frogbrook et al. (2009)	68.6	-69.5	+12.7
Frogbrook et al. (2009)	58.0	-58.8	+10.7

609

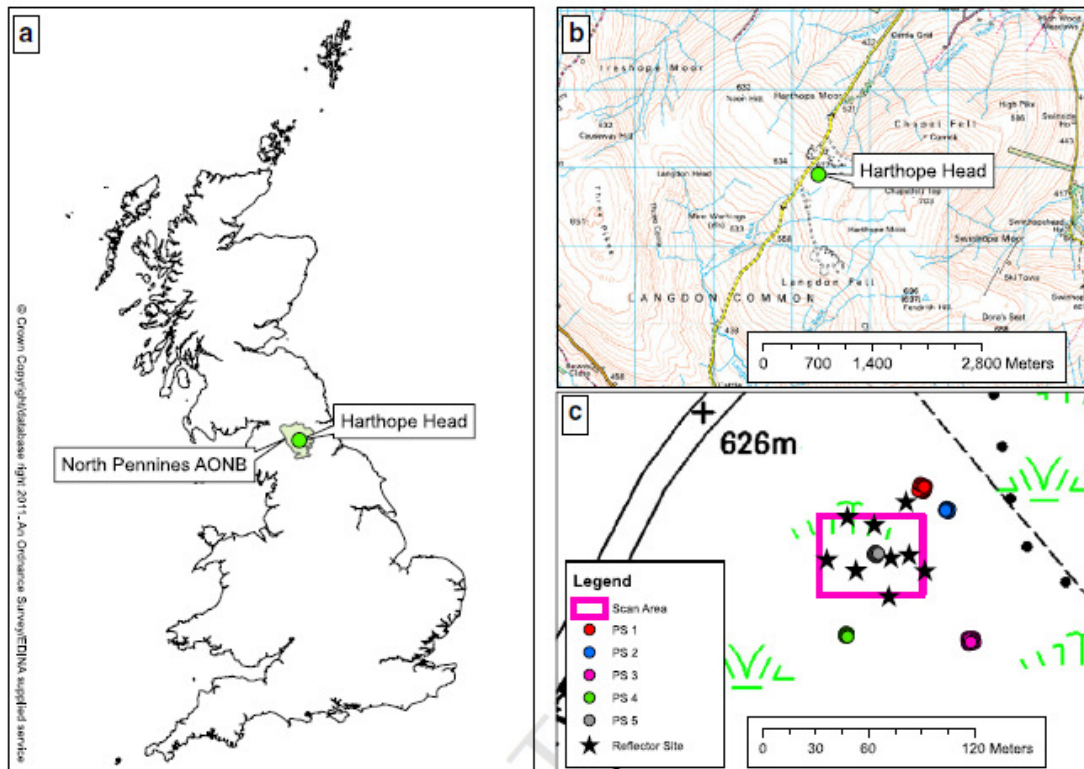


Fig. 1. Map showing the position of Valence Lodge Farm within the North Pennines AONB and the UK (a) and locally on Harthope Moor (b) and a detailed site map (c) showing the location of each set of erosion pins, the total LIDAR scan and the position of the reflector sites used during the LIDAR survey.

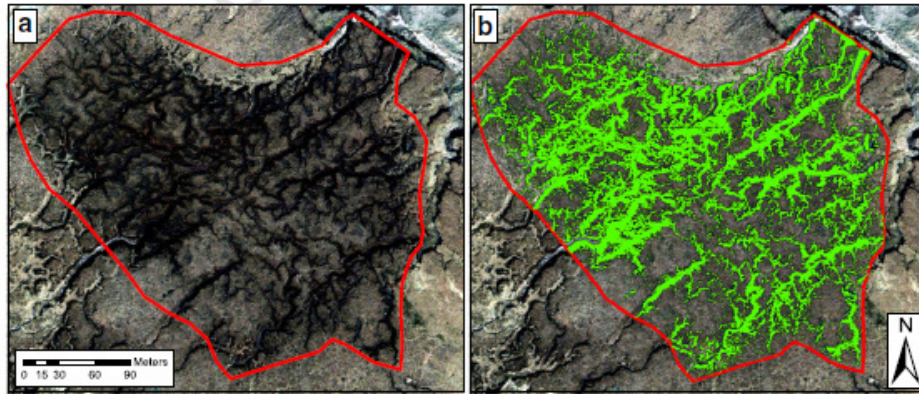


Fig 2. aerial image (a) showing the extent of bare and eroded peat across Harthope Head, the red outline shows the main area of erosion and the results of the pixel analysis (b) used to categorise bare/eroding areas of peat across the site, green shows those cells identified as bare/eroding.

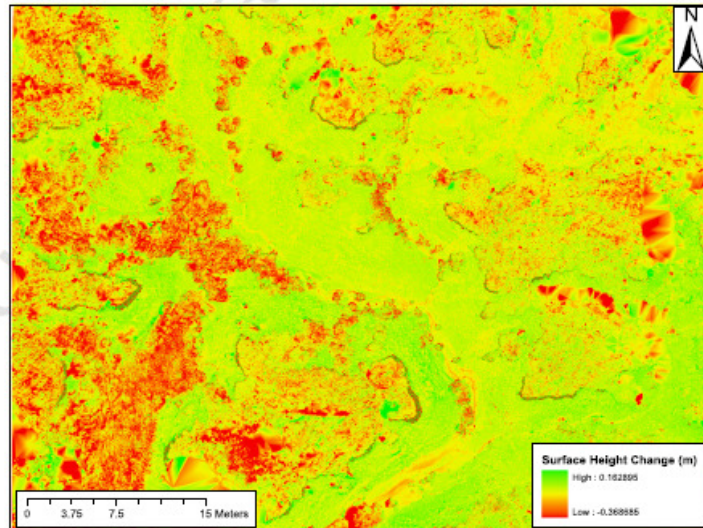


Fig. 3. Raster dataset showing changes in the peat surface height between October 2010 and April 2011 across the clipped LIDAR scan area at 2 cm resolution. Location of the survey area is shown in Fig. 1.

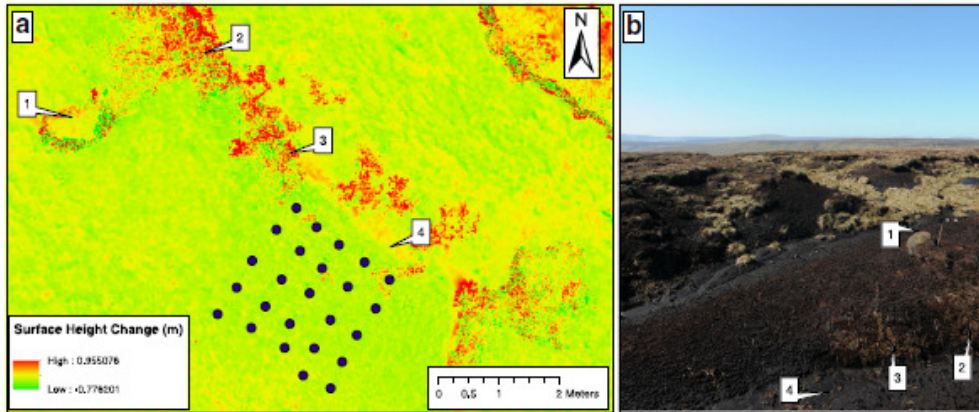


Fig 4. Impacts of vegetation shown in (a) the diff_2010-2011 raster dataset and (b) photograph. Annotations A and D show areas of vegetation and how these appear in the diff_2010-2011 raster dataset. Blue circles show pin locations for pin set 5.

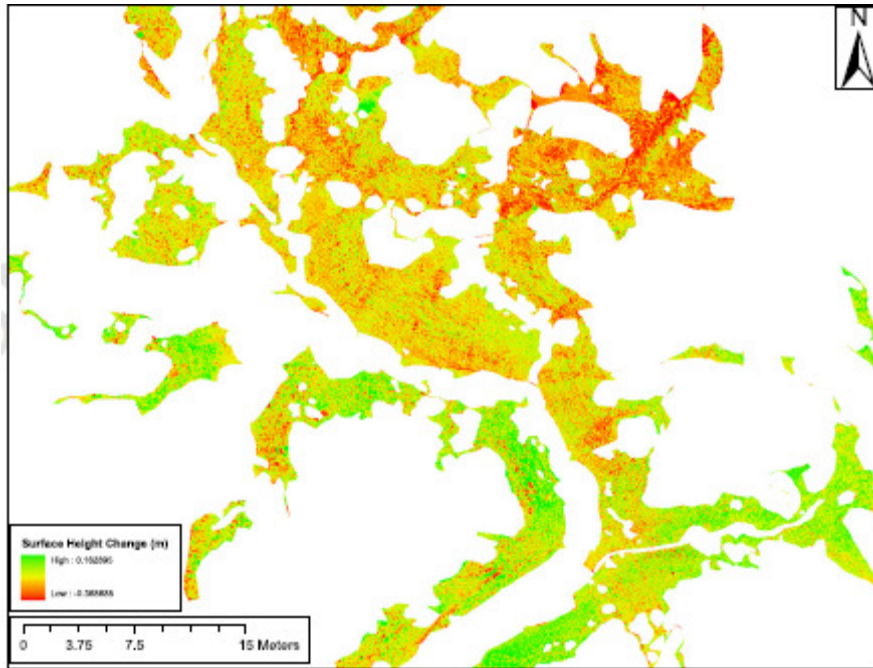


Fig 5. Raster dataset (2cm resolution) showing changes in the peat surface height between October 2010 and April 2011 limited to only those areas which are bare or eroded.

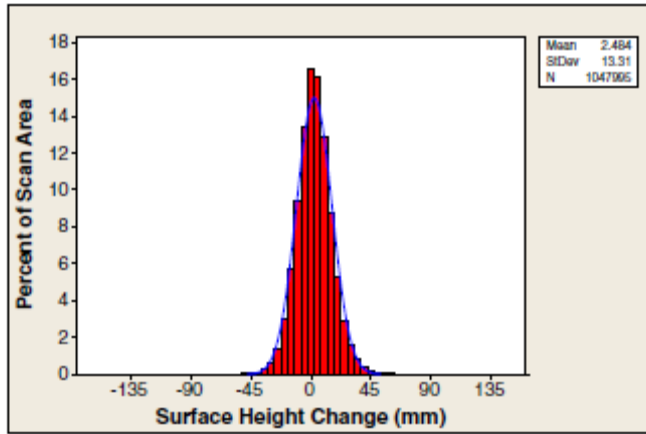


Fig. 6. Frequency distribution of surface height changes measured using the 2 cm resolution LIDAR data for Harthope Head.