



UNIVERSITY OF LEEDS

This is a repository copy of *Bi-objective network equilibrium, traffic assignment and road pricing*.

White Rose Research Online URL for this paper:

<https://eprints.whiterose.ac.uk/79925/>

Version: Accepted Version

Proceedings Paper:

Wang, JYT and Ehrgott, M (2014) Bi-objective network equilibrium, traffic assignment and road pricing. In: Helber, S, Breitner, M, Roesch, D, Schoen, C, Graf von der Schulenburg, J-M, Sibbertsen, P, Steinbach, M, Weber, S and Wolters, A, (eds.) Operations Research Proceedings 2012 -- Selected Papers of the International Annual Conference of the German Operations Research Society. International Annual Conference of the German Operations Research Society (GOR), 05-07 Sep 2012, Leibniz University of Hannover, Germany. Operations Research Proceedings . Springer , 563 - 568 (6). ISBN 978-3-319-00795-3

https://doi.org/10.1007/978-3-319-00795-3_84

Reuse

Items deposited in White Rose Research Online are protected by copyright, with all rights reserved unless indicated otherwise. They may be downloaded and/or printed for private study, or other acts as permitted by national copyright laws. The publisher or other rights holders may allow further reproduction and re-use of the full text version. This is indicated by the licence information on the White Rose Research Online record for the item.

Takedown

If you consider content in White Rose Research Online to be in breach of UK law, please notify us by emailing eprints@whiterose.ac.uk including the URL of the record and the reason for the withdrawal request.



eprints@whiterose.ac.uk
<https://eprints.whiterose.ac.uk/>

Bi-objective Network Equilibrium, Traffic Assignment and Road Pricing

Judith Y.T. Wang and Matthias Ehrgott

Abstract Multi-objective equilibrium models of traffic assignment state that users of road networks travel on routes that are efficient with respect to several objectives, such as travel time and toll. This concept provides a general framework for modelling traffic flow in tolled road networks. We present the concept of time surplus maximisation as a way of handling user preferences. Given a toll, users have a maximum time they are willing to spend for a trip. Time surplus is this maximum time minus actual travel time. A rational user can be assumed to maximise time surplus, leading to the definition of time surplus maximisation bi-objective user equilibrium. We propose to use such models on the lower level of bi-level models for pricing in road networks under multiple upper level objectives such as minimising total travel time and emissions. In such a model a multi-objective optimisation problem at the upper level is combined with a multi-objective equilibrium problem at the lower level.

1 Traffic Assignment and User Equilibrium

Traffic assignment models the route choice of users of a road network. Given a set of origin-destination (OD) pairs and demand for travel between these OD pairs, it determines how many users choose each of the available routes, and thereby the amount of traffic on each section of the road network. Conventional traffic assignment is based on the assumption that all users want to minimise their travel time, or more generally, a generalised cost function

$$c(x_p) = m(x_p) + \alpha t(x_p), \quad (1)$$

where x_p represents traffic flow on route p , t is travel time, which is dependent on flow, and m is a monetary cost comprising of tolls, vehicle operating cost etc.

Judith Y.T. Wang · Matthias Ehrgott

Department of Engineering Science, The University of Auckland, Private Bag 92019, Auckland 1142, New Zealand, e-mail: {m.ehrgott,j.wang}@auckland.ac.nz

that may also depend on flow and α is value of time. A user will choose the route between their origin and destination that has the least value of $c(x_p)$.

The traffic assignment problem is based on Wardrop's principle of user equilibrium [9], which can be stated as follows: *Under user equilibrium conditions traffic arranges itself in such a way that no individual trip maker can improve their generalised cost by unilaterally switching routes.* In other words, at equilibrium, the generalised cost of any used route between an OD pair must be equal and less than that of any unused route.

It is important to note that (1) is the linear combination of two components, time and monetary cost. In fact these are two different objective functions. Several authors have recognised this and suggested bi-objective traffic assignment models, see the references in [8]. However, these models are restrictive, by keeping the assumption of the existence of an additive generalised cost (or sometimes generalised time) function (1). Moreover, there is evidence, that users in reality do not behave according to this assumption, see references in [8]. In [8] we have suggested a more general bi-objective user equilibrium condition, that assumes that all users have the two objectives of minimising travel time and minimising toll cost.

Under bi-objective user equilibrium (BUE) conditions traffic arranges itself in such a way that no individual trip maker can improve either his/her toll or travel time or both without worsening the other objective by unilaterally switching routes.

We have shown that, even if considering all possible values of time, i.e. $\alpha \in [0, \infty)$, in (1), bi-objective models based on generalised cost provide only a subset of all possible solutions to traffic assignment that satisfy the BUE condition. Hence the definition of BUE provides an appropriate general framework for the study of traffic assignment in tolled road networks.

Furthermore, in [7] we have suggested the time surplus maximisation concept as a new route choice model that addresses the stochastic nature of route choice behaviour and the variability among users on their willingness to pay. It is based on the idea of time surplus. We assume that a user has in his mind a maximum time he is willing to spend in traffic, given any level of toll. If τ_p^k is the toll on route p for OD pair k and the travel time is $t(x_p^k)$ then the time surplus on route p for individual i is

$$t_{ip}^s = t_i^{\max}(\tau_p^k) - t(x_p^k). \quad (2)$$

We assume that the higher the toll, the shorter the maximum time willing to spend, i.e. we assume that t_i^{\max} is a strictly decreasing function of τ_p^k . This function t_i^{\max} is an indifference curve between time and toll for user i . The time surplus maximisation concept stipulates that all users maximise their time surplus. This gives rise to a user equilibrium condition: *Under the time surplus maximisation user equilibrium (TSmaxBUE) condition traffic arranges itself in such a way that no individual trip maker can increase their time surplus by unilaterally switching routes.*

In order to find a solution of the TSmaxBUE problem, we employ a route-based formulation of the equilibrium condition and follow [4] to formulate this as a non-linear complementarity problem, which is solved by minimising an associated gap function. Notice that because time surplus is maximised, but the NCP formulation

requires a cost function to be minimised, we need to write this cost function as $\eta_p^{ki} := M - t_i^{max}(\tau_p^k) + t(x_p^k)$ with a sufficiently large M in the NCP model.

2 Road Pricing

Road pricing is a common instrument to reduce congestion and has successfully been implemented in many cities around the world, e.g. in Singapore, Stockholm and London. The idea of congestion pricing is to charge tolls such that users are paying the marginal social cost rather than the average private cost for their trips. This induces changes in travel behaviour such that the total system travel time is minimised.

In today's world the idea of sustainable transport systems is gaining importance internationally. Sustainability encompasses the dimensions of economic, social and environmental sustainability [2]. The European Conference of Transport Ministers has defined a comprehensive catalogue of objectives of sustainable transport policy [3]. Among those, the objectives of creating wealth, reducing congestion, and reducing greenhouse gas emissions are relevant for this paper, the first in terms of economic sustainability, the second for both economic and environmental, and the last for environmental sustainability.

We suggest that, apart from considering tolls as a means to reduce congestion, road pricing can be an important instrument to reduce vehicle emissions. Hence the road pricing authority would pursue two objectives by charging road users: To minimise total travel time and to minimise total emissions. Road users on the other hand, will react to the imposed tolls and attempt to minimise their own travel time and toll cost. This framework is illustrated in Figure 1.

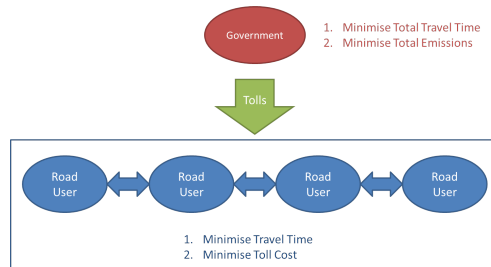


Fig. 1 The bilevel concept for road pricing.

At the government level there is, however, a dilemma. It is well known that tolls that minimise total travel time do not necessarily minimise emission levels [5, 10]. Hence the problem becomes that of the determination of efficient tolls such that neither the total travel time nor the total emissions can be reduced without worsening the other, which is a bi-objective optimisation problem.

3 A Bi-level Bi-objective Optimisation-Equilibrium Model

Here, we first formalise the two objective functions at government level. The first objective function is to minimise total travel time:

$$\min z_t(x(\tau)) = \sum_{a \in A} x_a(\tau) t_a(x_a(\tau)), \quad (3)$$

where $t_a(x_a) = t_0 \left[1 + \alpha \left(\frac{x_a}{C_a} \right)^\beta \right]$, is a typical link travel time function [1]. Here t_a is the travel time on link a , which depends on link flow x_a . Also, t_0 is the free-flow travel time and C_a the practical capacity of link a . The values of $\alpha = 0.1, \beta = 4.0$ are typical, and we adopt them in the example of Section 4. The left plot of Figure 2 shows three examples of travel time functions used in the example of Section 4.

The second objective function is the minimisation of total CO emissions.

$$\min z_e(x(\tau)) = \sum_{a \in A} x_a(\tau) e_a(v_a(x_a(\tau))). \quad (4)$$

Here, v_a is the traffic speed, which depends on link flow x_a and e_a is the CO emissions, which in turn depends on speed, on link a . Unfortunately, there is no consensus on the exact form of the emission function e_a . In Figure 2 we show the functions proposed by [10] in the middle and by [6] on the right.

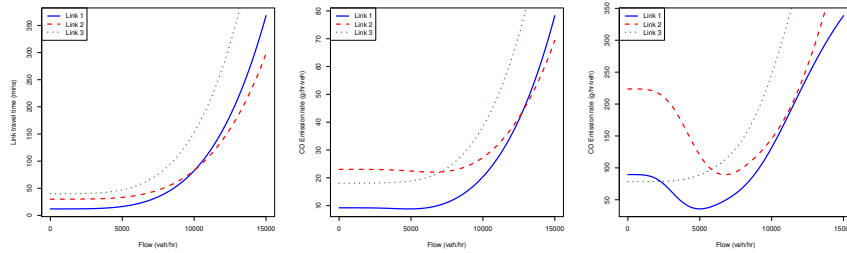


Fig. 2 Travel time (left) and CO emissions (middle and right) as functions of traffic flow.

4 A Three Link Example

We demonstrate our bilevel bi-objective-equilibrium model on a simple three link network. The three links (or routes) connect a single origin-destination pair and have the following characteristics. For route (link) 1, an expressway of 20 km length, we set $v_0 = 100$ km/h, $t_0 = 12$ minutes, and $C_a = 4,000$ vehicles per hour in the function

(3). For route (link) 2, a highway of 50 km distance these values are $v_0 = 100$, $t_0 = 30$ and $C_a = 5,400$. Finally, route (link) 3, an arterial route of 40 km length, has $v_0 = 60$, $t_0 = 40$ and $C_a = 4,800$.

The travel time and emission functions for the three links of this network are illustrated in Figure 2. In Figure 3 we show contour plots of the travel time and emission functions over feasible flows together with the social optimum solutions for travel time and emissions, illustrating that these are indeed different. We also show the traffic flows at the untolled user equilibrium solution, and the TSmaxBUE solution at the toll values of $\tau_1 = 40$ and $\tau_2 = 20$.

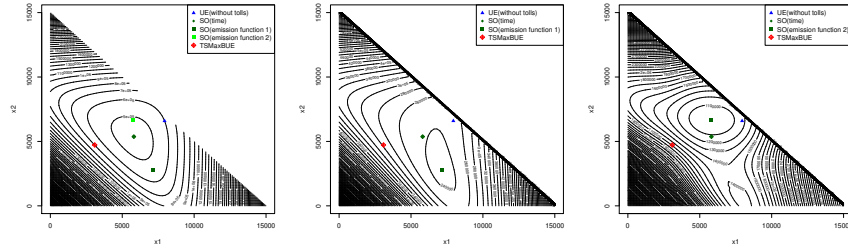


Fig. 3 Contour plots of travel time and emissions over feasible flows.

To find the efficient tolls, we observe that we must have that the tolls are such that $\tau_1 > \tau_2 > \tau_3$ and assume that $\tau_3 = 0$. We assume that t^{max} is uniformly distributed between 10 and 25, 30 and 45, and 60 and 90 minutes on the three links, respectively. Moreover, we allow τ_1, τ_2 to be in the range between 1 and 40 in discrete steps of 1.

The resulting total CO emissions versus total travel time, for both emission functions, are plotted in Figure 4, clearly illustrating the tradeoff between the two objectives as well as the difference to the untolled user equilibrium solution and the TSmaxBUE solution for $\tau_1 = 40, \tau_2 = 20$.

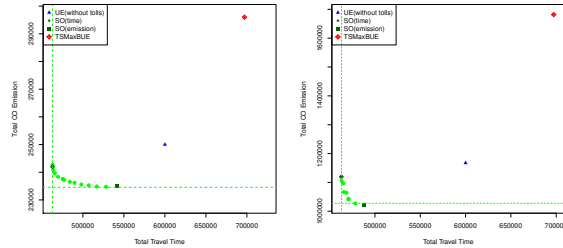


Fig. 4 The trade-off between total travel time and total CO emissions for efficient tolls.

5 Conclusion

In this work we have proposed a bilevel framework for road pricing to support sustainable transport systems. On the upper level we consider a bi-objective optimisation problem of minimising total emissions and total travel time, whereas on the lower level we consider a bi-objective user equilibrium model with users who minimise their own travel time and toll cost. We have proposed the concept of time surplus maximisation as a way of dealing with the bi-objective user equilibrium. In future work, we will develop algorithms to solve the problem, based on the NCP formulation of the TSmaxBUE problem and using a multi-objective evolutionary algorithm to integrate this with the bi-objective optimisation problem on the upper level.

Acknowledgement

This research was partially supported by the Marsden Fund project “Multiobjective network equilibria – From definitions to algorithms”, grant number 9075 362506.

References

1. Bureau of Public Roads. *Traffic Assignment Manual*. U.S. Department of Commerce, Urban Planning Division, Washington D.C., 1964.
2. European Commission. *Planning and Research of policies for land use and transport for increasing urban sustainability PROPOLIS: Final Report to European Commission*. European Commission, Brussels, Belgium, 2004.
3. European Conference of Ministers of Transport. Sustainable Transport Policies. Available online at www.cemt.org/online/council/2000/CM0001Fe.eps, 2000.
4. H. K. Lo and A. Chen. Traffic equilibrium problem with route-specific costs: Formulation and algorithms. *Transportation Research Part B: Methodological*, 34(6):493–513, 2000.
5. A. Nagurney. Congested urban transportation networks and emission paradoxes. *Transportation Research Part D*, 5:145–151, 2000.
6. D. A. Niemeier and S. Sugawara. How much can vehicle emissions be reduced? Exploratory analysis of an upper boundary using an emissions-optimized trip assignment. *Transportation Research Record*, 1815:29–37, 2002.
7. J. Y. T. Wang and M. Ehrgott. Modelling stochastic route choice with bi-objective traffic assignment. In *International Choice Modelling Conference 2011 held in Leeds on 4–6 July 2011*, 2011.
8. J. Y. T. Wang, A. Raith, and M. Ehrgott. Tolling analysis with bi-objective traffic assignment. In M. Ehrgott, B. Naujoks, T. Stewart, and J. Wallenius, editors, *Multiple Criteria Decision Making for Sustainable Energy and Transportation Systems*, pages 117–129. Springer Verlag, Berlin, 2010.
9. J. G. Wardrop. Some theoretical aspects of road traffic research. *Proceedings of the Institution of Civil Engineers, Part II*, 1:325–362, 1952.
10. Y. Yin and S. Lawphongpanich. Internalizing emission externality on road networks. *Transportation Research Part D*, 11:292–301, 2006.