



This is a repository copy of *Geotechnical causes for variations in output measured from shallow buried charges*.

White Rose Research Online URL for this paper:  
<http://eprints.whiterose.ac.uk/90210/>

Version: Accepted Version

---

**Article:**

Clarke, S.D., Fay, S.D., Warren, J.A. et al. (5 more authors) (2015) Geotechnical causes for variations in output measured from shallow buried charges. *International Journal of Impact Engineering*, 86. 274 - 283. ISSN 0734-743X

<https://doi.org/10.1016/j.ijimpeng.2015.08.009>

---

**Reuse**

Unless indicated otherwise, fulltext items are protected by copyright with all rights reserved. The copyright exception in section 29 of the Copyright, Designs and Patents Act 1988 allows the making of a single copy solely for the purpose of non-commercial research or private study within the limits of fair dealing. The publisher or other rights-holder may allow further reproduction and re-use of this version - refer to the White Rose Research Online record for this item. Where records identify the publisher as the copyright holder, users can verify any specific terms of use on the publisher's website.

**Takedown**

If you consider content in White Rose Research Online to be in breach of UK law, please notify us by emailing [eprints@whiterose.ac.uk](mailto:eprints@whiterose.ac.uk) including the URL of the record and the reason for the withdrawal request.



[eprints@whiterose.ac.uk](mailto:eprints@whiterose.ac.uk)  
<https://eprints.whiterose.ac.uk/>

# Geotechnical Causes for Variations in Output Measured from Shallow Buried Charges

S.D. Clarke<sup>a,\*</sup>, S.D. Fay<sup>a,b</sup>, J.A. Warren<sup>a,b</sup>, A. Tyas<sup>a,b</sup>, S.E. Rigby<sup>a</sup>, J.J. Reay<sup>b</sup>, R. Livesey<sup>c</sup>, I. Elgy<sup>c</sup>

<sup>a</sup>*Department of Civil & Structural Engineering, University of Sheffield, Mappin Street, Sheffield, S1 3JD, UK*

<sup>b</sup>*Blastech Ltd, The Sheffield Bioincubator, 40 Leavy Greave Road, Sheffield, S3 7RD, UK*

<sup>c</sup>*Physical Protection Group, Dstl Porton Down, Salisbury, SP4 0JQ, UK*

---

## Abstract

The role of the geotechnical conditions on the impulse delivered by a shallow buried charge has received much attention in recent times. As the importance of the soil in these events has become better understood, the control over the geotechnical conditions has improved. While previous work has investigated directly the role of geotechnical conditions on the magnitude of the impulse from a buried charge, the current work aims to identify how these same conditions also affect the repeatability of testing using soils. In this paper the authors draw together their work to date for a wide range of different soil types and moisture contents to investigate the variation in output from nominally identical tests. The methodology for the preparation of soil beds and the measurement of impulse is described along with the measured variations in peak and residual deflections of a target plate fixed to the impulse measurement apparatus.

*Keywords:* Buried charges, Impulse, Geotechnics, Soil, Plate deformation, IEDs

---

## 1. Introduction

With the increasing use of buried improvised explosive devices in current conflict zones, a need for a deeper understanding of the role of soil in the resulting explosive events has emerged. Being able to design protective structures to withstand such events, and save lives, depends on

---

\*Tel.: +44 (0) 114 222 5703

Email address: sam.clarke@sheffield.ac.uk (S.D. Clarke)

14 the accurate assessment of the blast loading produced by the detonation of such shallow-buried  
15 explosives. This is a highly complex detonation event, involving the interaction of extremely  
16 high-energy shock waves with multiple materials in different phases.

17 Experimental research into characterising the loading from buried explosives has typically  
18 focused on the structural response of a target [1, 2] with the geotechnical conditions prior to  
19 detonation being of secondary concern. In more recent studies attention has been given to the  
20 geotechnical conditions albeit without a full understanding of their role in the underlying re-  
21 peatability of the event [3, 4, 5, 6, 7, 8]. As an alternative, the shock-related aspects can be  
22 removed altogether by using well controlled small scale laboratory samples loaded by com-  
23 pressed gas [9]. This approach has the drawback of over-simplifying the problem by ignoring  
24 the air shock, geometrical and thermal aspects of the loading, and perhaps even more critically  
25 concentrating only on the sand throw as the mechanism for impulse transfer.

26 It is generally accepted that geotechnical properties of the soil surrounding a buried charge  
27 are of key importance in determining the variation in output. Significant parameters include;  
28 bulk density, moisture content, particle size distribution and burial depth. With so many possible  
29 principal variables being present, control of the geotechnical conditions is key to understand the  
30 relationships between them and the generated impulse.

31 The authors have shown previously that by carefully controlling the burial conditions very  
32 repeatable impulse data can be obtained ( $\pm 3\%$  for nominally identical tests [10]). This has  
33 enabled parametric studies to be conducted to assess the influence of individual geotechnical  
34 parameters on the resulting blast. With careful control during the preparation of the soil beds,  
35 variations in density of  $\pm 0.2\%$ , and in moisture content of  $\pm 0.05-0.1\%$  have been achieved.  
36 Previous testing has shown that for a fixed bulk density, an increase in moisture content leads to  
37 an increase in generated impulse with all other variables remaining constant [10] (series 'a' re-  
38 ported below). Since the previously published work by the authors, a more comprehensive test  
39 series, comprising 77 tests (in total) has been conducted. These tests have incorporated the test

40 modifications reported in [11] which improved the accuracy of the image tracking through the  
 41 use of LEDs set into the target markers. The aim of the research reported herein was to investi-  
 42 gate whether certain soil types and conditions produce more repeatable output when comparing  
 43 the total impulse generated, and the deformation of the target plate. These outputs were also  
 44 compared to the outputs from tests conducted using a surrogate mine in a steel pot (Minepot)  
 45 described in the Allied Engineering Publication on procedures for evaluating the protection  
 46 level of armoured vehicles (AEP-55) [12]. The use of the Minepot hence removes any of the  
 47 geotechnical conditions as possible causes for the variations in measured impulse and plate  
 48 deflections.

## 49 2. Geotechnical conditions

50 Soil is a naturally variable material. As such the achievable degree of control of the geotech-  
 51 nical conditions should be a product of this natural variation. Six soils have been tested in the  
 52 current research at a range of moisture contents ( $w = \text{mass of water} / \text{dry mass of solids}$ ) and  
 53 bulk and dry densities ( $\rho, \rho_d$ ).

Table 1: Soil types used in the current research

Soil	PSD	$w$ (%)	$\rho$ (Mg/m <sup>3</sup> )
Leighton Buzzard 14/25 (LB)	Uniform (0.6-1.18 mm)	0-25	1.5-2.0
Leighton Buzzard 6/14 (2LB)	Uniform (1.18-2.8 mm)	0-25	1.6-2.0
Leighton Buzzard 25B grit (LBF)	Well graded (0.5-5.0 mm)	0-25	1.6-2.0
Sandy gravel (Stanag) [12]	Well graded (0-20 mm)	0-14	1.9-2.2
Red building sand (RBS)	Uniform (0.1-0.5 mm)	25	1.9
Brown laminated silty clay	66% < 0.002 mm	~27	1.93

54 The soil types tested are given in Table 1 with information on the particle size distribution  
 55 for each soil type being shown in Fig. 1. Uniform soils have a small range of particle sizes and  
 56 hence plot as steep lines in Fig. 1 e.g. Leighton Buzzard 14/25 (LB) and 6/14 (2LB) sands.  
 57 Well graded soils have a large range of particle sizes and plot as shallow lines e.g. ‘Stanag’.

58 Stanag is the sandy gravel recommended for use in buried charge tests given in the AEP-55 [12],  
59 which is itself a testing addenda to NATO standardisation agreement, STANAG 4569 [13]. The  
60 Leighton Buzzard sands are renowned in the UK for their well-rounded and uniform nature and  
61 have a long history of use in geotechnical testing due to their inherently repeatable nature. Their  
62 name comes from the town in which they are quarried. For two of the Leighton Buzzard sand  
63 gradings (14/25 (LB) & 25B grit sand (LBF)) the test beds were first compacted to a constant  
64 bulk density (series 'a' in Table 2, which indicates how each test series varied). Hence, as the  
65 water content increased so the dry density decreased. As the dry density decreases the soil  
66 becomes more prone to self weight and vibration induced compaction, so great care must be  
67 taken when moving soil containers once prepared. In test series 'b', the dry density was kept  
68 constant with increased water content leading to an increased bulk density in each test. There is  
69 a natural limit on the moisture content achievable whilst still creating a homogeneous sample.  
70 Once this limit is passed the water in the soil matrix settles to the bottom of the soil container  
71 creating a fully saturated zone at the base with a partially saturated zone above. This is related  
72 to the particle size distribution, with the well graded soils being able to sustain higher moisture  
73 contents whilst remaining homogeneous. In the case of the Leighton Buzzard sands this limit  
74 was found to be around  $\approx 8\%$  moisture content. In test series 'c' the air void ratio (volume of  
75 air / total volume) in the sample was kept constant, leading to a reduction in both bulk and  
76 dry densities as the water content increased. As in test series 'a' the soils are prone to self  
77 compact once the natural minimum dry density is neared, hence low moisture contents were  
78 used. The test series types are summarised in Table 2. Further soil types were also tested using  
79 the series 'b' methodology, these included Leighton Buzzard 6/14 sand (2LB), AEP-55 sandy  
80 gravel (Stanag), brown laminated silty clay (Clay), and red building sand (RBS). The Leighton  
81 Buzzard sands provide an opportunity to investigate the effects of particle scaling and particle  
82 size distribution for nominally identical materials. Leighton Buzzard sand can be described as  
83 a rounded to well-rounded quartz silica sand shown in Fig. 2(a). The red building sand has a

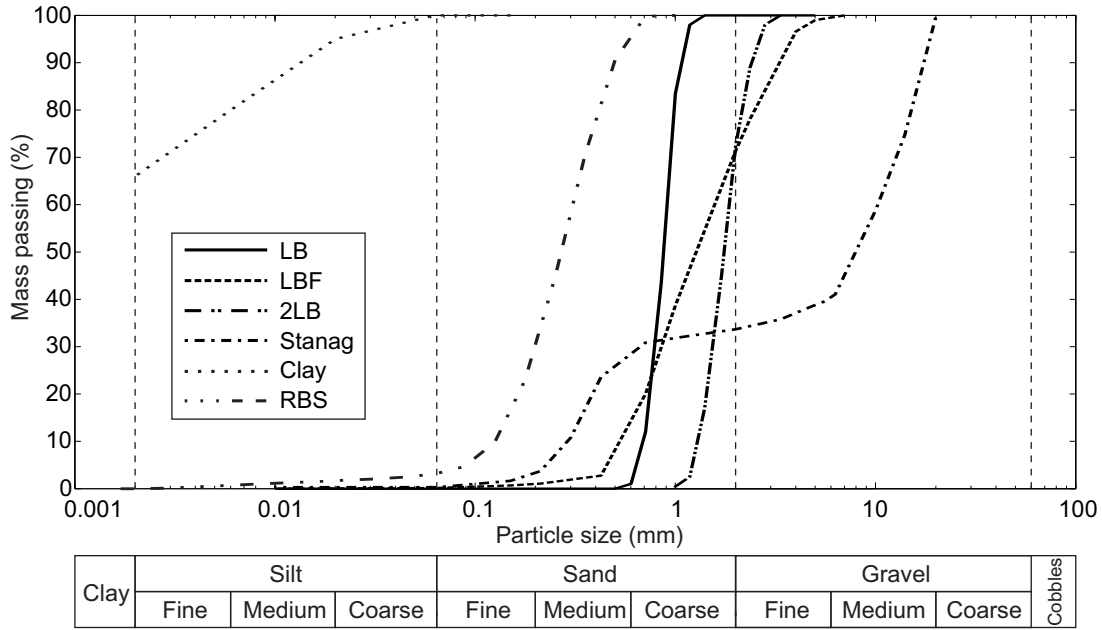


Figure 1: Particle size distribution curves for each soil type

Table 2: Test series conducted

Series	Notes
a	Constant bulk density ( $> w, < \rho_d$ )
b	Constant dry density ( $> w, > \rho$ )
c	Constant air voids ( $> w, < \rho, < \rho_d$ )

84 smaller average particle size and can be described as sub-angular, as shown in Fig. 2(b). For all  
 85 the soils tested with the exception of the clay, silica is the predominant mineral, giving the soils  
 86 an identical specific gravity,  $G_s$  of 2.65 (Clay  $G_s \approx 2.75$ ).

### 87 2.1. Soil preparation

88 To create repeatable test beds with varying soil types at differing dry densities (and hence  
 89 levels of compaction), an effectively rigid container was used [10]. The containers were con-  
 90 structed from 30 mm thick rolled mild steel plate formed into a 1000 mm diameter, 750 mm tall  
 91 cylinder. These dimensions are half scale when compared with the full scale soil beds mandated  
 92 in AEP-55 [12]. A 25 mm thick mild steel base plate was welded to the base of each cylinder.  
 93 To be able to control the final conditions of the test beds the initial conditions of the soils were

Table 3: Test plan and achieved geotechnical conditions

Test no.	Soil type	Series	w (%)	$\rho$ (Mg/m <sup>3</sup> )	$\rho_d$ (Mg/m <sup>3</sup> )
1	2LB	b	2.512	1.633	1.593
2	2LB	b	2.512	1.635	1.595
3	2LB	b	4.993	1.660	1.581
4	2LB	b	4.998	1.679	1.599
5	2LB	b	8.026	1.732	1.603
6	2LB	b	8.085	1.732	1.602
7	2LB	b	24.77	1.990	1.595
8	2LB	b	24.77	1.990	1.595
9	Clay	-	26.50	1.929	1.525
10	Clay	-	26.90	1.925	1.517
11	Clay	-	27.30	1.862	1.463
12	LB	a, b, c	0.100	1.594	1.592
13	LB	a, b, c	0.100	1.593	1.591
14	LB	a, b, c	0.281	1.594	1.589
15	LB	a	2.459	1.596	1.558
16	LB	a	2.470	1.596	1.558
17	LB	a	2.480	1.595	1.556
18	LB	a	4.932	1.595	1.520
19	LB	a	4.998	1.600	1.524
20	LB	a	5.020	1.595	1.519
21	LB	a	7.388	1.598	1.488
22	LB	a	7.446	1.599	1.488
23	LB	a	7.481	1.598	1.486
24	LB	b	2.491	1.643	1.603
25	LB	b	2.491	1.641	1.601
26	LB	b	2.543	1.642	1.601
27	LB	b	4.932	1.670	1.592
28	LB	b	4.943	1.664	1.586
29	LB	b	4.998	1.670	1.591
30	LB	b	8.108	1.733	1.603
31	LB	b	8.108	1.730	1.600
32	LB	b	8.120	1.734	1.604
33	LB	b	24.77	1.990	1.595
34	LB	b	24.77	1.990	1.595
35	LB	b	24.77	1.990	1.595
36	LB	c	1.926	1.557	1.528
37	LB	c	1.978	1.552	1.522
38	LB	c	1.999	1.558	1.527
39	LB	c	3.972	1.509	1.451
40	LB	c	4.037	1.502	1.444
41	LB	c	4.102	1.509	1.450
42	LBF	a, b	0.080	1.600	1.599
43	LBF	a, b	0.080	1.600	1.599
44	LBF	a, b	0.100	1.604	1.602
45	LBF	a	2.470	1.596	1.558
46	LBF	a	2.492	1.603	1.564
47	LBF	a	2.561	1.598	1.558
48	LBF	a	4.833	1.615	1.541
49	LBF	a	4.888	1.613	1.538
50	LBF	a	4.943	1.608	1.532
51	LBF	a	7.411	1.601	1.491
52	LBF	a	7.411	1.605	1.494
53	LBF	a	7.532	1.604	1.492
54	LBF	b	2.480	1.638	1.598
55	LBF	b	2.543	1.631	1.591
56	LBF	b	4.965	1.667	1.588
57	LBF	b	4.965	1.662	1.583
58	LBF	b	8.167	1.730	1.599
59	LBF	b	8.178	1.732	1.601
60	LBF	b	24.77	1.996	1.600
61	LBF	b	24.77	1.990	1.595
62	RBS	-	24.22	1.887	1.519
63	RBS	-	24.22	1.882	1.515
64	RBS	-	24.22	1.881	1.514
65	Stanag	b	0.090	1.937	1.935
66	Stanag	b	0.090	1.928	1.926
67	Stanag	b	4.167	2.006	1.926
68	Stanag	b	4.232	1.999	1.918
69	Stanag	b	8.648	2.088	1.922
70	Stanag	b	8.719	2.097	1.929
71	Stanag	b	11.11	2.148	1.933
72	Stanag	b	11.14	2.133	1.919
73	Stanag	b	14.15	2.198	1.926
74	Stanag	b	14.15	2.201	1.928
75	Minepot	-	-	-	-
76	Minepot	-	-	-	-
77	Minepot	-	-	-	-

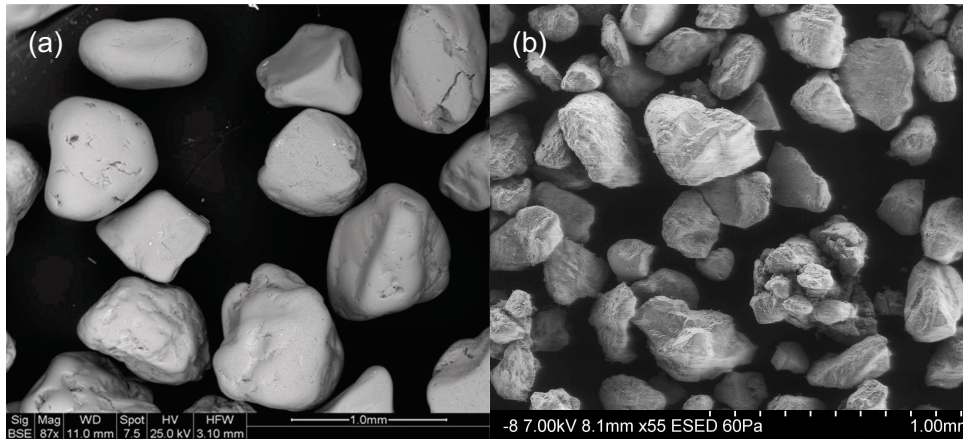


Figure 2: Scanning electron micrograph of (a) Leighton Buzzard sand [14] (b) Red building sand

94 checked prior to sample preparation. The initial moisture content of each soil was checked, and  
 95 the mass of water required to achieve the test prescribed water content was calculated. This led  
 96 to samples being created to within  $\pm 0.1\%$  of the target moisture content. Ideally all soils would  
 97 be initially dry but this introduces complications in the production of repeatable samples with  
 98 cohesive soils such as clays which require a long period of consolidation.

99 For the cohesionless soils, the containers were generally filled in 3 stages each of equal  
 100 mass (the exact mass depends on geotechnical conditions of the test). The soil was weighed  
 101 as it entered a forced action pan mixer and the correct mass of water added. Mixing continued  
 102 until the water was evenly distributed; with moisture content then being checked. If the moisture  
 103 content was confirmed to be within tolerance, the contents of the pan mixer were purged into the  
 104 soil container taking care to avoid sample loss. Plywood shuttering (cut to the internal diameter  
 105 of the container) was placed on the surface of the soil and a stiffened steel plate (100 mm clear  
 106 of the internal diameter) was seated on the timber boards. A vibrating compaction plate (VCP)  
 107 was placed upon the stiffened steel plate; the soil then being vibrated until it reached its target  
 108 density. Measurements of the final soil depth were then recorded. The VCP, stiffened steel  
 109 plate and timber boards are then removed from the container with care such that the soil surface  
 110 remains undisturbed. This was repeated until the container was filled. In the case of the non



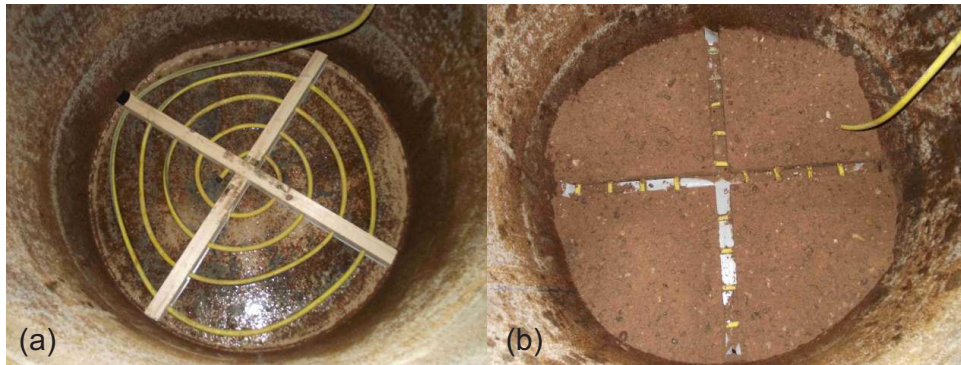


Figure 3: Bottom-up saturation technique (a) spacer present (b) part-filled with spacer removed

111 saturated soils a cavity was then excavated to accommodate the charge, at the correct burial  
112 depth. Excavated material was stored in sealed bags, in order to back fill to the correct density  
113 and moisture content.

114 For the full saturation tests the soil containers were filled using the above procedure to a  
115 designated dry density and then saturated from the base [15]. Fig. 3 shows the inside of the steel  
116 containers during filling. Any collapse settlement during the saturation process is accounted for  
117 in the initial target dry density to achieve the same bulk density in each test. The base saturation  
118 is achieved by burying a length of perforated hose, using a timber spacer to achieve an even  
119 hose distribution (Fig. 3a). This spacer is then removed once enough soil has been added to  
120 secure the hose location (Fig. 3b). The container is then filled in the usual manner with the hose  
121 being led up the inner wall to allow for saturation prior to firing. This method of flooding has  
122 been found to give a more uniform distribution of moisture content through the soil mass, so  
123 long as the flow rate used for saturation is insufficient to cause piping.

124 For the cohesive tests there are two ways of preparing the soil bed. One method is to  
125 reconstitute the soil from a high moisture content slurry under sustained pressure, which leads  
126 to a very high degree of control but very long preparation times. The second method is to ‘press  
127 in’ the soil containers into a natural clay outcrop, thus testing ‘real’ materials. In the current  
128 study the second method was used with the authors sourcing a supplier capable of using heavy

129 plant to force the containers into a uniform outcrop, with the surface being levelled with a wire  
130 saw to obtain a relatively undisturbed face. With the second method, the moisture content and  
131 density are controlled by the uniformity of the natural outcrop– the variation in the soil beds is  
132 recorded in Table 3.

### 133 **3. Experimental setup**

#### 134 *3.1. Test frame*

135 All experimental work was conducted by Blastech Ltd at the University of Sheffield Blast &  
136 Impact laboratory, Buxton, UK as part of a research project funded by the UK Defence Science  
137 and Technology Laboratory (Dstl). The large test frame fabricated is shown in Fig. 4. The  
138 deformable target plate is made from a 12.5 mm thick, 675 mm square mild steel sheet. This  
139 was attached to a 675 mm square stiff reaction frame, fabricated from 100 mm thick mild steel,  
140 with a circular free span for the target plate of 500 mm diameter. The reaction frame in turn  
141 was connected to a 3 m long steel circular hollow section. The resulting system had an overall  
142 reaction mass of 1574 kg. The entire reaction mass was allowed to translate freely in the vertical  
143 direction after picking up load from the detonation of a buried explosive charge, with up to 800  
144 mm of vertical travel allowed. The upward flight was then arrested either by gravity (if the  
145 initial velocity  $< \approx 4 \text{ ms}^{-1}$ ) or by impact of the interface plate with the lower face of the arrestor  
146 plate. As the mass subsequently descends, the lower flange settled onto the upper face of the  
147 arrestor plate, where the impact was softened by bushes. Peak and residual deflections of the  
148 deformable target plate were measured (§3.4). For the purposes of future numerical analysis,  
149 the 12.5 mm thick target plates were attached to the interface plate using 4 timber pegs which  
150 are designed to resist minimal loading, thus simplifying the boundary conditions of the plate to  
151 that of unrestrained, with the target plate simply bearing directly onto the inner profile of the  
152 interface plate. The detached target plate was free to fall into the soil container once the event  
153 was over reducing any further deformation from the landing.

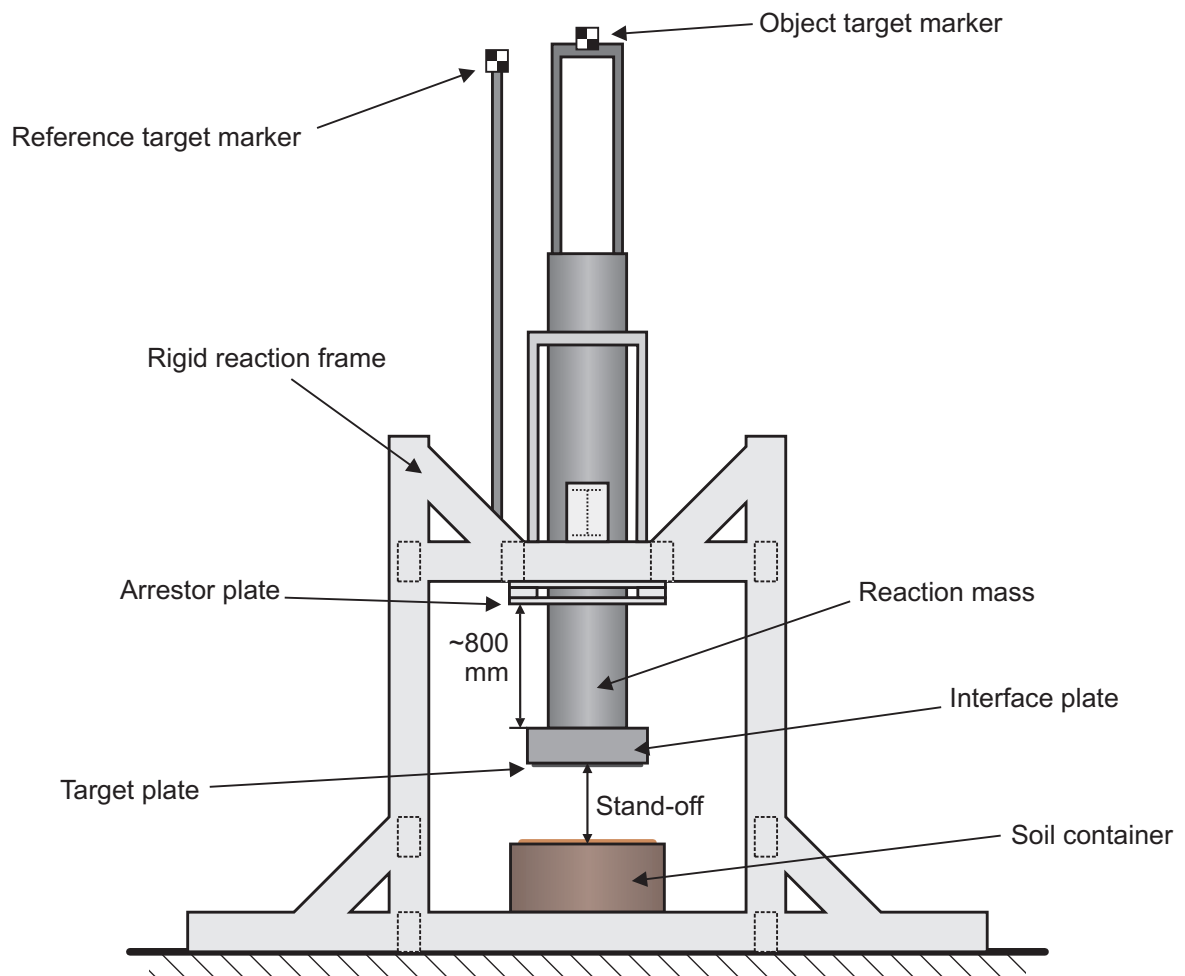


Figure 4: Free-flying mass impulse capture apparatus

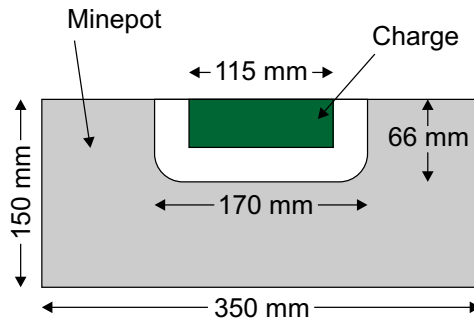


Figure 5: Scaled down surrogate mine in steel pot (Minepot)

154 *3.2. Test configuration*

155 The present work used a half linear scale version of STANAG threat level M2 as given in  
 156 AEP-55 [12]. The size of the soil container has also been scaled down to emulate the boundary  
 157 conditions stipulated in AEP-55 with the exception of the boundary being cylindrical rather  
 158 than rectangular. Due to the physically smaller charges being used (1/2 scale by geometry, 1/8  
 159 scale by mass and energy), the Minepot was also scaled down to half scale, Fig. 5. In each  
 160 test a charge of 625 grams PE4 buried at 50 mm, measured from the soil surface to the top of  
 161 the charge, was used. The charge was shaped into a 3:1 cylinder as indicated in Fig. 5. The  
 162 stand-off between the soil surface and the target plate was 137.5 mm in all tests.

163 *3.3. Impulse measurement*

164 In order to measure displacement-time data of the reaction mass, two target markers are  
 165 attached to the rig (Fig. 4), one to the rigid reaction frame to give a fixed reference, the other  
 166 attached to the rising mass. Both target markers are raised up on masts to ensure they are not  
 167 obscured by soil throw during the test. Two high-speed cameras (Dantec Dynamics NanoSense  
 168 Mk.2, framing at 4000 fps) are used, one to film these target markers and one to film the breakout  
 169 of the charge and resulting sand throw. An example of the footage from the lower camera is  
 170 shown in Fig. 6. The lower camera was situated within a reinforced concrete bunker and isolated  
 171 from any potential air shock vibration.

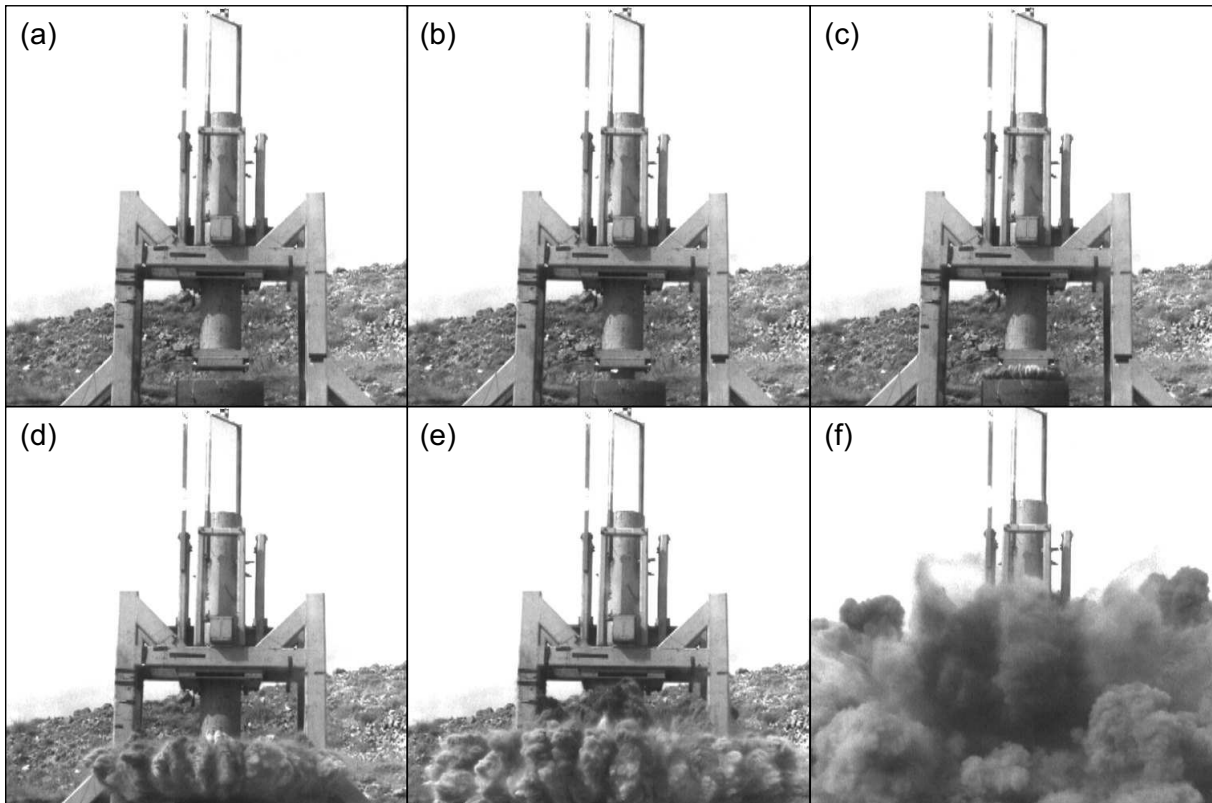


Figure 6: Frames from high speed video of an indicative test; a) pre firing, b) initial vertical throw, c) cloud reaches container edge, d) expansion clearing frame, e) expansion into free air, f) target movement clearly visible from object target marker

172 The upper camera was situated in protective housing on the bunker roof (at roughly the same  
 173 height as the target markers), which made it prone to vibration from the air shock, potentially  
 174 introducing an error into the marker tracking. However, since the excitation is common to both  
 175 target markers, the error can be minimised by subtracting the motion of the reference target  
 176 marker from that of the object target marker. Using the relative motion, the displacement-time  
 177 history for the target can be calculated to which a 4th order polynomial is fitted, an example  
 178 displacement-time history from the image tracking is shown in Fig. 7. The equivalent initial  
 179 velocity that would give the same peak rise as seen in the polynomial fit can then be calculated.  
 180 The velocity calculation assumes the velocity is applied instantaneously with the target mass  
 181 subsequently free to decelerate under gravity. The initial impulse can then be calculated from  
 182 knowing the mass and initial velocity [10, 11].

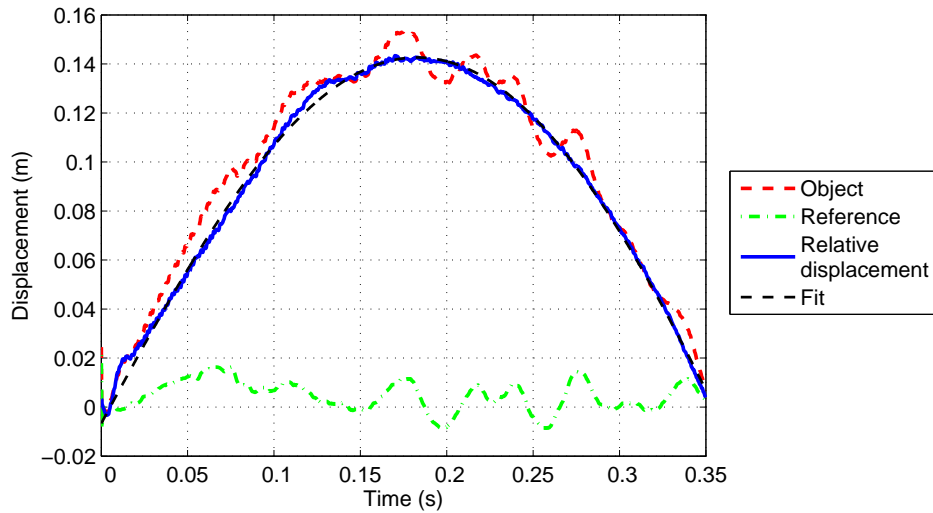


Figure 7: Example displacement-time history of the object and reference target markers with 4th order polynomial curve fit to relative displacement data

### 183 3.4. Deflection measurement

184 The peak and residual plate deflections were also recorded. The peak dynamic deformation  
 185 of the target plate (relative to the interface plate) was accurately measured using a deformable  
 186 aluminium honeycomb crush block, mounted on a rigid support spanning the 500 mm circular  
 187 hollow section. The residual deflections were recorded post test once the plate was recovered.  
 188 These data give a second measure on the ability of a given soil type (or the Minepot) to produce  
 189 repeatable results.

## 190 4. Results

### 191 4.1. Global repeatability

192 The focus of this paper is not to directly compare the magnitude of the impulses and de-  
 193 flections generated, but to compare the repeatability of the tests. This has been achieved by  
 194 normalising all data in a test series by the mean for that test series. The mean-normalised im-  
 195 pulse for each test is shown in Fig. 8(a), where the mean-normalised impulse was calculated by  
 196 dividing the recorded impulse by the mean impulse for the subset of nominally identical tests

197 (see shading in Table 3). The normalised residual and peak plate deflections were calculated in  
 198 an identical manner and are plotted against test number in Figs. 8(b) and 8(c) respectively.

199 Fig. 8(a) shows the repeatable nature of the testing with the maximum offset of any data  
 200 point being test 53 which shows a 0.166 (16.6%) variation from the mean. The likely cause for  
 201 this variation is the low dry density of the soil combined with a relatively high moisture content  
 202 making it highly susceptible to self compaction as noted earlier and is a common factor in all  
 203 ‘a’ series tests. All the other tests lie within 10% of the mean. From a comparison between  
 204 Fig. 8(a), (b) and (c) it can be seen that a low variation in impulse does not necessarily lead  
 205 to equally low variation in recorded deflection. For example LBb shows one of the lowest  
 206 variations in impulse (SD=0.0112, lower than that of the Minepot, SD=0.0201) yet one of the  
 207 highest variations in peak deflection (SD=0.0447). The standard deviations for all the individual  
 208 test soil types for the three measured outputs are given in Table 4.

Table 4: Soil type repeatability

Output	Standard deviation / soil type									
	2LB	Clay	LBa	LBb	LBc	LBFa	LBFb	RBS	Stanag	Minepot
Impulse	0.0124	0.0088	0.0340	0.0112	0.0463	0.0694	0.0371	0.0070	0.0313	0.0201
Residual deflection	0.0354	0.0158	0.0275	0.0350	0.0302	0.0268	0.0236	0.0308	0.0197	0.0072
Peak deflection	0.0243	0.0210	0.0176	0.0447	0.0269	0.0299	0.0171	0.0570	0.0232	0.0114

209 When the dataset is taken as a whole, the absolute offset of each test from the mean can be  
 210 plotted against the number of tests within that offset as shown in Fig. 9. This shows that the  
 211 range of impulses is higher than that of both deflections when considering 100% of the data.  
 212 This is reflected by the global standard deviations given in Table 5. However, when considering  
 213 only the closest 80% of data to the mean there is very little variation between the impulse and  
 214 deflections with 80% of the data lying within  $\pm 3.7\%$  of the mean. The variation reduces to  
 215  $\pm 2.2\%$  when looking at 50% of the data and  $\pm 1\%$  when looking at 30%.

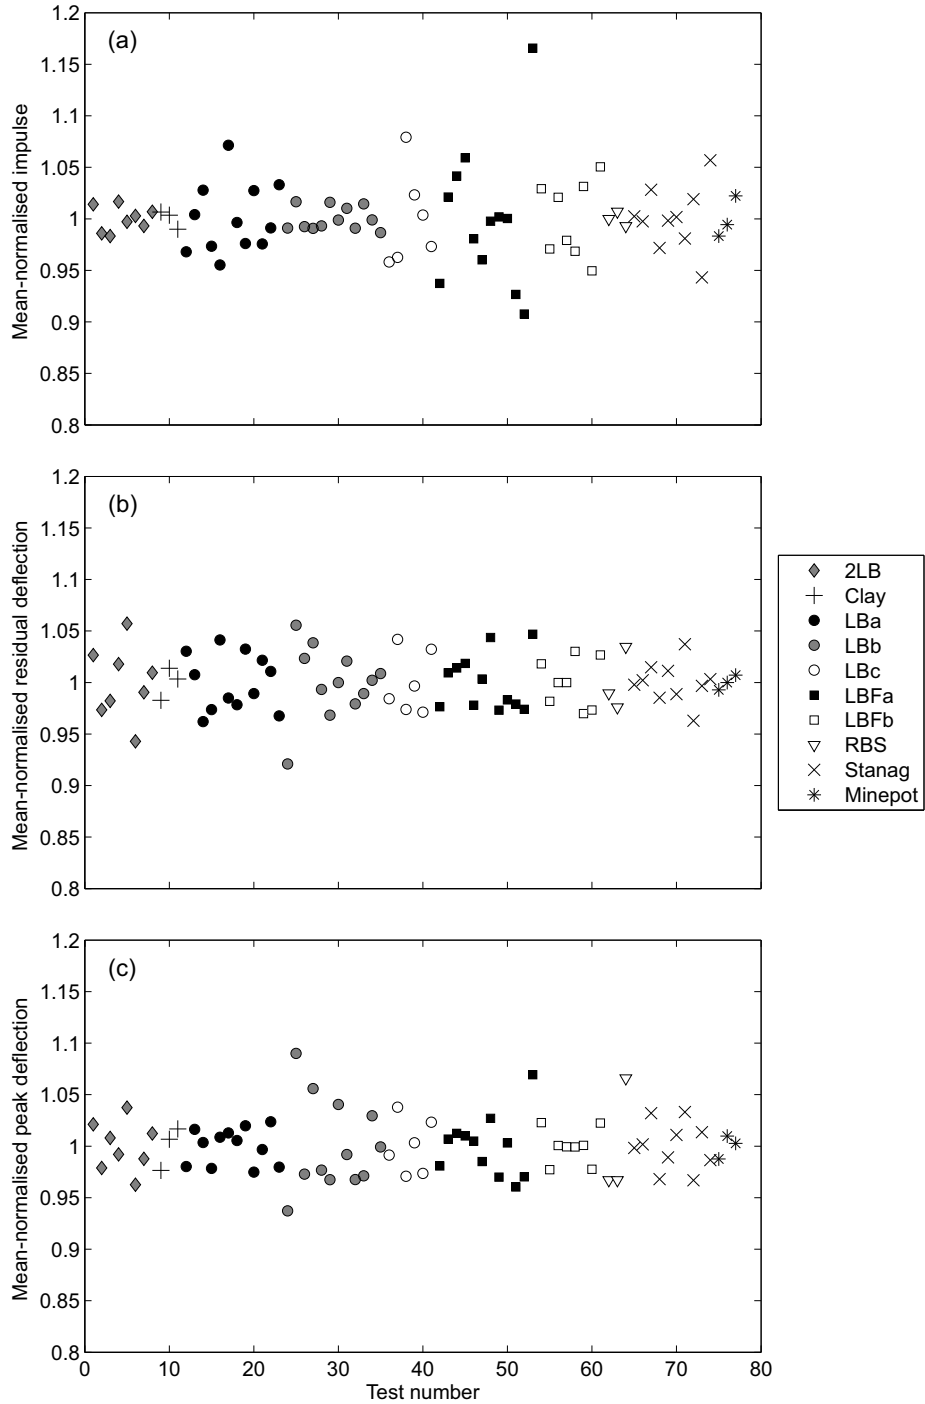


Figure 8: Mean-normalised (a) impulse, (b) residual plate deformation and (c) peak plate deformation for all tests



Output	Standard deviation	
	100%	80%
Impulse	0.0360	0.0174
Peak deflection	0.0275	0.0178
Residual deflection	0.0264	0.0176

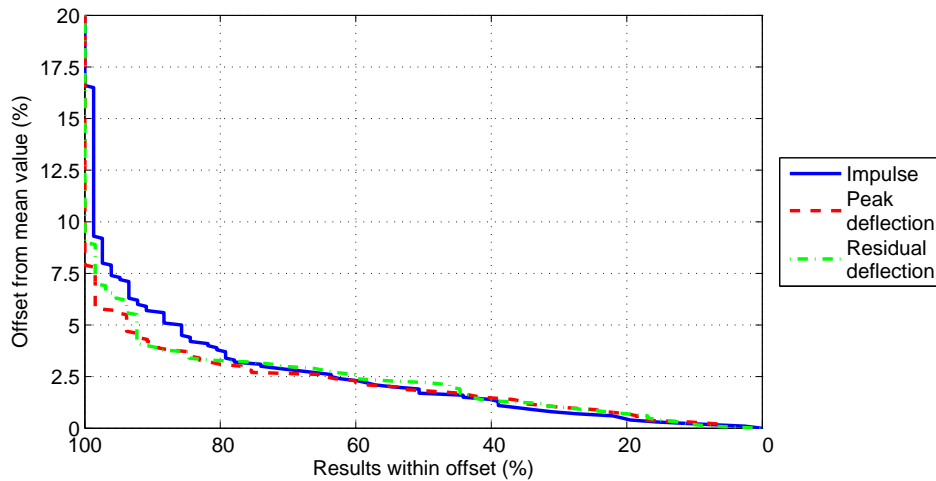


Figure 9: Offset from the mean for all data

216 *4.2. The effect of bulk density on repeatability*

217 To identify the trends and to allow for a more in depth comparison of the geotechnical  
 218 conditions, the data have been re-analysed to give the range (maximum – minimum) of output  
 219 for each set of repeat tests. This range is then mean-normalised. Thus in the figures presented,  
 220 each data point represents a sub series of tests (for the Clay this would be tests 9-11). The  
 221 range has then been plotted against bulk density in Fig. 10. For comparison the normalised  
 222 range is plotted for the Minepot results (the Minepot is shown as a line as there is no soil  
 223 present, hence the geotechnical conditions are irrelevant). This indicates that for certain soil  
 224 types at specific bulk densities it may be possible to achieve a higher repeatability than seen in  
 225 the Minepot results. In fact, Minepot tests are commonly favoured due their highly repeatable  
 226 nature. The data presented herein shows that whilst the Minepot standard is repeatable, there

227 are specific soil conditions which may give a more repeatable impulse. Fig. 10(a) shows that  
228 the largest variations in impulse are seen in the well graded soils - Stanag (SD=0.0313) and  
229 LBFb (SD=0.0371). The LBFb variation was consistently greater than that seen in the Minepot  
230 (SD=0.0201). As identified previously the most repeatable impulse data came from the LBb  
231 data series (SD=0.0112) which showed consistently less variation than the Minepot. Further  
232 statistics can also be used to analyse the data in Fig. 10. Specifically, the correlation using the  
233 Spearman rank correlation coefficient  $r_s$ , which evaluates how well the relationship between  
234 bulk density and the measured outputs can be described using a monotonic function. This  
235 indicates a moderate negative correlation between the bulk density of the soil and the variation in  
236 impulse ( $r_s=-0.4504$ ,  $p=0.0097$ ) and residual deflection ( $r_s=-0.4406$ ,  $p=0.0116$ ). The statistical  
237 significance of these results is high given the number tests, indicated by the low probability  $p$   
238 values. Interestingly the same trends were not seen in the peak deflection data ( $r_s=-0.0294$ ,  
239  $p=0.8733$ ) though almost no confidence can be put in this due to the very high  $p$  value.

#### 240 4.3. *The effect of moisture content on repeatability*

241 For each soil type shown in Fig. 8, as the test number increases so does the moisture con-  
242 tent used in the test. The increasing moisture content makes little difference to the variation in  
243 impulse (with the exception of the series 'a' tests as discussed earlier), it does however have a  
244 marked influence on the deflections seen in certain soil types. This is seen clearest in the LBb  
245 tests where is a strong correlation between increasing moisture content and deducing residual  
246 deflection range ( $r_s=-0.7$ ,  $p =0.2333$ ). It is noted that with a sample size of 4 this is under-  
247 powered and would require further testing to gain a statistically significant result. The authors  
248 hypothesise that in the LBb tests at saturation increases so does the spatial uniformity of the  
249 breakout, this has the effect of delivering the loading to the target plate more uniformly and  
250 hence producing repeatable deflections. In well graded soils and low moisture content tests the  
251 spatial variability of the loading will give rise to greater variation in the deflections generated.

252 The mean-normalised outputs have been replotted against bulk density as shown in Fig. 11.

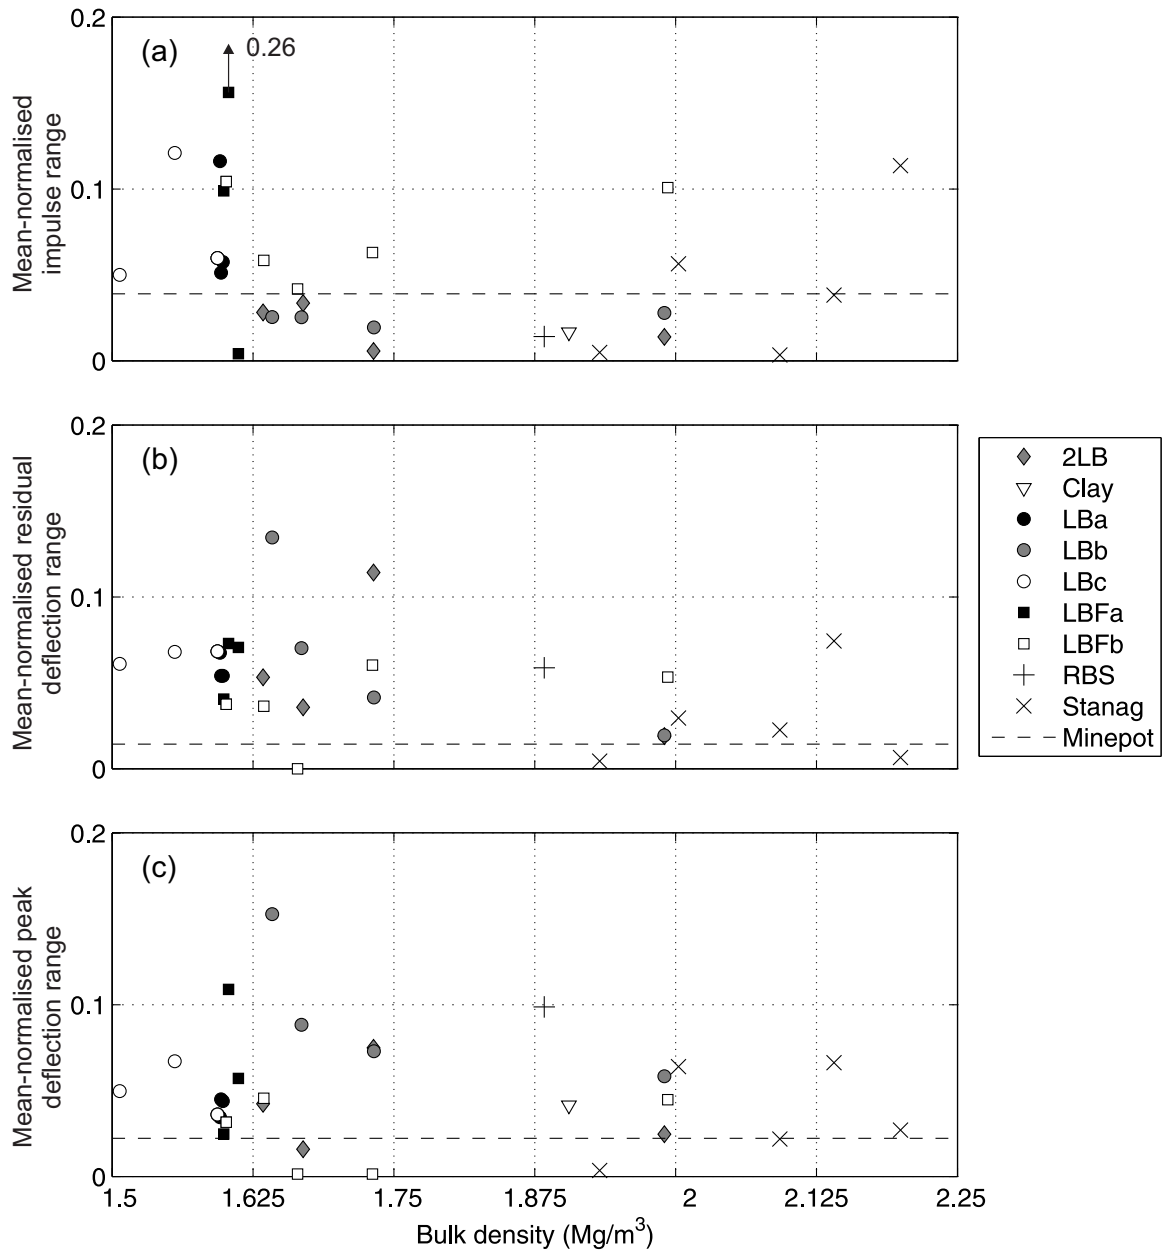


Figure 10: Bulk density versus the mean-normalised range of (a) impulse (b) residual deflection and (c) peak deflection

253 This shows the same trends as were present in Fig. 10, which is due to the intrinsic linking of  
254 moisture content and bulk density. Again, this shows that certain soil types at specific moisture  
255 contents it is possible to achieve a higher repeatability than seen in the Minepot results. The  
256 fully saturated tests here are easier to identify, sitting at ~25%, the notable exception being the  
257 Stanag soil which sits at a moisture content of 14% when fully saturated with a bulk density of  
258 2.2 Mg/m<sup>3</sup>. The maximum range of 0.114 (11.4%) for the fully saturated Stanag may at first  
259 glance seem large, but this is mainly due to the fact that other soil types / conditions are very  
260 repeatable.

#### 261 *4.4. Repeatability of output versus repeatable preparation*

262 It is clear that the geotechnical conditions have a large impact on the repeatability of any  
263 proposed testing. With differing soils come variations in both the output of a charge buried  
264 within that soil and a varying degree of repeatability of the preparation of the soil bed itself.  
265 It can be logically deduced that variations in the density and moisture content of a soil bed  
266 should directly impact on the variations in measured output. While this has been shown to be  
267 true, there is no direct relationship between the two due to the influence of soil type. With  
268 some soils it is hard to achieve repeatable initial conditions, whilst a low variation in output  
269 may still be achieved (Clay) and vice versa. This point is illustrated in Fig. 12 which plots  
270 the standard deviations of moisture content and bulk density on the two horizontal axes and the  
271 range of mean-normalised impulse on the vertical. On the horizontal axes, low values mean that  
272 both the moisture content and bulk density are repeatable using the preparation methodologies  
273 outlined earlier. This shows that the LBFa series soil conditions were one of the most difficult  
274 to consistently prepare (disregarding the natural clay). For the well graded soils such as Stanag  
275 and LBFb, whilst the preparation was repeatable, a relatively high degree of impulse variation  
276 was generated. The authors hypothesise that the well graded nature of these soils leads to a non-  
277 uniform breakout which can give rise to the variations in output measured. For uniform soils  
278 such as LBb the breakout is hypothesized to be relatively uniform giving a more repeatable

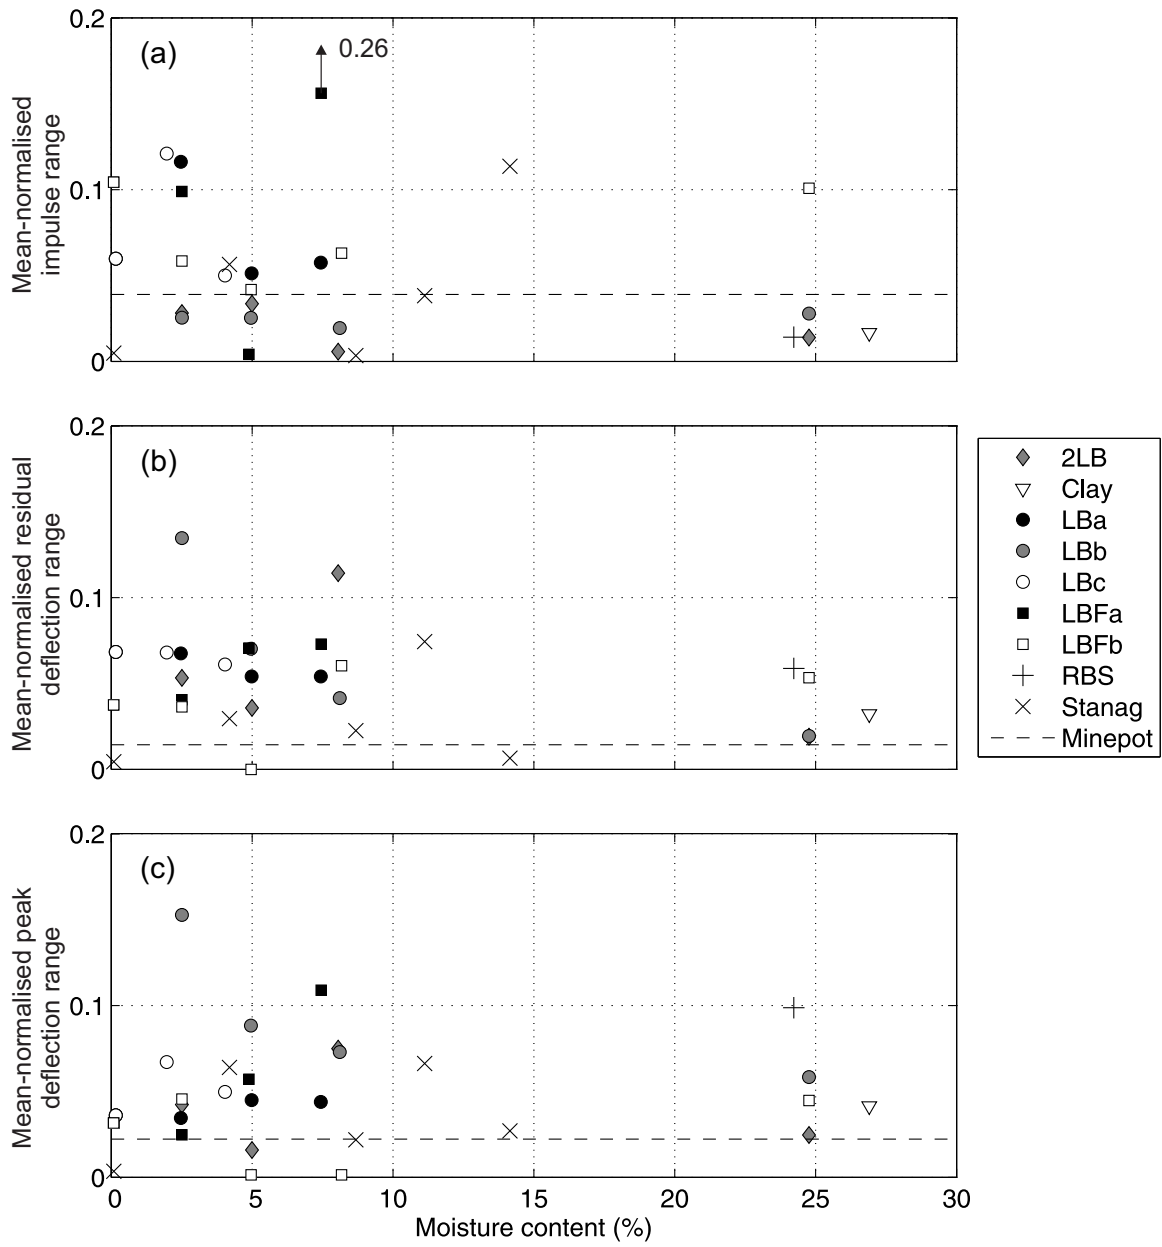


Figure 11: Moisture content versus the mean-normalised range of (a) impulse (b) residual deflection and (c) peak deflection

279 variation of impulse, again this is indicated in Fig. 12 with the LBb showing a high degree of  
280 repeatability in the geotechnical conditions and a low variation of impulse.

## 281 **5. Conclusions**

282 It has been shown that through careful soil preparation many soils can deliver a lower varia-  
283 tion of impulse than seen when using the standard Minepot tests described in AEP-55 [12]. The  
284 maximum offset seen in any test was 26% away from the mean. 80% of the data generated lies  
285 within  $\pm 3.7\%$  of the mean value for each test series.

286 The particle size distribution for cohesionless soils has been shown to be an indicator of the  
287 possible variation in impulse to be expected. This was shown previously [10, 11, 15] but has  
288 herein been shown to apply to a much greater range of soils. Currently the dataset for cohesive  
289 soils (Clay) is very small, but initial indications show a high degree of repeatability despite its  
290 relatively well graded particle size distribution.

291 Generally, well graded soils show a greater variation in the range of measured impulse for  
292 any given moisture content / bulk density combination, which could be due to local variations in  
293 density caused by the non-uniform nature of the soil. This trend however is not borne out in the  
294 plate deflection data where the range for most soil types is roughly equivalent. This illustrates  
295 the fact that despite very high control over the geotechnical conditions achieved in the presented  
296 work, if repeatability in the impulse generated in the tests is required a uniform soil should  
297 be utilised in the testing. This can be further refined to state that uniform cohesionless soils  
298 give repeatable results if bulk density is allowed to increase with moisture content. The most  
299 repeatable tests series in the reported data was that of the fully saturated Leighton Buzzard  
300 14/25 sand (LB), which gave repeatable impulse and deflections, with the impulse variation  
301 being lower than seen in the Minepot tests.

302 This is of course postulated on the transfer of global impulse and takes no account of the lo-  
303 calised loading effects which could be generated by changing between uniform and well graded

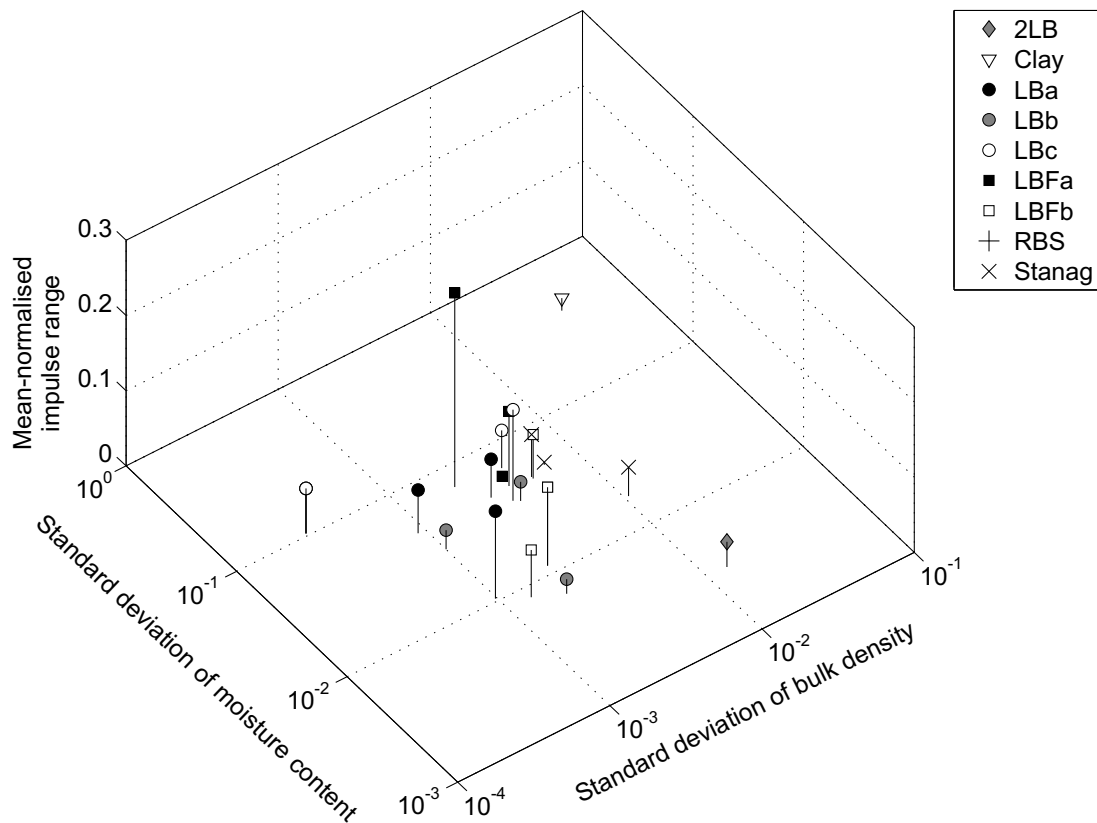


Figure 12: Controllability of geotechnical conditions versus the repeatability of the measured impulse

304 soils. This area of work is current being investigated in a separate project, details of which are  
 305 published here [16].

306 **Acknowledgements**

307 The authors wish to thank the Defence Science and Technology Laboratory for funding the  
 308 published work.

309 **References**

310 [1] Bergeron DM, Trembley JE. Canadian research to characterize mine blast output. *16th Int Sym on the*  
 311 *Military Aspects of Blast and Shock, Oxford, UK, 2000.*  
 312 [2] Hlady SL. Effect of soil parameters on landmine blast. *18th Int Sym on the Military Aspects of Blast and*  
 313 *Shock, Bad Reichenhall, Germany, 2004.*

- 314 [3] Pickering EG, Chung Kim Yuen S, Nurick, GN, Haw P. The response of quadrangular plates to buried  
315 charges. *Int J of Impact Eng*, 49:103–114, 2012.
- 316 [4] Fourny WL, Leiste U, Bonenberger R, Goodings DJ. Mechanism of loading on plates due to explosive  
317 detonation. *Int J on Blasting and Fragmentation*, 9(4):205–217, 2005.
- 318 [5] Anderson CE, Behner T, Weiss CE. Mine blast loading experiments. *Int J of Impact Eng*, 38(8-9):697–706,  
319 2011.
- 320 [6] Fox DM, Huang X, Jung D, Fourny WL, Leiste U, Lee JS. The response of small scale rigid targets to  
321 shallow buried explosive detonations. *Int J of Impact Eng*, 38(11):882–891, 2011.
- 322 [7] Ehrgott JQ, Rhett RG, Akers SA, Rickman DD. Design and fabrication of an impulse measurement device to  
323 quantify the blast environment from a near-surface detonation in soil. *Experimental Techniques*, 35(3):51–62,  
324 2011.
- 325 [8] Fox DM, Akers SA, Leiste UH, Fourny WL, Windham JE, Lee JS, Ehrgott JQ, Taylor LC. The effects of air  
326 filled voids and water content on the momentum transferred from a shallow buried explosive to a rigid target.  
327 *Intl J of Impact Eng*, 69(0):182–193, 2014.
- 328 [9] McShane GJ, Deshpande VS, Fleck NA. A laboratory-scale buried charge simulator. *Int J of Impact Eng*,  
329 62:210–218, 2013.
- 330 [10] Clarke SD, Warren JA, Tyas A. The influence of soil density and moisture content on the impulse from  
331 shallow buried explosive charges. *Int Sym on Interaction of the Effects of Munitions with Structures, Seattle,*  
332 *US*, 2011.
- 333 [11] Clarke SD, Warren JA, Fay SD, Rigby SE, Tyas A. The role of geotechnical parameters on the impulse  
334 generated by buried charges. *22nd Int Sym on the Military Aspects of Blast and Shock, November 5-9,*  
335 *Bourges, France*, 2012.
- 336 [12] NATO. Procedures for evaluating the protection level of logistic and light armoured vehicles. *Allied Eng.*  
337 *Publication (AEP) 55, Vol.2 (for Mine Threat)*, 2006.
- 338 [13] NATO. Protection levels for occupants of logistic and light armoured vehicles. *STANAG 4569*, 24th May,  
339 2004.
- 340 [14] Cai Y, Yu H, Wanatowski D, Li X. Noncoaxial behavior of sand under various stress paths. *J of Geotechnical*  
341 *and Geoenvironmental Eng*, 139(8):1381–1395, 2013.
- 342 [15] Clarke SD, Fay SD, Tyas A, Warren J, Rigby S, Elgy I, Livesey R. Repeatability of buried charge testing.  
343 *23rd Int Sym on the Military Aspects of Blast and Shock, September 5-9, Oxford, UK*, 2014.
- 344 [16] Clarke SD, Fay SD, Warren JA, Tyas A, Rigby SE, Elgy I. A large scale experimental approach to the



345 measurement of spatially and temporally localised loading from the detonation of shallow-buried explosives.  
346 *Measurement Science and Technology*, 26:015001, 2015.