



Deposited via The University of Leeds.

White Rose Research Online URL for this paper:

<https://eprints.whiterose.ac.uk/id/eprint/111460/>

Version: Accepted Version

Conference or Workshop Item:

Kundu, I, Dean, P, Valavanis, A et al. (Accepted: 2017) Electrically-controlled frequency tuning of terahertz quantum cascade lasers over 190 GHz using a coupled cavity with integrated photonic lattice. In: Optical Terahertz Science and Technology (OTST 2017), 02-07 Apr 2017, London, UK. (Unpublished)

Reuse

Items deposited in White Rose Research Online are protected by copyright, with all rights reserved unless indicated otherwise. They may be downloaded and/or printed for private study, or other acts as permitted by national copyright laws. The publisher or other rights holders may allow further reproduction and re-use of the full text version. This is indicated by the licence information on the White Rose Research Online record for the item.

Takedown

If you consider content in White Rose Research Online to be in breach of UK law, please notify us by emailing eprints@whiterose.ac.uk including the URL of the record and the reason for the withdrawal request.

Electrically-controlled frequency tuning of terahertz quantum cascade lasers over 190 GHz using a coupled cavity with integrated photonic lattice

Iman Kundu*, Paul Dean, Alexander Valavanis, Lianhe Li, Edmund H. Linfield, and A. Giles Davies

School of Electronic and Electrical Engineering, University of Leeds, Leeds LS2 9JT, U. K.

**I.Kundu@leeds.ac.uk*

Terahertz (THz) frequency quantum cascade lasers (QCLs) are compact unipolar semiconductor sources of THz radiation, in which photons are generated through intersubband electron transitions [1]. THz QCLs typically use ridge waveguides, and emit multiple frequencies characteristic of Fabry–Pérot cavities. However, several THz applications, such as trace gas detection, spectroscopy, feedback-interferometry-based imaging, atmospheric observations, and security screening, require a widely frequency tuneable and single-mode THz source. Moreover, the current and temperature tuning of THz QCLs are only ~ -5 MHz/mA and -34 to -100 MHz/K, respectively [2]. As such, development of an electrically-controlled frequency tuneable THz QCL is still a technological challenge.

We previously demonstrated electrically-controlled discrete, and quasi-continuous Vernier frequency tuning of THz QCLs using an optically coupled cavity (CC) approach, comprising a lasing (active) cavity and a tuning (passive) cavity [3, 4]. We have also demonstrated continuous tuning of a CC mode without any degradation of output power by integrating a finite-defect-site photonic lattice (PL) into the lasing cavity [4]. We recently improved our PL design and have engineered spectral emission, and frequency tuning from such PL-QCLs [5]. Here, we report the progress made towards improving the spectral coverage from our next generation of electrically-controlled frequency tuneable THz CC-PL-QCLs.

Frequency emission in our previous CC-QCLs was controlled only through localised electrical Joule heating of the tuning cavity (driven sub-threshold). Here, we have additionally driven our tuning cavity above threshold, and exploited mutual coupling and cavity pulling effects to enhance continuous frequency tuning [6]. Furthermore, we have also integrated a PL into the lasing cavity, allowing discrete tuning of CC modes. Through a combination of the discrete tuning and cavity pulling effect, in conjunction with thermal effects, we have recorded frequency tuning over 190 GHz (side mode suppression 20–40dB), including a ~ 100 GHz quasi-continuous tuning from ~ 3.47 – 3.57 THz [Fig. 1] from a THz CC PL QCL based on an active region reported in Ref. [7].

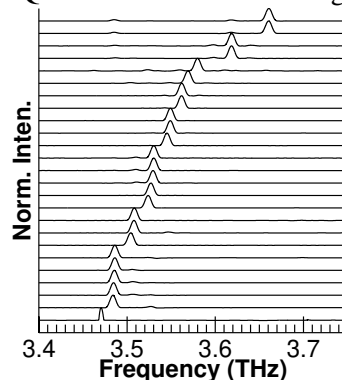


Fig. 1. Normalised emission spectra (offset and rearranged) showing tuneable frequency emission from a THz CC PL QCL over a bandwidth of 190 GHz, for a range of driving currents, and temperatures.

References

- [1] R. Köhler, *et al.*, *Nature* **417**, 156–159 (2002).
- [2] M. S. Vitiello and A. Tredicucci, *IEEE Trans. Terahertz Sci. Technol.* **1**, 76–84 (2011).
- [3] I. Kundu *et al.*, *Opt. Express* **22**, 16595–16605 (2014).
- [4] I. Kundu *et al.*, “Quasi-continuous frequency tuneable terahertz quantum cascade lasers with coupled cavity and integrated photonic lattice,” *Opt. Express*, *accepted* (2016).
- [5] I. Kundu *et al.*, “Frequency tunability and spectral control in terahertz quantum cascade lasers with a phase-adjusted finite-defect-site photonic lattice,” *in preparation* (2016).
- [6] D. Turčinková *et al.*, *Appl. Phys. Lett.* **106**, 131107 (2015).
- [7] M. Wienold *et al.*, *Electron. Lett.* **45**, 1030–1031 (2009).