



This is a repository copy of *An efficient transformation method for the bioplastic-producing "Knallgas" bacterium Ralstonia eutropha H16.*

White Rose Research Online URL for this paper:

<https://eprints.whiterose.ac.uk/119942/>

Version: Accepted Version

Article:

Tee, K.L., Grinham, J., Othusitse, A.M. et al. (3 more authors) (2017) An efficient transformation method for the bioplastic-producing "Knallgas" bacterium *Ralstonia eutropha* H16. *Biotechnology Journal*, 12 (11). ISSN 1860-6768

<https://doi.org/10.1002/biot.201700081>

This is the peer reviewed version of the following article: Tee, K. et al, An efficient transformation method for the bioplastic-producing "Knallgas" bacterium *Ralstonia eutropha* H16. *Biotechnol. J.*, which has been published in final form at <https://doi.org/10.1002/biot.201700081>. This article may be used for non-commercial purposes in accordance with Wiley Terms and Conditions for Self-Archiving.

Reuse

Items deposited in White Rose Research Online are protected by copyright, with all rights reserved unless indicated otherwise. They may be downloaded and/or printed for private study, or other acts as permitted by national copyright laws. The publisher or other rights holders may allow further reproduction and re-use of the full text version. This is indicated by the licence information on the White Rose Research Online record for the item.

Takedown

If you consider content in White Rose Research Online to be in breach of UK law, please notify us by emailing eprints@whiterose.ac.uk including the URL of the record and the reason for the withdrawal request.



eprints@whiterose.ac.uk
<https://eprints.whiterose.ac.uk/>

Biotech Method

An efficient transformation method for the bioplastic-producing "Knallgas" bacterium *Ralstonia eutropha* H16

Kang Lan Tee ¹

James Grinham ¹

Arona Martin Othusitse ¹

Miriam Gonzalez-Villanueva ¹

Abayomi Oluwanbe Johnson ¹

Tuck Seng Wong ¹

¹Department of Chemical and Biological Engineering, ChELSI Institute and Advanced Biomanufacturing Centre, The University of Sheffield, United Kingdom

Correspondence: Dr. Tuck Seng Wong, Department of Chemical and Biological Engineering, ChELSI Institute and Advanced Biomanufacturing Centre, The University of Sheffield, Sir Robert Hadfield Building, Mappin Street, Sheffield S1 3JD, United Kingdom.

E-mail: t.wong@sheffield.ac.uk

Keywords: *Ralstonia eutropha* H16, *Cupriavidus necator* H16, Transformation, Recombinant DNA, Biological carbon capture and utilization

Abbreviations: PHA, polyhydroxyalkanoates; PHB, polyhydroxybutyrate

Abstract

Ralstonia eutropha H16 (also known as *Cupriavidus necator* H16) is a Gram-negative lithoautotrophic β -proteobacterium with increasing biotechnological applications, including carbon capture and utilization, biopolymer synthesis and biofuel production. Engineering of this organism is supported by the availability of its genome sequence and suitable plasmid systems. However, the lack of a simple and robust transformation method remains a challenge as it limits both the pace and ease of engineering this organism. To overcome this limitation, a systematic study was performed to evaluate the effects of different parameters on the transformation efficiency of *R. eutropha* H16. The optimized electroporation protocol uses *R. eutropha* H16 cells grown to OD₆₀₀ 0.6. These cells were made competent by a 15-min incubation in 50 mM CaCl₂, followed by two cell washes and final resuspension in 0.2 M sucrose prior to electroporation using 2.3 kV. This protocol achieved a transformation efficiency of $(3.86 \pm 0.29) \times 10^5$ cfu/ μ g DNA, a 10³-fold improvement compared to a previously published value for the same plasmid. This transformation method is a valuable tool for *R. eutropha* H16 research and will further enable the development of other advanced molecular biology methods for this industrially relevant microorganism.

1 Introduction

Ralstonia eutropha H16 (also known as *Cupriavidus necator* H16) is a Gram-negative lithoautotrophic β -proteobacterium found in soil and freshwater habitats. Isolated in 1961 [1], this organism has the ability to accumulate up to 90% per dry cell weight of polyhydroxybutyrate (PHB) under stressed conditions [2] and is often studied as the model organism for polyhydroxyalkanoates (PHA) biopolymer production. *R. eutropha* H16 can metabolize a broad range of substrates as well as grow chemolithoautotrophically using CO₂ and H₂ as its sole carbon and energy source, respectively. These traits have captured the interests of scientists and fueled the research on this non-pathogenic bacterium for carbon capture and utilization, biopolymer synthesis and biofuel production [3-7].

Engineering *R. eutropha* H16 for biotechnological applications requires a set of molecular tools. The availability of its genome sequence [8] and suitable plasmid systems [9, 10] has facilitated the study of this bacterium. However, the lack of a simple and robust transformation method to introduce foreign DNA into *R. eutropha* H16 remains a challenge. Transformation of plasmid DNA into bacteria is a fundamental technique required in recombinant expression of foreign protein(s), genome editing and introduction of foreign metabolic pathways, all of which are key techniques for synthetic biology and strain engineering. With its growing industrial application, an efficient transformation method is urgently needed to support easy investigation and fast engineering of *R. eutropha* H16. The current state-of-the-art for introducing plasmids into *R. eutropha* H16 is via bioconjugation. The basic workflow of bioconjugation involves transforming the plasmid of interest into a donor strain (*e.g.*, *E. coli* S17-1) before transferring it to the final recipient strain (*e.g.*, *R. eutropha* H16) by mating. Despite being effective, bioconjugation is time-consuming as it requires transformation and cultivation

of two strains consecutively compared to a single direct transformation of plasmid DNA into the final recipient strain. Several recent publications included the use of both electroporation and bioconjugation for introducing plasmid DNA into *R. eutropha* H16, but electroporation was never the sole method used in any of these publications. A likely reason is the low electroporation transformation efficiency of *R. eutropha* H16, ranging from 3 cfu/ μg to 4×10^3 cfu/ μg DNA depending on the plasmid used [11-13].

To date, there is only one investigation published for the transformation of *R. eutropha* H16 [13]. Though not well studied for *R. eutropha* H16, transformation of plasmid DNA has been extensively investigated in *Escherichia coli* with a plethora of methods for preparing chemical- or electro-competent cells [14-16]. Between the 2 methods, electroporation frequently gives the highest transformation efficiency, often in the range of 10^9 to 10^{10} cfu/ μg of plasmid DNA. Drawing from the available knowledge for *E. coli* transformation, different parameters were investigated for their effects on the electroporation transformation efficiency of *R. eutropha* H16 and reported in this article.

2 Materials and methods

2.1 Chemicals, bacterial strains, cultivation conditions and plasmids

All chemicals used were from Sigma-Aldrich Ltd (Dorset, UK), Fisher Scientific (Loughborough, UK) or Formedium (Norfolk, UK). *R. eutropha* H16 (ATCC 17699) strain used was obtained from ATCC (Middlesex, UK). *R. eutropha* H16 was cultivated either in nutrient broth (NB) or mineral salts medium (MSM) [1] and transformants were selected on NB agar plates at 30°C. When necessary the medium used for *R. eutropha* H16 cultivation was supplemented with 250 $\mu\text{g}/\text{mL}$ kanamycin, 25 $\mu\text{g}/\text{mL}$ chloramphenicol or 10 $\mu\text{g}/\text{mL}$ gentamicin, while 50 $\mu\text{g}/\text{mL}$ kanamycin or 25 $\mu\text{g}/\text{mL}$ chloramphenicol was used for *E. coli*. DH5 α strain used for plasmid replication was cultivated in 2 \times TY medium at

37°C. Plasmid used in this work is the broad-host-range mobilizable vector pBHR1 (5.3 kb; MoBiTec GmbH, Germany). Plasmid DNA was prepared using the E.Z.N.A.® Plasmid Mini Kit I (Omega Bio-tek, USA) and eluted in double-distilled water. The plasmid DNA concentration was measured using VersaWave (Expedeon Inc, USA). Two-tailed t-test was performed using Graphpad Prism (La Jolla California, USA).

2.2 Electroporation of *R. eutropha* H16

2.2.1 Electroporation procedure

Unless stated otherwise, the following transformation procedure was used. A preculture of *R. eutropha* H16 was cultivated in 5 mL of NB supplemented with gentamicin for 38 h to 42 h at 30°C. For electrocompetent cell preparation, fresh NB supplemented with gentamicin was inoculated with the preculture at a 1:50 dilution and cultivated at 30°C. When the cells reached an optical density at 600 nm (OD₆₀₀) of 0.4–0.6, they were transferred to ice and chilled for 5–10 min. Two mL of the chilled cells were transferred to a pre-chilled 2-mL microcentrifuge tube. Cells were centrifuged at 17000 g for 30 s and the supernatant was removed by pipetting. The cell pellet was washed thrice by resuspension in 1 mL of ice-cold transformation buffer, followed by centrifuging at 17000 g for 30 s and removal of the supernatant by pipetting. For experiments with chemical treatment, the first cell wash was replaced by resuspension of the cell pellet using different chemicals instead of the transformation buffer and incubated for 0–60 min. After the final wash, the cell pellet was resuspended in 100 µL of ice-cold transformation buffer. Plasmid DNA pBHR1 (0.25 µg) was added to the cells and gently mixed before transferring the cells and DNA into a chilled 2-mm electroporation cuvette (Bio-Rad, USA) and electroporated at 2.5 kV (Eppendorf Eporator, Eppendorf, Germany). In all experiments, the volume of DNA is between 1–2% of cell volume. One mL of NB was immediately added after electroporation and the cells were then transferred to a 2-mL centrifuge tube for outgrowth at 30°C for 2

h. Following outgrowth, cells were plated on NB agar plates with 250 µg/mL kanamycin and incubated for 40–48 h. Typically, 9% (v/v) of the cells were plated after transformation. Gentamicin was not used in the agar plates. The above procedure was used for the parameters investigated in section 3.1 to 3.4 unless otherwise stated.

2.2.2 Electroporation procedure for large volume cell preparation

In the investigation of cell concentration, cell numbers and phase of cell growth (section 3.5 and 3.6), large volume of cells was required and was thus prepared using Erlenmeyer flasks. The cells were cultivated and chilled as before and then transferred to a 50-mL falcon tube and centrifuged at 6000 g, 4°C for 1.5 min. The supernatant was decanted and cells were resuspended in 25 mL of 50 mM CaCl₂ and incubated for 15 min on ice. The cells were then centrifuged at 6500 g, 4°C for 2 min and the supernatant was decanted. Cells were washed twice using 25-mL and 15-mL of ice-cold 0.2 M sucrose respectively. At the end of each wash, cells were centrifuged at 6500 g, 4°C for 2–3 min and the supernatant was decanted. The cell pellet was finally resuspended in the desired volume of transformation buffer (*e.g.*, 50 mL initial cell culture to 500 µL final resuspension volume for a 100-time cell concentration). Aliquots of competent cells were transferred into 1.5-mL centrifuge tubes and pBHR1 plasmid DNA was added. Each electroporation sample was then transferred into a chilled 2-mm electroporation cuvette and electroporated. One mL of NB was immediately added after electroporation and the cells were then transferred to a 2-mL centrifuge tube for outgrowth at 30°C for 2 h. After the outgrowth, cells were diluted and depending on the initial cell concentration 1–9% (v/v) of the transformed cells was plated. For transformation frequency calculation, the same transformed cells after outgrowth were diluted 10⁶ times before plating on NB agar plates with no antibiotics to obtain the corresponding number of survivor cells.

3 Results and discussion

Common factors that influence transformation efficiency were investigated, including the choice of electroporation buffer, the use of chemical agents to increase cell wall permeability, amount of DNA, electroporation voltage, supplementation of preferred carbon source, cell number and cell concentration. It is important to mention that transformation efficiency varies across different batches of competent cells prepared (see Table S1 in Supporting Information). As such, it necessitates the use of relative transformation efficiencies for comparison in this work. This was achieved by including in each cell batch a triplicate of the reference sample; 100 μ L of 20-time concentrated competent cells prepared using 0.2 M or 0.3 M sucrose and electroporated with 0.25 μ g of pBHR1. The transformation efficiency of this reference sample was arbitrarily assigned 100% and the efficiencies of other samples were calculated as relative transformation efficiency against this reference sample.

3.1 Sucrose - the most efficient transformation buffer

For efficient electroporation of most microorganisms, a high resistance medium (*i.e.*, low conductivity) is used. This is generally achieved by removal of ions in the growth media through cell wash during electrocompetent cell preparation [14]. Five common transformation buffers used for cell wash were first investigated, including double-distilled water, 10% (v/v) glycerol, 0.3 M sucrose, 0.3 M glucose and 10% (w/v) fructose (0.56 M). A comparison of the relative transformation efficiencies obtained is shown in Figure 1A. Using 0.3 M sucrose as transformation buffer yielded the best transformation efficiency. Interestingly, two of the most commonly used transformation buffers for *E. coli*, double-distilled water and 10% (v/v) glycerol performed poorly with very few transformants. Further optimization of the sucrose concentration from 0.1–0.6 M identified the optimum concentration for high transformation efficiency to be 0.2 M

sucrose (Figure 1A). Combinations of sucrose with glycerol or fructose were also investigated but both resulted in poorer transformation efficiency. The optimum transformation buffer was thus set as 0.2 M sucrose.

3.2 Calcium chloride treatment improves transformation efficiency

Various chemicals are known to facilitate DNA transfer into cells. Though the exact mechanisms by which they function were sometimes unclear, the general consensus is they increase cell wall permeability [17, 18]. This strategy is frequently combined with heat-shock [15] for transformation of Gram-negative bacteria and with electroporation for Gram-positive bacteria [19]. To explore the effects of these chemicals in combination with electroporation, a 30-min chemical treatment step was introduced to replace the first cell wash. The 5 chemicals tested were 50 mM CaCl₂, 20 mM MgCl₂, 100 mM EDTA, 1% (w/v) glycine and TSS buffer [20]. Results in Figure 1B show both the TSS and 50 mM CaCl₂ to improve transformation efficiency upon a 30-min incubation while all other chemicals decreased the transformation efficiency with 1% (w/v) glycine giving no transformants. As 50 mM CaCl₂ showed the greatest improvement, the time dependency of 50 mM CaCl₂ treatment was further investigated. Treatment time was varied from 0–60 min and results showed the 15-min incubation to be optimal, with a 5-fold increase in transformation efficiency compared to the sample with no chemical treatment. A 50 mM CaCl₂ treatment for 15 min was thus included in the final optimized protocol. Calcium chloride is commonly used to generate chemical competent bacterial cells [15] but not electro-competent cells. It was suggested that calcium ions bring the DNA molecule closer to the cell by forming a coordination complex between the negatively charged DNA and lipopolysaccharide for chemical competent cells [21]. Since the CaCl₂ and DNA were added at different stages in this investigation, its mechanism in the electroporation protocol remains obscure.

3.3 Optimum electroporation voltage and DNA amount for high transformation efficiency

At the beginning of this study, 0.25 μg of pBHR1 was electroporated in a 2-mm electroporation cuvette using 2.5 kV electroporation voltage. Figure 1C and 1D illustrate the effect of changing electroporation voltage and DNA quantity respectively. Varying the electroporation voltage between 2.1 to 2.5 kV demonstrated that the initial set voltage of 2.5 kV had the lowest efficiency within the tested range (Figure 1C). Using 2.3 kV for electroporation increased the efficiency 3.7 folds. The final optimal voltage for a 2-mm electroporation cuvette was thus set as 2.3 kV (11.5 kV/cm). The electroporation voltage used varies significantly in literature [11-13]. However, Park *et al.* previously investigated this specific property and also obtained 11.5 kV/cm as the optimum electroporation voltage [13].

Increasing DNA amount from 0.25 μg to 0.5 μg to 1.0 μg resulted in very similar transformation efficiencies (Figure 1D), where quadrupling the DNA quantity from 0.25 μg to 1.0 μg generated a 1.4-fold increase. Since transformant number is the multiplication of transformation efficiency and DNA amount, the number of transformants did increase proportionally with the increase in DNA quantity. Similar observation was made by Park *et al.* where the transformant number increased proportionally with increased DNA amount of up to 1 μg DNA [13]. This same trend was also reported for *E. coli* where transformation efficiency varied only 4.5 folds when DNA quantity increased 10^6 folds with transformant number increasing linearly with DNA quantity [14]. Thus increasing DNA quantity is especially advantageous when high number of transformants are desired (*e.g.*, generating mutant libraries) or for difficult-to-transform plasmids (*e.g.*, very large plasmids).

3.4 Fructose improves transformation efficiency

Fructose is one of the three carbohydrates assimilated by *R. eutropha* H16 [22]. When 1% (w/v) fructose was added to the growth and outgrowth medium, the transformant number increased (167 ± 47)% compared to that without fructose. It is postulated that the addition of a preferred carbon source may have facilitated the recovery of cells during outgrowth.

R. eutropha H16 is known to have natural resistance against low concentrations of kanamycin. To determine if transformant number was affected by the choice of kanamycin or chloramphenicol as selection marker, transformed cells (pBHR1 plasmid has both kanamycin and chloramphenicol resistant genes) were plated on agar plates with either kanamycin or chloramphenicol. No significant difference was observed; the chloramphenicol plates had transformant number (112 ± 24)% relative to the kanamycin plates.

3.5 High cell number and concentration improve transformation efficiency

Figure 2A shows the result of varying cell concentration and number. Using a constant number of cells prepared from a 2 mL-cell culture, transformation efficiency increased as cell concentration increased from 5× to 20×. The transformation efficiency also increased with competent cell number, as evident when the competent cell volume increased from 0.1 mL to 0.4 mL. Interestingly, the sample with 0.2 mL competent cell showed an unusual spike in transformation efficiency. Since the sample resistance within the electroporation cuvette is inversely proportional to the sample volume, it can only be postulated that a 0.2 mL sample generated the optimum resistance for high transformation efficiency. As increasing competent cell concentration and number both proved to increase

transformation efficiency, these parameters were increased further by maintaining a final competent cell volume of 0.1 mL and increasing competent cell concentration from 20× to 40× and 80×. The 80× cell concentration generated a 7.8-fold improvement in transformation efficiency relative to the 20× concentration. Among all the factors investigated thus far, increasing cell number and concentration showed the most pronounced effect on increasing the transformation efficiency which aligns to the trend observed by Park *et al.* [13].

3.6 Optimum cell growth phase for high transformation efficiency

Using the optimized parameter obtained thus far, the effect of cell growth phase was investigated. The phase of cell growth is known to affect transformation efficiency with most transformation methods using competent cells in the early to mid-logarithmic phase of growth. Different optima had also been suggested [23, 24]. Different phase of cell growth affects both cell number and the ease of transporting DNA across the cell membrane. In this study, the stage of cell harvest was optimized between the early to mid log-phase (OD₆₀₀ of 0.2 to 0.8).

Figure 2B shows the transformation efficiency and transformation frequency obtained at various OD₆₀₀. Within this tested range, transformation efficiency increased 2.4 folds from $(1.58 \pm 0.21) \times 10^5$ cfu/μg DNA to $(3.86 \pm 0.29) \times 10^5$ cfu/μg DNA as OD₆₀₀ increased, likely contributed by the increase in competent cell number. In this set of experiments, the transformation frequencies were also determined. Transformation frequency is defined as the number of successful transformants per survivor cell and it increased 10 folds as OD₆₀₀ increased from 0.2 to 0.6 before it decreased 2.6 folds at OD₆₀₀ of 0.8. This final fall in transformation frequency was due to a 3-fold increase in survivor cells but a relatively smaller increase in the number of successful transformants compared to OD₆₀₀ of 0.6. This

fall in transformation frequency suggests that increasing cell number by increasing OD₆₀₀ beyond 0.6 is counterproductive as the transport of DNA across cell membrane becomes less efficient. The optimal OD₆₀₀ for competent cell preparation was thus set at 0.6.

3.7 High transformation efficiency for *R. eutropha* H16 variant and different plasmids

To demonstrate the versatility of the optimized protocol, it was applied to *R. eutropha* H16 cells cultivated in mineral salts medium (MSM) [1] with 1% (w/v) sodium gluconate as carbon source instead of NB. Due to the different growth rate of *R. eutropha* H16 in NB and MSM, cells were cultivated to early-logarithmic phase of OD₆₀₀ of 1.0 in MSM before competent cell preparation. A transformation efficiency of $(3.07 \pm 0.44) \times 10^5$ cfu/ μ g DNA was achieved for the MSM cultivated cells, which is similar to the $(3.86 \pm 0.29) \times 10^5$ cfu/ μ g DNA obtained in NB under the same conditions. Cell growth in MSM however has a longer lag phase compared to NB; consequently 11–12 h is required to complete the whole procedure compared to the 7–8 h required when cells were cultivated in NB.

In most circumstances, the plasmids and *R. eutropha* H16 strains used would likely differ from that used during this method development; pBHR1 (5.3 kb) and wild type *R. eutropha* H16. The electroporation protocol was thus tested on the *R. eutropha* H16 Δ PhaC1 variant and an efficiency of $(7.70 \pm 2.14) \times 10^5$ cfu/ μ g DNA was achieved; almost twice as efficient compared to the wild type strain. This result suggests that transformation efficiency may vary slightly across different variants. The protocol was also used to transform pBBR1MCS1-based [25] L-arabinose-inducible broad host range plasmids; pBBR1c-RFP (6.7 kb) and pBBR1c-DD (9.7 kb). The former carries the red fluorescence protein open reading frame and showed a transformation efficiency of $(4.56 \pm 0.99) \times 10^4$ while the latter has a 5-gene operon and a transformation efficiency of

$(4.35 \pm 1.46) \times 10^4$ (see Table S2 for individual transformation efficiency values). The pBBR1c-RFP transformants were further tested for protein expression; 96 individual transformants were transferred to a microtiter plate and cultivated at 30°C in the presence of 0.1% (w/v) arabinose as inducer and 94 transformants showed clear expression of RFP (see Figure S1).

4 Concluding remarks

An efficient transformation protocol for *R. eutropha* H16 is developed in this work; cells cultivated in NB to OD₆₀₀ of 0.6 were treated for 15 minutes in 50 mM CaCl₂, followed by 2 cell washes and final resuspension using 0.2 M sucrose before the sample was electroporated with 2.3 kV in a 2-mm cuvette. The maximum transformation efficiency obtained for wild type *R. eutropha* H16 was $(3.86 \pm 0.29) \times 10^5$ cfu/μg DNA when 200 μL of 100× concentrated cells were used. Table 1 summarizes the electroporation conditions and efficiencies previously reported for *R. eutropha* H16. Despite the overlap of some parameters investigated in this work with previous publications (Table 1), the combination of all the optimized electroporation conditions has not been previously reported. Based on the transformation efficiency, this work achieved at least a 100 times more efficient method compared to any of the earlier reported values. Solaiman *et al.* previously reported a transformation efficiency of 450 cfu/μg for electroporation of pBHR1 [12], the same plasmid used in this study. This suggests a 10³-fold improvement was attained through a systematic investigation as reported here.

Bacterial conjugation is currently the most widely used method to transfer plasmids into *R. eutropha* H16 and has a reported conjugation frequency of 8×10^{-6} transconjugants per donor cfu [26]. The transformation efficiency of $(3.86 \pm 0.29) \times 10^5$ cfu/μg DNA translates to 2×10^{-6} cfu per molecule of pBHR1. As electroporation and bacterial conjugation are

vastly different techniques, direct comparison of their efficiency or frequency is difficult. The key advantage of electroporation is its shorter time requirement. *R. eutropha* H16 transformation with a target plasmid can be accomplished within 2 days, while bacterial conjugation typically requires 4–5 days.

Although the transformation efficiency achieved here remains lower than the 10^8 to 10^9 cfu per μg DNA commonly reported for *E. coli* [14], it is a significant improvement for *R. eutropha* H16. Not only is the procedure faster compared to conjugation, the transformation efficiency achieved here will enable other biotechnological applications, for example the generation of mutant libraries during directed evolution experiments. We foresee that this transformation method will further stimulate the development of more molecular biology tools to facilitate the investigation of *R. eutropha* H16 and development of biotechnological applications for this bacterial strain.

Acknowledgement

We thank the Department of Chemical and Biological Engineering, ChELSI and EPSRC (EP/E036252/1) for financial support. The authors are grateful for the financial support of CONACYT (for MGV) and the University of Sheffield (for AOJ) and the generous gift of *R. eutropha* H16 Δ PhaC1 variant from Prof. Alexander Steinbüchel (The University of Münster, Germany).

Conceived and designed the experiments: KLT and TSW. Performed the experiments: KLT JG, AMO, MGV and AOJ. Wrote the paper: KLT and TSW.

Conflict of interest

The authors declare no financial or commercial conflict of interest.

5 References

- [1] Schlegel, H. G., Kaltwasser, H., Gottschalk, G., A submersion method for culture of hydrogen-oxidizing bacteria: growth physiological studies. *Arch Mikrobiol* 1961, *38*, 209-222.
- [2] Pries, A., Priefert, H., Krüger, N., Steinbüchel, A., Identification and characterization of two *Alcaligenes eutrophus* gene loci relevant to the poly(beta-hydroxybutyric acid)-leaky phenotype which exhibit homology to ptsH and ptsI of *Escherichia coli*. *J Bacteriol* 1991, *173*, 5843-5853.
- [3] Crépin, L., Lombard, E., Guillouet, S. E., Metabolic engineering of *Cupriavidus necator* for heterotrophic and autotrophic alka(e)ne production. *Metab Eng* 2016, *37*, 92-101.
- [4] Haas, C., El-Najjar, T., Virgolini, N., Smerilli, M., *et al.*, High cell-density production of poly(3-hydroxybutyrate) in a membrane bioreactor. *N Biotechnol* 2016, doi: 10.1016/j.nbt.2016.06.1461.
- [5] Kim, H. S., Oh, Y. H., Jang, Y. A., Kang, K. H., *et al.*, Recombinant *Ralstonia eutropha* engineered to utilize xylose and its use for the production of poly(3-hydroxybutyrate) from sunflower stalk hydrolysate solution. *Microb Cell Fact* 2016, *15*, 95.
- [6] Liu, C., Colón, B. C., Ziesack, M., Silver, P. A., *et al.*, Water splitting-biosynthetic system with CO₂ reduction efficiencies exceeding photosynthesis. *Science* 2016, *352*, 1210-1213.
- [7] Park, S. J., Jang, Y. A., Noh, W., Oh, Y. H., *et al.*, Metabolic engineering of *Ralstonia eutropha* for the production of polyhydroxyalkanoates from sucrose. *Biotechnol Bioeng* 2015, *112*, 638-643.
- [8] Pohlmann, A., Fricke, W. F., Reinecke, F., Kusian, B., *et al.*, Genome sequence of the bioplastic-producing "Knallgas" bacterium *Ralstonia eutropha* H16. *Nat Biotechnol* 2006, *24*, 1257-1262.

- [9] Gruber, S., Schwab, H., Koefinger, P., Versatile plasmid-based expression systems for Gram-negative bacteria--General essentials exemplified with the bacterium *Ralstonia eutropha* H16. *N Biotechnol* 2015, 32, 552-558.
- [10] Bi, C., Su, P., Müller, J., Yeh, Y. C., *et al.*, Development of a broad-host synthetic biology toolbox for *Ralstonia eutropha* and its application to engineering hydrocarbon biofuel production. *Microb Cell Fact* 2013, 12, 107.
- [11] Sato, S., Fujiki, T., Matsumoto, K., Construction of a stable plasmid vector for industrial production of poly(3-hydroxybutyrate-co-3-hydroxyhexanoate) by a recombinant *Cupriavidus necator* H16 strain. *J Biosci Bioeng* 2013, 116, 677-681.
- [12] Solaiman, D. K., Swingle, B. M., Ashby, R. D., A new shuttle vector for gene expression in biopolymer-producing *Ralstonia eutropha*. *J Microbiol Methods* 2010, 82, 120-123.
- [13] Park, H. C., Lim, K. J., Park, J. S., Lee, Y. H., *et al.*, High frequency transformation of *Alcaligenes eutrophus* producing poly- β -hydroxybutyric acid by electroporation. *Biotechnol Tech* 1995, 9, 31-34.
- [14] Dower, W. J., Miller, J. F., Ragsdale, C. W., High efficiency transformation of *E. coli* by high voltage electroporation. *Nucleic Acids Res* 1988, 16, 6127-6145.
- [15] Hanahan, D., Studies on transformation of *Escherichia coli* with plasmids. *J Mol Biol* 1983, 166, 557-580.
- [16] Yoshida, N., Sato, M., Plasmid uptake by bacteria: a comparison of methods and efficiencies. *Appl Microbiol Biotechnol* 2009, 83, 791-798.
- [17] Dagert, M., Ehrlich, S. D., Prolonged incubation in calcium chloride improves the competence of *Escherichia coli* cells. *Gene* 1979, 6, 23-28.
- [18] Mandel, M., Higa, A., Calcium-dependent bacteriophage DNA infection. *J Mol Biol* 1970, 53, 159-162.

- [19] Zhang, G. Q., Bao, P., Zhang, Y., Deng, A. H., *et al.*, Enhancing electro-transformation competency of recalcitrant *Bacillus amyloliquefaciens* by combining cell-wall weakening and cell-membrane fluidity disturbing. *Anal Biochem* 2011, *409*, 130-137.
- [20] Chung, C. T., Niemela, S. L., Miller, R. H., One-step preparation of competent *Escherichia coli*: transformation and storage of bacterial cells in the same solution. *Proc Natl Acad Sci U S A* 1989, *86*, 2172-2175.
- [21] Panja, S., Aich, P., Jana, B., Basu, T., How does plasmid DNA penetrate cell membranes in artificial transformation process of *Escherichia coli*? *Mol Membr Biol* 2008, *25*, 411-422.
- [22] Volodina, E., Raberg, M., Steinbüchel, A., Engineering the heterotrophic carbon sources utilization range of *Ralstonia eutropha* H16 for applications in biotechnology. *Crit Rev Biotechnol* 2016, *36*, 978-991.
- [23] Tang, X., Nakata, Y., Li, H. O., Zhang, M., *et al.*, The optimization of preparations of competent cells for transformation of *E. coli*. *Nucleic Acids Res* 1994, *22*, 2857-2858.
- [24] Wu, N., Matand, K., Kebede, B., Acquaah, G., *et al.*, Enhancing DNA electrotransformation efficiency in *Escherichia coli* DH10B electrocompetent cells. *Electron J Biotechn* 2010, *13*.
- [25] Kovach, M. E., Elzer, P. H., Hill, D. S., Robertson, G. T., *et al.*, Four new derivatives of the broad-host-range cloning vector pBBR1MCS, carrying different antibiotic-resistance cassettes. *Gene* 1995, *166*, 175-176.
- [26] Park, J. M., Jang, Y. S., Kim, T. Y., Lee, S. Y., Development of a gene knockout system for *Ralstonia eutropha* H16 based on the broad-host-range vector expressing a mobile group II intron. *FEMS Microbiol Lett* 2010, *309*, 193-200.

Table 1. Transformation efficiency of *R. eutropha* H16 reported in the literature.

Plasmid		Cells	Electroporation condition		Transformation	Ref.
Name	Size (kb)	OD ₆₀₀ ^(b)	Buffer	Voltage (kV/cm)	efficiency (cfu/μg DNA) ^(a)	
pBS29-P2-gfp	8.7	n.r.	0.3 M sucrose	25	$(4.04 \pm 0.07) \times 10^3$	[12]
pBHR1	5.3	n.r.	0.3 M sucrose	25	$(4.70 \pm 0.02) \times 10^2$	[12]
pKK-II 89-6	7.8	n.r.	0.3 M sucrose	25	$(1.20 \pm 0.04) \times 10^2$	[12]
pCUP3	7.6	0.5	ddH ₂ O	7.5	$(1.11 \pm 0.08) \times 10^3$	[11]
pJRD215	10.2	0.5	ddH ₂ O	7.5	3.4 ± 0.6	[11]
pKT230	11.9	0.8	10% glycerol	11.5	8.0×10^1 ^(c)	[13]
pBHR1	5.3	0.6	0.2M sucrose	11.5	$(3.86 \pm 0.29) \times 10^5$	This work

^(a) The standard error of mean is provided whenever the information is available or can be calculated from the referenced article

^(b) n.r.: value not reported

^(c) The competent cells were frozen and thawed before transformation

Figure legends

Figure 1. Relative transformation efficiency of *R. eutropha* H16. **A.** Effect of 10 different transformation buffers. **B.** Effect of chemical treatment during competent cell preparation. **C.** Effect of different electroporation voltage ranging from 2.1–2.5 kV. **D.** Effect of DNA quantity. Bar charts show the mean and standard error of mean for each sample after at least 3 replicates. The reference sample (red bar; 100%) was 100 μ L of competent cells prepared using 0.3 M sucrose as transformation buffer to a 20-time cell concentration and transformed with 0.25 μ g of pBHR1 and 2.5 kV electroporation voltage. Two-tailed t-test was used to compare the means of the varied conditions against the reference sample; * denotes $P < 0.05$, ** denotes $P < 0.01$, *** denotes $P < 0.001$ and **** denotes $P < 0.0001$.

Figure 2. A. Effect of varying cell concentration and cell number on the relative transformation efficiency of *R. eutropha* H16. The reference sample (red bar; 100%) was 100 μ L of competent cells prepared using a 15-min CaCl_2 incubation step, 0.2 M sucrose as transformation buffer and transformed with 0.25 μ g of pBHR1 using 2.5 kV electroporation voltage. Cell concentration and number were controlled by varying the initial cell culture volume and/or final resuspension volume of the competent cells. **B.** Effect of cell growth phase on the transformation efficiency (black bar) and frequency (grey bar) of *R. eutropha* H16. Competent cells (200 μ L) were prepared using a 15-min CaCl_2 incubation step, 0.2 M sucrose as transformation buffer to a 100-time cell concentration and transformed with 0.25 μ g of pBHR1 using 2.3 kV electroporation voltage. Both bar charts show the mean and standard error of mean for each sample after at least 3 replicates. Two-tailed t-test was used to compare the means of the varied conditions in **2A** against the reference sample; * denotes $P < 0.05$, ** denotes $P < 0.01$, *** denotes $P < 0.001$ and **** denotes $P < 0.0001$.

Figure 1:


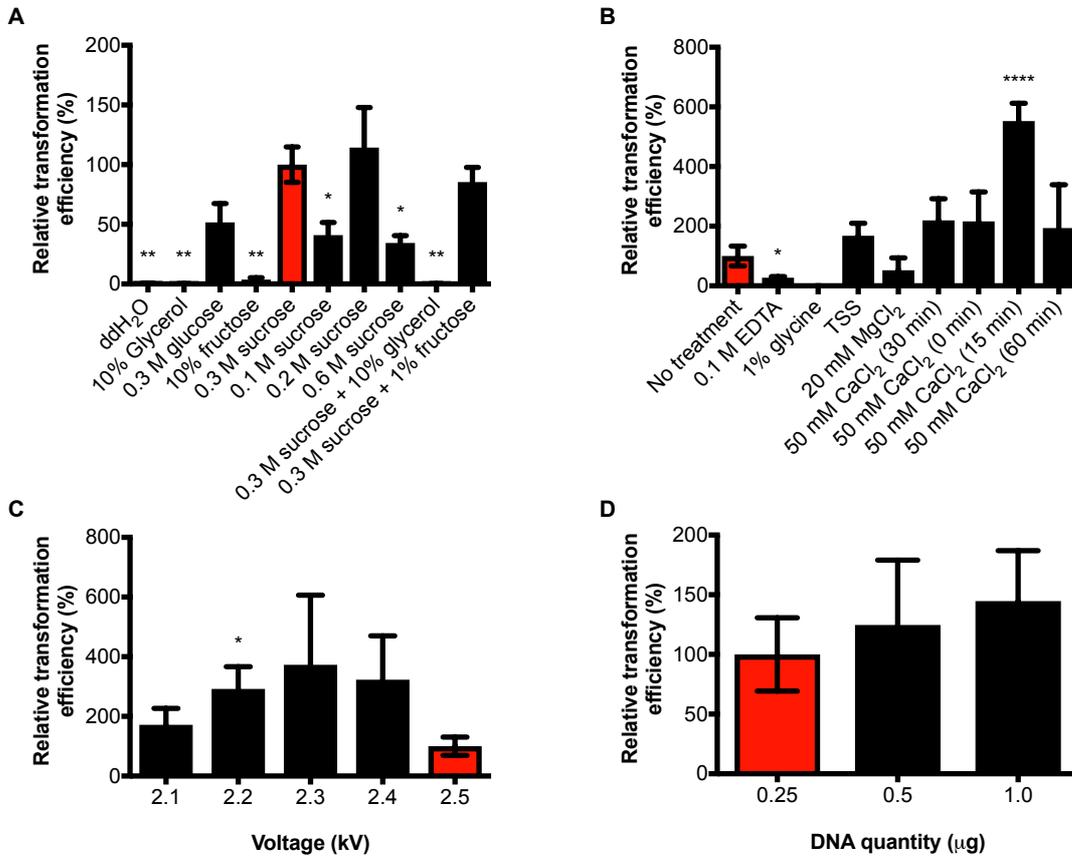


Figure 2:

A



B

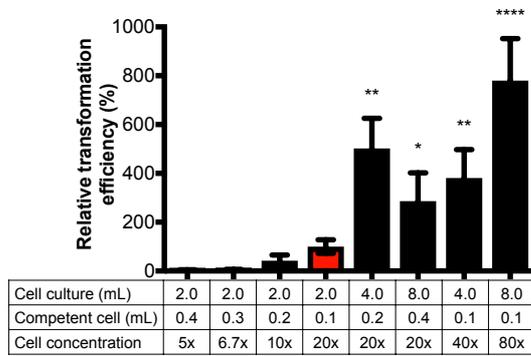