



Deposited via The University of Leeds.

White Rose Research Online URL for this paper:

<https://eprints.whiterose.ac.uk/id/eprint/120907/>

Version: Accepted Version

Proceedings Paper:

Liu, C-Y, Liu, D-Z, Mao, X et al. (2018) Extended Multipoint Approximation Method. In: DEStech Transactions on Computer Science and Engineering. 2nd International Conference on Applied Mathematics, Simulation and Modelling (AMSM 2017), 06-07 Aug 2017, Phuket, Thailand. DEStech Publications, Inc., pp. 219-225. ISBN: 978-1-60595-480-6. ISSN: 2475-885X.

<https://doi.org/10.12783/dtetr/amsm2017/14847>

© 2017 by DEStech Publications, Inc. This is an author produced version of a paper published in DEStech Transactions on Computer Science and Engineering. Uploaded with permission from the publisher.

Reuse

Items deposited in White Rose Research Online are protected by copyright, with all rights reserved unless indicated otherwise. They may be downloaded and/or printed for private study, or other acts as permitted by national copyright laws. The publisher or other rights holders may allow further reproduction and re-use of the full text version. This is indicated by the licence information on the White Rose Research Online record for the item.

Takedown

If you consider content in White Rose Research Online to be in breach of UK law, please notify us by emailing eprints@whiterose.ac.uk including the URL of the record and the reason for the withdrawal request.

Extended Multipoint Approximation Method

Cheng-yang LIU¹, Dian-zi LIU¹, Xiao-an MAO² and Xue ZHOU³

¹Engineering Division, Faculty of Science, University of East Anglia, Norwich, UK

²Faculty of Engineering, University of Leeds, Leeds LS2 9JT, UK

³Faculty of Business, Environment and Society, Coventry University, Coventry, UK

Keywords: Metamodel, Multipoint approximation method, Moving least square method, Taylor's expansion.

Abstract. Stemming from polynomial metamodels, multipoint approximation method (MAM) and moving least square method (MLSM) focus on the development of metamodels for the objective and constraint functions in solving a mid-range optimization problem with a trust region. Although both of these methods could solve problems successfully, there is still some room for improvement on the computational effort and search capability. To address this problem, the extended multipoint approximation method is proposed to seek the optimal solution in this paper. The developed method assimilating the advantage of Taylor's expansion used in MLSM demonstrates its superiority over other methods in terms of the computational efficiency and accuracy by some well-established benchmark problems.

Introduction

For better meeting the challenges in temporary tough competition in engineering products, metamodel-based optimization method has become increasing popular cause it could relieve the computation burden during analysis and minimize the total cost during experiments than normal detailed simulation methods (e.g. finite element method)

The Multipoint Approximation Method (MAM) [1] is one of the best-known metamodel-based optimization methods, which replaces the original optimization problem by a succession of simpler mathematical programming. This method is based on an assembly of multiple surrogates into a single surrogate using linear regression. The coefficients of the model assembly are not weights of the individual models but tuning parameters determined by the least squares method [2].

Although the MAM shows good performance on solving continuous problems, its full potential is not yet utilized. In this paper, an extended MAM has been studied and validated to be more efficient in searching ability and accuracy. In current research, another new surrogate called Taylor's expansion surrogate is added together with other five surrogates into an assembly to build the metamodel. This approach is intrigued by the Moving Least Squares Method (MLSM), which is a metamodel building technique that has been suggested for the use in the meshless form of the Finite Element method [3]. And it has been proposed for the applications to design optimization[4–6].

However, for the aim of optimization, the weighting coefficients here is no longer a function of Euclidian distance but a function related to the constraint and function values.

In current research, several benchmark problems have been tested by both the MAM and the Extended MAM with comparison to other algorithms. Analytical analysis validates that the extended MAM has better optimization ability.

Multipoint Approximation Method

In the present work, the metamodel is built by two subsequent steps. In the first step, single surrogate φ_l is identified using the weighted least squares method as follows:

$$\sum_{p=1}^P w_p^j [F_j(\mathbf{x}_p) - \varphi_l(\mathbf{x}_p, \mathbf{a}_j)]^2 \rightarrow \min \quad (1)$$

Where the coefficients w_p^j refer to the weights that reflect the inequality of data obtained in different sampling points P [7] and \mathbf{a}_j is the tuning parameters with respect to the specific surrogate.

In the second step, based on the known parameters \mathbf{a}_j and keeping the same design of experiments fixed, different approximate models could be assembled into one metamodel in the same manner:

$$\sum_{p=1}^P w_p^j [F_j(\mathbf{x}_p) - \tilde{F}_j(\mathbf{x}_p, \mathbf{b}_l)]^2 \rightarrow \min \quad (2)$$

In other words, the assembly metamodel could be expressed as:

$$\tilde{F}(x) = \sum_{l=1}^{NF} b_l \cdot \varphi_l(x) \quad (3)$$

That leads to solving the linear system of NF equations with NF unknowns b_l where NF is the number of regressors in the model bank $\{\varphi_l(x)\}$. Here, the coefficients b_l are regression coefficients that should not be considered as weight factors, e.g. could be positive or negative.

Extended MAM

Intrigued by the Moving Least Square Method (MLSM), which builds the highly-dependent metamodel in the local space around the specific point, an extended MAM could be developed to explore the full potentials of the polynomial regression metamodels.

Other than the surrogates built by Liu and Toropov [2], one new surrogate called the Taylor's Expansion surrogate is introduced in the extended MAM by the following equation:

$$\varphi(x) = \varphi_0 + \sum_{i=1}^N \left(\frac{\partial \varphi_0}{\partial x_i} \cdot \Delta_i \right) \quad (4)$$

Where

$$\Delta_i = x_i - x_i^0 \quad (5)$$

x_i^0 is the starting point e.g. the sub-optimal point during the optimization loop and φ_0 is the primary function value at the starting point.

Unlike the metamodel built by the MLSM, the weight w_p^j is no longer the functions related to the Euclidian distance from a sampling point to the specific point where the surrogate model is evaluated. Actually, the points that belong to the boundary of the feasible region should be treated with great weights. In the current work, this can be achieved by the formula $\omega = e^{-4|F_j(\mathbf{x}_p)-1|}$.

Examples

Design of Tension/Compression Spring

This problem was first described by Belegundu [8] and Arora[9]. The design objective is to minimize the weight of a tension/compression spring subject to constraints on shear stress, surge frequency and minimum deflections as shown in Figure 1. The design variables include the wire diameter d ; the mean coil diameter D , and the number of active coils N . (see detailed formulation in [8])

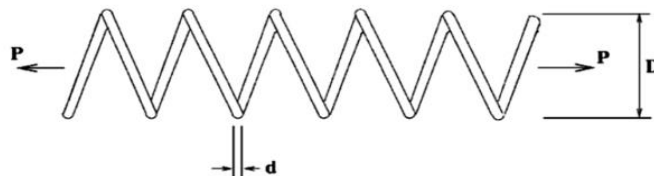


Figure 1. Schematic of the tension/compression spring with indication of design variables

Table 1 and Table 2 compare the best results obtained by present algorithms and those of the other researchers. As is shown in table 1, the MAM and extended MAM found the best design overall (0.0126653). In fact, the lighter design found by Kaveh actually violates the first two optimization constraints which could be seen in Table 2.

By choosing different starting points, it can be seen as showed in Table 3.9 that the evaluations called by the extended MAM are 10% less than MAM. And the average optimal weight also demonstrates the extended MAM has better search performance (0.01274 VS 0.01283). In conclusion, from this typical case, the sixth regressor added in the extended MAM enhances the robustness and the accuracy of metamodel.

Table 1. Comparison of present optimized designs with literature for the spring

Methods	d	D	N	weight
Belegundu [8]	0.050000	0.315900	14.250000	0.0128334
Arora [9]	0.053396	0.399180	9.185400	0.0127303
Coello [10]	0.051480	0.351661	11.632201	0.0127048
Coello & Montes [11]	0.051989	0.363965	10.890522	0.0126810
Montes & Coello [12]	0.051643	0.355360	11.397926	0.012698
Kaveh & Talatahari [13]	0.051744	0.358532	11.165704	0.0126384
MAM	0.051604352	0.35468326	11.409247	0.0126653
Extended MAM	0.051656017	0.35592318	11.3357128	0.0126653

Table 2. Comparison of present constraint values with literature for the spring

Methods	g_1	g_2	g_3	g_4
Belegundu [8]	-0.000014	-0.003782	-3.938302	-0.756067
Arora [9]	0.000019	-0.000018	-4.123832	-0.698283
Coello [10]	-0.002080	-0.000110	-4.026318	-4.026318
Coello & Montes [11]	-0.000013	-0.000021	-4.061338	-0.722698
Montes & Coello [12]	-0.001732	-0.0000567	-4.039301	-0.728664
Kaveh & Talatahari [13]	8.78603e-6	0.0011043	-4.063371	-0.726483
MAM	-1.0843e-7	-6.10541e-8	-4.0497478	-7.291416
Extended MAM	-6.3091e-7	-3.2158e-7	-4.052208	-7.282805

Table 3. Statistical results from present algorithms for the spring

Methods			MAM		Extended MAM	
Number of sample points			8		8	
Starting point (d, D, N)			Output Value	No. of iteration	Output Value	No. of iteration
0.05	0.4	9	0.01269	17	0.01267	19
0.08	1.0	10	0.01311	58	0.01277	28
0.06	0.5	11	0.01267	11	0.01266	17
0.07	0.8	8	0.01303	15	0.01296	25
0.05	0.5	11	0.01269	10	0.01266	14
Average			0.01283	22	0.01274	20

Design of a Pressure Vessel

The second case is the design optimization of the cylindrical pressure vessel capped at both ends by hemispherical heads (Figure 2). The main topic of this problem is to minimize the total manufacturing cost of the vessel including the combination of welding, material and forming costs. The design variables consist of the shell thickness T_s , the spherical head thickness T_h , the radius of cylindrical shell R , and the shell length L . The detailed problem formulation could be seen in [14].

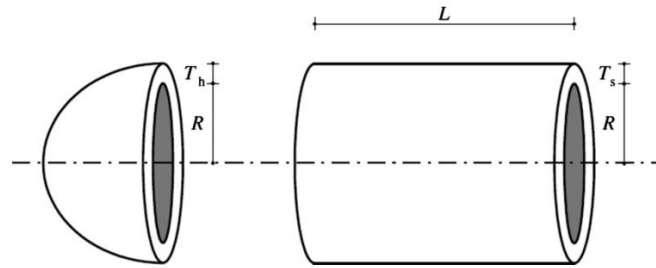


Figure 2. Schematic of the spherical head and cylindrical wall of the pressure vessel with indication of design variables

Table 4. Comparison of present optimized designs with literature for the pressure vessel

Methods	T_s	T_h	R	L	cost
Kannan & Kramer [14]	1.125000	0.625000	58.29100	43.6900	7198.0428
Deb [15]	0.937500	0.500000	48.32900	112.6790	6410.3811
Coello [10]	0.812500	0.437500	40.32390	200.0000	6288.7445
Coello & Montes [11]	0.812500	0.437500	42.09739	176.6540	6059.9463
Montes & Coello [12]	0.812500	0.437500	42.098087	176.64051	6059.7456
Kaveh & Mahdavi [16]	0.779946	0.385560	40.409065	198.76232	5889.911
MAM	0.7781687	0.3846492	40.319619	200.000	5885.268
Extended MAM	0.7781687	0.3846492	40.319619	200.000	5885.268

It can be seen from Table 4 that the present algorithms found the best design that is 0.8% less than the best-known design quoted in literature (5885.268 vs. 5889.911). Table 5 supports that the optimized designs are feasible cause all constraints are not violated. Statistical results given in Table 6 indicate that the extended MAM reduces the number of response analysis by 8%.

Table 5. Comparison of present constraint values with literature for the pressure vessel

Methods	g_1	g_2	g_3	g_4
Kannan & Kramer [14]	1.6e-5	-0.0689	-21.220	-196.31
Deb [15]	-4.7e-3	-0.0390	-3652.877	-127.321
Coello [10]	-3.4e-2	-0.0528	-27.106	-40.000
Coello & Montes [11]	-2.0e-5	-0.0359	-27.886	-63.346
Montes & Coello [12]	-7.0e-6	-0.0371	2.94791	-63.360
Kaveh & Mahdavi [16]	-5.1e-5	-0.0013	-19.195	-41.237
MAM	-5.3e-8	-0.0012	-0.01962	-40.000
Extended MAM	-5.3e-8	-0.0012	-0.01962	-40.000

Table 6. Statistical results from present algorithms for the pressure vessel

Methods				MAM		Extended MAM	
Number of points				9		9	
Starting point (T_s, T_h, R, L)				Output Value	No. of iteration	Output Value	No. of iteration
1.0	1.0	100	150	5885.268	10	5885.268	10
0.8	0.5	50	150	5885.268	10	5885.268	9
0.5	0.5	100	100	5885.268	21	5885.268	17
1.5	1.5	50	50	5885.268	9	5885.268	10
Average				5885.268	13	5885.268	12

Summary

The extended multipoint approximation method is proposed to solve complex optimization problems with the high efficiency and accuracy. It significantly reduces the calls for evaluations on objective

and constraint functions, which is really important when solving complex optimization problems. The robustness of the extended multipoint approximation method is validated by some benchmark examples. The potential of this developed method demonstrates that it can be easily implemented in MAM to solve mixed-variable problems and outperforms the other methods in terms of the computational accuracy.

References

- [1] V. V. Toropov, Simulation approach to structural optimization, *Struct. Optim.* 1 (1989) 37–46.
- [2] D. Liu, V. Toropov, Implementation of Discrete Capability into the Enhanced Multipoint Approximation Method for Solving Mixed Integer-Continuous Optimization Problems, *Int. J. Comput. Methods Eng. Sci. Mech.* 17 (2016).
- [3] T. Liszka, An interpolation method for an irregular net of nodes, *Int. J. Numer. Methods Eng.* 20 (1984) 1599–1612.
- [4] K.K. Choi, B.D. Youn, R. Yang, Moving Least Square Method for Reliability-Based Design Optimization, *Fourth World Congr. Struct. Multidiscip. Optim.* (2001).
- [5] P. Breitkopf, H. Naceur, A. Rassineux, P. Villon, Moving least squares response surface approximation: Formulation and metal forming applications, *Comput. Struct.* 83 (2005) 1411–1428.
- [6] H. Naceur, S. Ben-Elchi, J.L. Batoz, C. Knopf-Lenoir, Response surface methodology for the rapid design of aluminum sheet metal forming parameters, *Mater. Des.* 29 (2008) 781–790.
- [7] V.V. Toropov, A.A. Filatov, A.A. Polynkin, Structural Optimization Multiparameter structural optimization using FEM and multi-point explicit approximations*, *Struct. Optim.* 6 (1993) 7–14.
- [8] A.D. Belegundu, A study of mathematical programming methods for structural optimization., University of Iowa, Iowa, USA, 1982.
- [9] J.S. Arora, *Introduction to Optimum Design*, McGraw-Hill, New York, 1989.
- [10] C.A. Coello Coello, Use of a self-adaptive penalty approach for engineering optimization problems, *Comput. Ind.* 41 (2000) 113–127.
- [11] C.A.C. Coello, E. Mezura-Montes, Constrained Optimization based on a Multiobjective Evolutionary Algorithm, *Congr. Evol. Comput.* 3 (2003) 0–7.
- [12] E. Mezura-Montes, C. a. C. Coello, An empirical study about the usefulness of evolution strategies to solve constrained optimization problems, *Int. J. Gen. Syst.* 37 (2008) 443–473.
- [13] A. Kaveh, S. Talatahari, A novel heuristic optimization method: Charged system search, *Acta Mech.* 213 (2010) 267–289.
- [14] Kannan, B.K., Kramer, S.N., An augmented Lagrange multiplier based method for mixed integer discrete continuous optimization and its applications to mechanical design. *Journal of Mechanical Design*, 116(2), 405–411..pdf, 1 (1994).
- [15] K. Deb, GeneAS: A Robust Optimal Design Technique for Mechanical Component Design, in: D. Dasgupta, Z. Michalewicz (Eds.), *Evol. Algorithms Eng. Appl.*, Springer Berlin Heidelberg, Berlin, Heidelberg, 1997: pp. 497–514.
- [16] A. Kaveh, V.R. Mahdavi, Colliding bodies optimization: A novel meta-heuristic method, *Comput. Struct.* 139 (2014) 18–27.