



Deposited via The University of Leeds.

White Rose Research Online URL for this paper:

<https://eprints.whiterose.ac.uk/id/eprint/126398/>

Version: Accepted Version

Proceedings Paper:

Paulillo, B, Pirotta, S, Nong, H et al. (2017) Ultrafast terahertz detectors based on 3D meta-atoms. In: Proceedings 2017 European Conference on Lasers and Electro-Optics and European Quantum Electronics Conference. The European Conference on Lasers and Electro-Optics, 25-29 Jun 2017, Munich, Germany. IEEE. ISBN: 9781557528209.

<https://doi.org/10.1109/CLEOE-EQEC.2017.8087843>

(c) 2017 IEEE. Personal use of this material is permitted. Permission from IEEE must be obtained for all other uses, in any current or future media, including reprinting/republishing this material for advertising or promotional purposes, creating new collective works, for resale or redistribution to servers or lists, or reuse of any copyrighted component of this work in other works.

Reuse

Items deposited in White Rose Research Online are protected by copyright, with all rights reserved unless indicated otherwise. They may be downloaded and/or printed for private study, or other acts as permitted by national copyright laws. The publisher or other rights holders may allow further reproduction and re-use of the full text version. This is indicated by the licence information on the White Rose Research Online record for the item.

Takedown

If you consider content in White Rose Research Online to be in breach of UK law, please notify us by emailing eprints@whiterose.ac.uk including the URL of the record and the reason for the withdrawal request.

Ultrafast terahertz detectors based on 3D meta-atoms

B. Paulillo¹, S. Pirotta¹, H. Nong², P. Crozat¹, S. Guilet¹, G. Xu^{1,3}, L. Li⁴,
E.H. Linfield⁴, G.A. Davies⁴, S. Dhillon² and R. Colombelli¹

¹Centre for Nanoscience and Nanotechnology (C2N Orsay), CNRS, Univ. Paris Sud, 91405 Orsay, France

²Laboratoire Pierre Aigrain, Ecole Normale Supérieure, UMR 8551 CNRS, Paris, France

³Key Laboratory of Infrared Imaging Materials and Detectors, Shanghai Institute of Technical Physics, Chinese Academy of Sciences, Shanghai 200083, China

⁴School of Electronic and Electrical Engineering, University of Leeds Leeds, United Kingdom

Terahertz (THz) and sub-THz frequency emitter-detector technology is receiving increasing attention because of key applications in several fields. In particular, ultrafast THz receivers are desired for compact, ultrafast spectroscopy and communication systems. While most of the available THz detectors (thermal, FET ...) are currently limited in response time by slow thermal processes and/or by the read-out electronics, quantum well infrared photodetectors (QWIP) are excellent candidates given their intrinsic ps-range response [1]. The key to true ultrafast response is an aggressive reduction in device size, well below the typical diffraction-limited optical cavities [2].

In this contribution, we demonstrate ultrafast sub-wavelength ($\lambda/10$) THz QWIP detectors based on a 3D splitting geometry recently developed in our team [3]. The key idea is to exploit a miniaturized loop RF antenna as a coupler element to efficiently feed THz radiation ($\lambda=100\text{-}200\ \mu\text{m}$) into an ultra-sub-wavelength ($\lambda/25$) QWIP active core (active volume $\sim 20\ \mu\text{m}^3$, as depicted in Fig. 1(a)). The LC resonance of the device has been set by carefully selecting both the capacitor and inductor sizes in order to match the GaAs/AlGaAs QWIP response band (detection peak at ~ 3 THz) [4].

Several arrays and even single “meta-atom” detectors equipped with individual electrical contacts have been implemented and fully characterized optically and electrically. Photocurrent spectra show a clear response around 3 THz at 4.5 K, as reported in Figure 1(b). The measured dark currents are very low due to the sub-wavelength active volume: less than 2 nA and 20 nA for single device and array configuration, respectively, for the typical operational bias. The background-limited infrared performance temperature (T_{blip}) is ≈ 8 K for both configurations, similarly to what is found when the same material is processed in a standard mesa geometry.

We have explored the operational electrical bandwidth of these devices: the effect of the extremely small size on the device speed is dramatic. Experimentally measured electrical S-parameters place the cut-off frequency - for both single object and array configurations - at above 20 GHz. In order to perform a direct optical response analysis, we have illuminated the detector with a 3 THz QCL, operating in continuous wave, that was intensity-modulated using an RF synthesizer. The output of the detector was amplified and fed to a spectrum analyzer. Figure 1(c) shows the spectrum obtained when the QCL is modulated at 1.5 GHz (solid red line) while the solid blue line is the noise reference with the QCL operated under threshold. Our latest results, which will be thoroughly discussed during the talk, prove a clear optical response up to 2.5 GHz for the array geometry, currently limited only by the experimental setup (current laser modulation speed).

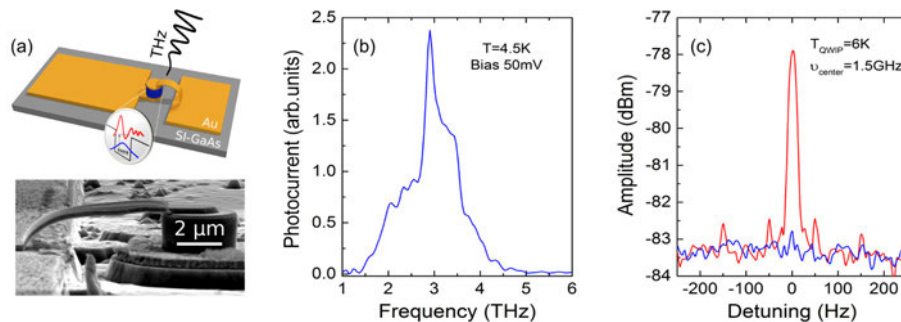


Fig. 1 (a) Scheme and colored SEM picture of a sub- λ 3D THz split-ring meta-atom QWIP detector. (b) Photocurrent spectrum for a meta-atom array with 50 mV applied bias. (c) RF spectrum from a meta-atom array when a 1.5-GHz-modulated THz QCL is focused on it (solid red line). The blue solid line is the noise reference when the QCL is under threshold (DC+RF).

References

- [1] H. Schneider, H.C. Liu, *Quantum Well Infrared Photodetectors. Physics and Applications*, Springer Series in Optical Sciences, Springer Verlag Berlin Heidelberg (2007)
- [2] D. Palaferri, Y. Todorov, Y.N. Chen, J. Madeo, A. Vasanelli, L.H. Li, A.G. Davies, E.H. Linfield and C. Sirtori, “Patch antenna terahertz photodetectors”, *Applied Physics Letters*, **106**, 161102 (2015)
- [3] B. Paulillo, J. Manceau, A. Degiron, N. Zerounian, G. Beaudoin, I. Sagnes, and R. Colombelli, “Circuit-tunable sub-wavelength THz resonators: hybridizing optical cavities and loop antennas” *Optics Express***22**, 21302-21312 (2014)
- [4] H.Luo, H.C.Liu, C.Y. Song and Z.R. Wasilewsky, Background-limited THz quantum-well photodetector, *Applied Physics Letters*, **86**, 1 (2005)