



Deposited via The University of Sheffield.

White Rose Research Online URL for this paper:

<https://eprints.whiterose.ac.uk/id/eprint/167101/>

Version: Published Version

Proceedings Paper:

Hanein, T., Stevens, M.M., Zhao, H. et al. (2020) Production of M-S-H cement using talc mine tailings as a source of magnesia. In: 40th Cement and Concrete Science Conference. 74th RILEM Annual Week and 40th Cement and Concrete Science Conference, 31 Aug - 04 Sep 2020, Online conference.

© 2020 The Author(s). For re-use permissions, please contact the author(s).

Reuse

Items deposited in White Rose Research Online are protected by copyright, with all rights reserved unless indicated otherwise. They may be downloaded and/or printed for private study, or other acts as permitted by national copyright laws. The publisher or other rights holders may allow further reproduction and re-use of the full text version. This is indicated by the licence information on the White Rose Research Online record for the item.

Takedown

If you consider content in White Rose Research Online to be in breach of UK law, please notify us by emailing eprints@whiterose.ac.uk including the URL of the record and the reason for the withdrawal request.

Production of M-S-H cement using talc mine tailings as a source of magnesia

Theodore Hanein^{1*}, Meredith M. Stevens¹, Han Zhao¹, Valter Wigren², Bob Talling², and Hajime Kinoshita^{1*}

¹Department of Materials Science and Engineering, the University of Sheffield, S1 3JD, UK

²Renotech Ltd. Turku, Finland

* Corresponding authors: t.hanein@sheffield.ac.uk & h.kinoshita@sheffield.ac.uk

Occasion

74th RILEM Annual Week and 40th Cement and Concrete Science Conference

31 August - 4 September 2020

Hosted by the University of Sheffield | Online

Background and Introduction

Magnesium silicate hydrate (M-S-H) cements are alternative low-carbon cements usually formed from MgO or Mg(OH)₂ combined with a source of amorphous/reactive silica in the presence of water. M-S-H cements can also have specialist applications such as the stabilization of heavy metals [1].

One main hindrance in the development of M-S-H cements is the availability of the Mg-source which is, normally, scarce magnesium carbonate (MgCO₃). The formation of M-S-H cement from precursors such as MgO or Mg(OH)₂ and reactive silica is slow [2]; thus, limiting its application.

Our previous study showed that it is possible to accelerate M-S-H formation through the addition of water-soluble alkali carbonates (i.e., NaHCO₃) [2]. An acceleration of approximately 8 times was observed where Mg(OH)₂ was almost completely consumed after 7 days, instead of 56 days, when cured at 35°C [2].

Ferroan-magnesite rich talc mine tailings are formed when the talc ore is crushed, milled and chemically processed in order to recover the talc and Ni concentrate from the gangue material. In the present work, calcined Finnish talc mine tailings, originally consisting mainly of iron-bearing magnesite ((Mg,Fe)CO₃), are tested for use as precursors to produce M-S-H cement.

Due to the COVID-19 pandemic, characterisation of the produced cement samples was not possible and only visual inspection of physical properties was conducted.

Objectives

- Valorise talc mine tailings through assessing the potential for using them as precursors for the manufacture of M-S-H cement.
- Characterise the ferroan-magnesite rich talc mine tailings.
- Calcine the tailings to produce a source of reactive MgO.
- Test both silica fume (microsilica) and rotary-calcined clay (metakaolin) to supply the necessary SiO₂.
- Test the acceleration of M-S-H formation from the tailings through the addition of sodium bicarbonate (NaHCO₃).
- Visually inspect the rate of hardening of samples cured for 3, 7, and 14 days.

Materials and Methods

Materials

- Ferroan magnesite mine tailings — Renotech Ltd.
- Silica fume — Elkem Microsilica 940-U
- Metakaolin — BASF MetaMax (52% SiO₂, 45% Al₂O₃)
- Sodium bicarbonate — NaHCO₃ Sigma-Aldrich ≥99% purity

Methods

- Thermogravimetric (TG) analysis was carried out on 30 mg of sample in a PerkinElmer Pyris 1 TGA under N₂ gas flow of 20 mL/min. The sample was heated from 30°C to 950°C at 10°C/min.
- X-ray fluorescence (XRF) analysis was conducted using PANalytical's Zetium. The PANalytical Omnian package was used to determine the elemental concentrations. A Claisse LeNeo Fluxer was used for the formation of 40 mm beads prepared by mixing 1 g of sample in 10 g of lithium tetraborate salt.
- Inductively coupled plasma – optical emission spectrometry (ICP-OES) was also used for compositional analysis of the tailings. A Spectro-Ciros-Vision optical emission spectrometer was used for the measurement.
- The talc mine tailings were calcined in a muffle furnace for two hours in air at 900°C.
- Further information can be provided upon reasonable request.

Tailings Characterisation Data

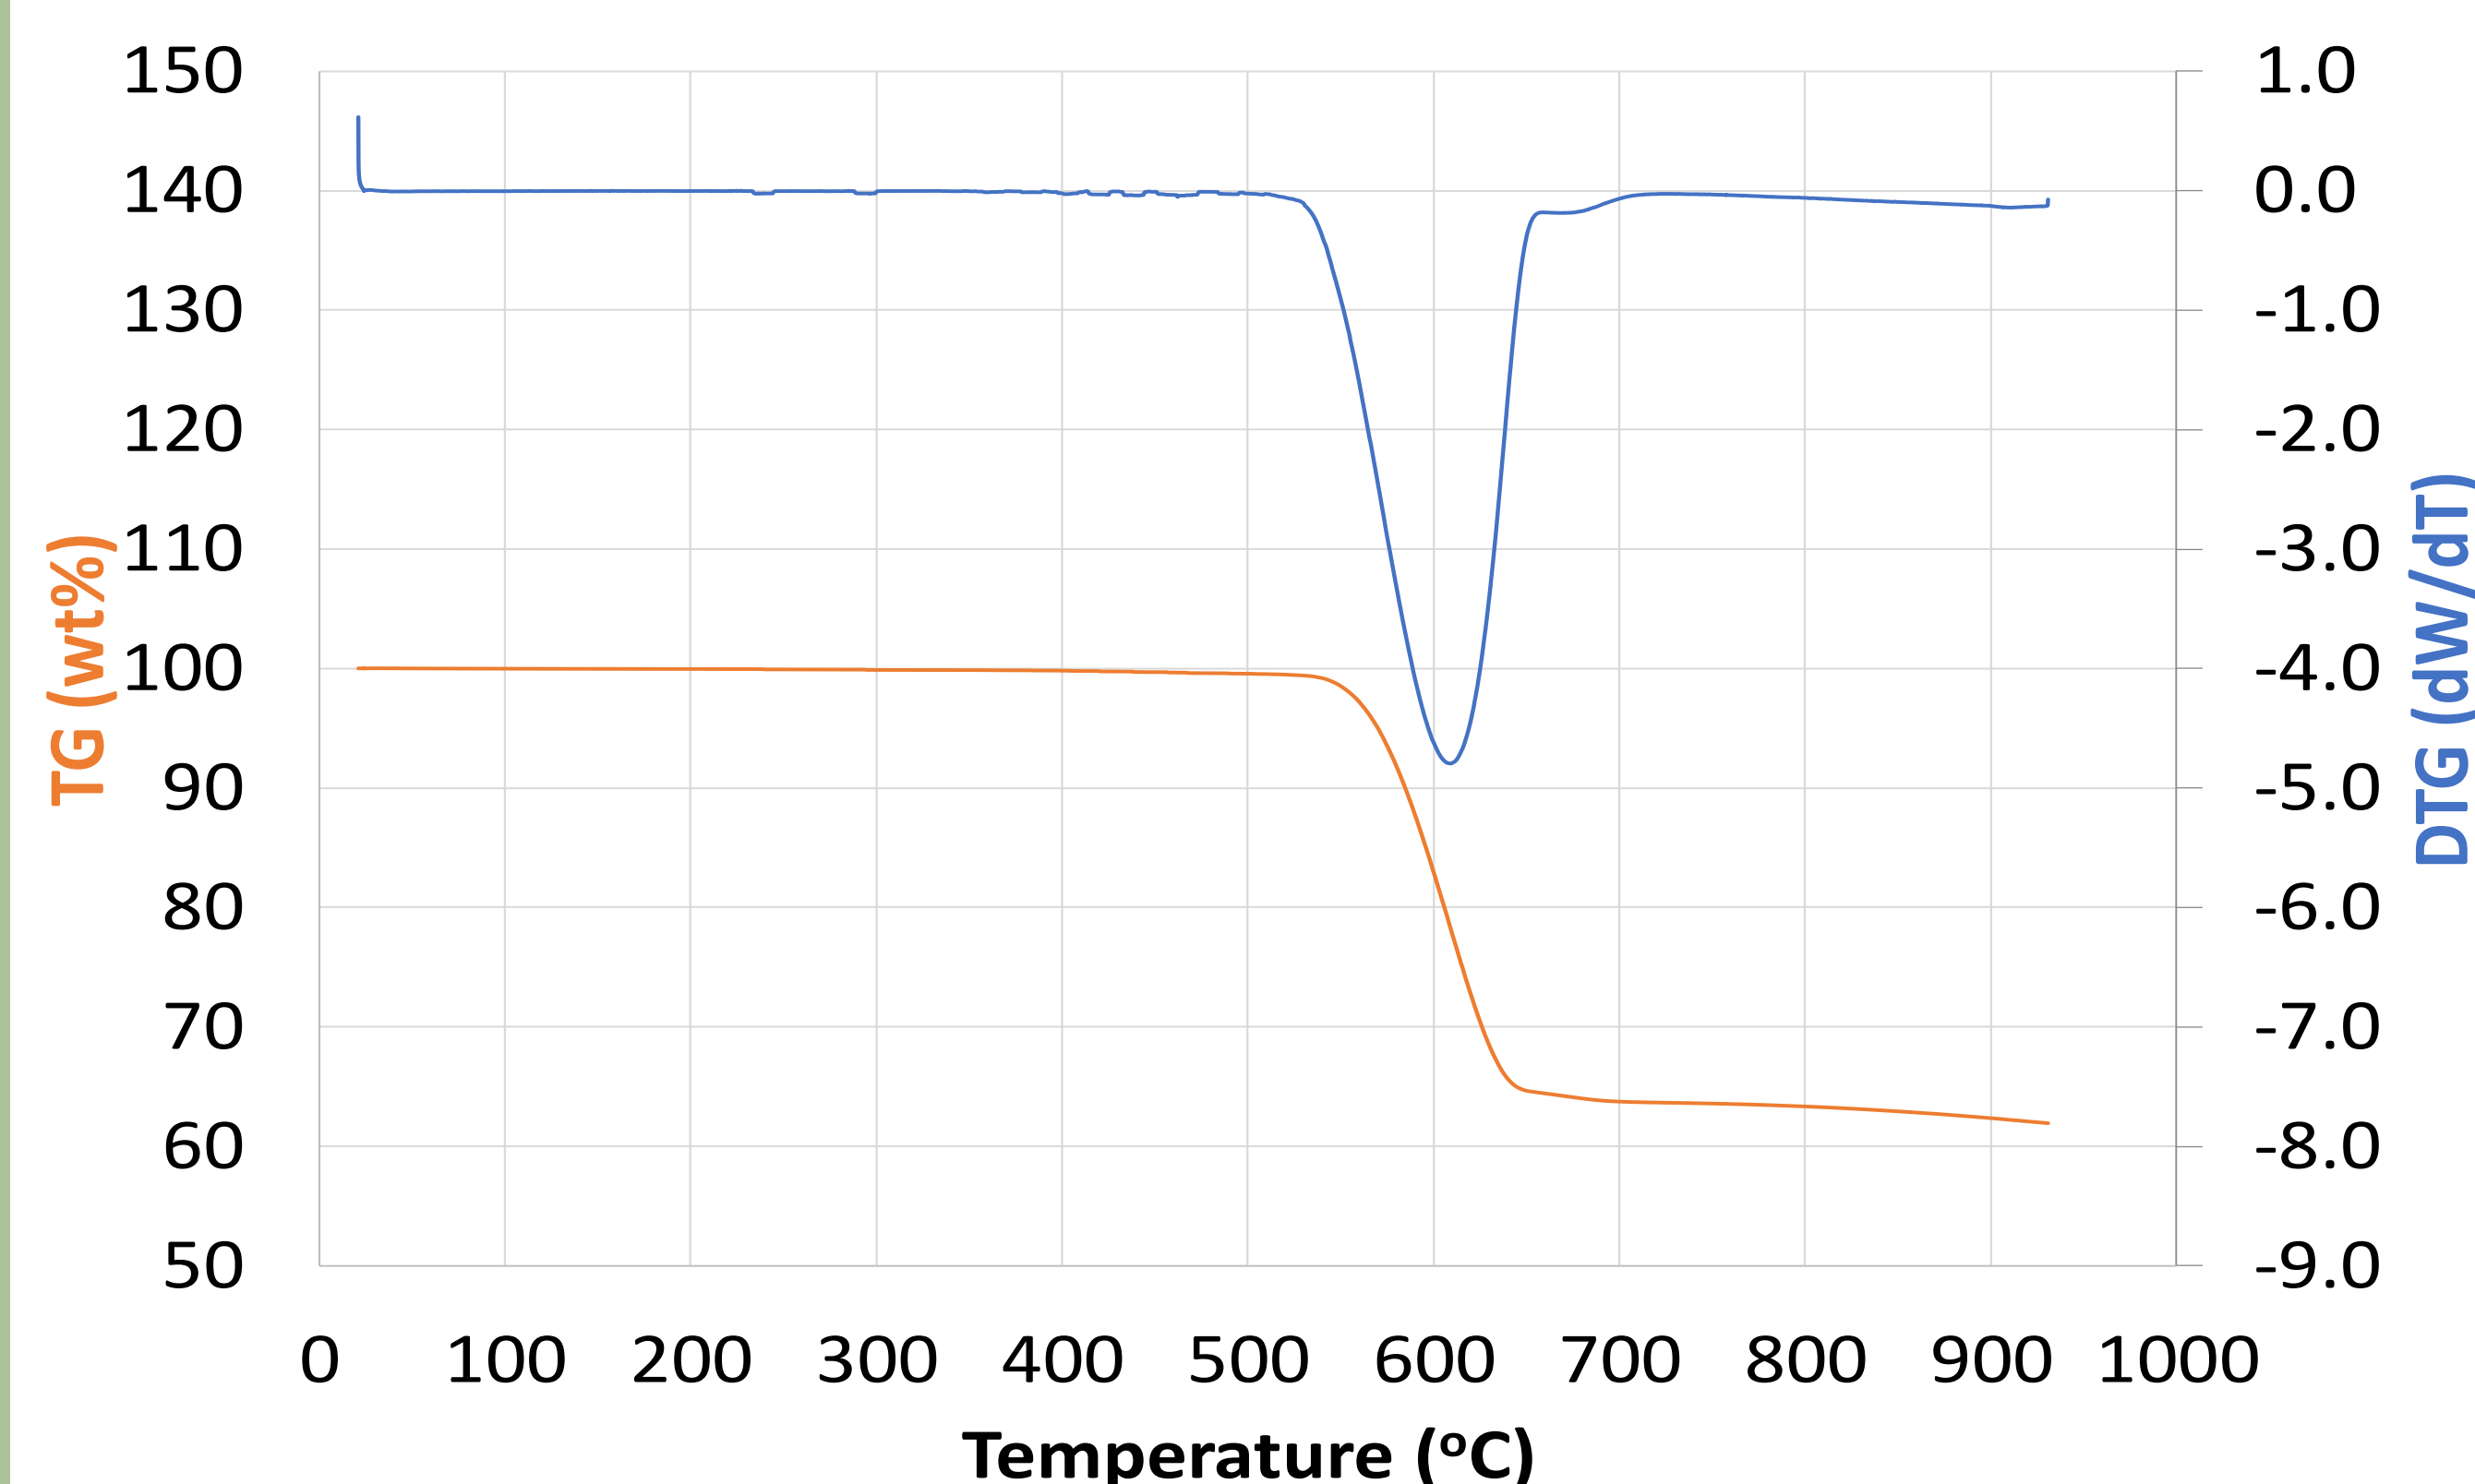


Figure 1: TG analysis of ferroan magnesite rich tailings.

Table 1: XRF analysis of ferroan magnesite rich tailings (weight %). N.B. Although Fe is presented as Fe₂O₃, the iron may exist in other oxidation states.

MgO	SiO ₂	Fe ₂ O ₃	SO ₃	Al ₂ O ₃	CaO	Na ₂ O	TiO ₂	Mn ₃ O ₄	NiO	Cr ₂ O ₃
38.5	15.1	8.2	1.1	0.9	0.6	0.6	0.1	0.1	0.1	0.1

Table 2: ICP-OES analysis of ferroan magnesite rich tailings (weight %).

Mg	Si	Fe	Ca	Al	S	Cl	Cr	Mn	Ni
18.7	7.0	4.6	0.4	0.3	0.3	0.1	0.1	0.1	0.1

Sample Preparation

- As magnesium silicates are also present in the tailings, TG data was used to estimate MgO contents which were as carbonates.
- Weighing of the materials in crucibles before and after calcination in muffle furnace agreed with the TG data.
- Four samples were produced as shown in Table 3.
- The amount of water, SiO₂ (Elkem) and NaHCO₃ (Sigma-Aldrich) were based on a previous formulations [2].
- The rotary-calcined metakaolin was made up of 52% SiO₂ so the amount of microsilica used was to ensure a similar SiO₂ content.
- Samples were mixed by hand. Cements 3 and 4 were initially difficult to mix so an additional 22 g of water was added to each.
- The samples were put into centrifuge tubes, sealed and placed in the drying oven at 35°C for 3, 7, and 14 days.
- The physical properties of each of the samples were examined visually after these time intervals.

Table 3: Composition of cement samples. 100 g of dry tailings was used in all samples.

Sample	Calcined tail-ings (MgO) /g	Silica fume (SiO ₂) /g	Calcined clay/g	NaHCO ₃ /g	Water /g
1	32.6	47.2	-	-	109
2	32.6	47.2	-	9	109
3	32.6	-	90.8	-	109 (+22)
4	32.6	-	90.8	9	109 (+22)

Results and Conclusions

- The LOI (950°C) of the tailings is 38% and the tailings are composed of mainly magnesium, silicon, and iron oxides.
- After 3 days, cements 1 and 2 were still soft; but, cement 3 had hardened and 4 contained some harder parts, but was mostly soft.
- After 7 days, 1 and 2 were still soft but cements 3 and 4 were hard.
- After 14 days, 1 was soft, 2 was soft but contained some harder parts, 3 was very hard and 4 was hard.

Talc mine tailings can be used to produce hardened cement. Samples containing calcined clay hardened the quickest. NaHCO₃ addition seems to have caused the sample to harden faster when microsilica is used. However, the addition of NaHCO₃ seems to have resulted in slower hardening in the metakaolin cement.

References

- 1) Wang, L., Chen, L., Cho, D.W., Tsang, D.C., Yang, J., Hou, D., Baek, K., Kua, H.W. and Poon, C.S., 2019. Novel synergy of Si-rich minerals and reactive MgO for stabilisation/solidification of contaminated sediment. Journal of hazardous materials, 365, pp.695-706.
- 2) Zhao, H., Hanein, T., Li, N., Alotaibi, A., Li, A., Walling, S. and Kinoshita, H., 2019. Acceleration of MSH gel formation through the addition of alkali carbonates. In Proceedings of the 15th International Congress on the Chemistry of Cement, Prague.

Acknowledgements

This work was performed at the MIDAS facility at the University of Sheffield which was established with support from the Department of Energy and Climate Change.