



This is a repository copy of *Fuzzy inference model for railway track buckling prediction*.

White Rose Research Online URL for this paper:

<https://eprints.whiterose.ac.uk/202093/>

Version: Published Version

Article:

Ślódczyk, I. orcid.org/0000-0002-0796-5302, Fletcher, D. orcid.org/0000-0002-1562-4655, Gitman, I. orcid.org/0000-0002-7369-6905 et al. (1 more author) (2023) Fuzzy inference model for railway track buckling prediction. *Transportation Research Record: Journal of the Transportation Research Board*. ISSN 0361-1981

<https://doi.org/10.1177/03611981231184245>

Reuse

This article is distributed under the terms of the Creative Commons Attribution (CC BY) licence. This licence allows you to distribute, remix, tweak, and build upon the work, even commercially, as long as you credit the authors for the original work. More information and the full terms of the licence here:

<https://creativecommons.org/licenses/>

Takedown

If you consider content in White Rose Research Online to be in breach of UK law, please notify us by emailing eprints@whiterose.ac.uk including the URL of the record and the reason for the withdrawal request.



eprints@whiterose.ac.uk
<https://eprints.whiterose.ac.uk/>

Fuzzy Inference Model for Railway Track Buckling Prediction

Iwo Ślodyczyk¹ , David Fletcher¹ , Inna Gitman² , and Brian Whitney³

Transportation Research Record
1–13

© National Academy of Sciences:
Transportation Research Board 2023



Article reuse guidelines:

sagepub.com/journals-permissions

DOI: 10.1177/03611981231184245

journals.sagepub.com/home/trr



Abstract

The application of rail buckling models is often limited by uncertain information with respect to track properties, and many conventional models are poorly suited to network-wide or even regional application. Here, a methodology using fuzzy sets is presented that, when trained using buckling data can use inputs of track properties to predict the minimum buckling temperature increase for a particular track. An investigation of the impact of the size of training data and the influence of key track parameters on the minimum buckling temperature increase was conducted, and it was found that a high level of influence stems from the sleeper spacing and fastener torsional resistance parameters. The model was shown to give a low prediction error even for small dataset sizes of training data. The results of this work show the efficacy of a fuzzy sets based model when applied to track buckling prediction data, giving both a low error and rapid calculation times. The approach has potential for application for a wider array of variables, such as track geometry and vehicle dynamics, and is not limited to the study of track buckling owing to the flexibility of the fuzzy inference methodology.

Keywords

artificial intelligence and advanced computing applications, fuzzy systems, supervised learning, rail safety, railroad infrastructure design and maintenance, mitigation, natural hazard

The buckling of railway tracks in hot weather presents a challenging problem, being both difficult to predict and severe in its consequences. In the U.K., buckles were reported as early as 1885 (1) and, despite improvements in the form of the track and efforts toward the characterization, prediction, and mitigation of buckling events, buckles still occur. Historically, buckles have resulted in the loss of life (2) and still pose a derailment threat (3), while the damage caused to the infrastructure and delays caused by speed restrictions incur significant costs (4). A recent total closure of U.K.'s East Coast Main Line on July 19, 2022, exemplifies this, enacted in part to prevent buckling incidents caused by extreme heat (5).

Buckles in tracks take the form of the track bending out, usually in the lateral direction, as a result of constrained thermal expansion stress in the rail, which occurs most often on hot summer days. The main parameter governing buckling risk is the temperature of the rail. A temperature increase above the stress free temperature of the rail can be reached such that a disturbance of sufficient magnitude causes the rail to buckle,

called the minimum buckling temperature increase ($\Delta T_{B, \min}$). This can be seen in Figure 1 where, for a temperature increase above $\Delta T_{B, \min}$, three equilibrium states exist. The first stable equilibrium state is that of non-deflected track, a state of unstable equilibrium exists on section AB, and the third state, of stable equilibrium, is represented on section BC when the track deforms. If, for a temperature increase above $\Delta T_{B, \min}$ sufficient disturbance is imparted to a track with low lateral displacement on section AB, it can explosively deflect to its corresponding displacement on branch BC. Therefore, being able to accurately determine the $\Delta T_{B, \min}$ is crucial

¹Department of Mechanical Engineering, University of Sheffield, Sheffield, UK

²Department of Mechanics of Solids, Surfaces and Systems, University of Twente, Enschede, Netherlands

³Network Rail, Milton Keynes, UK

Corresponding Author:

Iwo Ślodyczyk, islodyczyk1@sheffield.ac.uk

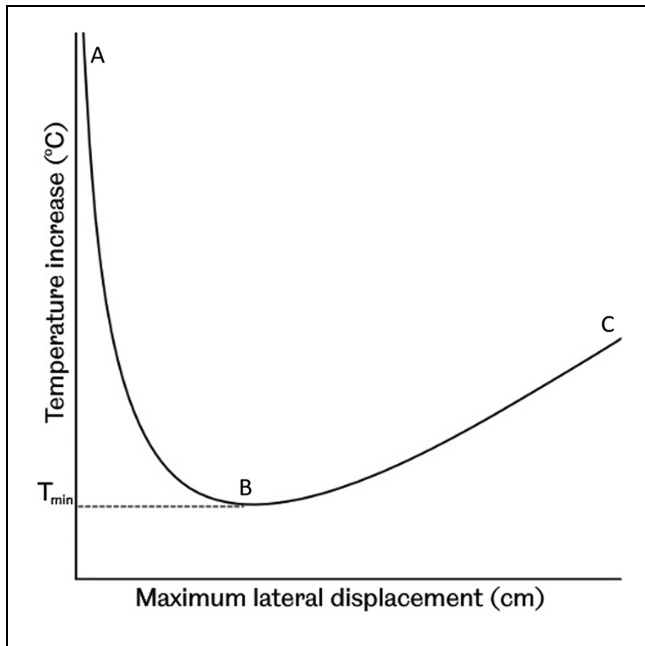


Figure 1. Diagram of a post buckling equilibrium curve.

for assessing the risk of buckling, an instrumental part of planning preventative measures.

Experimental approaches (6) and analytical (7) and numerical models (8) have been used to identify the key variables governing the risk of buckling for a particular section of track. Following the critical survey of previous work in the field (9), Kerr (10) developed an analysis of lateral track buckling, which was further expanded on in Kerr (11). The core concepts from these publications served to inform future analyses, which introduced new parameters such as vehicle loads and non-linear lateral resistance (12), and considered the track as a ladder-type structure (13).

Despite advances in identifying the main parameters influencing the minimum buckling temperature, significant challenges remain in implementing that knowledge. Complex interactions between the aforementioned parameters necessitate the use of intricate prediction models; however, these often require extensive computing power and are limited in their scope. Another limitation of traditional models is their reliance on experimentally obtained values (e.g., of the resistance of sleepers to lateral movement in the ballast), the determination of which in turn can also be challenging. Because of these factors, implementing accurate predictions of buckling risk either in the field or for an extensive network of railways remains difficult.

As such, there exists a need for a methodology that can offer predictions to the infrastructure manager based on easily accessible information. While knowledge of properties such as the sleeper type, sleeper spacing, or

fastener type is easily obtainable, the condition of the sleepers or of the ballast is often more uncertain. Without experimental testing, such properties may in most cases only be described linguistically based on observation using qualitative terms such as “ballast is well consolidated”.

Field Data Interpretation

Table 1 shows typical data from buckling incidents, which is in significant contrast to the well quantified numerical representation of track conditions characteristic of conventional buckling models. A clear challenge exists in linking the uncertain and largely linguistic data on buckling with methods that have predictive capability that may prevent future buckling incidents, such as analytical buckling models.

The challenge in using track descriptions as inputs for a prediction model is perhaps best demonstrated by considering the lateral resistance of sleepers in the ballast property of a track. Previous studies have shown that the temperature at which a track buckles is influenced greatly by the lateral resistance that, in turn, is affected by the ballast conditions, the influence of which can vary the lateral resistance by several kNs. Furthermore, while factors such as the consolidation of the ballast, the width of the shoulder, and the level of ballast relative to the sleeper influence the lateral resistance, each of these becomes uncertain after a buckling event, because of the destructive nature of the phenomenon. As such, directly applying recorded data of the type seen in Table 1 as training data for a machine learning approach would yield few insights beyond well-established knowledge. Meanwhile, while conventional buckling models can capture the detailed characteristics of the buckling mechanism, they have no capability to use linguistic data as inputs.

Development of a buckling prediction method that uses field data inputs requires a two-step approach. Firstly, the ability of the modeling technique must be validated for well understood conditions—this is the subject of the work reported in this paper. Secondly, to be reported separately, the model must be adapted to work with the scarce or uncertain data characteristics of field conditions.

Due to the challenges of using recorded buckling incident data as described above, the validation of the modeling technique in this paper has been approached by using training data generated by an analytical model. While such an approach is unconventional, with most machine learning models trained on and validated against experimental or field data, several authors have used analytical models (14) and finite element models (15–17) to provide training data for a machine learning approach.

Table 1. Examples of Recorded Data from Three Track Buckling Events

Track	Date	Fault description	Temperature (°C)
A	06/18/2017	“Poor ballast condition and rail creep”	41
B	07/23/2018	“No obvious cause of buckle. Site was risk assessed as 21 deg C with no issues detected in last 5 years. Stressing records not evident for this site.”	49
C	06/29/2019	“Insufficient ballast shoulder and inadequate stress in timbered S&C. Track buckled following recent disturbance after S&C tamping activity”	35

Application of Fuzzy Logic

One approach with the capability to address this challenge is fuzzy logic, first developed in 1965 by Zadeh (18). Fuzzy logic allows for a framework within which non-numerical information (such as linguistic variables) can be linked to numerical values through the use of sets of ascribed “truth values,” known as membership. Unlike classical Boolean logic, which only accepts membership values of true (1) or false (0), fuzzy logic allows for a full range of membership values between 0 and 1. The merit of this methodology in buckling modeling is in using uncertain or vague information, such as linguistic descriptions of track properties (19), to arrive at a value for buckling temperature that is consistent with the mechanical knowledge or incident data used to train the model. Furthermore, the approach presented here is not computationally intensive, requiring neither significant processing power nor memory usage.

Recently, a fuzzy model was introduced by Gitman et al. (20), which makes use of experimental data as a base of knowledge, from which a set of rules is derived and serves to approximate the unknown function linking the input and output variables of interest. In the current paper, an expanded version of that approach is applied to the field of railway track buckling with the aim to approximate the minimum temperature increase above which buckling risk exists based on track parameters.

Methodology

The following describes the implementation of a fuzzy sets based model in a methodology predicting the buckling risk of a track. The steps taken by the model, from starting with an initial training dataset to calculating a prediction, are outlined and further supported by an example given in the Appendix.

Application of the Fuzzy Model to Calculate Buckling Temperatures

A flow of information describing the application of the methodology to determine buckling temperatures for a

section of track is represented in Figure 2. It is an example of how the fuzzy inference model could potentially be integrated in a data acquisition, processing, and prediction framework. The diagram is split into two sections, the methodology development side and the application side. The methodology development section deals with the design of the inference model, sourcing and structure of the training data, and optimization of the prediction of the trained model and is the subject of this paper. Although not in itself part of the scope of this paper, the application side is given for completeness and deals with applying linguistic inputs to the trained fuzzy model, their translation into fuzzy sets, and validation of the generated predictions. Firstly, data comprising track parameters and corresponding buckling temperatures is collected using information from buckling incidents or is generated by an analytical or finite element model. For incident data, a suitable training set is selected from the available rows of data (observations), with each observation representing a track scenario consisting of values of track properties (such as the lateral resistance of sleepers in ballast for the section of track, called inputs) and a resulting buckling temperature for the track (outputs). The remaining observations not used to form the training set are collected in a testing set, used to evaluate the performance of the model. Using an analytical or finite element model to provide the observations limits the predictive capacity of the model to that of the analytical or finite element model used to train it; however, this approach is useful in cases where data of sufficient quality or quantity is not available and has the benefit of control over the input values, which can be selected to have a desired range and distribution. Such an approach was taken in this work (see the *Development of Training Data* section). Once the training and testing data have been selected, they are passed to the fuzzy model. The fuzzy model, a development on the model first introduced by Gitman et al. (20), uses the training data to formulate rules representing the function linking track parameters to minimum buckling temperatures. These rules are stored in a matrix of input–output relations and are used to calculate predicted output values for the inputs from the testing set, which are then evaluated

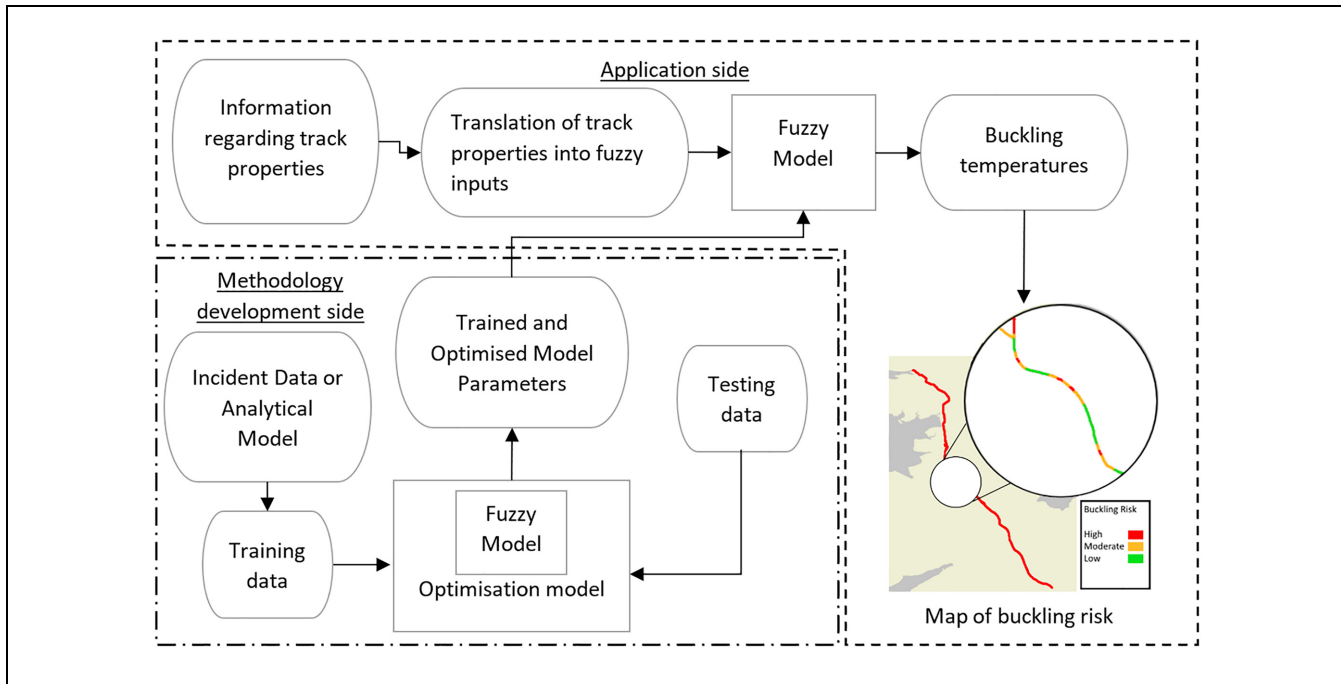


Figure 2. The process and flow of information through the model when applied to an illustrative example location.

against the testing set output values. The prediction error is used as the comparison metric in an optimization loop that modifies the fuzzy model parameters (hyperparameters) to reduce error.

The trained and optimized fuzzy model can then be used to accept new input values from a railway operator to predict minimum buckling temperatures. To do this, track property information, both well-defined and uncertain, is collected at the site of investigation. The linguistic values are then replaced with previously defined fuzzy sets and passed to the fuzzy model for prediction. The map of buckling risk in Figure 2 is a hypothetical representation of how the rapid calculation of the fuzzy inference model has potential application at short intervals to produce a map of buckling hotspots that could be used to instruct maintenance work or speed restrictions.

Fuzzy Model Set-Up

The steps taken to create and train the model, comprising fuzzification, construction of relational matrices, and defuzzification, together with some main aspects of fuzzy sets theory, are outlined below. The concepts and equations described in this section are applied in an example in the Appendix, using parameters of sleeper-ballast lateral resistance and fastener torsional resistance.

Fuzzification. A core concept of fuzzy methodology involves blurred boundaries for the membership of variable values (elements) in collections of like values (sets).

Contrary to a *crisp* set, where values are either a full member of the set or a full member of the complement of that set, in *fuzzy* sets elements may have partial membership in both the set itself and its complement. Consequently, in an “IF X THEN Y ” rule structure, a fuzzy framework allows, for example, a rule of $X = 5$ to trigger even if the value is close to but not equal to 5, such as 4.8. Figure 3 depicts two fuzzy sets, with the membership of values in the set on the vertical axis and the values of the variable of interest on the horizontal axis. Both sets describe a crisp value x_n , given a membership of 1, while a membership component is provided for values either side of x_n . Crisp sets can be translated into fuzzy sets through the process of *fuzzification*—the supplying of membership values for each element of the set. In this way each element has two components: the value of the variable of interest, called the *universe of discourse*, and its corresponding membership in the fuzzy set. Membership values can be determined through one of many functions, two of which are outlined below. The membership values span from 0 to 1 and a higher membership value denotes a stronger membership, for which the description of the set is considered more true. A membership value of 1 denotes full membership in the set, while a value of 0 is given to elements that are not part of the set.

For a value X_j of set X with elements X_i , membership can be determined for each element X_i , which describes the similarity of X_i with respect to X_j . A commonly used triangular membership function (21) can be employed:

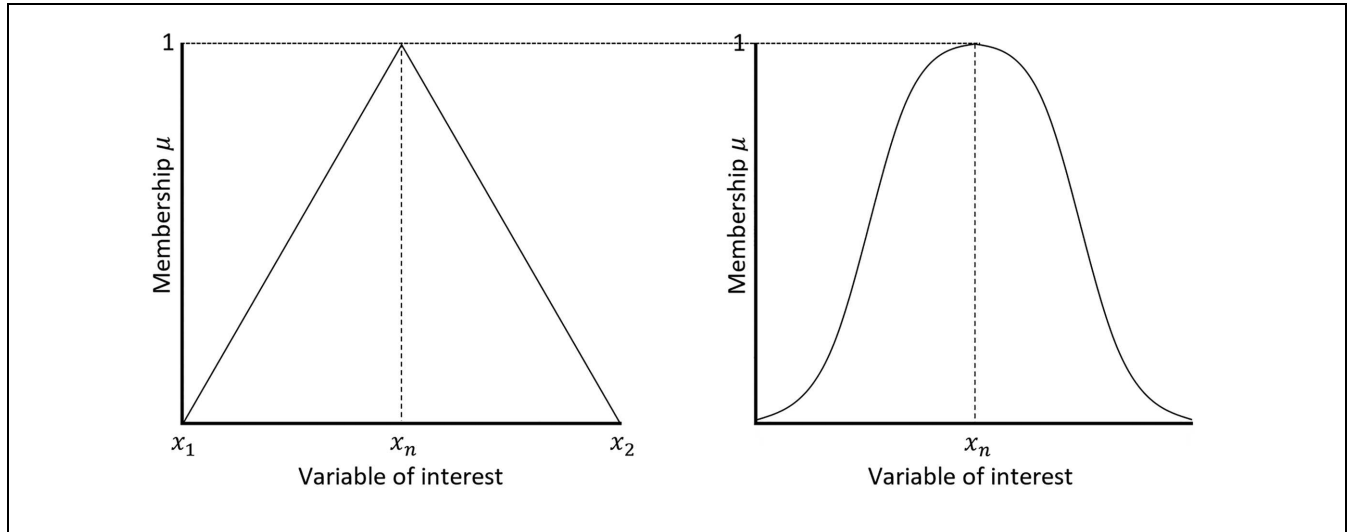


Figure 3. Fuzzy set formed using a triangular and Gaussian membership function.

$$\mu_i = \max\left(0, 1 + \left(\frac{q_i}{0.5 \times h}\right)\right) \quad (1)$$

where

$$q_i = \min(X_i, X_j) - \max(X_i, X_j) \quad (2)$$

and

$$h = \frac{\max(X) - \min(X)}{\alpha} \quad (3)$$

where μ_i is the value of membership for the i th element of the map set X , describing the X_j value. The independent variable α is used to adjust the width of the membership function and is one of the main hyperparameters used to optimize the model. It is a positive value and is directly related to the range of the values in the universe of discourse, such that for a triangular membership set, the base of the triangle is equal in size to the range when $\alpha = 1$ and half the range when $\alpha = 0.5$.

Many different fuzzification functions exist beyond just the triangular shape. For the purposes of this paper, the effect of two commonly used fuzzification shapes (FSs) has been considered, those of triangular and Gaussian shapes. As these concepts may at first appear quite abstract, readers unfamiliar with the approach will find a helpful numerical example in the Appendix.

Construction of Relational Matrices. Fuzzy relations are used to map elements of one set to that of another, such as, for example, lateral resistance values to buckling temperatures. One method of formulating a relational matrix is to employ the Cartesian product of two fuzzy sets,

antecedent \tilde{A} and consequent \tilde{C} , to calculate the relational matrix \tilde{R} :

$$\tilde{R} = \tilde{A} \times \tilde{C} \quad (4)$$

where the \times operator represents a minimum function taken in the same way as the cross-product of two vectors (see example in the Appendix). Then, for a new fuzzy input set \tilde{A}' , the previously calculated relational matrix \tilde{R} can be used to calculate a new fuzzy output set \tilde{C}' using the following:

$$\tilde{C}' = \tilde{A}' \circ \tilde{R} \quad (5)$$

where the operator \circ represents a max–min composition. Each relation \tilde{R} results from a single observation from the training data, such that the number of relations is equal to the size of the training dataset. Instead of enacting the relations individually, a more efficient approach is to combine the relational matrices using the following:

$$\tilde{R}_c = \max(\tilde{R}_1, \dots, \tilde{R}_n) \quad (6)$$

where n is the number of relations and the max operator compares values across the relational matrices for each matrix position, taking the maximum of each position. The resultant \tilde{R}_c is a combined relational matrix. The minimum function used in Equations 4 and 5 is tested for comparison with the product function, which results in a max-product composition, a second commonly used form (21).

Defuzzification. While a fuzzy set can be a useful output in itself, a crisp value of buckling temperature is desirable to gauge the risk of track buckling. In Equation 5

Table 2. Crisp and Fuzzy Characterization of Variables

Sleeper spacing, {crisp} (m)	Sleeper lateral bending stiffness, {crisp} (Nm ²)	Longitudinal resistance, {fuzzy} (N/m)	Lateral resistance, {fuzzy} (kN/m)	Fastener rotational stiffness, {fuzzy} (kNm/rad)
0.60, 0.65, 0.70, 0.75	Wood— 2.30×10^6 Concrete— 6.87×10^6	3.26–13.1	5.88–17.7	0–533

above, \tilde{C}' is a fuzzy set for the unknown output, which can be *defuzzified* to achieve a single crisp value through the reverse of the fuzzification process.

Many defuzzification methods (DMs) are available, two of the most common being the middle of maxima and centroid. For the middle of maxima method, the highest value of membership in the set is considered and, if it is unique, the corresponding buckling temperature value is taken as the crisp value of the set. If multiple positions of maximum membership are found, the average is taken as the output value (22).

The centroid method considers the whole fuzzy set and applies the following function:

$$C' = \sum_{j=1}^r \left(\frac{\tilde{C}'_{j,\mu}}{\sum_{i=1}^r \tilde{C}'_{i,\mu}} \tilde{C}'_{j,x} \right) \quad (7)$$

where C' is the crisp representative of the fuzzy set \tilde{C}' , $\tilde{C}'_{j,\mu}$ is the membership value of element j in the fuzzy set, r is the number of elements in the fuzzy set, and $\tilde{C}'_{j,x}$ is the universe of discourse value for element j in the set.

Development of Training Data

Owing to the lack of availability of a large dataset of buckling incidents, in part because of the difficulty of being able to accurately know the track conditions before the buckle occurs, the set of data used here in training the fuzzy model has been created using an analytical model. While overcoming the limitations of a missing high-quality dataset of incidents, such an approach is not ideal, resulting in a fuzzy model that is constrained by the assumptions of the analytical model used to generate the training data.

The model developed by Grissom and Kerr (13) was implemented in MATLAB to generate a matrix of track properties and a vector of corresponding minimum temperature increases. The choice of model was based on its consideration of the sleeper lateral bending stiffness and the fastener rotational resistance, both of which are shown to have a significant impact on the minimum buckling temperature increase.

The five variables seen in Table 2 were chosen from the Grissom and Kerr model (13) based on their potential to vary between different tracks and affect the minimum buckling temperature increase. They form the

training inputs and were split into fuzzy and crisp categories based on whether the variables are considered continuously distributed and significantly uncertain.

The training data provided by the analytical model consist of a matrix of input values of longitudinal resistance, lateral resistance, and fastener rotational stiffness (see Table 2) and a vector of corresponding $\Delta T_{B, \min}$ for each combination of the crisp variables. Each fuzzy variable is split into equally spaced values, as follows:

$$S_t = \left(X_{\min}, \dots, n \left(\frac{X_{\max} - X_{\min}}{t} \right), \dots, X_{\max} \right) \quad (8)$$

where S_t is the training set of t equally spaced points for the variable, X_{\min} is the minimum considered value of the variable and X_{\max} the maximum, and n are integers from 1 to $t - 2$. The equally spaced points divide the variable space, representing the fuzzy rules. For example, for a case of three divisions, a variable is split into a minimum value, a maximum value, and a value in the middle to give low, high, and medium sets, respectively. These are then used in combination with the other variables in an “IF variable x IS LOW AND variable y IS HIGH THEN output variable z IS MEDIUM” rule format. The number of these divisions, defined by t , can be increased to give more sets and potentially increase the accuracy of the model. Every combination of the aforementioned divisions between all fuzzy variables was considered, such that the total number of combinations and therefore dataset size N is given by the following:

$$N = t^v \quad (9)$$

where t is the number of divisions and v is the number of fuzzy variables under consideration. For a three-variable model with each variable of three divisions, $N = 3^3 = 27$ rows of data are necessary to cover every combination. A model of 0.60 m sleeper spacing and wooden sleepers (see Table 2), with the fuzzy variables split into three divisions, was considered for the testing scenarios below.

Testing Method

A testing set of 100 observations, generated by the analytical model, was used to test the predictive capabilities of the model, formed of a matrix of input track properties of the fuzzy variables described above and a vector of

Table 3. The Fuzzy Parameters of Optimization and their Ranges


Optimizable parameter	Range
Fuzzification shape (FS)	Triangular, Gaussian
Training input set membership function width (IW)	0.33–2
Training output set membership function width (OW)	0.01–2
Composition type (CT)	min, product
Defuzzification method (DM)	centroid, maximum

minimum buckling temperature increases. A set of 50 $\Delta T_{B, \min}$ values was generated from random combinations of the input variables, a further 25 values close to the minimum of the range of buckling temperature values allowable from the input ranges were selected and the remaining 25 close to the mean of the range. In this way, the predictive capability was investigated throughout the range while paying more attention to low buckling temperature values, which are of most concern for predicting the risk of buckling. While a 70:30 ratio of training data to testing set is a traditional approach when training machine learning models, a significantly larger testing set was chosen here to ensure that any trends in the prediction error are better revealed.

Optimization of Hyperparameters

The choice of FS, composition type (CT), and DM options under investigation was based on standard fuzzy model parameters, commonly seen across fuzzy applications, although it should be noted that a wide array of options exists, especially for fuzzification and DMs. The range of IW and OW was based on a consideration of the training data. For the input width, a minimum width of one third of the range (practically $\alpha = 0.33$) was chosen, so that for a three-division per variable input every section of the universe of discourse has a membership value. The upper limit of $\alpha = 2$ was chosen as it is the smallest value of IW resulting in overlap of every fuzzy set at any given point in the universe of discourse. This upper limit was likewise introduced for the output width, with the range further extended to a lower limit of $\alpha = 0.01$ because of the larger number of unique values in the output training dataset.

A Bayesian optimization algorithm, *bayesopt* in MATLAB, was used to explore the available combinations of the fuzzy hyperparameters in Table 3 that minimize the error, using the *expected-improvement-plus* acquisition method with an exploration ratio of 0.1, over 800 steps (23). The maximum prediction error was chosen as the objective function, being the largest value of error witnessed when providing predictions for the 100

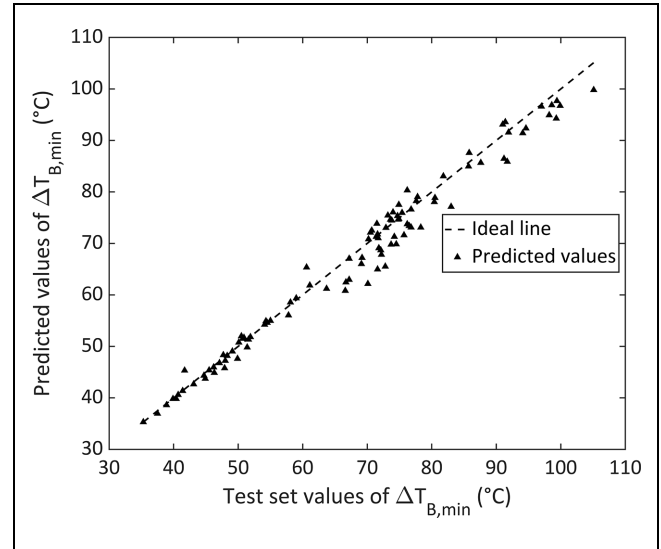**Figure 4.** Prediction results offered by the model with initial hyperparameter choice.

points of the testing set. The maximum error was chosen as the performance metric to emphasize reducing the error of outlying predictions, by grading the predictive ability of the model on its worst prediction. The choice of Bayesian optimization was based on its favorable comparison with similar methods, such as the grid search method (24).

Results and Discussion

The following section details a comparison of the minimum buckling temperature increase ($\Delta T_{B, \min}$) predictions offered by the fuzzy model against the values of the testing set. The values in the testing set are shown on the horizontal axis of the result plots while the vertical axis represents the values predicted by the fuzzy model, with the black dashed line showing the ideal case scenario of predicted values being equal to the test (expected) value, here called the ideal line.

Initial Hyperparameter Choice

Figure 4 shows an initial prediction with hyperparameter values of triangular FS, minimum CT, centroid DM, IW of $\alpha = 1$, and OW of $\alpha = 0.0186$. The FS and CT were chosen for their simplicity of calculation, while the DM was selected based on its widespread use in fuzzy applications. The input width of $\alpha = 1$ allows for the fuzzy sets to overlap to a maximal extent without the high set and low set overlapping, while the output width of $\alpha = 0.0186$ was chosen based on the following consideration of the distribution of the output training set. The

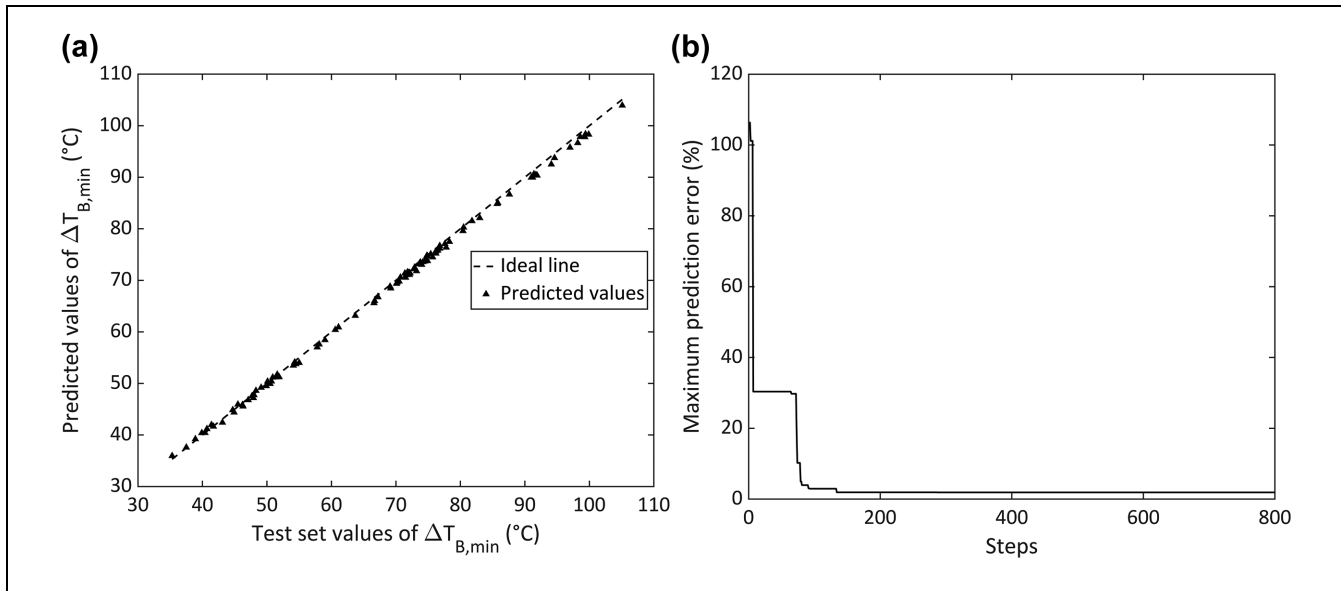


Figure 5. (a) Prediction results offered by the optimized model (top) and (b) convergence of the minimum error (bottom).

output training set of minimum buckling temperature increases features a range of 80.25°C, with the nearest neighbor differences having a mode of 1.49, the division of the latter by the former giving the width of $\alpha = 0.0186$. This value of width, therefore, is a compromise between ensuring enough of the universe of discourse is represented with membership values without featuring too much overlap. While the value of 80.25°C is much higher than would be reasonably expected to be seen on a track, this value comes from combinations of the extremes of track property values applied to the analytical model. The benefit of such an approach is in exploring both exceptionally strong and particularly weak tracks, and thus showing the difference in strength between the two through the minimum buckling temperature increase figure. A reasonable fit can be seen with a mean absolute error (MAE):

$$MAE = \left(\frac{\sum |error|}{no. \text{ error values}} \right) \quad (10)$$

resulting in $MAE = 2.7\%$; however, the maximum error of 11.3% is quite high. Prediction errors are generally low for values of $\Delta T_{B,\min}$ below around 60°C, although above that point a larger number of higher error values are seen. A least-squares method trendline was calculated with an intercept of 1.04 and slope of 0.958, close to the 0 intercept and 1 slope of the testing set, showing that despite its scatter, the trend of the predicted data is very close to that of the testing set. Radiant heating typically raises rail temperature significantly above ambient, leading to the consideration of very high temperatures here (25).

Optimized Hyperparameter Results

Following the initial results, the Bayesian optimization algorithm described in the *Optimization of Hyperparameters* section was employed to determine values of the fuzzy model hyperparameters that reduce the maximum error. Figure 5a shows the values predicted by the optimized model, using the hyperparameters of triangular FS, product CT, centroid DM, IW of $\alpha = 1.02$, and OW of $\alpha = 0.0127$.

This choice of parameters leads to a reduction of error to just 1.90% maximum and 0.898% mean error. The excellent accuracy of these results shows the fuzzy model is capable of faithfully approximating the buckling model providing its training data. Furthermore, the time required for the model to be trained and calculate buckling temperatures for 100 scenarios was just 0.129 s, in contrast to the 30 s calculation time required by the analytical model to calculate a single buckling scenario.

It should be noted that the 0.129 s time is not the time required to optimize the model, which was of the order of magnitude of 60 min. Nonetheless, the rapid calculation time of the model is an important metric, as once the optimization of the model has been performed it does not need to be enacted each time the model is used to predict the buckling temperature for a section of track. Furthermore, the model does not need to be trained, or the relational matrix recalculated, each time it is used for prediction, further reducing the prediction time. Through both accurate results and rapid calculation times, a method such as this could be used to provide buckling risk prediction for a large array of sites, such as a network of tracks.

The convergence of the optimization algorithm, shown in Figure 5b, settles on the choice of hyperparameters before 200 iterations, significantly below the allowed 800 iterations. A rapid convergence is desirable, supporting the choice of values for hyperparameters as being close to optimal for the model.

Two possible methods of reducing the number of iterations taken to find an optimized solution would be to either reduce the number of hyperparameters considered or to reduce the range of hyperparameters under optimization. The second option would require foreknowledge of the range of hyperparameter values leading to more accurate results, which usually is specific to the training dataset and application of the model. As the method aims to be applicable to a wide range of buckling data and scenarios, the variable ranges seen in Table 3 should be used without reduction. The first option, of reducing the number of hyperparameters, offers more potential. The DM, with categorical options of either the centroid or middle of maxima, could be reduced to just the centroid option, thus removing the parameter from consideration by the optimization algorithm. While the middle of maxima method was included here for academic interest and its classical use, it has been seen to provide vastly inferior accuracy to the centroid method throughout testing the model.

Because of considering a lower amount of information (the location of the highest peak of a fuzzy set, rather than both the width and height of the whole set, as done by the centroid method), it is unlikely that middle of maxima defuzzification will offer superior accuracy in other applications of this model. Likewise, the composition of fuzzy sets can be established using either the minimum or the product operator, although the product option has seen consistently more accurate results during testing and is theorized to offer results of quality at least as good as, if not better, than the minimum method for applications of inputs featuring a degree of compensability (26). The FS parameter is thought to be significantly dependent on the application of the model and so both options of triangular and Gaussian should be kept, with the potential to expand the pool of fuzzification methods in future iterations of the model, while the input and output widths of the fuzzy sets are dependent on the size and distribution of the training data and so remain free to be optimized.

Analysis of Training Data Size Impact

An investigation of the effect of the number of experiments used to train the model was conducted, with each fuzzy variable split into $t = 2, 3, 4, 5,$ and 6 divisions using Equation 8, corresponding to 8, 27, 64, 125, and 216 observations, respectively. It should be noted that

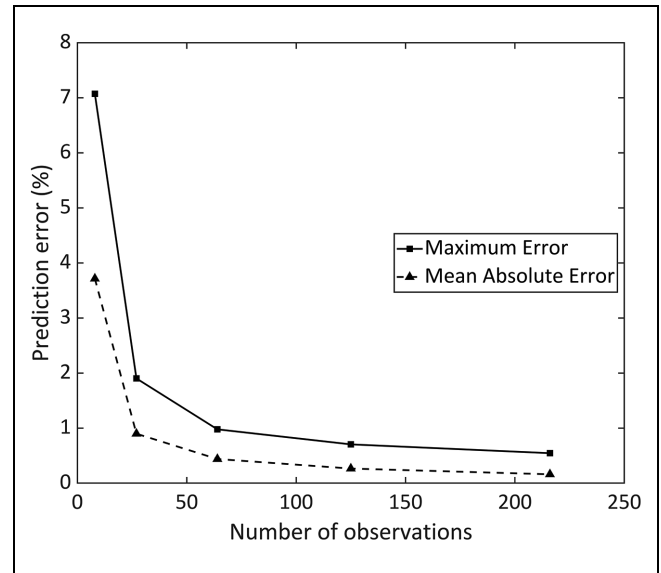


Figure 6. Impact of number of observations in the training set on the accuracy of prediction.

this distribution of training data was made possible through the use of an analytical model that generated the training and testing sets. For buckling incident data from real-life scenarios, such equal spacing is extremely difficult to achieve outside of a controlled laboratory environment and would usually be composed of unequally distributed divisions, which possibly would not cover all parameter value combinations, thus potentially affecting the accuracy of the model.

Figure 6 shows the change in maximum and MAE for increasing numbers of observations, for equally spaced training inputs, when predicting values of the testing set. As can be seen, both types of error decrease consistently with increasing the amount of training data, showing the model is adept at predicting buckling temperatures beyond merely the case presented in the *Optimized Hyperparameter Results* section. The model has shown robust performance even for low numbers of datapoints, such as the eight observations case (the leftmost point in Figure 6), with the maximum error remaining below 8%. This agrees with the findings presented by Gitman et al. (27), which show that the fuzzy methodology does not need large sizes of data to obtain accurate results.

Having considered the accuracy of the inference results it is useful to explore the logistics of training and applying the model. Of particular importance is the prediction time, enacted each time the model is used to calculate an output given new inputs, which has significance for applications on a large scale. For example, for a network of tracks, the prediction time will have a direct impact on the discretization of the network, with long calculation times limiting the lengths of track under

Table 4. Impact of Training Data on the Prediction Time and Accuracy of the Fuzzy Model

	Prediction time	Accuracy
Positively affected by	<ul style="list-style-type: none"> Evaluating the relational matrix before the prediction calculation 	<ul style="list-style-type: none"> Increasing number of divisions per variable Optimization of hyperparameters
Negatively affected by	<ul style="list-style-type: none"> Increasing number of divisions per variable Increasing number of variables 	<ul style="list-style-type: none"> Unnecessary introduction of previously crisp variables as fuzzy variables Unevenly scattered distribution of variable divisions Erroneous input–output pairs in the training data Prediction using input values outside of the training input range

consideration. While the configuration of hyperparameters has little bearing on this time, the same is not the case for the size of the relational matrix, resulting from the number of observations and number of variables considered.

Table 4 shows the influence of dataset factors on the prediction time and accuracy of the fuzzy model. For the sake of brevity the opposite impact of the factors has been omitted; however, it should be noted that the opposite of each of the factors mentioned will likewise have a reversed effect on the prediction time and accuracy, for example, decreasing the number of divisions per variable will negatively affect the accuracy.

Firstly, based on the low improvement in accuracy from the four-division to the six-division model seen in Figure 6 coupled with the already good accuracy of the two-, three-, and four-division cases, an increase above four divisions offers little benefit while unnecessarily increasing the calculation time. The accuracy of the model is expected to vary across the applications and variables under consideration, and as such an analysis of the impact of data size on the prediction accuracy is an integral part of determining how much data is necessary for an accurate but quick calculation.

Secondly, care should be taken to declare variables as fuzzy only where there is need, where the variable may take any value across the range and may be uncertain. For example, while sleeper spacing can be considered a fuzzy variable (without greatly compromising the accuracy of the model, as seen in the *Sensitivity Analysis of Track Parameters* section), the spacing of sleepers in a track generally conforms to a standard spacing (for example, 60, 65, 70, or 75 cm) and is unlikely to take intermediary values (such as 67.5 cm) or be vague or uncertain to a significant degree. Therefore, sleeper spacing is a poor choice for a fuzzy variable, unlike parameters such as the lateral resistance, which can vary across a continuous range of values for various tracks and may be highly uncertain.

A further issue of a needlessly large set of training data is the time and resources necessary for its acquisition. Looking at Figure 6, the difference in accuracy

between the penultimate (125 datapoints) and final (216 datapoints) instances is a mere 0.16% improvement in the maximum error despite an increase of 72.8% in the size of training data. In this paper a relatively lightweight analytical model was used to provide the training sets; however, for cases where a finite element model or experimental data are used, increasing the number of experiments carried out may be costly without significant benefit to the accuracy of the model while slowing down its calculation time. With this in mind, the influence of hyperparameters and their optimization should be considered first when aiming to improve the accuracy of the model, before looking to increase the size of the training data.

Finally, the choice of the source of training data whether from analytical and finite element models or from buckling incidents should be considered, as it affects both the accuracy and applicability of the prediction methodology. When using training data from a buckling incident on track section A, the application of the fuzzy model for track section B can only be conducted if data is available for all the variables in the training set. Furthermore, the range of the variables in the training set needs to encompass the new input values supplied for prediction, otherwise it will result in a loss of accuracy. A third consideration should be made for the distribution of the training data that, if the values are clustered around a few select points and lack information for a large section of the range for each track variable, will again lead to an increase in prediction error. Each of the three aforementioned conditions is relatively simple to fulfil for data from analytical and finite element models, while posing a challenge for data from incidents, which can be incomplete, limited in scope, low in number, and have erroneous values. Nevertheless, a significant advantage of using data from incidents is its ability to offer insights into the track buckling mechanism, which analytical or finite element models may not account for, being limited by their assumptions. As such, a set of information from buckling incidents that takes into account the considerations mentioned above would be of significant value to the method presented here.

Table 5. Sensitivity of Prediction Error to Missing Variable Information

Variable	Rise in maximum error	Rise in mean error
Longitudinal resistance	3.82	1.98
Lateral resistance	21.0	6.22
Sleeper spacing	26.8	13.6
Fastener torsional stiffness	49.8	18.0

Sensitivity Analysis of Track Parameters

Collecting a comprehensive description of track conditions at sites of buckling incidents is sometimes impossible, especially in the field of track buckling where the event of a buckle often makes it difficult to determine the conditions before the buckle. The following sensitivity study therefore considers the predictions of the fuzzy model as applied to the buckling data generated by the Grissom and Kerr (13) analytical model. The aim of this study is to investigate the agreement of the trends perceived through the parametric investigation against other publications, thus validating the applicability of the fuzzy inference model. To investigate the impact of missing variables on the quality of prediction of the model, a four-variable training dataset was constructed, with the sleeper spacing introduced as the additional variable. Each variable was split into five equally spaced values, for the ranges seen in Table 2, resulting in a training dataset of 625 theoretical track scenarios. The same optimization algorithm that was used in the *Optimized Hyperparameter Results* section was employed to determine the values of the hyperparameters and an accuracy of 2.5% maximum error and 1.28% MAE were achieved.

For each variable, the parameter in question was removed from the input training data of the main set, while keeping the values of the output unchanged. Then, inputs missing the parameter under investigation were used to calculate a prediction, which was compared against an unchanged value of the minimum buckling temperature increase of the testing set. The minimum and mean errors of these predictions were then reduced by the respective errors of the main set, resulting in the impact on error introduced to the prediction resulting from removal of the variable of interest, seen in Table 5.

The least impact is seen for the longitudinal resistance variable that, when not considered, only increases the maximum error by 3.82%, thus still giving a reasonable prediction with 6.32% maximum error. This agrees with findings from other parametric analyses, which show that while the longitudinal resistance has an influence on the minimum buckling temperature increase, the effect is small (28).

The sleeper spacing is seen to have a larger effect than both longitudinal and lateral resistances, showing it is a key parameter when considering the buckling of track. Given that both the longitudinal and lateral resistances of the track rely on the number of sleepers, while the fastener torsional resistance is enacted at each sleeper, a change in sleeper spacing has an effect for multiple different mechanisms opposing the buckling phenomenon. The spacing of sleepers is of particular interest for the lateral resistance property, as the spacing not only influences the lateral resistance of the track as a whole but also affects the lateral resistance of individual sleepers, as seen in Koyama et al. (29).

The largest impact is seen to stem from the fastener rotational stiffness variable, with the maximum error rising by almost 50%. The MAE also increases by the significant amount of 18%, showing that the reduction in accuracy is not limited to a single difficult-to-predict scenario. Despite a relatively limited amount of research into the influence of this variable, the findings in Table 5 largely agree with Van (30), Grissom and Kerr (13), and Samavedam et al. (28), where high torsional resistance fasteners are seen to have a large impact on the minimum buckling temperature increase. The agreement of this sensitivity analysis with that of the aforementioned publications further supports the applicability of the fuzzy inference model to real-world buckling scenarios.

It should be noted that the analysis offered here only considers a small selection of track properties relevant to the study of buckling of tracks. This selection was made based on the impact of these variables on the safety criteria, that being the minimum buckling temperature increase of the track, which is influenced most by the variables mentioned above, as shown by Samavedam et al. (28). Other variables, such as track curvature, vehicle loads, and the size of rail imperfections, are considered secondary to the prediction of minimum buckling temperature increase, having been shown to have a greater impact on the maximum buckling temperature increase, and their impact in a fuzzy logic model approach is a matter of further research. Nevertheless, the data presented here allows for a rudimentary comparison between each variable and a ranking of their impact on the buckling risk based on the minimum buckling temperature safety criteria.

Following the success of the model based on its low error and agreement with previous authors' studies of parameter influence, the future directions include validation against recorded field data and investigating the effect of using linguist descriptions of track, in the form of fuzzy sets, as inputs. The former will further confirm the validity of the modeling technique, while the latter opens up the applicability of the model to account for the uncertainty of track conditions.

Conclusions

In this work, a methodology using a fuzzy inference model for predicting the minimum buckling temperature increase based on track properties has been presented. A high degree of accuracy was achieved with maximum and MAE measures below 1% and rapid calculation times. The method does not rely on large sizes of training data and once trained can be used without the need for knowledge of fuzzy methodology by the operator. The inference method has been applied for training data generated by an analytical model, which offers the advantage over using field training data of calculating the minimum buckling temperature increase, an important concept for prediction of buckling events.

The model shows particularly good results when trained using a triangular membership function shape, product CT, and centroid DM. Increasing the data size has been shown to reduce error, with a significant improvement for increased number of observations at the low range of data size. To achieve a model with less than 1% maximum error, 125 datapoints are shown to be effective, although 64 or 27 points both feature less than 2% maximum error and offer shorter prediction times.

Following further investigation into the use of the methodology with the application of linguistic inputs of track conditions based on engineering experience rather than measured data on condition, the methodology presented here could prove to be an accurate, reliable, and fast method for predicting buckling temperatures for both well-known and uncertain track properties.

Author Contributions

The authors confirm contribution to the paper as follows: study conception and design: I. Słodczyk, D. Fletcher, I. Gitman, B. Whitney; data collection: I. Słodczyk, B. Whitney; analysis and interpretation of results: I. Słodczyk, D. Fletcher, I. Gitman, B. Whitney; draft manuscript preparation: I. Słodczyk, D. Fletcher, I. Gitman. All authors reviewed the results and approved the final version of the manuscript.

Declaration of Conflicting Interests




The author(s) declared no potential conflicts of interest with respect to the research, authorship, and/or publication of this article.

Funding

The author(s) disclosed receipt of the following financial support for the research, authorship, and/or publication of this article: The authors acknowledge that this work was completed at the University of Sheffield and are grateful to the Engineering and Physical Sciences Research Council (EPSRC)

grant number: EP/T517835/1 as well as Network Rail for funding this work.

ORCID iDs

Iwo Słodczyk  <https://orcid.org/0000-0002-0796-5302>
David Fletcher  <https://orcid.org/0000-0002-1562-4655>
Inna Gitman  <https://orcid.org/0000-0002-7369-6905>

Supplemental Material

Supplemental material for this article is available online.

References

1. Marindin, F. A. *Accident Returns: Extract for the Accident at Warile-Inveramsay on 2nd July 1885*. Board of Trade, 1885.
2. Rose, C. F. *Report on the Derailment that Occurred on 2nd July 1971 at Tattenhall Junction near Chester on the London Midland Region British Railways*. HMSO, London, 1972.
3. Department of Transport. *Derailment of a Freight Train near Langworth, Lincolnshire 30 June 2015*. Derby, 2016.
4. Dobney, K., C. J. Baker, A. D. Quinn, and L. Chapman. Quantifying the Effects of High Summer Temperatures due to Climate Change on Buckling and Rail Related Delays in the South-East United Kingdom. *Meteorological Applications*, Vol. 16, No. 2, 2008, pp. 245–251.
5. Network Rail. Red Weather Warning - East Coast Main Line to Close. July 2022. <https://www.networkrail.co.uk/stories/red-weather-warning-east-coast-main-line-to-close/>.
6. Kish, A., and G. Samavedam. *Dynamic Buckling Test Analyses of a High Degree CWR Track*. U.S. Department of Transportation, Federal Railroad Administration, Washington, D.C., 1991.
7. Tvergaard, V., and A. Needleman. On Localized Thermal Track Buckling. *International Journal of Mechanical Sciences*, Vol. 23, No. 10, 1981, pp. 577–587.
8. Lim, N. H., N. H. Park, and Y. J. Kang. Stability of Continuous Welded Rail Track. *Computers and Structures*, Vol. 81, No. 22–23, 2003, pp. 2219–2236.
9. Kerr, A. D. Lateral Buckling of Railroad Tracks due to Constrained Thermal Expansions - A Critical Survey. *Proc., Symposium on Railroad Track Mechanics*, Princeton, NJ, 1975.
10. Kerr, A. D. Analysis of Thermal Track Buckling in the Lateral Plane. *Acta Mechanica*, Vol. 30, No. 1–2, 1978, pp. 17–50.
11. Kerr, A. D. An Improved Analysis for Thermal Track Buckling. *International Journal of Non-Linear Mechanics*, Vol. 15, No. 2, 1980, pp. 99–114.
12. Kish, A., and G. Samavedam. Dynamic Buckling of Continuous Welded Rail Track: Theory, Tests, and Safety Concepts. *Transportation Research Record: Journal of the Transportation Research Board*, 1991. 1289: 23–38.
13. Grissom, G. T., and A. D. Kerr. Analysis of Lateral Track Buckling Using New Frame-Type Equations. *International Journal of Mechanical Sciences*, Vol. 48, No. 1, 2006, pp. 21–32.

14. Healy, T. A., L. J. Kerr, and L. J. Larkin. Model Based Fuzzy Logic Sensor Fault Accommodation. *Proceedings of the ASME Turbo Expo: Power for Land, Sea, and Air*, Vol. 4, Orlando, FL, June 2–5, 1997.
15. Ciancio, C., T. Citrea, G. Ambrogio, L. Filice, and R. Musmanno. Design of a High Performance Predictive Tool for Forging Operation. *Procedia CIRP*, Vol. 33, 2014, pp. 173–178.
16. Ben Seghier, M. E. A., H. Carvalho, B. Keshtegar, J. A. F. O. Correia, and F. Berto. Novel Hybridized Adaptive Neuro-Fuzzy Inference System Models Based Particle Swarm Optimization and Genetic Algorithms for Accurate Prediction of Stress Intensity Factor. *Fatigue and Fracture of Engineering Materials and Structures*, Vol. 43, No. 11, 2020, pp. 2653–2667.
17. Lim, D. H., I. H. Bae, M. G. Na, and J. W. Kim. Prediction of Residual Stress in the Welding Zone of Dissimilar Metals Using Data-Based Models and Uncertainty Analysis. *Nuclear Engineering and Design*, Vol. 240, No. 10, 2010, pp. 2555–2564.
18. Zadeh, L. A. Fuzzy Sets. *Information and Control*, Vol. 8, No. 3, 1965, pp. 338–353.
19. Zadeh, L. A. Fuzzy Logic = Computing with Words. *IEEE Transactions on Fuzzy Systems*, Vol. 4, No. 2, 1996, pp. 103–111.
20. Gitman, I. M., A. V. Klyuev, M. B. Gitman, and V. Yu Stolbov. Multi-Scale Approach for Strength Properties Estimation in Functional Materials. *Journal of Applied Mathematics and Mechanics*, Vol. 98, No. 6, 2018, pp. 945–953.
21. Ross, T. J. *Fuzzy Logic with Engineering Applications*. John Wiley & Sons, Chichester, 2010.
22. Lee, C. C. Fuzzy Logic in Control Systems: Fuzzy Logic Controller. *IEEE Transactions on Systems, Man, and Cybernetics*, Vol. 20, No. 2, 1990, pp. 404–435.
23. MathWorks. bayesopt. MathWorks.com. October 2022. <https://uk.mathworks.com/help/stats/bayesopt.html>.
24. Snoek, J., H. Larochelle, and R. P. Adams. Practical Bayesian Optimization of Machine Learning Algorithms. *Advances in Neural Information Processing Systems*, Vol. 4, 2012, pp. 2951–2959.
25. Hong, S., C. Park, and S. Cho. A Rail-Temperature-Prediction Model Based on Machine Learning: Warning of Train-Speed Restrictions Using Weather Forecasting. *Sensors*, Vol. 21, No. 3, 2021, p. 4606.
26. Kandasamy, W. V., and F. Smarandache. *Fuzzy Relational Maps and Neurotrophic Relational Maps*, 1st ed. Publishing Online Co., Seattle, WA, 2004.
27. Gitman, I. M., M. B. Gitman, S. E. Batin, and D. A. Boyarshinov. Stochastic Stability of Performance Properties for Materials with Non-deterministic Microstructure. *Zeitschrift für Angewandte Mathematik und Mechanik*, Vol. 101, No. 6, 2021, p. e202000240.
28. Samavedam, G., A. Kish, A. Purple, and J. Schoengart. *Parametric Analysis and Safety Concepts of CWR Track Buckling*. United States. Federal Railroad Administration, Washington, D.C., 1993.
29. Koyama, E., K. Ito, K. Hayano, and Y. Momoya. A New Approach for Evaluating Lateral Resistance of Railway Ballast Associated with Extended Sleeper Spacing. *Soils and Foundations*, Vol. 61, No. 6, 2021, pp. 1565–1580.
30. Van, M. A. Buckling Analysis of Continuous Welded Rail Track. *Heron*, Vol. 41, No. 3, 1996, pp. 175–186.