



Deposited via The University of Sheffield.

White Rose Research Online URL for this paper:

<https://eprints.whiterose.ac.uk/id/eprint/79679/>

Version: Accepted Version

---

**Article:**

Wagg, D.J. and Bishop, S.R. (2002) Application of nonsmooth modelling techniques to the dynamics of a flexible impacting beam. *Journal of Sound and Vibration*, 256 (5). 803 - 820. ISSN: 0022-460X

<https://doi.org/10.1006/jsvi.2002.5020>

---

**Reuse**

Items deposited in White Rose Research Online are protected by copyright, with all rights reserved unless indicated otherwise. They may be downloaded and/or printed for private study, or other acts as permitted by national copyright laws. The publisher or other rights holders may allow further reproduction and re-use of the full text version. This is indicated by the licence information on the White Rose Research Online record for the item.

**Takedown**

If you consider content in White Rose Research Online to be in breach of UK law, please notify us by emailing [eprints@whiterose.ac.uk](mailto:eprints@whiterose.ac.uk) including the URL of the record and the reason for the withdrawal request.

# APPLICATION OF NONSMOOTH MODELLING TECHNIQUES TO THE DYNAMICS OF A FLEXIBLE IMPACTING BEAM

D. J. WAGG<sup>1</sup>

*Faculty of Engineering, University of Bristol, Queens Building,  
University Walk, Bristol BS8 1TR, U.K.*

May 3, 2013

## Abstract

Nonsmooth modelling techniques have been successfully applied to lumped mass type structures for modelling phenomena such as vibro-impact and friction oscillators. In this paper the application of these techniques to continuous elements using the example of a cantilever beam is considered. Employing a Galerkin reduction to form an  $N$  degree of freedom modal model, a technique for modelling impact phenomena using a nonsmooth dynamics approach is demonstrated. Numerical simulations computed using the nonsmooth model are compared with experimentally recorded data for a flexible beam constrained to impact on one side. A method for dealing with sticking motions when numerically simulating the beam motion is presented. In addition, choosing the dimension of the model based on power spectra of experimentally recorded time series is discussed.

## 1 INTRODUCTION

In this paper the dynamics of a flexible vibro-impacting cantilever beam system is considered. Such continuous beam systems, even without impacts, have well known

---

<sup>1</sup>Author for correspondance:David.Wagg@bristol.ac.uk

multi-modal behaviour which has been documented in a number of classic texts [1, 2, 3]. The problem of a cantilever beam impacting against an impact stop has also been considered by several authors, see for example [4, 5] and the references therein. However, in general, this latter body of literature has been concerned mainly with modelling the impact event itself, rather than the global dynamics of the beam.

Following the work of Moon & Holmes [6] and Moon & Shaw [7], a new approach to modelling the vibro-impact dynamics of beams has been developed [8, 9, 10]. In this approach, the beam is modelled as a single degree of freedom system, and a piecewise linear stiffness or coefficient of restitution rule is used to model the impact process. For example, Moon & Holmes [6] considered the nonlinear dynamics of a beam subject to harmonic and magnetic forcing, using a Galerkin method to reduce the system to a single degree of freedom (see also [11]). Moon & Shaw [7] and Shaw [8] considered a single degree of freedom approach to modelling a vibro-impact cantilever beam experiment, also by reducing the model to a single mode. In this case, the system was considered as piecewise linear, and the single degree of freedom model was obtained using a Galerkin method applied to each linear part. Also using a single degree of freedom approach to model beam dynamics Bishop *et al.* [9] compared experimental and numerical results for a stiff vibro-impact cantilever beam by using an instantaneous coefficient of restitution model for the impacts.

A similar coefficient of restitution rule is used in combination with a single degree of freedom linear oscillator to form the now well known impact oscillator [12]. These systems have nonsmooth dynamical characteristics which have been studied in depth in recent years, see for example: [13, 14, 15, 16, 17, 18] and references therein. Other approaches to modelling multi-dimensional impact oscillators have included the use of nonsmooth mappings [19], finite elements [20] and studies of lumped mass type systems, [21, 22, 23, 24, 25]. In addition work on estimating the dimension of multi-dimensional impact oscillators has been carried out by Cusamano *et al.* [26] using correlation dimension, and by Azeez & Vakakis [27] who consider proper

orthogonal decomposition as a means of both estimating dimension and creating a low dimensional model of a flexible vibro-impact system. Other authors have studied vibro-impact systems which include continuous rods [28, 29] and beam elements [30, 31, 32].

In this paper the problem of modelling flexible beams subject to impacts, which because of their flexibility require multiple modes to adequately capture their dynamical behaviour is addressed. In common with previous studies, a Galerkin approach is used to reduce the system to a finite set of ordinary differential equations — previously usually one. However, in this work a technique is presented which allows more than a single mode to be used in the model. In order to model the impact process a nonsmooth model based on the instantaneous coefficient of restitution rule is used. Qualitative comparisons with experimental results using models with one to four degrees of freedom will be presented, and the issues of chatter, sticking and choosing the dimension of the model are discussed in detail. Finally comparisons between experimentally recorded and numerically computed bifurcation diagrams will be drawn.

## 2 EQUATIONS OF MOTION

Consider a vertically clamped cantilever beam with a motion limiting constraint on one side. This scenario is shown in figure 1, where the beam is constrained by an impact stop at a single point. The stop is positioned at a distance  $B$  from the base along the beam, and with an initial transverse distance  $a$  from the beam. It is assumed that the beam is harmonically forced at a distance  $C$  from the base because this relates to the situation in the experimental system which will be discussed in section 4.

The transverse vibration of the centre line of the beam is denoted by  $u(x, t)$ , where  $x$  is the length along the beam from the base and  $t$  is time. It is assumed that the beam vibrates with small enough displacements such that it remains within

the linear elastic range. Therefore a classical approach can be used for deriving the equation of motion, (for example [3]), such that the equation of motion for the beam away from the impact constraint can be written as

$$\frac{EI}{L^4} \frac{\partial^4 u}{\partial s^4} + \eta \frac{\partial u}{\partial t} + \rho A \frac{\partial^2 u}{\partial t^2} = f(s, t) \quad u < a. \quad (1)$$

where  $E$  is the Young's modulus,  $\rho$  density,  $A$  cross-sectional area and  $I$  the second moment of area for the beam of length  $L$ . As a measure of length along the beam centre line the nondimensional coordinate  $s = x/L$  is defined, such that the distance along the beam  $s \in [0, 1]$ , and the function  $f(s, t)$  represents the forcing of the beam per unit length. Similarly we define  $b = B/L$  and  $c = C/L$ . In addition, the beam has viscous damping,  $\eta$ , per unit length. Equation 1 is the Euler-Bernoulli beam equation for a beam with viscous damping and forcing. In the following analysis  $\rho$ ,  $A$  and  $I$  are considered to be constant, corresponding to the case of a beam with uniform cross section throughout its length.

## 2.1 Nonsmooth impact condition

When an impact occurs  $u(b, t) = a$  and a coefficient of restitution rule of the form

$$\dot{u}(b, t_+) = -r\dot{u}(b, t_-) \quad u(b, t_-) = a, \quad (2)$$

is applied, where  $t_-$  is the time just before impact,  $t_+$  is the time just after impact and  $r \in [0, 1]$  is a coefficient of restitution. It is assumed that the velocities,  $\dot{u}$  are normal to the beam centre line, and that the tangential velocity component at impact is negligible.

For systems with steel impacting components, it has been demonstrated the cumulative impact time can be as little as 1% of the overall time [33]. Thus, for this class of systems it can be assumed that the time of contact for individual impacts is so small, as to be close to zero. This assumption means that equation 2 can be applied instantaneously such that  $t_- = t_+$ , and a nonsmooth discontinuity in velocity

occurs at impact. The advantage of using this assumption is that the analysis of the system is simplified as there is no need to compute the time of impact.

However, previous systems studied using this nonsmooth assumption have been the lumped mass type. For such systems the velocity vector relates to a set of discrete lumped masses. Thus a particular lumped mass can have a nonsmooth discontinuity in its velocity field independently from the other masses. For a continuous structural element, such as a beam, the velocity is a continuous function of beam length. Thus, in order to apply the nonsmooth impact condition, equation 2, at  $u = a$ , the velocity components for the non-impacting part of the beam  $s \neq b$  remain unaffected. Therefore in addition to equation 2 the relation

$$\dot{u}(s \neq b, t_+) = \dot{u}(s \neq b, t_-) \quad u(b, t_-) = a. \quad (3)$$

applies.

The combination of equations 2 and 3 are essentially a nonsmooth representation of the physical impact process for the beam. In the physical beam system the contact time will be finite (though small for materials with high stiffness) and the velocity reversal will propagate outwards from the point of impact, a process which is captured with this type of model.

The application of this type of nonsmooth impact law to a continuous beam can be illustrated using the schematic diagrams shown in figure 2. In figure 2 (a) the beam is away from impact, but with a velocity field, indicated with arrows, is acting in a direction which is forcing the beam towards the impact stop. Figure 2 (b) represents the time  $t = t_-$ , which is the first part of the nonsmooth impact process; the beam has come into contact with the stop,  $u = a$  at time  $t = t_-$ , just before the application of the coefficient of restitution rule. The next stage in the impact process is the application of the coefficient of restitution rule at time  $t = t_+$ , shown in figure 2 (c), where the velocity at the point of contact has been reversed and reduced. Finally, the beam leaves contact with the stop, figure 2 (d) with time  $t > t_+$ . Figure 2 (d) also shows the case where the velocity field for the beam has both positive and

negative components at the same time.

So, after an impact has occurred it is possible for some parts of the beam to be moving away from the impact stop, and at the same time other parts of the beam are still moving towards the impact stop. This type of behaviour has been observed qualitatively during experimental testing of vibro-impacting flexible beam systems. The aim here is to use the nonsmooth impact conditions for the beam, equations 2 and 3, combined with multi-modal modelling techniques to obtain a continuous nonsmooth model of such flexible beam systems.

## 2.2 Galerkin reduction

The Euler-Bernoulli equation can be reduced to a series of ordinary differential equations by using the standard Galerkin approach (see for example [34]), such that the transverse displacement of the beam is approximated by

$$u(s, t) = \sum_{j=1}^{\infty} \phi_j(s) q_j(t), \quad (4)$$

where  $\phi_j(s)$  are the normal mode shapes of the beam, and  $q_j(t)$  are the modal coordinates. Then by substituting equation 4, into the Euler-Bernoulli equation (equation 1), applying the orthogonality principle for normal modes [3], and then truncating to  $N$  equations yields

$$\sum_{j=1}^N \left( \omega_{nj}^2 q_j(t) + 2\zeta_j \omega_{nj} \dot{q}_j(t) + \ddot{q}_j(t) = \frac{1}{\rho A} \int_0^1 f(s, t) \phi_j ds \right) \quad j = 1, 2, 3 \dots N, \quad (5)$$

where the natural frequency of each mode is

$$\omega_{nj} = (\xi_j)^2 \sqrt{\frac{EI}{\rho AL^4}} \quad (6)$$

and  $\xi_j$  is the  $j$ th eigenvalue. A further assumption is that damping  $\eta$  is linearly proportional to stiffness where  $\zeta_j = \eta/\eta_c$  is the ratio of damping to critical damping  $\eta_c = 2\rho A\omega_{nj}$ .

It is assumed that  $f(s, t)$  can be separated into a space dependent function and a time dependent function such that  $f(s, t) = g(s)h(t)$ . Therefore as the forcing is applied at a single point,  $s = c$ ,  $g(s)$  is a Dirac delta function  $g(s) = \delta(s - c)$ . Thus the integral in equation 5 term becomes

$$\int_0^1 f(s, t)\phi_j ds = h(t) \int_0^1 \delta(s - c/L)\phi_j ds = h(t)\phi_j(c/L) = h(t)\alpha_j \quad (7)$$

where  $\alpha_j$  is a constant value for each mode, dependent only on the predefined position of forcing at  $s = c$ . Note when  $c$  is close to a node point for a particular mode, the excitation of this mode can be significantly reduced, because  $\phi_j = 0$  at a node point. Conversely, if  $c$  is at an anti-node, then the excitation of that mode will be maximised.

For each mode, the equation governing the modal coordinate is then

$$\ddot{q}_j(t) + 2\zeta_j\omega_{n_j}\dot{q}_j(t) + \omega_{n_j}^2q_j(t) = \frac{\alpha_j}{m}h(t) \quad (8)$$

where  $m = \rho AL$ . Equation 8 has a well known exact solution (see for example [3]) which applies during non-impacting motion,  $u(b, t) < a$ .

### 2.3 Mode shapes and initial conditions

In previous studies of the constrained cantilever beam, Moon & Shaw [7] and Shaw [8], the solution of a clamped-free cantilever is matched with a clamped-pinned beam at impact, to obtain a solution for a piecewise linear beam model. This approach is based on the assumption that the beam is in contact with the stop for some contact time  $t_c$  and that only a single mode of vibration is considered. Our current approach is to use a nonsmooth coefficient of restitution rule, equations 2 and 3, for which  $t_c$  is assumed to be so short as to be approximately equal to zero. Thus, when an impact occurs, the beam is in contact with the constraint for a negligible (ideally zero) amount of time, and as a result mode shapes of the beam during impact are not considered to be those of a clamped pinned beam (see discussion on sticking in section 5.1).

The normal modes shapes for a cantilever beam can be defined as,

$$\phi_j(s) = (\cosh \xi_j s - \cos \xi_j s) - \sigma_j (\sinh \xi_j s - \sin \xi_j s) \quad j = 1, 2, 3, \dots \quad (9)$$

where

$$\sigma_j = \frac{(\sinh \xi_j - \sin \xi_j)}{(\cosh \xi_j + \cos \xi_j)} \quad (10)$$

and  $\xi_j$  are the eigenvalues of the beam [35].

If required, the initial conditions for the motion of the beam can be determined from

$$u(s, 0) = \sum_{j=1}^{\infty} \phi_j(s) q_j(0) \quad (11)$$

and

$$\dot{u}(s, 0) = \sum_{j=1}^{\infty} \phi_j(s) \dot{q}_j(0) \quad (12)$$

In all the simulations and experiments in this current work the initial conditions are  $u(s, 0) = \dot{u}(s, 0) = 0$ .

### 3 VIBRO-IMPACT CANTILEVER BEAM ANALYSIS

In this section a nonsmooth model for a vibro-impacting continuous beam is obtained by combining the nonsmooth impact law with a Galerkin reduction of the Euler-Bernoulli equation. Firstly, following the standard Galerkin approach, the number of modes is truncated to  $N$ , such that the dynamics of the beam is modelled by  $N$  ordinary differential equations of the form of equation 8. The condition for an impact to occur is that  $u(b, t) = a$ , and as the systems is now truncated to a set of  $N$  modes the condition for impact can be written as

$$u(b, t) = a = \sum_{j=1}^N \phi_j(b) q_j(t) = \phi(b) \mathbf{q}(t) \quad (13)$$

where  $\phi(b) = [\phi_1(b), \phi_2(b), \dots, \phi_N(b)]$  and  $\mathbf{q}(t) = [q_1(t), q_2(t), \dots, q_N(t)]^T$ . Using this relationship in the impact law, equation 2 can be expressed as

$$\phi(b) \mathbf{q}(t_+) = -r \phi(b) \mathbf{q}(t_-) \quad \phi(b) \mathbf{q}(t) = a. \quad (14)$$

In the  $N = 1$  case  $\phi(b)$  and  $\mathbf{q}(t)$  become scalar and the relationship reduces to  $\mathbf{q}(t_+) = -r\mathbf{q}(t_-)$ . However, for  $N > 1$  this cannot hold because for the remainder of of the beam,  $s \neq b$ , equation 3 applies during impact.

### 3.1 Example: two mode model of beam

To demonstrate how to include the effect of equation 3 consider the case for  $N = 2$ , using the displacement of the beam at the point of impact,  $s = b$  and the point of forcing,  $s = c$ . Thus for such a system at an impact

$$\begin{aligned} \dot{u}(b, t_+) &= -r\dot{u}(b, t_-) \\ \dot{u}(c, t_+) &= \dot{u}(c, t_-) \end{aligned} \tag{15}$$

which can be written as

$$\begin{aligned} \phi(b)\dot{\mathbf{q}}(t_+) &= -r\phi(b)\dot{\mathbf{q}}(t_-) \\ \phi(c)\dot{\mathbf{q}}(t_+) &= \phi(c)\dot{\mathbf{q}}(t_-) \end{aligned} \tag{16}$$

where, in this case  $\phi(b) = [\phi_1(b), \phi_2(b)]$ ,  $\phi(c) = [\phi_1(c), \phi_2(c)]$  and  $\dot{\mathbf{q}}(t) = [\dot{q}_1(t), \dot{q}_2(t)]^T$ . The relations in equation 16 can be combined to give

$$[\Phi]\dot{\mathbf{q}}(t_+) = [R][\Phi]\dot{\mathbf{q}}(t_-) \tag{17}$$

where  $[\Phi] = [\phi(b), \phi(c)]^T$  is a  $2 \times 2$  matrix and

$$[R] = \begin{bmatrix} -r & 0 \\ 0 & 1 \end{bmatrix} \tag{18}$$

is the coefficient of restitution matrix. Finally, from equation 17 a relationship for the modal velocities at impact is obtained

$$\dot{\mathbf{q}}(t_+) = [\Phi]^{-1}[R][\Phi]\dot{\mathbf{q}}(t_-) \tag{19}$$

which is a modal form of the coefficient of restitution rule.

The following observations on this example are made:

1. To have square matrices, this analysis requires that the number of modes  $N$  to be equal to the number of points considered on the beam. Square matrices simplify the analysis as matrices have to be inverted.
2. The matrix  $[\Phi]$  is effectively a subset of the full modal matrix containing the normal modes for the beam. As  $N$  becomes larger,  $[\Phi]$  becomes a better approximation of the full modal matrix.
3. For vibro-impact systems, the effect of decoupling the governing Euler-Bernoulli into normal mode components is to couple the modes via impact; equation 19.

This analysis can be generalised to consider any number of points along the beam. To ensure that square matrices are used, it is assumed that the number of modes,  $N$ , and the number of points along the beam are the same. Note also that this set of points must include the point of impact. Then the matrix  $[\Phi]$  can be written

$$[\Phi] = \begin{bmatrix} \phi_1(s_1) & \phi_2(s_1) & \dots & \phi_N(s_1) \\ \phi_1(s_2) & \phi_2(s_2) & \dots & \phi_N(s_2) \\ \phi_1(s_3) & \phi_2(s_3) & \dots & \phi_N(s_3) \\ \vdots & \vdots & \dots & \vdots \\ \phi_1(s_N) & \phi_2(s_N) & \dots & \phi_N(s_N) \end{bmatrix}. \quad (20)$$

and  $[R] = \text{diag}[1, 1, \dots, -r, \dots, 1, 1]$ , with the coefficient of restitution positioned to coincide with the position of the impact stop.

## 4 EXPERIMENTAL RESULTS

The experimental results were recorded from a steel cantilever beam apparatus constructed specifically for this work. A schematic representation of the experimental apparatus is shown in figure 3. The cantilever beam has dimensions length 300mm width 25.5mm and thickness 0.49mm. The beam is clamped vertically into a steel base, to which a steel frame is attached which provides a housing for the impact

stop, displacement and forcing transducers. The impact stop is a 3mm diameter steel rod, with a rounded tip, fixed to the frame with a lock nut. The magnetic forcing transducer consists of an electro magnet capable of producing a variable magnetic field from an input analogue voltage signal which is provided via a LabPC+ data acquisition card installed in a personal computer. The capacitive displacement transducer works in conjunction with a Wayne Kerr TE 100 Mk II feedback amplifier. The transducer is calibrated to read displacements in the range of  $\pm 1.25\text{mm}$ . The signal from the Wayne Kerr is recorded using the LabPC+ card.

Using equation 6 the first four natural frequencies for the beam have been computed using the following parameter values, Young's Modulus  $E=205\times 10^9\text{N/m}^2$ , second moment of area  $I=24.4\times 10^{-14}\text{m}^4$ , density  $\rho=8500\text{kg/m}^3$ , cross sectional area  $A=12.4\times 10^{-6}\text{m}^2$  and length  $L=0.3\text{m}$ . The results are  $f_1 = 4.3$ ,  $f_2 = 26.84$ ,  $f_3 = 75.1$ ,  $f_4 = 147.3$ , where  $f_j = \omega_{n_j}/2\pi$  Hz. These compare with measured frequencies (see figure 4 and 5 (b)) of  $f_1 \approx 3.8\text{Hz}$ ,  $f_2 \approx 21.5\text{Hz}$ ,  $f_3 \approx 106\text{Hz}$  and  $f_4 \approx 210\text{Hz}$ . From these measurements it can be seen that the analytically computed frequency is a reasonably close approximation for  $f_1$ , but the accuracy of the predicted frequency decreases with increasing mode number.

A frequency response diagram for the beam is shown in 4. For this and all subsequent figures, the convention of [36] is followed where the amplitude of response is shown in voltage units. From figure 4 the shape of the resonance peaks indicate that the beam is lightly damped. The damping for the flexible beam was estimated using a half power bandwidth on the first two resonance peaks to occur in the response spectrum corresponding to the first two natural frequencies of the beam. Using this frequency response data gives a value of  $\eta$  (including data from some free vibration tests) in the range  $0.01-0.005(\text{Ns/m})/\text{m}$ . The value  $\eta = 0.005$  was subsequently used for all modes in the numerical simulations. If data could be obtained for more than the first two modes, we anticipate that the accuracy of the model could be improved by including individual damping values for each mode. Each experimental test was

started from the static state, so determining initial conditions for the experimental beam, was straight forward because  $u(s, 0) = \dot{u}(s, 0) = 0, \forall s$ .

In figure 5 (a) one second of a typical non-impacting time series sampled at a rate of 1000 samples per second from the flexible beam forced at  $f = 21\text{Hz}$ , (close to the second natural frequency) is shown. The power spectrum of this signal is shown in figure 5 (b). From the power spectrum it can be seen that for the non-impacting response the most significant modal components are the first four,  $f_1, f_2, f_3$  and  $f_4$ , and as the system is being forced close to  $f_2$ , this is the largest component in the response. In fact it is not possible to distinguish any other modal contribution from noise above  $f_4$  (approximately 210Hz). Thus by viewing the power spectrum for this particular beam time series the number of modes which contribute to the overall motion can be estimated, by the appearance of the associated modal frequency in the spectrum. This gives us a basis for choosing  $N$  in the Galerkin approach developed in section 2.2.

Two other approaches have been discussed for estimating the number of modes to include in modelling continuous vibro-impacting systems. Cusamano *et al.* used a correlation dimension approach [26] and Azeez & Vakakis have demonstrated a method based on proper orthogonal decomposition [27].

## 5 NUMERICAL SIMULATION OF FLEXIBLE BEAM

Having chosen  $N$ , and estimated the parameters and initial conditions for the beam a numerical time series of the beam motion can be computed. This is achieved by computing the exact solution to equation 8 in small time steps  $\Delta t$  such that  $t_{n+1} = t_n + \Delta t$ , for each mode included in the model. This is assuming that initially the beam starts away from the impact stop. At each time step the condition  $\phi(b)\mathbf{q}(t_n) < a$  is checked. When  $\phi(b)\mathbf{q}(t_n) > a$ , the values  $\mathbf{q}(t_{n-1})$  and  $\mathbf{q}(t_n)$  are on either side of the impact discontinuity, and a secant type root finding method is used to compute the exact time of crossing  $t_i$  from which the modal values at impact  $\mathbf{q}(t_i)$  are found.

Then the impact law, equation 19 is applied and the time stepping of the exact solutions continues.

### 5.1 Sticking motions

For some parameter values the beam undergoes a succession of low velocity impacts in quick succession. In impacting systems, this phenomenon is referred to as “chatter” [37]. If the sequence of low velocity impacts continues, the beam can become stuck to the stop, in a similar way that a bouncing ball eventually comes to rest on a horizontal surface. For the beams considered in this work, the regions of chatter were very small, and periods of sticking behaviour were very short in comparison to the forcing periods. As a result this behaviour could not be qualitatively observed experimentally due to limitations in the experimental sampling rate, but was observed in the numerical simulations of the beam.

A sticking motion typical of those observed during numerical simulation is shown in figure 6. In figure 6 (a) a two second sample of a vibro-impact time series is shown, and in (b) a close up around the sticking region, which in this case occurs close to  $t = 22.76$ . Here a succession of low velocity impacts forming a chatter sequence followed by a short sticking period can be observed.

To deal with sticking motions numerically the approach proposed by Cusumano *et al.* [22] is adopted, which is based on recording the time interval between subsequent impacts. When this time interval falls below a certain threshold, as it can after a chatter sequence, the beam is assumed to be stuck to the stop. The method proposed by Cusumano *et al.* [22] was for a lumped mass system with a single mass subject to a motion limiting constraint. Once sticking had been detected the force holding the constrained mass against the stop could be computed from the motion of the remaining masses. When this force passed through zero the mass will no longer be held against the stop and so the sticking motion ends.

For continuous systems this approach cannot be so easily applied, and for this

work a different method has been applied. The onset of sticking is computed in the same way, by monitoring the time interval between successive impacts. Then during the sticking phase, a root finding method is used to compute the required force, applied at the point of impact, to keep the beam displacement equal to the stop distance i.e.  $u(b, t_i) = a$ . When this force passes through zero the sticking motion is deemed to have ended.

To model sticking motion, the approach of assuming the beam is clamped-pinned during sticking [7, 8] was also considered. However for systems where  $N > 1$  this means that at impact

$$u(b, t) = \sum_{j=1}^N \phi_j(s)q_j = \sum_{j=1}^N \psi_j(s)q_j = a \quad (21)$$

where  $\psi_j(s)$  are the modes for a clamped-pinned beam. In general this relation cannot hold as

$$\sum_{j=1}^N \phi_j(s)q_j \neq \sum_{j=1}^N \psi_j(s)q_j. \quad (22)$$

An alternative would be to use the relationship

$$u(b, t) = \sum_{j=1}^N \phi_j(s)q_j = \sum_{j=1}^N \psi_j(s)\hat{q}_j = a \quad (23)$$

where  $\hat{q}_j$  are the modal coordinates for a clamped-pinned beam. However this leaves the problem of relating the two sets of modal coordinates  $q_j$  and  $\hat{q}_j$  at the point of discontinuity. Therefore clamped-free modes were used during simulations of sticking motion.

## 5.2 Comparison between numerical and experimental results

For comparison between numerical and experimental results, figure 5 (c) shows a simulation of the non-impact motion shown in figure 5 (a). This simulation (using a four degree of freedom model) has been computed using the Galerkin method, with  $N = 4$ , and using a harmonic forcing function of the form  $f(t) = F \cos(\Omega t)$ . It can be

seen from figures 5 (c) and 5 (a) that there is good qualitative correlation, indicating that the modelling method works for the non-impacting case, a fact which is already well known from the general literature on classic vibration theory [1, 2, 3].

In figure 7 (a) a typical vibro-impact time series recorded from the flexible beam experiment at a forcing frequency of  $\Omega = 20.8\text{Hz}$  close to the second natural frequency is shown. The power spectrum of this motion is shown in figure 7 (c), here vertical lines represent the theoretically computed natural frequencies of the non-impacting beam. It is interesting to compare this power spectrum with the non-impact example in figure 5 (b). The vibro-impacting power spectrum has a much greater high frequency content. In addition there are several significant power spikes in the spectrum, and it is not obvious whether these are due to a modal contribution or could be attributed to the nonlinearity in the system. For the first two computed natural frequencies there does seem to be a reasonable correlation with a nearby power spike in the spectrum. The power spike at approximately 60Hz may be due to the third mode, but from the three remaining spikes at approximately 120Hz, approximately 160Hz and approximately 195Hz it is not possible to distinguish which correlates to the fourth and fifth modal contributions. However, in common with the non-impacting case there is no significant modal contribution above 250Hz. By comparison with figure 5 it can be observed that the additional power spikes in the spectrum are due to the nonlinearity caused by impacts, and therefore it is assumed that a four mode model is sufficient to model the beam dynamics.

Thus, in figure 7 (b) a numerical simulation of the motion in figure 7 (a) is shown, using the nonsmooth Galerkin approach, with  $N = 4$ . As with the non-impact result this simulation appears to give a good qualitative agreement with the experimental recorded time series in figure 7 (a). The power spectrum of the numerical simulation is shown in figure 7 (d). As would be expected, the main frequency components of this signal correspond to the first four computed natural frequencies. One significant additional frequency component occurs close to the second natural frequency, this

can also be seen in the experimental spectrum, and is due to the forcing frequency at 20.8Hz.

### 5.3 Dimensionality of the model

In order to choose the number of modes to include in our modelling of the beam, the qualitative technique of examining the power spectrum of a recorded experimental time series has been used. By examining the spectrum, individual power spikes can be attributed to a particular modal contribution, and hence the number of modes for a model estimated. It is interesting, therefore to consider the effect of underestimating the number of modes which contribute to the beam response.

In figure 8, numerical simulations for both the non-impacting case (a) and the vibro-impacting case (b) are presented with simulations using  $N = 1, 2, 3$  and 4. For the non-impacting case, figure 8 (a), it can be seen that using a single mode  $N = 1$ , the amplitude of response is significantly underestimated by the model. This is due to the fact that in this example the system is being forced close to the second natural frequency  $f_2 \approx 21.5\text{Hz}$ , and thus for a single mode model with a resonance at  $f_1 \approx 3.8\text{Hz}$  the response to excitation at  $f_2$  will be low amplitude. When the second mode is added,  $N = 2$ , as would be expected, the response becomes much closer to the experimental values, in fact, a slight overestimate. Finally there is very little difference between the solutions for  $N = 3$  and  $N = 4$ , which gives a close qualitative agreement with experimental results.

For the vibro-impacting model, figure 8 (b), the single mode solution  $N = 1$  predicts a periodic vibro-impact solution. It is interesting to note that in this case the system is also being forced away from the first natural frequency but unlike the non-impact case the amplitude of response of the single mode model is in good agreement with experimental data, figure 7 (a). The main difference is that the model is only capable of simulating periodic type motion for a single harmonic forcing term, whereas the experimental system appears to qualitatively exhibit a quasi-

periodic type response. Thus when additional modes are included in the model,  $N = 2, 3, 4$  the quasi-periodic nature of the motion is represented in the response of the model. Note also that although each of the solutions  $N = 2, 3, 4$  produces a qualitatively different response, the time of impact and maximum amplitudes are all approximately similar.

The power spectral densities for the numerical simulations in figure 7 are shown in figure 9. In figure 9 (a), a large number of harmonics are visible in the spectrum due to the sharply defined nonsmooth discontinuity in the time series. In figure 9 (b)-(d) the harmonics are substantially reduced and the additional modal contributions, modes 2,3 and 4 respectively can be seen in the spectra.

#### 5.4 Bifurcation diagrams

Using the four mode model for the beam a measure of the beam displacement can be computed for a range of frequency values: for this analysis the maximum minus the minimum displacement per forcing period is used. In this study, only frequency values close to the first resonance peak in the spectrum are considered which for the experimental system  $f_1 \approx 3.2$  Hz. Figure 10 (a), shows an experimentally recorded bifurcation diagram for the beam. In figure 10 (a) approximately ten steady state readings from the beam tip at each frequency value were recorded, having first allowed the transients to decay. In this example, the impact stop was positioned at a displacement equivalent to approximately -1.05 volts. Therefore as the maximum minus minimum displacement is being plotted, the first grazing will occur at approximately 2.1 volts. During these experiments forcing amplitude was significantly reduced so that non-impacting resonance curves could also be recorded without excessively large beam vibrations.

In figure 10 (b), a numerically computed bifurcation diagram is shown of the first resonance peak in the four mode model for which  $f_1 \approx 4.3$ Hz. It can be seen that the qualitative appearance of the two plots is similar, with a non-impacting

behaviour below Max-Min=2.1 and hysteresis loop behaviour for frequencies greater than the non-impacting natural frequency indicating, as expected, hardening spring type behaviour [7, 9]. Quantitatively, the numerical solution gives good agreement for Max-Min amplitude but is less accurate for the frequency values even after accounting for the approximately 1Hz frequency shift between experiment and simulation. It appears that both the frequency scale and range have significant differences between experiment and simulation.

## 6 CONCLUSIONS

In this paper nonsmooth modelling techniques have been applied to continuous systems such as beams. Numerically computed simulations have been presented of flexible cantilever beam vibro-impact motion using this technique, which provide reasonable qualitative comparisons with experimentally recorded results within the parameter range studied.

The formation of the numerical model depends, in its current form, on the number of modes chosen being equal to the number of points considered on the beam. A further condition is that the point of impact must be included. This is a generalisation of previous studies, where for a beam with a single point of impact the system was reduced to a single degree of freedom.

The impact process has been modelled using an instantaneous coefficient of restitution rule. The main limitation with this approach is that the impact time for flexible beams may not always be small, although allowance has been made for chatter and sticking motions. In systems where impact times are not short the assumption of an instantaneous impact would not be valid and a different modelling approach would be required.

For engineering structures with high flexibility subject to nonsmooth effects such as impact and friction, multi-modal behaviour is a significant part of the dynamical behaviour. Single degree of freedom models, although useful, do not fully capture

this behaviour. The modelling process presented here, provides a means of modelling the dynamics of continuous systems, with the inclusion of the higher dimensional dynamics.

## REFERENCES

1. R. E. D. BISHOP AND D. C. JOHNSON. 1960 *The mechanics of vibration*. Cambridge University Press.
2. L. MEIROVITCH. 1967 *Analytical methods in vibration*. McGraw-Hill: New York.
3. S. P. TIMOSHENKO, D.H. YOUNG, AND W. WEAVER JR. 1974 *Vibration problems in engineering*. Van Nostrand USA.
4. A. FATHI AND N. POPPLEWELL. 1994 *Journal of Sound and Vibration* **170**(3) 365–375. Improved approximations for a beam impacting a stop.
5. J. WANG AND J. KIM. 1996 *Journal of Sound and Vibration* **191**(5) 809–823. New analysis method for a thin beam impacting against a stop based on the full continuous model.
6. F. C. MOON AND P. J. HOLMES. 1979 *Journal of Sound and Vibration* **65**(2) 275–296. A magnetoelastic strange attractor.
7. F. C. MOON AND S. W. SHAW. 1983 *International Journal of Non-Linear Mechanics* **18**(6) 465–477. Chaotic vibrations of a beam with non-linear boundary conditions.
8. S. W. SHAW. 1985 *Journal of Sound and Vibration* **99**(2) 199–212. Forced vibrations of a beam with one-sided amplitude constraint: Theory and experiment.

9. S. R. BISHOP, M. G. THOMPSON, AND S. FOALE. 1996 Proceedings of the Royal Society of London A **452** 2579–2592. Prediction of period-1 impacts in a driven beam.
10. S. R. BISHOP, D. J. WAGG, AND D. XU. 1998 *Chaos, Solitons and Fractals* **9**(1/2) 261–269. Use of control to maintain period-1 motions during wind-up or wind-down operations of an impacting driven beam.
11. T. WATANABE. 1978 Journal of Mechanical Design **100** 487–491. Forced vibration of continuous system with nonlinear boundary condition.
12. S. W. SHAW AND P. J. HOLMES. 1983 *Journal of Sound and Vibration* **90**(1) 129–155. A periodically forced piecewise linear oscillator.
13. J. M. T. THOMPSON AND R. GHAFARI. 1982 Physics Letters A **91** 5–8. Chaos after period doubling bifurcations in the resonance of an impact oscillator.
14. S. W. SHAW AND P. J. HOLMES. 1983 ASME Journal of Applied Mechanics **50** 849–857. A periodically forced impact oscillator with large dissipation.
15. A. B. NORDMARK. 1991 *Journal Of Sound and Vibration* **145**(2) 275–297. Non-periodic motion caused by grazing incidence in an impact oscillator.
16. S. R. BISHOP. 1994 Philosophical Transactions the Royal Society of London A **347** 347–351. Impact oscillators.
17. W. CHIN, E. OTT, H. E. NUSSE, AND C. GREBOGI. 1994 *Physical Review E* **50**(6) 4427–4444. Grazing bifurcations in impact oscillators.
18. C. J. BUDD, F. DUX, AND A. CLIFFE. 1995 *Journal of Sound and Vibration* **184**(3) 475–502. The effect of frequency and clearance variations on single degree of freedom impact oscillators.

19. M. H. FREDRIKSSON AND A. B. NORDMARK. 1997 Proceedings of the Royal Society of London A **453** 1261–1276. Bifurcations caused by grazing incidence in many degrees of freedom impact oscillators.
20. R. H. B. FEY, E. L. B. VAN DE VORST, D. H. VAN CAMPDEN, A. DE KRAKER, G. J. MEIJER, AND F. H. ASSINCK. Chaos and bifurcations in a multi-dof beam system with nonlinear support. In *Nonlinearity and chaos in engineering dynamics*, J. M. T. Thompson and S. R. Bishop, Eds. John Wiley: Chichester 1994 ch. 9, pp. 125–139.
21. J. SHAW AND S. W. SHAW. 1989 Journal of Applied Mechanics **56** 168–174. The onset of chaos in a two-degree of freedom impacting system.
22. J. P. CUSUMANO AND B-Y. BAI. 1993 Chaos, Solitons and Fractals **3** 515–536. Period-infinity periodic motions, chaos and spatial coherence in a 10 degree of freedom impact oscillator.
23. R. D. NEILSON AND D. H. GONSALVES. Chaotic motion of a rotor system with a bearing clearance. In *Applications of fractals and chaos*, A. J. Crilly, R. A. Earnshaw, and H. Jones, Eds. Springer-Verlag 1993 pp. 285–303.
24. D. J. WAGG AND S. R. BISHOP. 2001 *International Journal of Bifurcation and Chaos* **11**(1) 57–71. Chatter, sticking and chaotic impacting motion in a two-degree of freedom impact oscillator.
25. M. WIERCIGROCH AND B. DE KRAKER, Eds. 2000 *Applied nonlinear dynamics and chaos of mechanical systems with discontinuities*. World Scientific Publishing.
26. J. P. CUSUMANO, M. T. SHARKADY, AND B. W. KIMBLE. 1994 Philosophical Transactions of the Royal Society of London A **347** 421–438. Experimental measurements of dimensionality and spatial coherence in the dynamics of a flexible-beam impact oscillator.

27. M. F. A. AZEEZ AND A. F. VAKAKIS. 2001 *Journal of Sound and Vibration* **240**(5) 859–889. Proper orthogonal decomposition (pod) of a class of vibroimpact oscillations.
28. P. METALLIDIS AND S. NATSIAVAS. 2000 *International Journal of Non-linear Mechanics* **35** 675–690. Vibration of a continuous system with clearance and motion constraints.
29. Y. V. MIKHLIN AND A. M. VOLOK. 2000 *International Journal of Solids and Structures* **37** 3403–3420. Solitary transversal waves and vibro-impact motions in infinite chains and rods.
30. E. EMACI, T. A. NAYFEY, AND A. F. VAKAKIS. 1997 *Zeitschrift für Angewandte Mathematik und Mechanik (ZAMM)* **77**(7) 527–541. Numerical and experimental study of nonlinear localization in a flexible structure with vibro-impacts.
31. M. F. A. AZEEZ AND A. F. VAKAKIS. 1999 *International Journal of Non-linear Mechanics* **34** 415–435. Numerical and experimental analysis of a continuous overhung rotor undergoing vibro-impacts.
32. V. I. BABITSKY. 1998 *Theory of vibro-impact systems and applications*. Springer-Verlag: Berlin Heidelberg.
33. D. J. WAGG, G. KARPODINIS, AND S. R. BISHOP. 1999 *Journal of Sound and Vibration* **228**(2) 243–264. An experimental study of the impulse response of a vibro-impacting cantilever beam.
34. C. A. J. FLETCHER. 1984 *Computational Galerkin Methods*. Springer-Verlag: New York.
35. R. D. BLEVINS. 1979 *Formulas for natural frequency and mode shape*. Van Nostrand Reinhold: New York.

36. S. FOALE AND S. R. BISHOP. 1994 *Nonlinear Dynamics* **6** 285–299. Transient response of a constrained beam subjected to narrow-band random excitation.
37. C. J. BUDD AND F. DUX. 1994 *Philosophical Transactions of the Royal Society of London A* **347** 365–389. Chattering and related behaviour in impact oscillators.
38. F. PFEIFFER AND C. GLOCKER. 1996 *Multibody dynamics with unilateral contacts*. John Wiley.

## FIGURE CAPTIONS

- Figure 1: Schematic representation of a continuous vibro-impact cantilever beam system.
- Figure 2: Schematic representation of a continuous cantilever beam.(a) before impact, (b) at time  $t = t_-$ , (c) at time  $t = t_+$ , (d) after impact. Note: for simplicity  $a = 0$  in this figure.
- Figure 3: Schematic representation of the beam apparatus
- Figure 4: Experimentally recorded frequency-response diagram for the beam, showing first two resonance peaks. Maximum minus minimum displacement *vs* forcing frequency.
- Figure 5: Experimentally recorded signal for the beam with a forcing frequency of  $f = 21.0\text{Hz}$ . (a) non-impacting time series sample rate 1000 samples/second, (b) power spectrum, (c) numerical simulation of non-impact motion in (a), parameter values;  $F = 0.6(\text{volts})$ ,  $\Omega = 144$ ,  $N = 4$ ,  $\eta = 0.005$ .
- Figure 6: Numerical simulation of a typical sticking motion. Parameter values  $a = -1.05$ ,  $r = 0.8$ ,  $F = 0.1$ ,  $N = 4$ ,  $\rho = 8500$ ,  $E = 2.05 \times 10^{11}$ ,  $\Omega = 27.21$  and  $\eta = 0.005$ .(a) Time series of motion with sticking close to  $t = 22.76$ . (b) Close up around the sticking region.
- Figure 7: Impacting beam simulation; (a) Experimentally recorded signal for the beam and power spectrum sample rate 1000 sample/second. (b) power spectrum of signal shown in (a), vertical lines represent natural frequencies computed using classical beam theory. (c) Numerical simulation, parameter values  $u_s = -0.7$ ,  $N = 4$ ,  $F = 0.6$ ,  $\Omega = 28.3$ ,  $\eta = 0.005$ ,  $r = 0.8$ .
- Figure 8: Numerical simulation using modal models with  $N = 1$  solid line,  $N = 2$  dashed line,  $N = 3$  short dashes and  $N = 4$  dotted line. Parameter

values  $u_s = -0.6$ ,  $A = 0.6$ ,  $c = 0.005$ ,  $r = 0.8$ . (a) non-impacting  $\Omega = 21.0$  (b) vibro-impacting  $\Omega = 28.3$ .

- Figure 9 Power spectrum of the numerical simulations shown in figure 8. (a)  $N=1$ , (b)  $N=2$ , (c)  $N=3$ , (d)  $N=4$ .
- Figure 10 Flexible beam; (a) Experimentally recorded bifurcation diagram (c). (b) Numerical simulation.: parameter values  $u_s = -1.05$ ,  $N = 4$ ,  $A = 0.1$ ,  $c = 0.0.005$ ,  $r = 0.6$ .

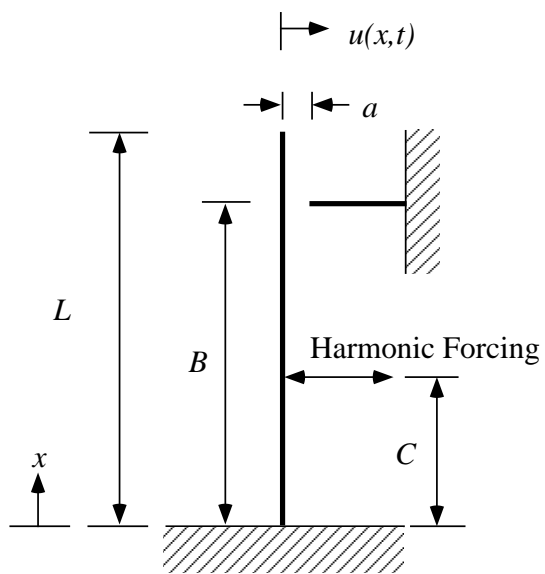


Figure 1:

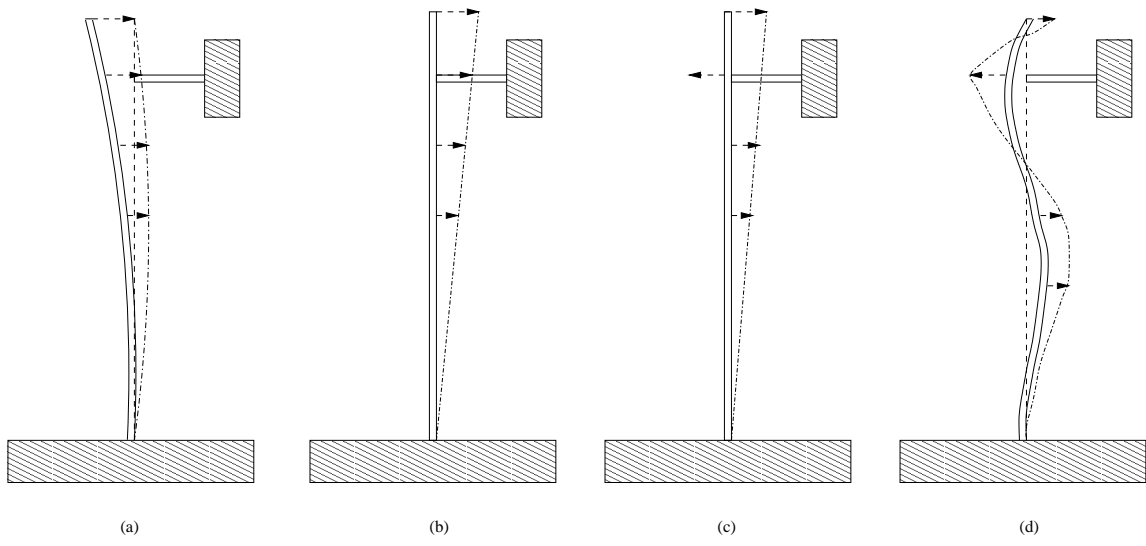


Figure 2:

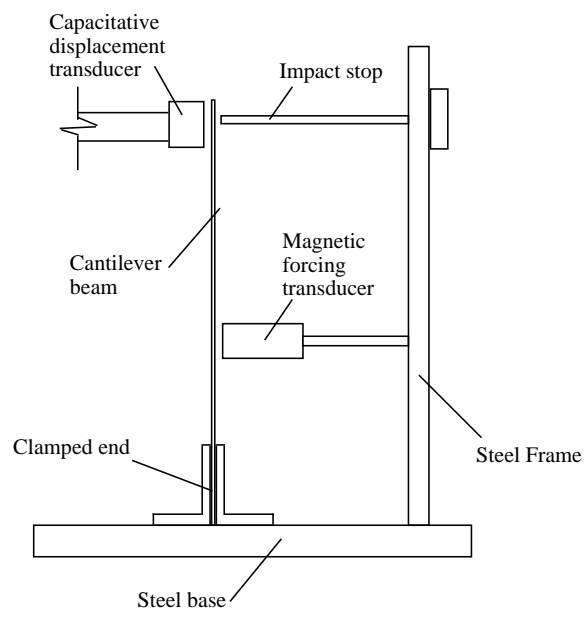


Figure 3:



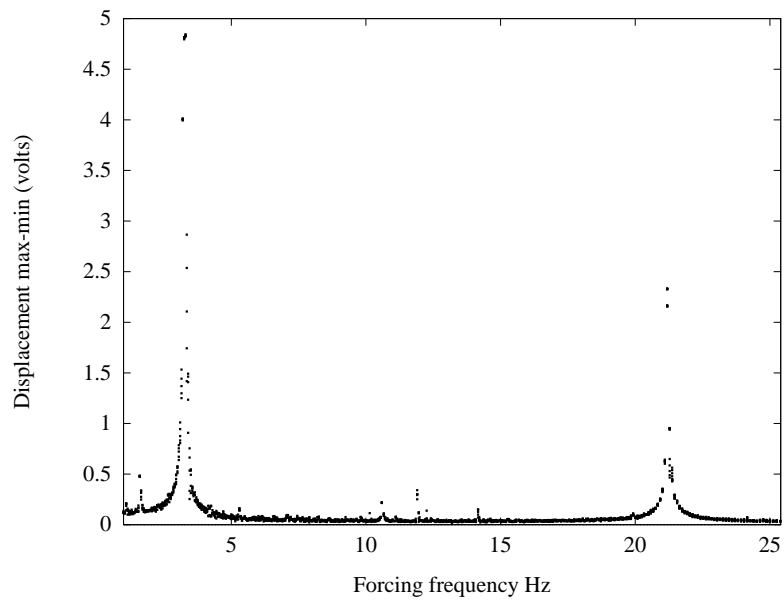



Figure 4:

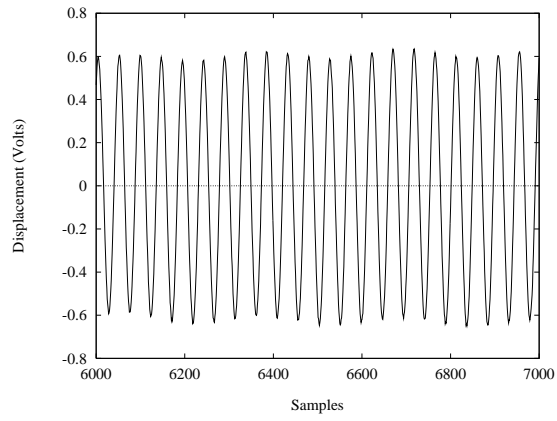

(a)

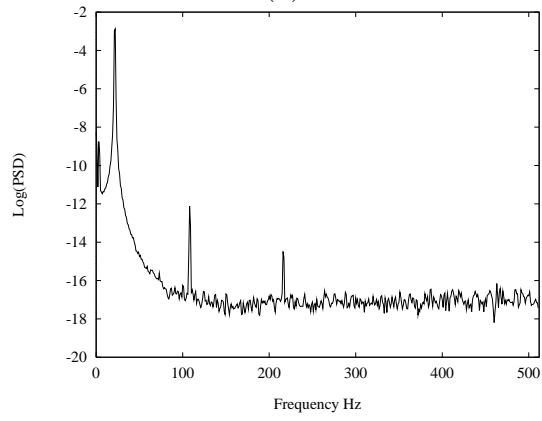


(b)

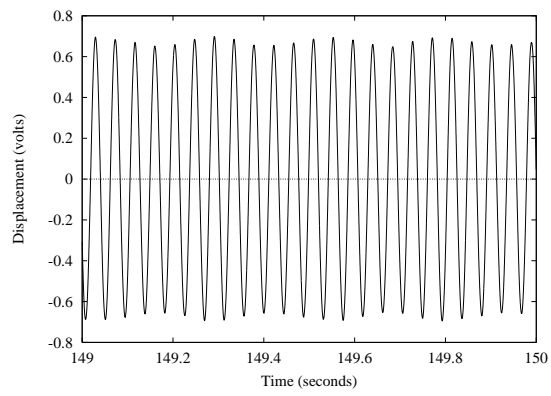


(c)

Figure 5:

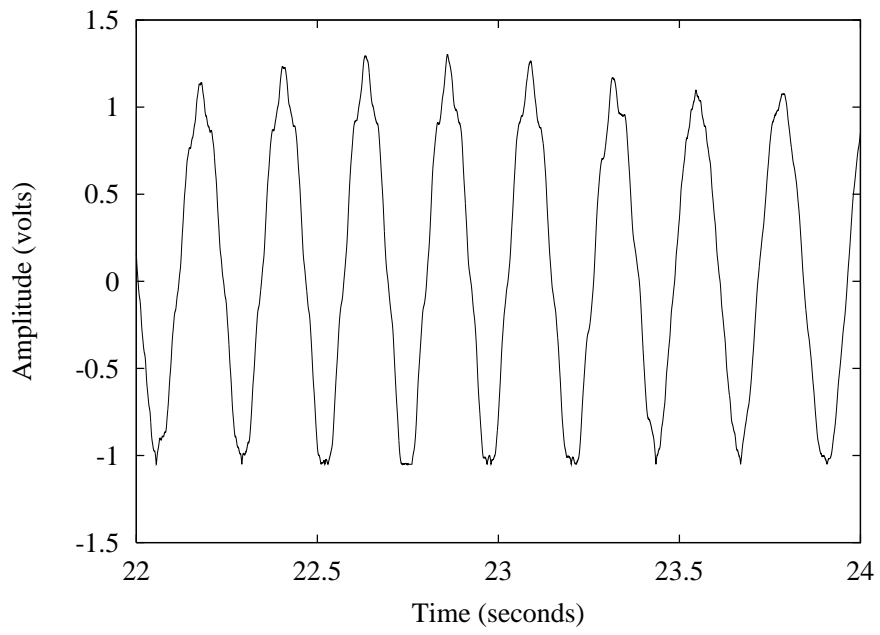

(a)

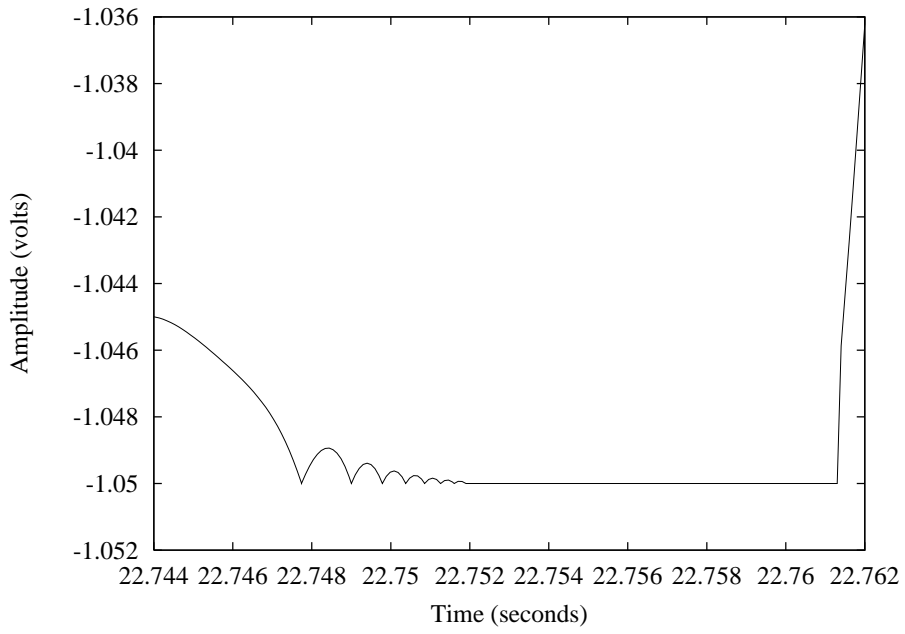

(b)

Figure 6:



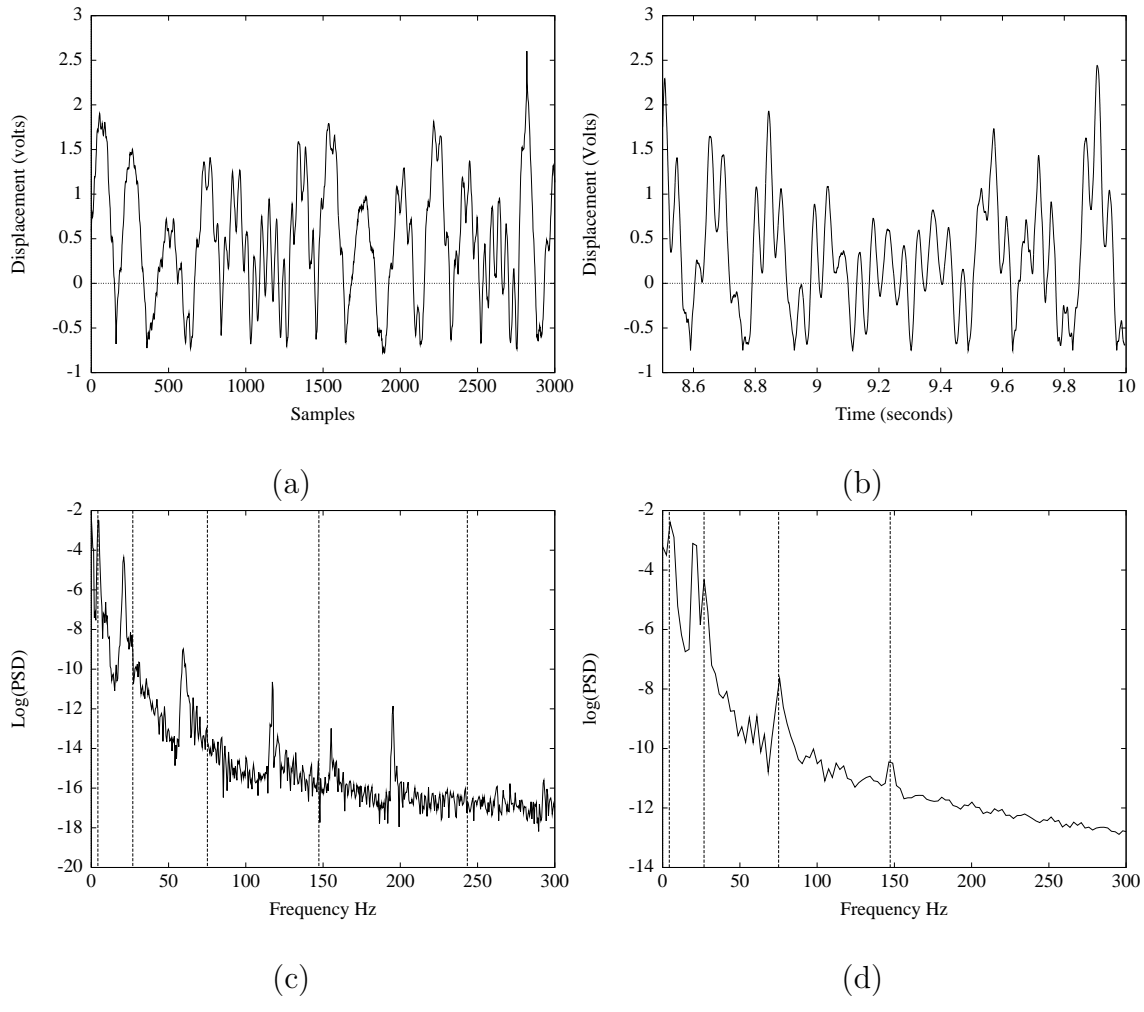


Figure 7:

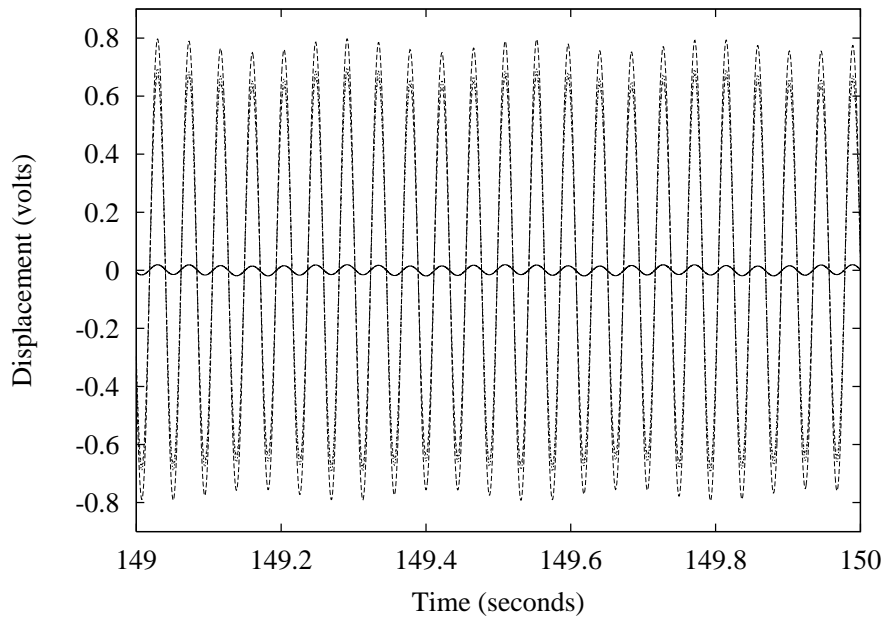


(a)

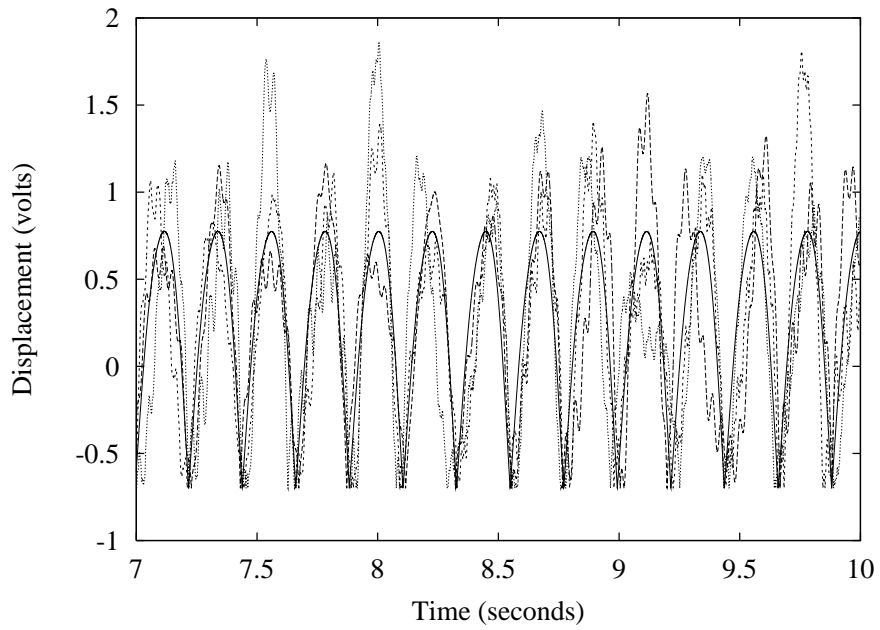


(b)


Figure 8:

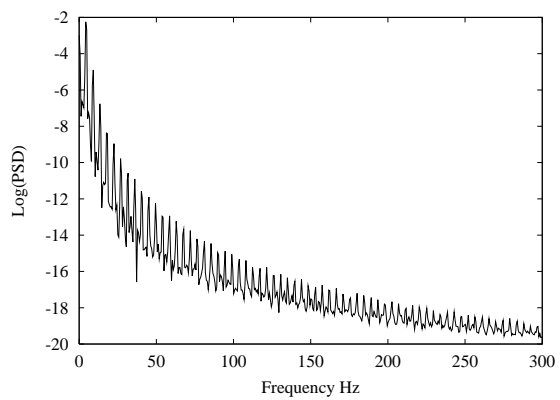


(a)

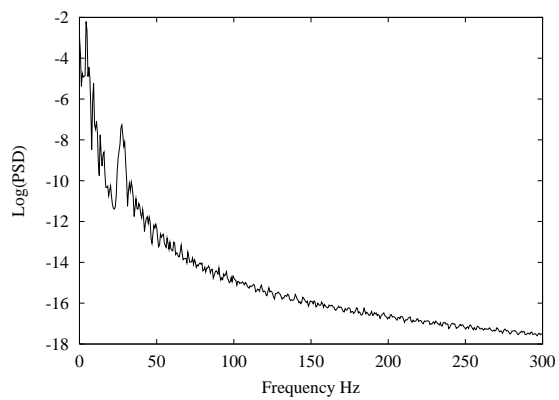

(b)

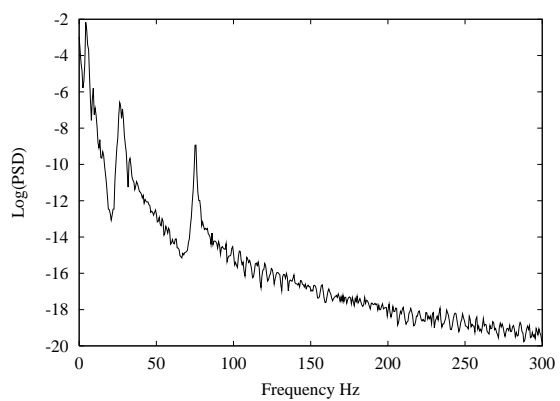


(c)

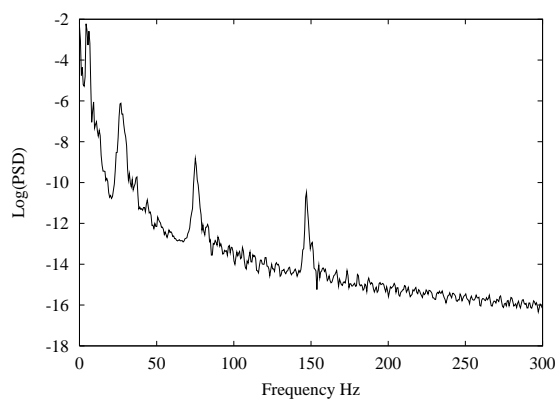


(d)

Figure 9:

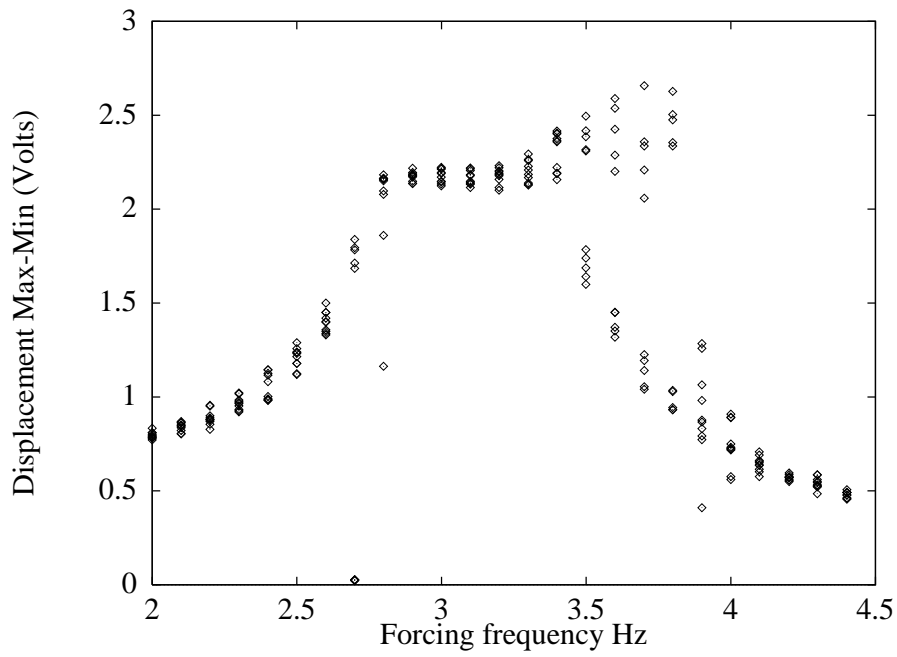

(a)

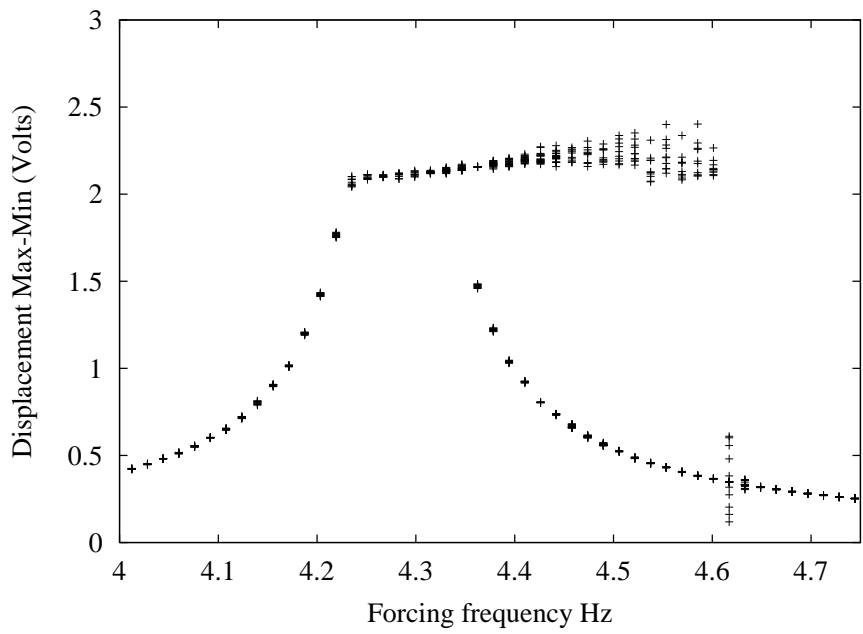

(b)

Figure 10: