



UNIVERSITY OF LEEDS

This is a repository copy of *Waveguide-integrated terahertz-frequency quantum-cascade lasers for trace-gas detection applications*.

White Rose Research Online URL for this paper:

<https://eprints.whiterose.ac.uk/88242/>

Version: Accepted Version

Conference or Workshop Item:

Rui, D, Valavanis, A, Han, Y et al. (10 more authors) (2015) Waveguide-integrated terahertz-frequency quantum-cascade lasers for trace-gas detection applications. In: UK Semiconductors 201, 01-02 Jul 2015, Sheffield, UK.

Reuse

Items deposited in White Rose Research Online are protected by copyright, with all rights reserved unless indicated otherwise. They may be downloaded and/or printed for private study, or other acts as permitted by national copyright laws. The publisher or other rights holders may allow further reproduction and re-use of the full text version. This is indicated by the licence information on the White Rose Research Online record for the item.

Takedown

If you consider content in White Rose Research Online to be in breach of UK law, please notify us by emailing eprints@whiterose.ac.uk including the URL of the record and the reason for the withdrawal request.



eprints@whiterose.ac.uk
<https://eprints.whiterose.ac.uk/>

Waveguide-integrated terahertz-frequency quantum cascade lasers for trace-gas detection applications

Rui Dong¹, Alexander Valavanis^{1,*}, Yingjun Han¹, Iman Kundu¹, Nick Brewster², Lianhe Li¹, Li Chen¹, Jingxuan Zhu¹, Luke Bushnell², Matthew Oldfield², Brian N. Ellison², Paul Dean¹, Edmund H. Linfield¹, A. Giles Davies¹

¹University of Leeds, Leeds, West Yorkshire, LS2 9JT, UK

²Rutherford Appleton Laboratory, STFC, Harwell Oxford, Didcot, OX11 0XU, UK

Abstract—We demonstrate photonic-lattice THz QCLs lasing at 2.2, 2.56, 3.5 and 4.7 THz, targeting water, methane, hydroxyl and atomic oxygen absorption lines, respectively. A robust micro-machined waveguide block improves beam quality and enables future integration of complete THz heterodyne systems including a local oscillator, mixer, and feed-horn.

I. INTRODUCTION

The terahertz frequency band (1–5 THz) is of significant interest for atmospheric science and astronomy, owing to the strong fundamental rotational modes of relevant molecular gas species in this spectral range. However, there has been a lack of compact, robust and powerful THz sources at these frequencies, which are needed to perform high spectral resolution heterodyne gas spectroscopy. For example, THz quantum-cascade lasers (QCLs) can provide > 1 W optical power [1], with very narrow intrinsic linewidth [2], and as such are highly-promising candidates for use as heterodyne receiver local oscillators and background illumination sources. To date, however, their use has been limited (in part) by the lack of a low-cost, mechanically-robust and reproducible scheme for integration with other THz system components, control and stabilization of the emission frequency, high working temperature and far-field beam profile optimization.

We demonstrate a reliable photonic-lattice waveguide design scheme [Fig. 1(top)] for single-mode, continuous wave operation of QCLs, specifically for trace-gas detection [2.2 THz (H₂O, CH₄), 2.56 THz (CH₃OH), 3.5 THz (OH) and 4.7 THz (O)] and present a systematic optimization of their performance. The applicability of these lasers to *in situ* gas sensing is demonstrated and their use as future LO sources is described.

Furthermore, QCL devices have been integrated into precision-micro-machined waveguide blocks [Fig. 1(bottom)], which have previously been developed to support construction of waveguide-integrated THz mixers. These mechanically-robust blocks yield significant improvement in the far-field beam pattern without degradation in thermal or electrical performance.

II. RESULTS

The QCL tuning coefficients were measured with respect to heat-sink temperature and drive current (e.g. –0.7 GHz/K and –5 GHz/A respectively for a 2.2 THz QCL), and we show that this enables analysis of water and methanol lines at 2.2 and 2.56 THz respectively, in a single-pass gas cell.

The waveguide-integrated QCL was characterized in terms of emission power, far-field beam profile, threshold current and thermal performance. Compared with the performance of bare

devices, we show that there is no significant change in threshold current or operating temperature, thus demonstrating good thermal and electronic integration of the QCL. The far-field beam profile has been improved significantly with a sharply reduced full-width at half-maximum (< 20°, c.f. 120° for unmounted double metal QCLs).

III. SUMMARY

We have developed single-mode THz QCLs using photonic lattice waveguides and integrated them in a robust, reproducible and low-cost package, which significantly improves the far-field beam profile. We have used these QCLs to measure the absorption line shapes of atmospheric gas species.

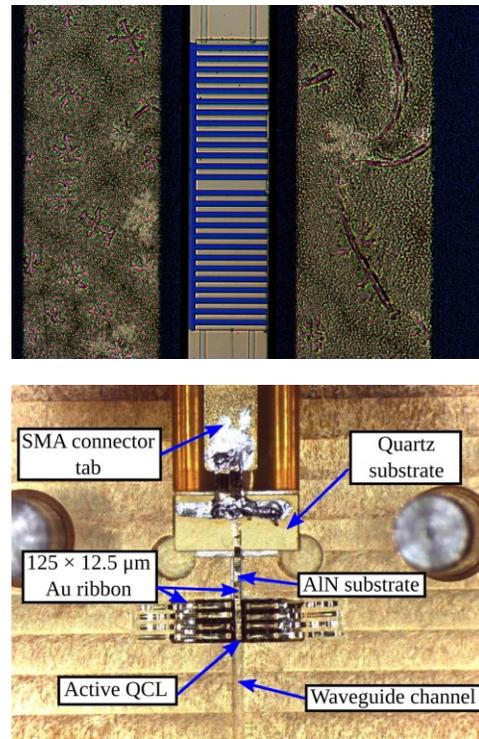


Fig. 1. (top) Single mode QCL, using a photonic lattice waveguide (bottom) structure of block-integrated device.

REFERENCES

- [1] L. H. Li, L. Chen, J. Zhu, J. Freeman, P. Dean, A. Valavanis, A.G. Davies and E.H. Linfield “Terahertz quantum cascade lasers with >1 W output powers,” *Electron. Lett.*, vol. 50, pp. 309–311, 2014.
- [2] M.S. Vitiello, L. Consolino, A. Taschin, A. Tredicucci, M. Inguscio, and P. D. Natale, “Quantum-limited frequency fluctuations in a terahertz laser,” *Nat. Photonics*, vol. 6, pp. 525–528, 2012.

* Corresponding author: a.valavanis@leeds.ac.uk