



This is a repository copy of *Active robust optimization: Enhancing robustness to uncertain environments*.

White Rose Research Online URL for this paper:
<http://eprints.whiterose.ac.uk/98425/>

Version: Accepted Version

Article:

Salomon, S., Avigad, G., Fleming, P.J. orcid.org/0000-0001-9837-8404 et al. (1 more author) (2014) *Active robust optimization: Enhancing robustness to uncertain environments*. *IEEE Transactions on Cybernetics*, 44 (11). pp. 2221-2231. ISSN 2168-2267

<https://doi.org/10.1109/TCYB.2014.2304475>

© 2014 IEEE. Personal use of this material is permitted. Permission from IEEE must be obtained for all other users, including reprinting/ republishing this material for advertising or promotional purposes, creating new collective works for resale or redistribution to servers or lists, or reuse of any copyrighted components of this work in other works. Reproduced in accordance with the publisher's self-archiving policy.

Reuse

Unless indicated otherwise, fulltext items are protected by copyright with all rights reserved. The copyright exception in section 29 of the Copyright, Designs and Patents Act 1988 allows the making of a single copy solely for the purpose of non-commercial research or private study within the limits of fair dealing. The publisher or other rights-holder may allow further reproduction and re-use of this version - refer to the White Rose Research Online record for this item. Where records identify the publisher as the copyright holder, users can verify any specific terms of use on the publisher's website.

Takedown

If you consider content in White Rose Research Online to be in breach of UK law, please notify us by emailing eprints@whiterose.ac.uk including the URL of the record and the reason for the withdrawal request.



eprints@whiterose.ac.uk
<https://eprints.whiterose.ac.uk/>

Active Robust Optimization – Enhancing Robustness to Uncertain Environments

Shaul Salomon, Gideon Avigad, Peter J. Fleming, and Robin C. Purshouse

Abstract—Many real world optimization problems involve uncertainties. A solution for such a problem is expected to be robust to these uncertainties. Commonly, robustness is attained by choosing the solution’s parameters such that the solution’s performance is less influenced by negative effects of the uncertain parameters’ variations. This robustness may be viewed as a passive robustness, because once the solution’s parameters are chosen, the robustness is inherent in the solution and no further action, to suppress the effect of uncertainties, is expected. However, it is acknowledged that enhanced robustness comes on the expense of peak performances. In this study, *Active Robust Optimization* is presented as a new robust optimization approach. It considers products that are able to adapt to environmental changes. The enhanced robustness of these solutions is attained by adaptation, which reduces the loss in performance due to environmental changes. A new optimization problem named *Active Robust Optimization Problem* is formulated. The problem amalgamates robust optimization with dynamic optimization in order to evaluate the performance of a candidate solution, while considering possible environmental conditions. Adaptation’s influence on the solution’s performance and cost is considered as well. Hence, the problem is formulated as a multiobjective problem that simultaneously aims at low costs and high performance. Since these goals are commonly in conflict: the solution is a set of optimal adaptive solutions. An evolutionary algorithm is proposed in order to evolve this set. An example of optimizing an adaptive table is provided. It is shown that an adaptive product, which is an outcome of the suggested approach, may be superior to an equivalent product that is not adaptive.

Keywords—robust optimization, dynamic optimization, evolutionary algorithms, adaptive design, multi-objective optimization.

I. INTRODUCTION

MOST real world optimization problems involve uncertainties. These uncertainties might be an outcome of, e.g., manufacturing tolerances on components or uncontrolled changes in environmental conditions. In such cases, the motivation is to identify a solution that is not just an optimal one, but also robust to the uncertainties involved. This kind of optimization is known as *Robust Optimization* (RO). Some common approaches for RO, such as presented in [1] consider the solution’s expected (mean) performance, its variance or worst case. To ensure robustness, a solution may include some properties that reduce the possible negative influences caused by uncontrolled parameters’ variations (e.g.,

thick insulation may reduce fluctuations of an oven internal temperature, caused by changes in the ambient temperature).

Many products have some parameters that can be altered while in use. These changes may influence the performances of the product. A tire’s air pressure, a power drill’s speed, and a cellphone’s screen brightness are examples for such parameters. Adjusting these parameters to account for the effects of uncertainties may improve a product’s performance. If the influence of these adjustable variables is considered during the design phase, the outcome might be a product that is more robust, meaning that its performance is less sensitive to the uncertainties involved.

This conviction may be explained by the cellphone screen example. Suppose that the brightness of a cellphone’s screen is determined by optimizing its battery-life, subjected to satisfying the constraint that the screen should be bright enough to enable visibility of the displayed data. The lower the screen brightness, the longer the battery-life and therefore, the lowest brightness that allows visibility should be chosen as the optimal value. Since visibility depends on the surrounding light, which is uncertain, RO should be considered. The conventional RO approach will result in a fixed brightness that provides some defined trade-off between optimality and robustness, i.e., the minimal brightness that satisfies the robustness criterion (e.g., based on worst case, mean value, etc.). Such brightness enables visibility in any lighting that is not stronger than a certain level (e.g., daylight with no direct sunlight on the screen). Whenever the surrounding light is weaker than the level considered (e.g., during the night), energy is wasted as the screen is brighter than required. It is clear then, that the phone’s robustness comes at the expense of a shorter battery-life. Moreover, whenever the surrounding light is stronger than the considered level, the data is not visible, and the constraint is violated.

Adjusting the cellphone’s brightness in real time according to the actual lighting conditions (either manually or automatically) will preserve battery-life in ambient conditions (i.e., more favourable conditions than these driving the robustness requirement), and offers potential of enhanced robustness in periods of extreme conditions (e.g., direct sunlight on the screen). Such an adjustment does not eliminate the environment’s related uncertainty, as well as its influence on the objective, yet it enables an *active robustness* to this uncertainty. The above example can indicate that an active robustness approach may result in better performance than the conventional RO approach that promotes passive robustness. It is conceivable though that implementing the adjustment might increase the product’s cost.

The process of adjustment to a new configuration as a result

S. Salomon, P. J. Fleming, and R. C. Purshouse are with the Department of Automatic Control & Systems Engineering, University of Sheffield, Mappin Street, Sheffield, S1 3JD, UK. E-mail: ssalomon1@sheffield.ac.uk.

G. Avigad is with the Department of Mechanical Engineering, ORT Braude College of Engineering, 51 Snunit Street, Karmiel, 21982, Israel.

Manuscript received May 31, 2013; Revised submission January 20, 2014

of an environmental change is termed here as *adaptation*. The meanings of other terms that relate to adaptation are as follows: *adaptive* describes a design or a product that can perform adaptation, and the *adaptability* of a design defines what properties it can adjust as well as their limits.

This paper introduces a new optimization problem that aims at optimal adaptive products that will promote robustness. The problem, *Active Robust Optimization Problem* (AROP), considers the influence of the solution's adaptability both on its performances and its cost. Therefore, it is a *multi-objective optimization problem* (MOP), and its solution is expected to be a set of optimal adaptive solutions with a trade-off between cost and performance.

The remainder of this paper is organized as follows: In Section II, the position of the current study with respect to the current state of the art in RO is explained, and common definitions of *robust* and *dynamic* optimization problems are provided. The AROP is defined and explained in Section III. In Section IV the problem is demonstrated with an example of an optical table design. Finally, conclusions and future research directions are discussed in Section V.

II. BACKGROUND

In this section the required background for understanding the active robustness approach is provided. The terms *Dynamic Optimization* and *Robust Optimization* that are the building blocks of the AROP are explained. Existing design and optimization methodologies that relate to the AROP are surveyed, and the newly suggested approach is positioned with respect to them.

Robust performance design tries to ensure that performance requirements are met and constraints are not violated due to systems uncertainties and variations. Fundamentally, robust optimization is concerned with minimizing the effect of such variations without eliminating the source of the uncertainty or variation [2]. To search for robust solutions, the variables are treated as stochastic rather than deterministic, while information about their probability distribution functions (PDF) is taken into account.

There are several approaches for robust optimization. The most common are to represent the performance of a solution by either its expected value [1], or by the worst case (e.g., [3]). If we assume a minimization problem (without loss of generality) then the aim is to find the solution with the minimum expected value or the minimum worst case, respectively.

The expected value problem can be formulated as:

$$\min_{\mathbf{x} \in \mathcal{X}} \mathbb{E} [f(\mathbf{x}, \mathbf{P})] \quad (1)$$

where $f(\cdot)$ is the objective function, \mathbf{x} is an n_x -dimensional vector of decision variables in some feasible region $\mathcal{X} \subset \mathbb{R}^{n_x}$, and \mathbf{P} is an n_p -dimensional vector random variate, with some defined PDFs, of uncertain environmental parameters that are independent from the design variables \mathbf{x} .

The worst case problem can be formulated as:

$$\min_{\mathbf{x} \in \mathcal{X}} \max_{\mathbf{p} \in \mathbf{P}} f(\mathbf{x}, \mathbf{p}) \quad (2)$$

where \mathbf{p} is a realized vector of uncertain parameters from the random variate \mathbf{P} .

Some other RO methods define a utility multiobjective problem to optimize the average performance and to minimize the variance [1].

Optimization problems that search for a solution to changing objective functions and constraints are known as *Dynamic Optimization Problems* (DOPs). Mathematically, a DOP is defined as follows:

$$\min_{\mathbf{y} \in \mathcal{Y}} f(\mathbf{y}, \mathbf{p}) \quad (3)$$

where \mathbf{y} is an n_y -dimensional vector of decision variables from some feasible region $\mathcal{Y} \subset \mathbb{R}^{n_y}$.

For any given vector \mathbf{p} , the solution of the DOP \mathbf{y}^* is the vector \mathbf{y} that minimizes the objective function. The most common DOP involves the case where \mathbf{p} consists of a single uncertain parameter – the time. In that case, the optimal solution \mathbf{y}^* changes in time, since the objective function and the constraints are time-dependent. Commonly, evolutionary algorithms for DOPs consist of a mechanism for continuously tracking the optimum over time, and an additional mechanism for seeking a new optimum in other regions of the design space. A comprehensive survey of the existing methods for solving DOPs and their applications can be found in [4].

The difference between a DOP and RO problem is that in the latter the solution is to be found prior to the realization of the uncertainties, while in the former it is searched for once a particular environmental condition is realized. The fields of RO and dynamic optimization have been comprehensively studied during the past two decades, though the synergy between these two optimization approaches has received scarce attention. The proposed AROP uses both robust and dynamic optimization: the properties that cannot change with time are optimized through RO, while the adaptation of adjustable properties to the changing environment is analysed by using dynamic optimization.

Some existing design and optimization methodologies aim at products that can be modified while in service. Reconfigurable design is an approach to develop Reconfigurable Manufacturing Systems (RMS) [5] that are built of modules. These modules can be added, removed or replaced when a new product should be produced. RMS combines the advantages of high accuracy and production rates associated with dedicated manufacturing systems, with the versatility of flexible manufacturing systems. An RMS is designed to have the exact flexibility (adaptability) to enable the production of a desired family of products. The RMS methodology defines the properties required from a system in order to be reconfigurable, but does not include an optimization of the system in order to achieve its goals, which are high production rates, low costs and fast reconfiguration.

While RMS is limited to manufacturing systems, Adaptable Design [6] (AD) is a methodology that addresses various types of products. AD aims at products that can adapt from one configuration to another, when the requirements from the product change. In order to assess the profitability of an AD, a cost measure is considered. That measure supports

a decision whether to produce an AD that can satisfy a number of functions, or several non-AD products, one for each required function. The AD approach does not inherently include optimization, though a recent study that performs an optimization procedure for AD is presented in [7]. For the problem presented in that work, the dynamic behavior of the objective functions is known during the design phase, and therefore, there is no need in RO as in AROP.

In the field of *Linear Programming*, there is a class of problems termed “multi-stage stochastic optimization problems” (see e.g., [8],[9]). These problems can be considered as stochastic DOPs, where at each stage the uncertain parameters’ distribution is assessed according to their past realizations. The current study might be mistakenly associated with this type of problems as it also presents a two-stage approach for dealing with stochastic optimization problems, but apart from the title, it is completely different. The main differences are: **(a)** the above studies are limited to problems that can be modelled as a set of linear conditions, **(b)** the AROP makes a distinction between decision variables that can or cannot be dynamically adjusted, and **(c)** the AROP considers the costs of changes between possible configurations.

The work of Avigad et al. on the “Pareto layer” [10], is the only one known to the authors that deals with the RO of solutions that are able to adapt to a changing environment, for non-linear problems. In that work, each variable of a solution is considered as a range of values rather than a single value. In contrast to a range rooted in uncertainties, such as manufacturing tolerances, there, this range is comprised of all of the variable’s possible values for a later decision. However, dynamic optimization was not implemented within the evaluation procedure, and therefore a non-optimal representation of solutions was used.

III. METHODOLOGY

A. Fundamentals

Let $\mathbf{x} = [x_1, \dots, x_{n_x}] \in \mathcal{X}$ be an adaptive design, where $\mathcal{X} \subset \mathbb{R}^{n_x}$ is the feasible domain.

Let $\mathcal{Y}(\mathbf{x}) \subset \mathbb{R}^{n_y(\mathbf{x})}$ be the domain for adjustable variables of a design \mathbf{x} , where each vector $\mathbf{y} = [y_1(\mathbf{x}), \dots, y_{n_y}(\mathbf{x})] \in \mathcal{Y}(\mathbf{x})$ represents a possible configuration of the design \mathbf{x} . All possible configurations of a design \mathbf{x} , defined by $\mathcal{Y}(\mathbf{x})$, are termed as the design’s adaptability.

Let $\mathbf{p} = [p_1, \dots, p_{n_p}]$ be a vector of environmental parameters, which are independent from the design variables, and at least one of them is uncertain, such that \mathbf{p} can be considered a scenario of a vector random variate \mathbf{P} that is the environmental space defining all possible scenarios of \mathbf{p} and their probabilities.

An objective function $f(\mathbf{x}, \mathbf{y}, \mathbf{p})$ is defined as a mapping of \mathbf{x} , \mathbf{y} , and \mathbf{p} to \mathbb{R} . Once a design \mathbf{x} is implemented, its function value depends on its configuration \mathbf{y} , and the realized scenario of the environmental parameters \mathbf{p} . The configuration \mathbf{y} can be determined according to the realization of \mathbf{p} . Since \mathbf{p} is a realization of the random variate \mathbf{P} then we can also define $F(\mathbf{x}, \mathbf{y}, \mathbf{P})$ as the uncertain distribution of f , considering the environmental uncertainty.

We also consider a cost function $c(\mathbf{x}, \mathbf{y}, \mathbf{p})$, which is another mapping of \mathbf{x} , \mathbf{y} , and \mathbf{p} to \mathbb{R} . It is comprised of three components: **(a)** the initial implementation costs (e.g., price of a turbine engine for a power-plant), denoted by c_x , **(b)** the operational costs of using the design in a configuration \mathbf{y} (e.g., fuel and deterioration costs for a given working condition of the engine), denoted by c_y , and **(c)** the costs of the adaptations of a design as a reaction to changes in \mathbf{p} (e.g., the cost of changing the engine to a different working condition), denoted by c_p . The cost function for a design is a function of the above three costs, $c(\mathbf{x}, \mathbf{y}, \mathbf{p}) \equiv \Gamma(c_x, c_y, c_p)$, where Γ is a mapping of c_x , c_y and c_p to \mathbb{R} . Once again, since \mathbf{p} is a realization of the random variate \mathbf{P} then we can also define $C(\mathbf{x}, \mathbf{y}, \mathbf{P})$ as the uncertain distribution of c , considering the environmental uncertainty.

B. Problem Definition

An *optimal adaptive solution* is the solution to the following Robust Multiobjective Optimization Problem:

$$\min_{\mathbf{x} \in \mathcal{X}} \mathbf{Z} = [F(\mathbf{x}, \mathbf{y}, \mathbf{P}), C(\mathbf{x}, \mathbf{y}, \mathbf{P})] \quad (4)$$

where \mathbf{Z} is a bi-objective vector random variate of performance. To obtain point objective vectors, the desired performance indicators $I[\bullet]$ (e.g. expected value or worst case) can be applied. We use generic functions $\phi(\mathbf{x}, \mathbf{y}, \mathbf{P}) = I_f[F(\mathbf{x}, \mathbf{y}, \mathbf{P})]$ and $\psi(\mathbf{x}, \mathbf{y}, \mathbf{P}) = I_c[C(\mathbf{x}, \mathbf{y}, \mathbf{P})]$ to represent these indicators.

The problem in (4) is a multi-objective robust optimization problem, since the optimal solution should be robust to the uncertainties in \mathbf{P} . The fact that \mathbf{x} is an adaptive solution distinguishes this problem from the common RO problem (as explained in Section II), and makes it an *active* RO problem. For every scenario of the uncertainties in \mathbf{P} , the performance of a solution can be affected by changing the \mathbf{y} configuration within the solution’s adaptability. As a result, whenever the environmental parameters change, the solution’s performance can be improved by adaptation. For a proper evaluation of an adaptive solution, it has to be assessed for each scenario with its best possible performance. This performance is achieved by the optimal configuration for that scenario. In this study, we define the optimal configuration solely according to the objective function f , and the configuration’s cost is not considered at this stage. This definition reflects our perception that whenever a designer chooses to invest in a product’s adaptability in order to achieve active robustness, his/her main concern is to enhance performance, even if it costs more than a non-adaptive product. According to this perspective, it is not worthwhile to invest in adaptability, if its strength is not fully exploited to improve the performance. Therefore the cost is a secondary objective that should be considered as an additional criterion for comparison between different adaptive solutions. An alternative definition for optimal configuration that considers configuration’s cost is suggested as a future work (see section V).

In order to find the optimal configuration \mathbf{y}^* in a changing

environment, one must solve the following DOP:

$$\mathbf{y}^* = \operatorname{argmin}_{\mathbf{y} \in \mathcal{Y}(\mathbf{x})} f(\mathbf{x}, \mathbf{y}, \mathbf{p}) \quad (5)$$

Note that, in the above formulation, when \mathbf{y}^* is searched for the values of the environmental parameters \mathbf{p} are known. The values of \mathbf{x} are constant (the evaluated design doesn't change) and therefore the \mathbf{x} variables are treated here as parameters too. However, one or more values of \mathbf{p} can change (which makes this problem a DOP) and so, for best performance, the above DOP should be solved whenever \mathbf{p} changes, and \mathbf{y} should be adapted to the new \mathbf{y}^* . The optimization can be done either on-line or off-line, depending on how rapid the response should be.

Considering the entire environmental uncertainty, a one-to-one mapping between the scenarios in \mathbf{P} and the optimal configurations in $\mathcal{Y}(\mathbf{x})$ can be defined as:

$$\mathbf{Y}^* = \operatorname{argmin}_{\mathbf{y} \in \mathcal{Y}(\mathbf{x})} F(\mathbf{x}, \mathbf{y}, \mathbf{P}) \quad (6)$$

In order to transform the RO problem in (4) to an active RO problem, \mathbf{y} should be replaced with \mathbf{Y}^* for both objectives.

Following the above, an *Active Robust Optimization Problem* (AROP) is formulated:

Definition 1 (Active Robust Optimization Problem).

$$\min_{\mathbf{x} \in \mathcal{X}} \zeta(\mathbf{x}, \mathbf{P}) = [\phi(\mathbf{x}, \mathbf{Y}^*, \mathbf{P}), \psi(\mathbf{x}, \mathbf{Y}^*, \mathbf{P})] \quad (7)$$

$$\text{where } \mathbf{Y}^* = \operatorname{argmin}_{\mathbf{y} \in \mathcal{Y}(\mathbf{x})} F(\mathbf{x}, \mathbf{y}, \mathbf{P}) \quad (8)$$

It is a multi-stage problem. In order to compute the objective functions ϕ and ψ in (7), the DOP in (8) has to be solved for every solution \mathbf{x} with the entire environment universe \mathbf{P} .

If ϕ and ψ are contradicting, which is most probably the case, the solution of the AROP is expected to be a Pareto optimal set (PS). It is defined by the following definitions, which are basically similar to the common definitions for MOPs:

Definition 2 (Pareto Dominance). A vector $\mathbf{a} = [a_1, \dots, a_n]$ is said to Pareto dominate another vector $\mathbf{b} = [b_1, \dots, b_n]$ (denoted as $\mathbf{a} \prec \mathbf{b}$) if and only if $\forall i \in 1, \dots, n : a_i \leq b_i$ and $\exists i \in 1, \dots, n : a_i < b_i$

Definition 3 (Pareto Optimality). An adaptive solution $\mathbf{x} \in \mathcal{X}$ is said to be Pareto optimal in \mathcal{X} if and only if $\neg \exists \hat{\mathbf{x}} \in \mathcal{X} : \zeta(\hat{\mathbf{x}}, \mathbf{P}) \prec \zeta(\mathbf{x}, \mathbf{P})$

Definition 4 (Pareto Optimal Set). The Pareto optimal set (PS) is the set of all Pareto optimal adaptive solutions, i.e., $PS = \{\mathbf{x} \in \mathcal{X} \mid \neg \exists \hat{\mathbf{x}} \in \mathcal{X} : \zeta(\hat{\mathbf{x}}, \mathbf{P}) \prec \zeta(\mathbf{x}, \mathbf{P})\}$

Definition 5 (Pareto Optimal Front). The Pareto optimal front (PF) is the set of objective vectors corresponding to the solutions in the PS, i.e., $PF = \{\zeta(\mathbf{x}, \mathbf{P}) \mid \mathbf{x} \in PS\}$

In a typical implementation, such as the examples given in Sections III-D and IV, we sample the environmental uncertainty \mathbf{P} using Monte Carlo methods. This sample, $\bar{\mathbf{P}}$, leads to sample-based representations of \mathbf{Y}^* , F and C – denoted

$\bar{\mathbf{Y}}^*$, \bar{F} and \bar{C} respectively. This leads to estimates of design and cost performance, $\bar{\zeta}$.

C. An Evolutionary Algorithm for Solving the AROP

The AROP can be solved with an evolutionary algorithm (EA) which is described in Algorithm 1. The algorithm includes a main EA to solve the robust multiobjective optimization problem in (7), and an additional algorithm (possibly an EA) to solve the DOP in (8). The choices of which specific algorithms to use for each stage are application dependent, and they are not in the scope of this paper.

The EA is comprised of three main stages:

Steps 8–12: Allocation of the optimal configurations $\bar{\mathbf{Y}}_i^*$ and the corresponding function values $\bar{F}(\mathbf{x}_i, \bar{\mathbf{Y}}_i^*, \bar{\mathbf{P}})$ for each solution \mathbf{x}_i . This procedure is done by solving the DOP in (8).

Steps 13–14: Evaluation of the objective functions of (7) according to RO criteria I_f and I_c .

The main loop: Solving the MOP in (7).

Algorithm 1 An evolutionary algorithm for solving the AROP

- 1: Sample the environmental space into a set $\bar{\mathbf{P}}$
 - 2: $g \leftarrow 1$
 - 3: $POP_g \leftarrow$ initialize a random population of \mathbf{x} solutions
 - 4: **while** stopping criteria not satisfied **do**
 - 5: **for all** $\mathbf{x}_i \in POP_g$ **do**
 - 6: $\bar{\mathbf{Y}}_i^* \leftarrow \emptyset$
 - 7: $\bar{F}(\mathbf{x}_i, \bar{\mathbf{Y}}_i^*, \bar{\mathbf{P}}) \leftarrow \emptyset$
 - 8: **for all** $\mathbf{p}_j \in \bar{\mathbf{P}}$ **do**
 - 9: Solve the following DOP:
 $\mathbf{y}_{i,j}^* \leftarrow \min_{\mathbf{y} \in \mathcal{Y}(\mathbf{x}_i)} f(\mathbf{x}_i, \mathbf{y}, \mathbf{p}_j)$
 - 10: $\bar{\mathbf{Y}}_i^* \leftarrow \bar{\mathbf{Y}}_i^* \cup \mathbf{y}_{i,j}^*$
 - 11: $\bar{F}(\mathbf{x}_i, \bar{\mathbf{Y}}_i^*, \bar{\mathbf{P}}) \leftarrow \bar{F}(\mathbf{x}_i, \bar{\mathbf{Y}}_i^*, \bar{\mathbf{P}}) \cup f(\mathbf{x}_i, \mathbf{y}_{i,j}^*, \mathbf{p}_j)$
 - 12: **end for**
 - 13: $\phi(\mathbf{x}_i, \bar{\mathbf{Y}}_i^*, \bar{\mathbf{P}}) \leftarrow I_f[\bar{F}(\mathbf{x}_i, \bar{\mathbf{Y}}_i^*, \bar{\mathbf{P}})]$
 - 14: $\psi(\mathbf{x}_i, \bar{\mathbf{Y}}_i^*, \bar{\mathbf{P}}) \leftarrow I_c[\Gamma(c_x(\mathbf{x}_i), c_y(\bar{\mathbf{Y}}_i^*), c_p(\bar{\mathbf{Y}}_i^*))]$
 - 15: **end for**
 - 16: $POP_{g+1} \leftarrow$ evolve the next generation from POP_g
 - 17: $g \leftarrow g + 1$
 - 18: **end while**
-

D. Illustrative Example

Consider an AROP where $f(\mathbf{x}, \mathbf{y}, \mathbf{p})$ is the following objective function:

$$f = \frac{x_1 \sin(p_1 y_1 + y_2 + 0.5 p_2)}{p_2 y_2^2 + 1} - \frac{x_2 \cos(y_1 - y_2 + p_1^2)}{y_1^2 + 1} \quad (9)$$

The design space consists of two variables $\mathbf{x} = [x_1, x_2] \in \mathbb{R}^2$ and the environmental space consists of two uncertain variables with Beta probability distribution functions (B). p_1 lies within the region $0.3 \leq p_1 \leq 1$ with B coefficients $a = 1.5, b = 2$, and p_2 lies within $4 \leq p_2 \leq 20$ with B coefficients $a = 2, b = 1.1$.

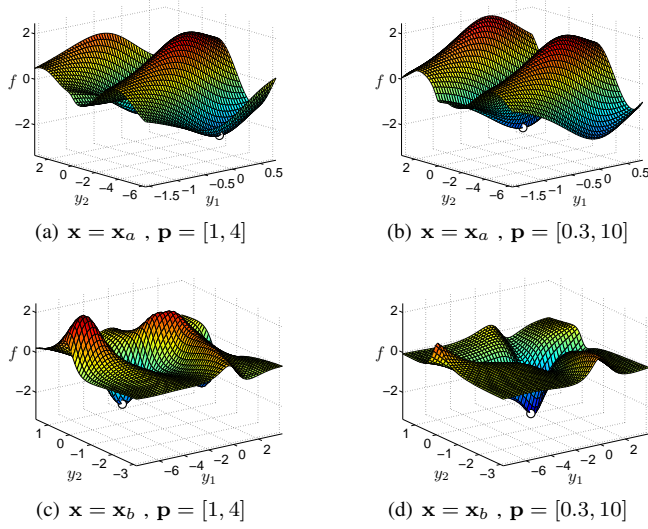


Fig. 1. Objective function values for various values of the adjustable variables \mathbf{y} . The solution of the DOP in (8) is marked with a circle. Each figure is for a different vector of environmental variables \mathbf{p} . Note that every solution has a different domain of adjustable variables $\mathcal{Y}(\mathbf{x})$.

The adaptability of the solutions $\mathcal{Y}(\mathbf{x})$ is given by:

$$-\pi x_i \leq y_i \leq \frac{\pi x_i}{2}$$

Fig. 1 depicts objective function values f as a function of \mathbf{y} of two candidate solutions $\mathbf{x}_a = [0.5, 2]$ and $\mathbf{x}_b = [2.5, 1]$, under two arbitrary samples of the environmental parameters $\mathbf{p}_\alpha = [0.3, 10]$ and $\mathbf{p}_\beta = [1, 4]$. Fig. 1(a) shows the function values $f(\mathbf{x}_a, \mathbf{y}, \mathbf{p}_\alpha)$, and Fig. 1(b) shows the function values $f(\mathbf{x}_a, \mathbf{y}, \mathbf{p}_\beta)$. Similarly, Fig. 1(c) and 1(d) depict the objective function values corresponding to a solution \mathbf{x}_b with the same samples of \mathbf{p} . The solutions to the DOP in Step 9 of Algorithm 1, $\mathbf{y}_{i,j}^*$ and $f(\mathbf{x}_i, \mathbf{y}_{i,j}^*, \mathbf{p}_j)$, are found by evaluating $f(\mathbf{x}_i, \mathbf{y}, \mathbf{p}_j)$ over an equally spaced grid of 50×50 of the adjustable variables domain. $\mathbf{y}_{i,j}^*$ and $f(\mathbf{x}_i, \mathbf{y}_{i,j}^*, \mathbf{p}_j)$ are marked with a circle in each of the figures of Fig. 1.

The set $\bar{\mathbf{P}}$ is sampled according to the uncertain parameters' PDF, and it consists of $k = 100$ samples distributed according to the Latin hypercube sampling method [11]. The repetitive search for $\mathbf{y}_{i,j}^*$ and $f(\mathbf{x}_i, \mathbf{y}_{i,j}^*, \mathbf{p}_j)$ for all samples $\mathbf{p}_j \in \bar{\mathbf{P}}$ (Steps 8–12) produces the sets $\bar{\mathbf{Y}}_i^*$ and $\bar{F}(\mathbf{x}_i, \bar{\mathbf{Y}}_i^*, \bar{\mathbf{P}})$. Fig. 2 depicts the $\bar{\mathbf{Y}}_i^*$ and $\bar{F}(\mathbf{x}_i, \bar{\mathbf{Y}}_i^*, \bar{\mathbf{P}})$ values for the various scenarios of \mathbf{P} , together with the sets of values for the sampled scenarios: $\bar{\mathbf{Y}}_i^*$ and $\bar{F}(\mathbf{x}_i, \bar{\mathbf{Y}}_i^*, \bar{\mathbf{P}})$. The surfaces $\bar{\mathbf{Y}}_i^*$ and $\bar{F}(\mathbf{x}_i, \bar{\mathbf{Y}}_i^*, \bar{\mathbf{P}})$ were obtained for illustrative purposes by sampling $\bar{\mathbf{P}}$ with an equally spaced grid of 40×40 . Fig. 2(a) and 2(b) depict the optimal y_1 and y_2 values, respectively, for solution \mathbf{x}_a , and Fig. 2(c) depicts the function values $\bar{F}(\mathbf{x}_a, \bar{\mathbf{Y}}_a^*, \bar{\mathbf{P}})$. Similarly, Fig. 2(d)–2(f) depict the same for solution \mathbf{x}_b .

By comparing between solutions \mathbf{x}_a and \mathbf{x}_b , the following may be noted:

- Solution \mathbf{x}_a is more robust to variations in environmental variables than solution \mathbf{x}_b . This can be noticed from the

smaller objective values' differences in Fig. 2(c) than in Fig. 2(f).


- \mathbf{x}_a 's robustness is achieved thanks to adaptation, and therefore this robustness is an active robustness. It can be seen from Fig. 1(a) and 1(b) that for the same values of \mathbf{y} , \mathbf{x}_a has different function values for different scenarios of \mathbf{p} . Nonetheless, the optimal function values, achieved by adaptation, are almost constant for all possible scenarios of \mathbf{p} .
- For the sampled set depicted in this example, the performance of solution \mathbf{x}_b (Fig. 2(f)) is better for most of the samples in $\bar{\mathbf{P}}$, while it is worse for two limited regions at the boundary of the environmental space. There are very few samples at these regions as a result of their low probability. The comparison between the solutions' performances depends on the RO criterion I_f (e.g., when considering the worst-case, design \mathbf{x}_a is a better solution, while \mathbf{x}_b is better according to the expected performance).
- There is a difference in the cost of adaptation c_p between the two solutions. \mathbf{x}_a is required to make larger adjustments of y_1 than \mathbf{x}_b , while \mathbf{x}_b is required to make larger adjustments of y_2 than \mathbf{x}_a . Whether \mathbf{x}_a or \mathbf{x}_b has a higher cost of adaptation depends on which variable is more expensive to adjust.

IV. REAL WORLD APPLICATION


In this section the advantage of the proposed optimization approach is demonstrated through an example of an optical table design. An "optical table" is a platform that supports systems for optics experiments. Optics equipment often requires vibrations to be sub-wavelength [12], therefore the optical table has to minimize the platform motion caused by floor vibrations. There are many sources of floor vibrations (e.g., street traffic, door slams, nearby machinery such as fans and air-conditioners, acoustic noises, etc.). The diverse sources for vibration are associated with a wide range of frequencies and therefore the isolation system between the floor and the platform needs to reduce the vibration's amplitude over a wide spectrum. The legs of an optical table usually include an isolation system (e.g., passive rubber mounts, air springs and regulated pneumatic isolators). The stiffness, damping and location of the legs affect the competency of the isolation system to absorb the floor vibrations.

A. Formulation


In this example, a simplified planar model of an optical table is considered. It consists of a rigid platform with an evenly distributed mass, supported by three elements: two springs and a viscous damper. The table should be suitable to various experiments, and therefore, the mass of the experiment's equipment and its center position are uncertain (within known limits). The motivation is to search for optimal combinations of springs and damper and their positions, so as to: (a) minimize the amplitude ratio (AR) between the displacement of the equipment's center of mass and the floor's displacement, for a known band of vibration frequencies; and (b) minimize the cost. An adaptive design to satisfy these goals is considered:

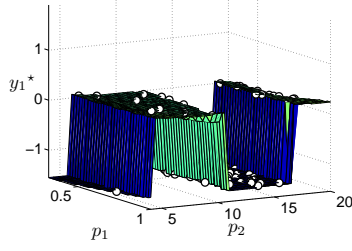


(a) The optimal values $y_1^*(\mathbf{x}_a, \mathbf{P})$. At different environmental conditions the optimal value of y_1 switches from its lower bound to its upper bound.




(b) The optimal values $y_2^*(\mathbf{x}_a, \mathbf{P})$. Minor adjustments have to be made to y_2 for different environmental conditions.

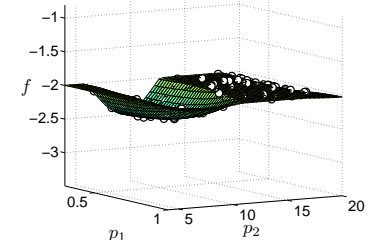


(c) The performances $F(\mathbf{x}_a, \mathbf{Y}_a^*, \mathbf{P})$. The solution's best performance is almost constant under all environmental conditions.

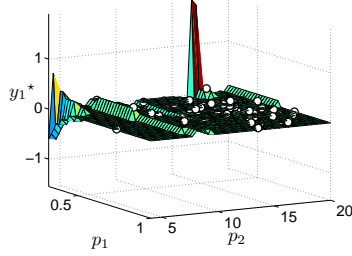

(d) The optimal values $y_1^*(\mathbf{x}_b, \mathbf{P})$. The optimal value of y_1 is almost constant for all environmental conditions, except for two cases which are also associated with poor performance (see Fig. 2(f)).



(e) The optimal values $y_2^*(\mathbf{x}_b, \mathbf{P})$. Many adjustments have to be made to y_2 in order to remain optimal at different environmental conditions.

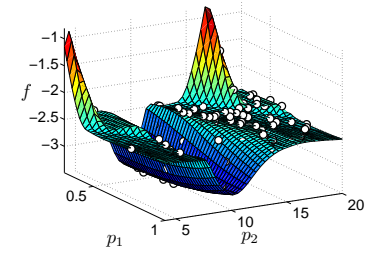

(f) The performances $F(\mathbf{x}_b, \mathbf{Y}_b^*, \mathbf{P})$. This solution is highly influenced from environmental changes.

Fig. 2. $\mathbf{Y}^*(\mathbf{x}, \mathbf{P})$ and $F(\mathbf{x}, \mathbf{Y}^*, \mathbf{P})$ – The best performance of both solutions under the different scenarios of the uncertain variables \mathbf{p} . Values for all possible scenarios (\mathbf{P}) are depicted as surfaces, and those for the sampled set $\bar{\mathbf{P}}$ are marked with white dots.

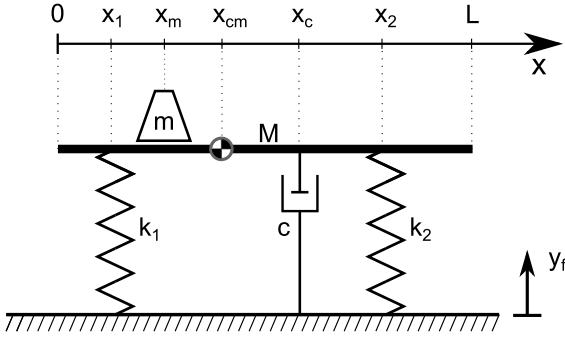


Fig. 3. A model of an optical table.

optical table with an adjustable damper (i.e. the damping coefficient can be altered with a valve), and with legs (springs and damper) that can be relocated.

The model and related parameters are depicted in Fig. 3. The table's length is L and its mass is M . The experimental equipment has a total mass of m , its center of gravity is located at x_m and its vertical displacement is denoted as y_m . The spring coefficients are k_1 and k_2 , and the damping coefficient of the damper is c . The location of the i^{th} element is denoted as x_i . x_G represents the location of the system's center of

gravity, which is computed by:

$$x_G = \frac{ML + 2mx_m}{2(m + M)} \quad (10)$$

The vertical displacement of the floor, denoted by y_f , is considered as a simple harmonic motion with frequency ω . Horizontal displacement is not considered.

The AROP for an adaptive optical table is the following:

$$\min_{\mathbf{x} \in \mathcal{X}} \bar{\zeta}(\mathbf{x}, \bar{\mathbf{P}}) = [\phi(\mathbf{x}, \bar{\mathbf{Y}}^*, \bar{\mathbf{P}}), \psi(\mathbf{x}, \bar{\mathbf{Y}}^*, \bar{\mathbf{P}})] \quad (11)$$

$$\text{where: } \bar{\mathbf{Y}}^* = \operatorname{argmin}_{\mathbf{y} \in \mathcal{Y}(\mathbf{x})} \bar{AR}(\mathbf{x}, \mathbf{y}, \bar{\mathbf{P}}) \quad (12)$$

$$\mathbf{x} = [k_1, k_2] \quad (13)$$

$$\mathbf{y} = [c, x_1, x_2, x_c] \quad (14)$$

$$\mathbf{p} = [m, x_m, \omega, M, L] \quad (15)$$

where m , x_m and ω are uncertain parameters. In the absence of information regarding the parameters' PDFs, it is assumed that m , x_m and $\log(\omega)$ have uniform probability distribution within their limits. The parameters' values and the limits of search variables and uncertainties are given in Table I.

Fig. 4 depicts the free body diagram of the table's surface. The x coordinates are measured from x_G and are denoted as $x' = x - x_G$.

Assuming small angles, the physical model of the system can be described by the following set of equations:

TABLE I. VARIABLES AND PARAMETERS OF THE OPTICAL TABLE OPTIMIZATION PROBLEM

Type	Symbol	Units	Lower limit	Upper limit
\mathbf{x}	k_1, k_2	N/mm	1	100
\mathbf{y}	c	N·s/mm	1	10
	x_c	m	0.1	1.9
	x_1	m	0.1	0.9
	x_2	m	1.1	1.9
\mathbf{P}	m	kg	20	50
	x_m	m	0.1	1.9
	ω	rad/s	1	10^4
	L	m		2
	M	kg		200

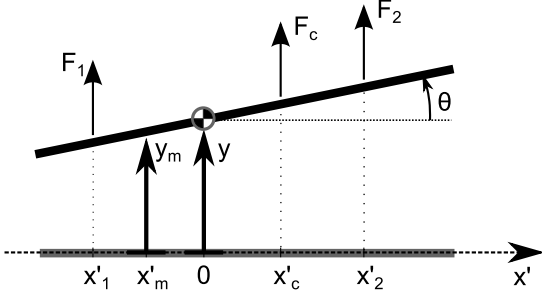


Fig. 4. A free body diagram for the system. The gray line represent the steady state location of the surface. As a reaction to floor vibrations, its center of gravity is shifted by y and the whole surface is rotated by θ .

$$F_1 + F_2 + F_c = (m + M)\ddot{y} \quad (16)$$

$$F_1 x'_1 + F_2 x'_2 + F_c x'_c = I\ddot{\theta} \quad (17)$$

where : $F_{1,2} = k_{1,2}(y_f - y_{1,2})$ (18)

$$F_c = c(\dot{y}_f - \dot{y}_c) \quad (19)$$

$$y_{1,2} = y + \theta x'_{1,2} \quad (20)$$

$$\dot{y}_c = \dot{y} + \dot{\theta} x'_c \quad (21)$$

$$I = \frac{3mM(2x_m - L)^2 + M(m + M)L^2}{12(m + M)} \quad (22)$$

(16)–(21) can be reformulated as:

$$[M]\ddot{\mathbf{x}} + [C]\dot{\mathbf{x}} + [K]\mathbf{x} = [A]\mathbf{v} \quad (23)$$

where : $\mathbf{x} = [y(t), \theta(t)]$, $\mathbf{v} = [y_f(t), \dot{y}_f(t)]$

$$[M] = \begin{pmatrix} m + M & 0 \\ 0 & I \end{pmatrix} , \quad [C] = \begin{pmatrix} c & cx'_c \\ cx'_c & cx'^2_c \end{pmatrix}$$

$$[K] = \begin{pmatrix} k_1 + k_2 & k_1 x'_1 + k_2 x'_2 \\ k_1 x'_1 + k_2 x'_2 & k_1 x'^2_1 + k_2 x'^2_2 \end{pmatrix}$$

$$[A] = \begin{pmatrix} k_1 + k_2 & c \\ k_1 x'_1 + k_2 x'_2 & cx'_c \end{pmatrix}$$

Assuming zero initial conditions, a matrix of transfer functions between $\mathbf{V}(s) = \mathcal{L}(\mathbf{v})$ and $\mathbf{X}(s) = \mathcal{L}(\mathbf{x})$ may be obtained by performing a Laplace transform on both sides

of (23):

$$[G(s)] = \begin{pmatrix} G_{11} & G_{12} \\ G_{21} & G_{22} \end{pmatrix} = \frac{\mathbf{X}(s)}{\mathbf{V}(s)} \quad (24)$$

$$= ([M]s^2 + [C]s + [K])^{-1}[A]$$

A transfer function between the equipment's displacement $Y_m(s)$ and the floor's displacement $Y_f(s)$ can be obtained by recalling that $Y_m(s) = Y(s) + x'_m \Theta(s)$, and $\mathcal{L}(\dot{y}_f(t)) = sY_f(s)$:

$$G(s) = \frac{Y_m(s)}{Y_f(s)} = G_{11} + sG_{12} + x'_m(G_{21} + sG_{22}) \quad (25)$$

Finally, the amplitude ratio between the equipment's displacement and the floor's displacement, when it vibrates at a frequency ω , is the norm of the transfer function in (25):

$$AR = \|G(j\omega)\| \quad (26)$$

Due to the high sensitivity of the optics equipment, the AR is considered as its worst case over all sampled realizations of the uncertainties:

$$\phi(\mathbf{x}, \mathbf{Y}^*, \mathbf{P}) =: \max_{\mathbf{P}} \overline{AR}(\mathbf{x}, \overline{\mathbf{Y}}^*, \overline{\mathbf{P}}) \quad (27)$$

The cost function is based on the following assumptions:

- The implementation cost c_x does not consider costs that are identical for all different solutions. Therefore, it is a function of the solution's selected springs. For a given load, a small spring coefficient demands a larger spring (either more coils or a larger diameter), which is also more expensive. Considering the above, the implementation cost function of the product is:
- The configuration in which the design operates does not affect the cost. Therefore, $c_y = 0$.
- The energy (and its associated cost) required to move the springs and damper is relative to the distances traveled. The damping coefficient's adjustment is a simple action of turning a knob and therefore it does not have a cost. $\overline{c_p}$ is then calculated as the averaged adaptation cost during the expected lifetime of the product. It considers all possible adaptations between two optimal states \mathbf{y}_i^* and \mathbf{y}_j^* that belong to the sampled set $\overline{\mathbf{Y}}^*$:

$$\overline{c_p} =: \frac{\sum_{i=1}^k \sum_{j=1}^k \mathbf{c}_a |\mathbf{y}_i^* - \mathbf{y}_j^*|}{k(k-1)} \tau \quad (29)$$

where $\mathbf{c}_a = [0, 0.3, 0.3, 0.12]$ is a vector containing the costs of adjusting each variable per unit of change, and $\tau = 100$ is the expected number of adaptations during the lifetime of the product. Note that the PDFs of uncertain parameters affect the value of $\overline{c_p}$ since $\overline{\mathbf{P}}$ is sampled according to them.

Thus:

$$\overline{C}(\mathbf{x}, \overline{\mathbf{Y}}^*, \overline{\mathbf{P}}) = c_x + \overline{c_p} \quad (30)$$

B. Simulations

The AROP in (11)–(15) is solved with an EA as suggested in Algorithm 1. The MOP in (11) is solved using NSGA-II-PSA [13] with a population size of $n = 100$ for 50 generations. All parameters are set according to the values suggested in [13] (real-coded chromosome, SBX crossover and polynomial mutation with distribution indices $\eta_c = 15$ and $\eta_m = 20$, respectively, crossover probability $p_c = 1$ and mutation probability $p_m = 0.2$). The DOP in (12) is solved using a single objective genetic algorithm with the same crossover, mutation, population size and number of generations as mentioned above. In order to use the knowledge acquired with the progress of the dynamic optimization, at every iteration of the loop of Steps 8–12 of Algorithm 1, the existing $\bar{\mathbf{Y}}_i^*$ is added to the random initial population of the GA. The real-coded algorithm was directly implemented in MATLAB.

First results indicate a strong correlation between the highest AR and the lower limit of the equipment's mass. Since the worst case scenario is considered, the value of the mass was taken as its lower limit: $m = 20\text{kg}$. The sampled set \mathbf{p} consists of $k = 5,000$ samples distributed according to the PDFs of x_m and ω with the Latin hypercube sampling method [11].

The final approximated set and approximated front are depicted in Fig. 5. The results indicate that softer springs achieve better performance in reducing the reaction to the floor's vibrations, but they are more expensive. Interestingly, the solution with the best damping is not the one with the minimal value of spring coefficient for both springs, but a solution with $k_1 = 1 \frac{\text{N}}{\text{mm}}$ and $k_2 = 3.5 \frac{\text{N}}{\text{mm}}$. This difference has shown to decrease the equipment's displacement better than two springs with an equal coefficient of $1 \frac{\text{N}}{\text{mm}}$.

The AR and adjustments of three solutions as a function of x_m are depicted in Fig. 6. These three solutions are highlighted in Fig. 5 as a square, a star and a diamond. Fig. 6(a)–6(c) depict the AR and optimal locations of springs and damper for each of the three solutions, and Fig. 6(d) depicts the optimal damping coefficients. Note that solutions with stiffer springs, in addition to their lower cost, require smaller adjustments to changes in location of the experimental equipment. Another interesting observation is that the optimal adjustments of the damper and components' locations for the star related solution are not symmetric. This is a consequence of the differences between its springs.

In order to assess the reliability of the obtained approximated front, the problem was solved for twenty independent runs of the EA. The statistics for the solution with the best AR (marked with a star in Fig. 5) is depicted in Fig. 7.

To check the added value of adaptation to the performance of the adaptive optical table, it is compared with a similar design that is not adaptive. This design possesses the same characteristics, but it cannot be changed once implemented (i.e., all its variables are of type \mathbf{x}). The costs are not considered for this comparison, and the only consideration is minimal AR. The optimal non-adaptive product is found by

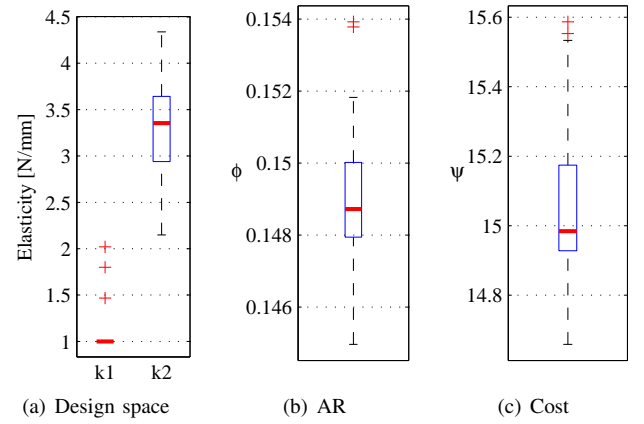


Fig. 7. Box-plots for the results of the obtained adaptive solution with the best AR, from 20 independent simulations of the EA.

solving the following worst-case RO problem:

$$\mathbf{x}_{na} = \underset{\mathbf{x} \in \mathcal{X}}{\operatorname{argmin}} \max_{\mathbf{p} \in \bar{\mathbf{P}}} AR(\mathbf{x}, \mathbf{p}) \quad (31)$$

where $\mathbf{x} = [k_1, k_2, c, x_c, x_1, x_2]$, $\mathbf{p} = [m, x_m, \omega, M, L]$, and $\bar{\mathbf{P}}$ and the limits of \mathcal{X} are the same as for the AROP. The search was conducted with the same genetic algorithm as for the AROP.

The solution to the problem in (31) is $\mathbf{x}_{na} = [1, 1, 1, 1, 0.9, 1.1]$, i.e., both springs and the damper are the weakest possible, the damper is located at the center of the table, and the springs are as close to the center as possible. The maximal AR for this configuration occurs when the center of mass aligns with the center of the table, and its value is $\phi(\mathbf{x}_{na}) = 0.456$. This value is three times higher than the worst AR of the adaptive solution \mathbf{x}^* , which is $\phi(\mathbf{x}^*) = 0.15$.

V. CONCLUSIONS AND FUTURE WORK

In this paper *Active Robustness*, a novel robust optimization approach, was introduced. With this approach, robustness is enhanced by adaptation to a possibly changing environment. The *Active Robust Optimization Problem* was formulated. The AROP motivates a search for cost effective adaptive solutions, by simultaneously optimizing for high performance and low cost. During the design phase, the possible scenarios of the uncertainties involved are considered, and the optimal configuration for a sampled set of scenarios is searched for. It was shown that an adaptive solution that possesses active robustness is able to achieve better performance than an equivalent non-adaptive solution.

The type of uncertainty treated in the framework of this paper was a dynamic or uncertain environment. However, the AROP is not limited to this type alone, and can be easily adopted to deal with other sources of uncertainties. If the fixed design variables are subjected to uncertainties (e.g., as a result of manufacturing tolerances or deterioration), then these uncertainties can be considered when solving (8). In a similar manner, if the adjustable variables cannot be precisely determined (e.g., due to control issues), the variation of \mathbf{Y}^*

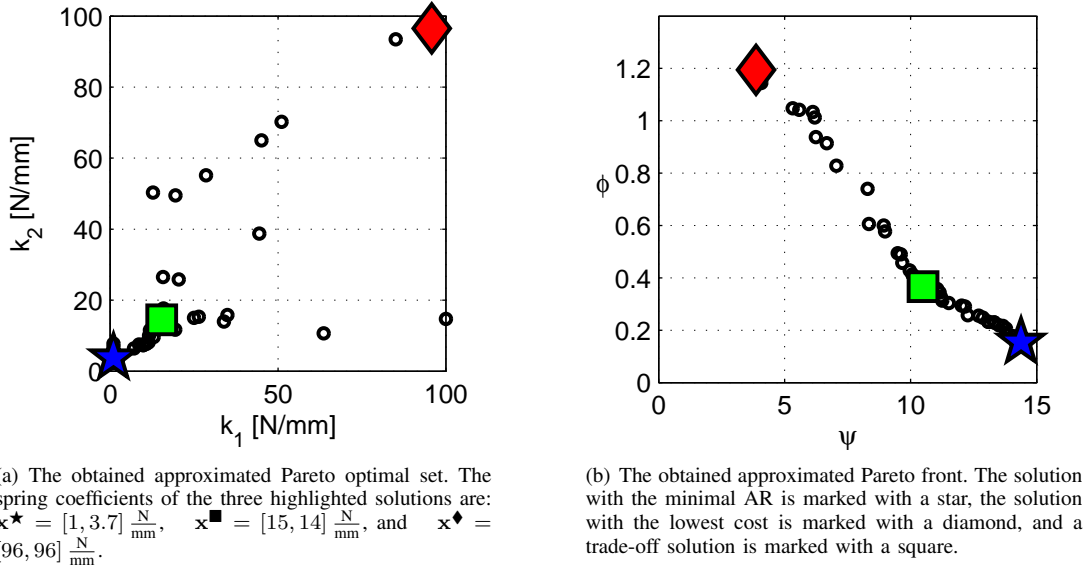


Fig. 5. Final approximated set and Pareto front after 50 generations of the evolutionary algorithm.

from its desired value can also be added as an uncertain parameter to (8).

Active robust optimization can be used for concept-based optimization, where a comparison is required between candidate solutions of different concepts (see e.g., [14] and [15]). Concept-based optimization involves the association of multiple particular solutions with a concept. Each particular solution from any concept is associated with a point in the objective space, which is usually common to all concepts. Each conceptual solution, and its associated particular solutions, may be characterized by different models, different search spaces, and/or different range of variables. This property is inherent within the AROP, as the performance and cost of each solution are evaluated according to its own adjustable domain.

The main drawback of the AROP is its nested nature that requires algorithms with high computational complexity in order to be solved. This complexity can be easily noticed by examining the algorithm suggested in Section III-C: Assuming the DOP of (8) (Steps 9–11), is solved by an EA with a population size n and G generations; then nG function evaluations are conducted for each sample of the environmental space. If the environmental space is sampled k times; then the DOP requires nGk function evaluations for each solution \mathbf{x} . Assuming the MOP of (7) is also terminated after G generations, and has a population size of n ; then the total number of function evaluations will be n^2G^2k . In addition, the cost function has to be evaluated as well nG times. The AROP's nested nature might have a large impact when solving large scale optimization problems with many design variables and/or many uncertain parameters. When this is the case, a large sampled set is required as well as many function evaluations to find the optimal configuration for each sampled scenario. A variety of methods exist for reducing the number of samples and function evaluations in Algorithm 1 or using


approximation methods in the case of expensive functions (for a comprehensive survey see [16]). In order to allow for practical implementation of the AROP in real life applications, an important future work, will be to implement these methods.

Another future work is to further investigate the adaptation's cost of the AROP (c_p). The adaptation's cost suggested here only considers the resources required for adaptation (reflected from the differences between optimal configurations). In [17], a method to optimize adaptation to a given environmental change was introduced. There, in addition to the resources required for adaptation, the performance of the solution during adaptation is also considered. An integration of this method into the AROP might result in a more accurate evaluation of the solution's active robustness.


The suggested AROP is a two-stage optimization problem, where the first stage (Equation (8)) considers the solution's best performance for each scenario, and the second stage (Equation (7)) considers the performance–cost trade-off between candidate solutions. Since the main goals are performance and cost, it is conceivable to evaluate a solution according to these two goals in the first stage as well. If this is the case, Equation (8) needs to be reformulated to the following dynamic MOP:

$$\mathbf{Y}^\star = \underset{\mathbf{y} \in \mathcal{Y}(\mathbf{x})}{\operatorname{argmin}} \mathbf{Z} = [F(\mathbf{x}, \mathbf{y}, \mathbf{P}), C_y(\mathbf{x}, \mathbf{y}, \mathbf{P})] \quad (32)$$


This means that a solution would be assessed according to sub-optimal configurations if they contribute to reducing its operational costs (c_y). In contrast to the one-to-one mapping of (8) between each environmental scenario and its optimal configuration, here each scenario would be associated with a set of Pareto optimal configurations. As a result the objective functions' variate F and C should be evaluated according to a set-based approach. As a future work, the pros and cons of the extended formulation of the AROP should be studied.

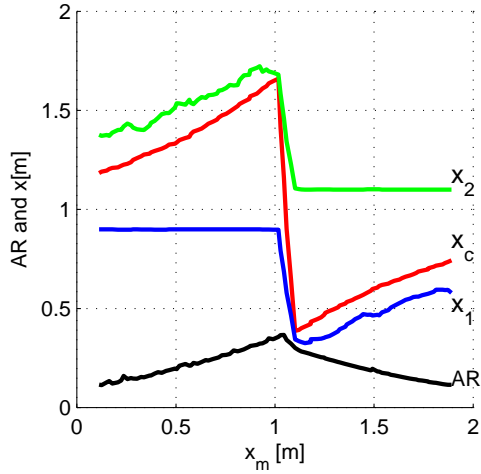


(a) AR and locations of the components of $\mathbf{x}^{\blacksquare}$ for the various location of the equipment.

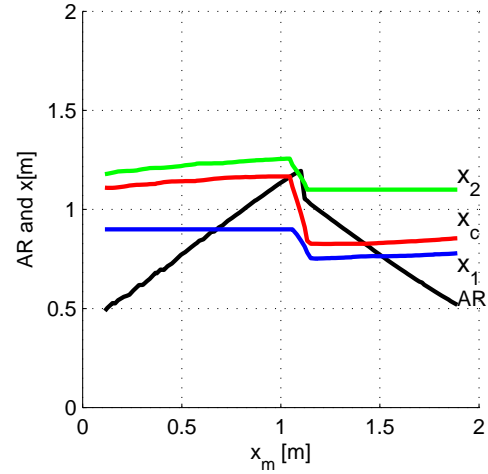

(b) AR and locations of the components of $\mathbf{x}^{\blacklozenge}$ for the various location of the equipment.

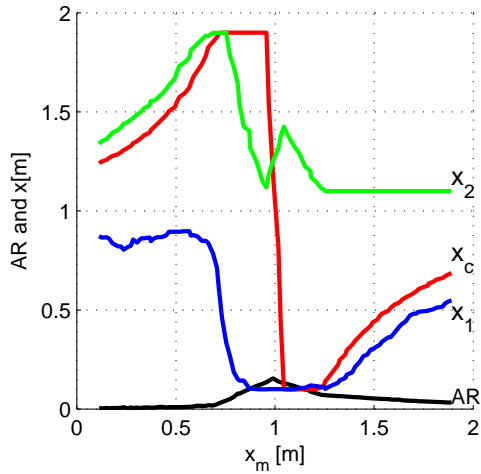

(c) AR and locations of the components of \mathbf{x}^{\star} for the various location of the equipment.

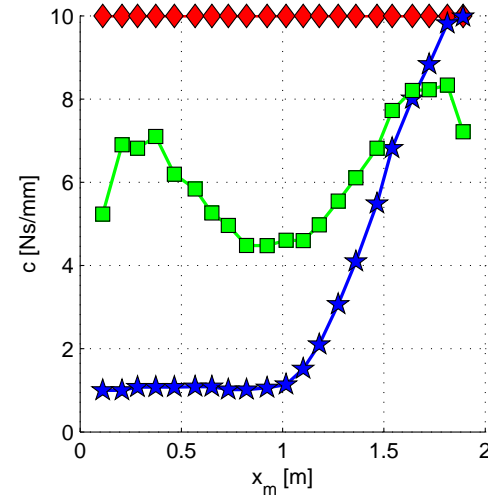

(d) Optimal damping coefficients for every location of the equipment. The values for each solution are marked with the solution's associated shape.

Fig. 6. The \overline{AR} and $\overline{\mathbf{Y}^*}$ of the highlighted three solutions.

So far, the AROP deals with cases where there is only a single objective function (other than cost). The next stage of this study will deal with generalizing the AROP to enhance robustness of solutions to multiobjective problems. In a multiobjective AROP, for every realization of the uncertainties, there is a set of Pareto optimal configurations that form the solution to the nested DOP. Hence, instead of a one-to-one mapping between the variate of uncertain parameters and the variate of objective values, there is a one-to-many mapping. We envisage that a set-based approach for evaluating the solutions' performances will be required.

ACKNOWLEDGEMENT

This research was supported by a Marie Curie International Research Staff Exchange Scheme Fellowship within

the 7th European Community Framework Programme. The first author acknowledges support from Ort Braude College of Engineering, Israel. The first and second authors acknowledge the hospitality and support of the Mechanical and Material Engineering Department at the University of Western Ontario, Canada.

REFERENCES

- [1] I. Paenke, J. Branke, and Y. Jin, "Efficient search for robust solutions by means of evolutionary algorithms and fitness approximation," *Evolutionary Computation, IEEE Transactions on*, vol. 10, no. 4, pp. 405–420, aug. 2006.
- [2] M. S. Phadke, *Quality Engineering Using Robust Design*, 1st ed. Upper Saddle River, NJ, USA: Prentice Hall PTR, 1995.

- [3] J. Branke and J. Rosenbusch, "New approaches to coevolutionary worst-case optimization," in *Parallel Problem Solving from Nature PPSN X*, ser. Lecture Notes in Computer Science, G. Rudolph, T. Jansen, S. Lucas, C. Poloni, and N. Beume, Eds. Springer Berlin Heidelberg, 2008, vol. 5199, pp. 144–153.
- [4] C. Cruz, J. R. González, and D. A. Pelta, "Optimization in dynamic environments: a survey on problems, methods and measures," *Soft Computing*, vol. 15, pp. 1427–1448, 2011.
- [5] Y. Koren, U. Heisel, F. Jovane, T. Moriwaki, G. Pritschow, G. Ulsoy, and H. V. Brussel, "Reconfigurable manufacturing systems," *CIRP Annals - Manufacturing Technology*, vol. 48, no. 2, pp. 527 – 540, 1999.
- [6] P. Gu, M. Hashemian, and A. Nee, "Adaptable design," *CIRP Annals - Manufacturing Technology*, vol. 53, no. 2, pp. 539 – 557, 2004.
- [7] D. Xue, G. Hua, V. Mehrad, and P. Gu, "Optimal adaptable design for creating the changeable product based on changeable requirements considering the whole product life-cycle," *Journal of Manufacturing Systems*, vol. 31, no. 1, pp. 59 – 68, 2012.
- [8] A. Ben-Tal, A. Goryashko, E. Guslitzer, and A. Nemirovski, "Adjustable robust solutions of uncertain linear programs," *Mathematical Programming*, vol. 99, no. 2, pp. 351–376, 2004.
- [9] D. Bertsimas, V. Goyal, and X. Sun, "A geometric characterization of the power of finite adaptability in multistage stochastic and adaptive optimization," *Mathematics of Operations Research*, vol. 36, no. 1, pp. 24–54, 2011.
- [10] G. Avigad, E. Eisenstadt, and A. Goldvard, "Pareto layer: Its formulation and search by way of evolutionary multi-objective optimization," *Engineering Optimization*, vol. 42, no. 5, pp. 453–470, 2010.
- [11] M. D. McKay, R. J. Beckman, and W. J. Conover, "Comparison of three methods for selecting values of input variables in the analysis of output from a computer code," *Technometrics*, vol. 21, no. 2, pp. 239–245, 1979.
- [12] Newport Corporation. Vibration control - identifying and controlling vibrations in the workplace. [Online]. Available: <http://photonics.com/edu/Handbook.aspx?AID=25517> [Accessed: 29.01.2013]
- [13] S. Salomon, G. Avigad, A. Goldvard, and O. Schütze, "PSA a new scalable space partition based selection algorithm for MOEAs," in *EVOLVE - A Bridge between Probability, Set Oriented Numerics, and Evolutionary Computation II*, ser. Advances in Intelligent Systems and Computing, O. Schütze, Ed. Springer Berlin Heidelberg, 2013, vol. 175, pp. 137–151.
- [14] C. Mattson and A. Messac, "Pareto frontier based concept selection under uncertainty, with visualization," *Optimization and Engineering*, vol. 6, no. 1, pp. 85–115, 2005.
- [15] G. Avigad and A. Moshaiiov, "Simultaneous concept-based evolutionary multi-objective optimization," *Applied Soft Computing*, vol. 11, no. 1, pp. 193 – 207, 2011.
- [16] Y. Jin, S. Member, and J. Branke, "Evolutionary Optimization in Uncertain Environments A Survey," *Evolutionary Computation, IEEE Transactions on*, vol. 9, no. 3, pp. 303–317, 2005.
- [17] S. Salomon, G. Avigad, P. J. Fleming, and R. C. Purshouse, "Optimization of adaptation – a multi-objective approach for optimizing changes to design parameters," in *Evolutionary Multi-Criterion Optimization*, ser. Lecture Notes in Computer Science, R. C. Purshouse, Ed. Springer Berlin Heidelberg, 2013, vol. 7811, pp. 21–35.