



Deposited via The University of York.

White Rose Research Online URL for this paper:

<https://eprints.whiterose.ac.uk/id/eprint/189009/>

Conference or Workshop Item:

Wright, Steven A., Dudson, Benjamin Daniel, Hill, Peter Alec et al. (2022) Approaches to Performance Portability for Fusion Applications. In: ExCALIBUR Programme-wide Workshop, 11-12 Jul 2022.

Reuse

Items deposited in White Rose Research Online are protected by copyright, with all rights reserved unless indicated otherwise. They may be downloaded and/or printed for private study, or other acts as permitted by national copyright laws. The publisher or other rights holders may allow further reproduction and re-use of the full text version. This is indicated by the licence information on the White Rose Research Online record for the item.

Takedown

If you consider content in White Rose Research Online to be in breach of UK law, please notify us by emailing eprints@whiterose.ac.uk including the URL of the record and the reason for the withdrawal request.

Approaches to Performance Portability for Fusion Applications


Steven Wright¹, Ben Dudson¹, Peter Hill¹, David Dickinson¹, Edward Higgins¹,
Gihan Mudalige², Ben McMillan² and Tom Goffrey²
¹University of York, ²University of Warwick



Project NEPTUNE

NEPTUNE (*NEutrals & Plasma T*urbulence *N*umerics for the *E*xascale) is the *Fusion Modelling System* use case for the ExCALIBUR Programme.

The goal is to develop a code that can make efficient use of current Petascale and future Exascale hardware in order to draw insights from ITER, and to guide and optimise the design of the UK demonstration Nuclear Fusion Power Plant (STEP).

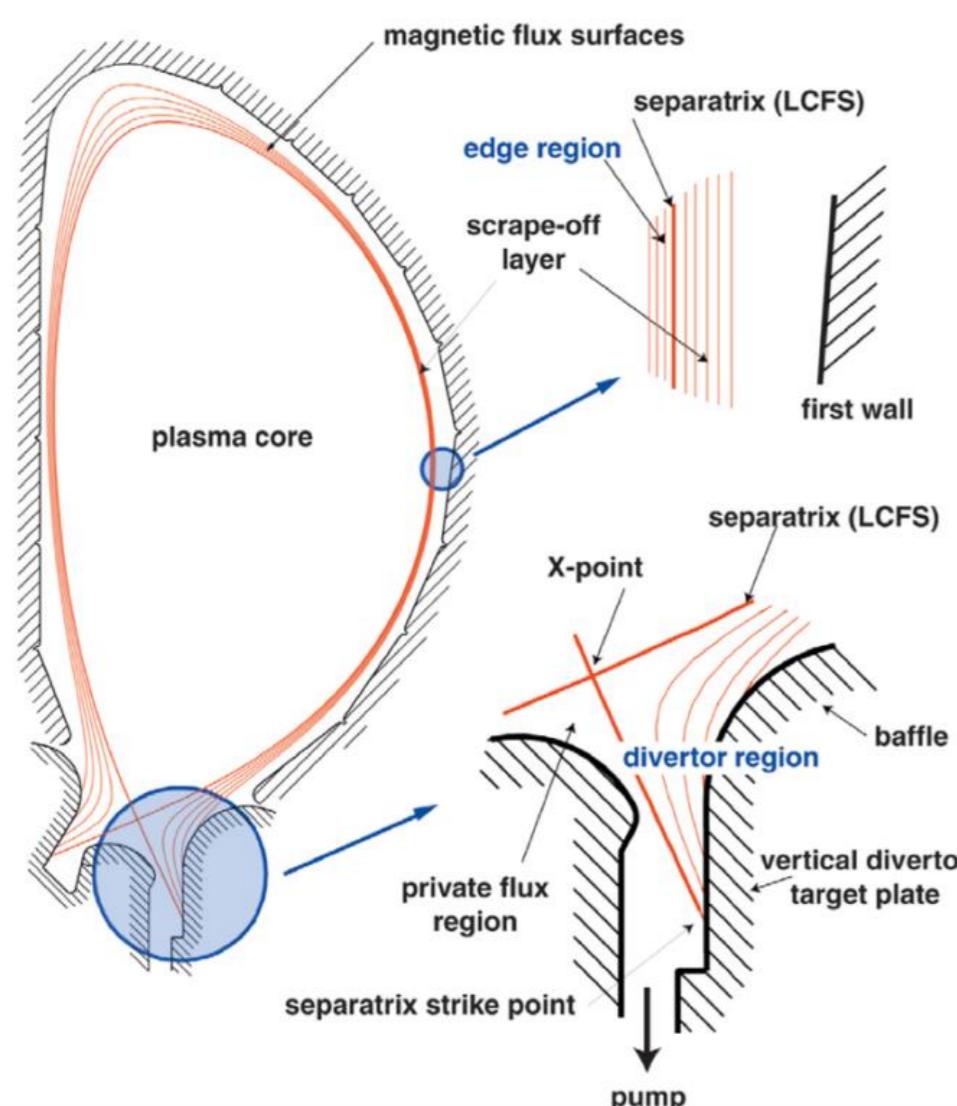


The initial focus is on simulation of the edge and divertor regions (or the “exhaust system”).

The **Support and Coordination** work package is focussed on establishing a series of best practices in engineering such an Exascale-ready simulation code.

Context

Hardware is diversifying. There is a proliferation of hardware and programming models. Almost all pre- and post-Exascale systems will be heterogenous.

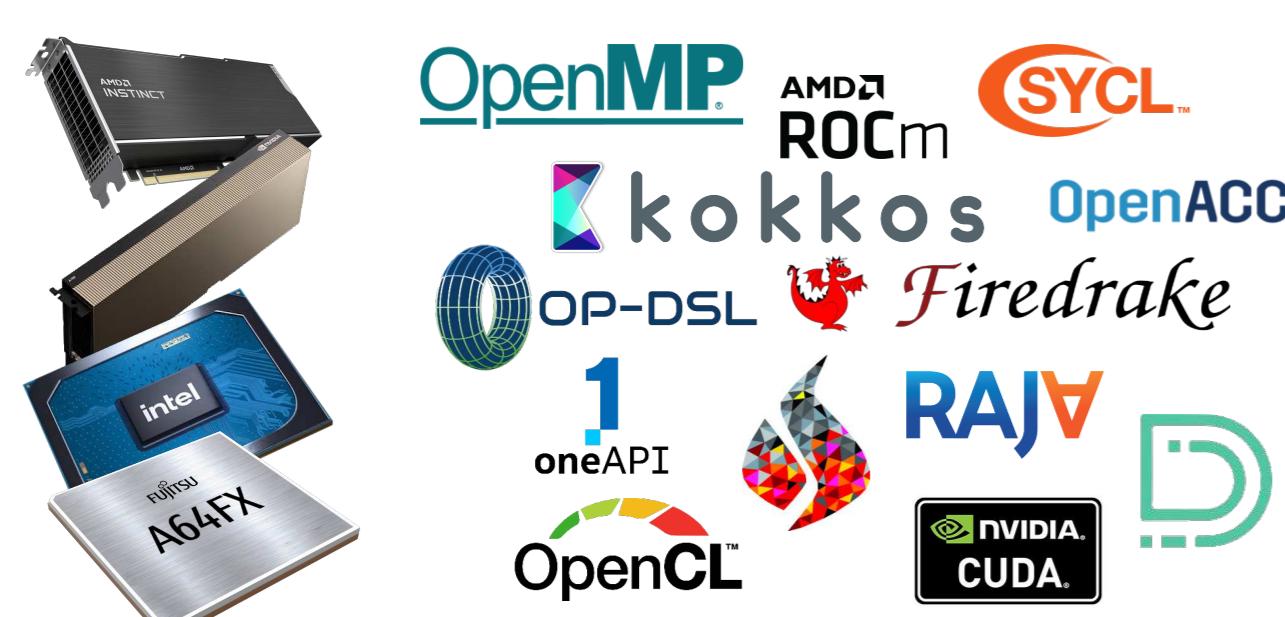

Most of the FLOP/s will be provided by GPU accelerators from **NVIDIA**, **AMD**, and **Intel**. These will sit alongside **x86_64** and **ARM** CPU architectures from **Intel**, **AMD**, **NVIDIA**, **Fujitsu**, and possibly others.

Each architecture might require a specific parallel programming model for optimal performance (e.g. CUDA for NVIDIA).

Avoiding vendor-lock-in requires an approach that is portable between architectures but also performant.

Evaluation

Our evaluation is based on mini-apps that are available in a range of parallel programming models that implement algorithms that are of interest to NEPTUNE.

In particular, we have been periodically evaluating applications that implement **fluid methods** and **particle methods**. We evaluate the performance portability of each available implementations with the Pennycook metric [1].


$$\Phi(a, p, H) = \begin{cases} \frac{|H|}{\sum_{i \in H} \frac{1}{e_i(a, p)}} & \text{if } i \text{ is supported } \forall i \in H \\ 0 & \text{otherwise} \end{cases}$$

Since this may hide useful insights, we visualise portability with the box plot and cascade plot visualisations from Sewall et al. [2].

Fluid Methods


It is often sufficient to treat plasma as a fluid, using various computational schemes. Our evaluation is currently based finite difference (TeaLeaf), finite element (miniFE) and high-order finite element (Laghos) schemes.

miniFE from the Mantevo suite implements a heat diffusion problem in 3D on an unstructured finite element mesh.

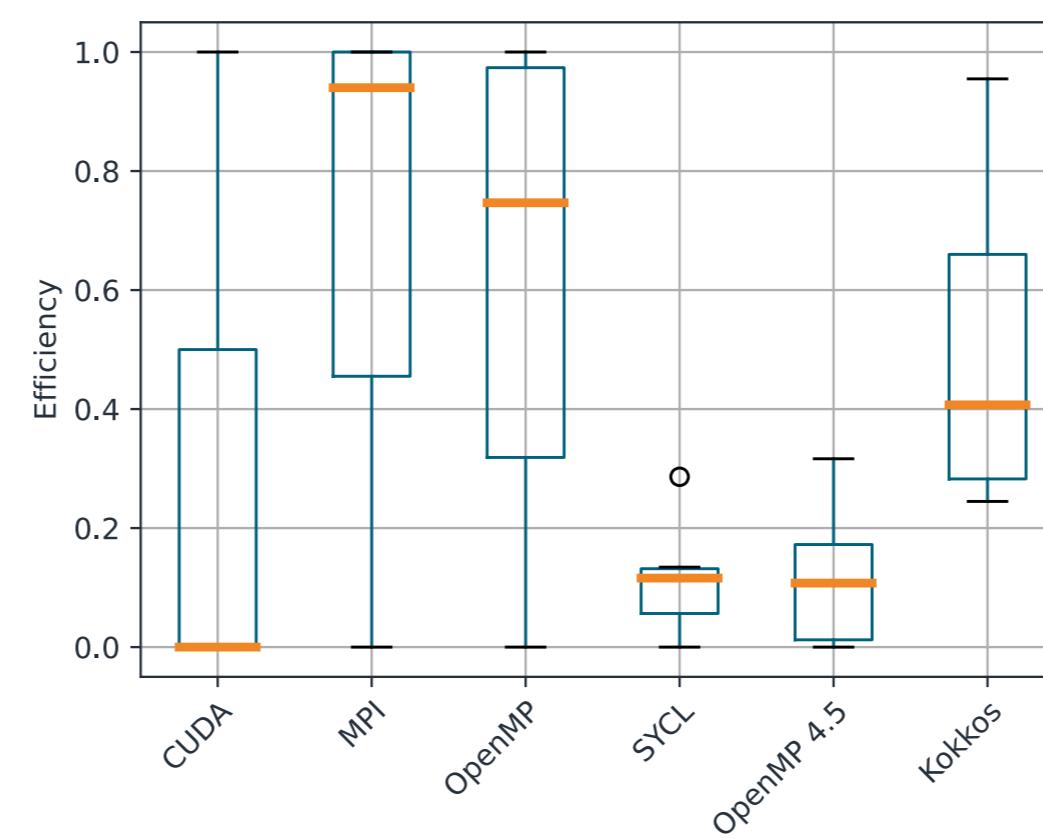

Native implementations (CUDA, MPI, OpenMP) achieve the highest levels of performance on their respective platforms. Kokkos is the only fully portable solution, but may lead to half the performance or worse.


OpenMP 4.5 and SYCL both perform poorly (likely due to immature compiler support). The cascade plot better shows how performance changes as platforms are added to the evaluation set.

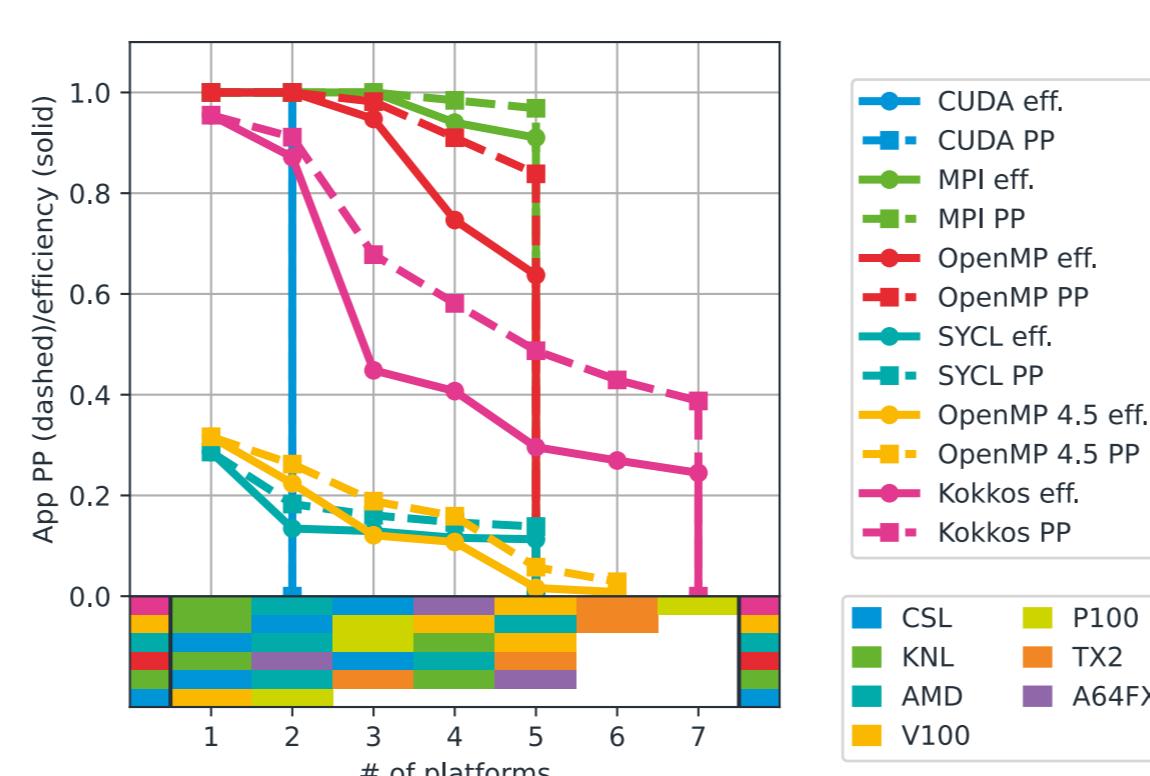

Particle Methods

The particle-in-cell (PIC) method is typically used when a fluid model is insufficient. Our evaluation of particle methods is based on three Kokkos-based PIC codes (CabanaPIC, VPIC and EMPIRE-PIC [3]).


As these applications are only available in a single programming model, we can only evaluate each kernel with respect to the platform's peak performance.

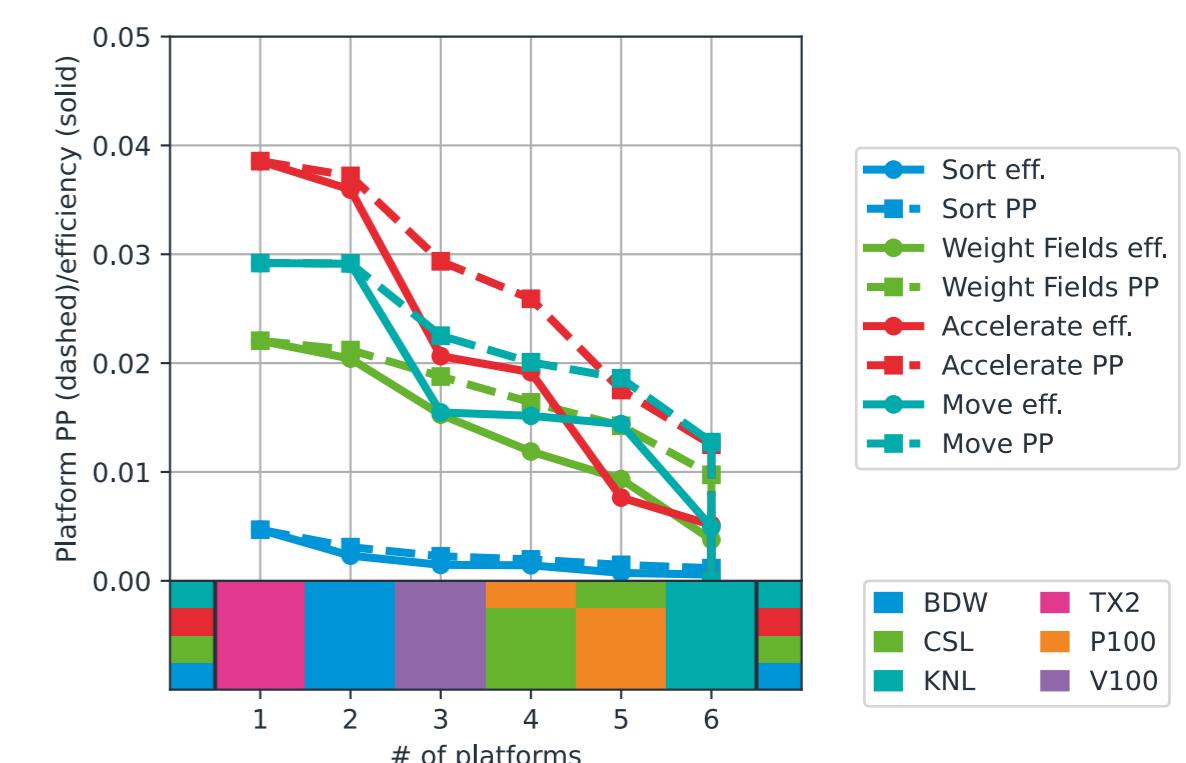

Across each of the kernels (except sort, which has a low arithmetic intensity), we typically achieve a fraction of peak performance (1-4%), and this approximately correlates with each platform's available memory bandwidth.

Highlights

- Pragma-based approaches are the easiest to implement and can offer good portability. Achieving high performance on accelerators often requires different directives (and therefore multiple implementations).
- Template-based programming models offer good portability and programmability. SYCL should offer similar performance as compilers mature (see data from MG-CFD below [4]).

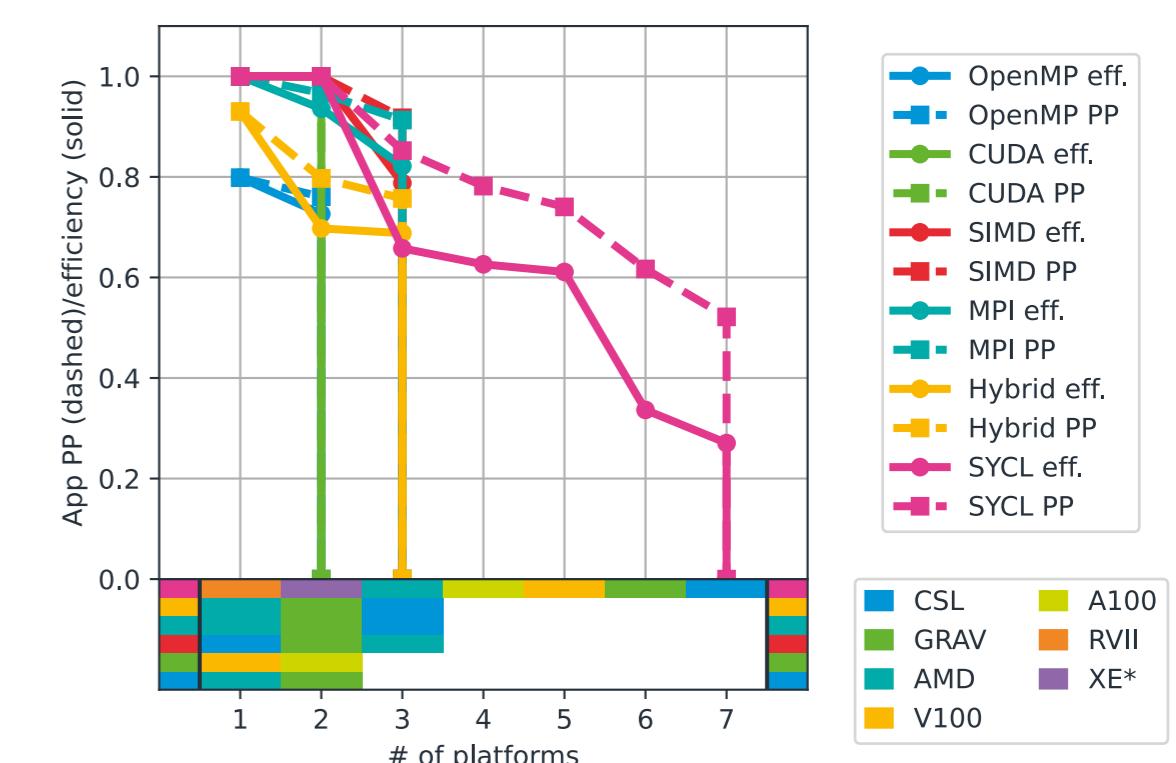

- Higher-level DSLs (e.g. Firedrake, UFL) may allow scientists to be more expressive, and can code-gen to a secondary programming model. Thus, they may be able to provide better portability and productivity, but require complex back-end development.

References

- [1] S.J. Pennycook, et al. Implications of a metric for performance portability. Future Generation Computer Systems, 92:947 –958, 2019.
- [2] J.D. Sewall, et al. Interpreting and visualizing performance portability metrics. In 2020 P3HPC Workshop, pages 14–24, 2020.
- [3] M.T. Bettencourt, et al. EMPIRE-PIC: A Performance Portable Unstructured Particle-in-Cell Code. Comms. in Computational Physics, 30(4):1232–1268, August 2021
- [4] I.Z. Reguly, et al. Under the Hood of SYCL – An Initial Performance Analysis With an Unstructured-mesh CFD Application, International Supercomputing Conference (ISC 2021), June 2021