White Rose Research Online

eprints@whiterose.ac.uk
https://eprints.whiterose.ac.uk
Universities of Leeds, Sheffield and York

Deposited via The University of Leeds.

White Rose Research Online URL for this paper:
https://eprints.whiterose.ac.uk/id/eprint/110639/

Version: Accepted Version

Article:
Al-Rahbi, AS and Williams, PT (2017) Hydrogen-rich syngas production and tar removal from biomass gasification using sacrificial tyre pyrolysis char. Applied Energy, 190. pp. 501-509. ISSN: 0306-2619

https://doi.org/10.1016/j.apenergy.2016.12.099

© 2017 Elsevier Ltd. Licensed under the Creative Commons Attribution-NonCommercial-NoDerivatives 4.0 International http://creativecommons.org/licenses/by-nc-nd/4.0/

Reuse
Items deposited in White Rose Research Online are protected by copyright, with all rights reserved unless indicated otherwise. They may be downloaded and/or printed for private study, or other acts as permitted by national copyright laws. The publisher or other rights holders may allow further reproduction and re-use of the full text version. This is indicated by the licence information on the White Rose Research Online record for the item.

Takedown
If you consider content in White Rose Research Online to be in breach of UK law, please notify us by emailing eprints@whiterose.ac.uk including the URL of the record and the reason for the withdrawal request.

UNIVERSITY OF LEEDS
University of Sheffield
UNIVERSITY of York

Hydrogen-rich syngas production and tar removal from biomass gasification using sacrificial tyre pyrolysis char

Amal S. Al-Rahbi, Paul T. Williams*

School of Chemical & Process Engineering,

University of Leeds, Leeds, LS2 9JT, UK

(*Email: p.t.williams@leeds.ac.uk; Tel: +44 1133432504; FAX: +44 1132467310)

Abstract

Carbonaceous materials have been proven to have a high catalytic activity for tar removal from the syngas produced from biomass gasification. The simultaneous reforming and gasification of pyrolysis gases and char could have a significant role in increasing the gas yield and decreasing the tar in the product syngas. This study investigates the use of tyre char as a catalyst for H_2-rich syngas production and tar reduction during the pyrolysis-reforming of biomass using a two stage fixed bed reactor. The biomass sample was pyrolysed under nitrogen at a pyrolysis temperature of 500 ℃, the evolved pyrolysis volatiles were passed to a second stage with steam and the gases were reformed in the presence of tyre char as catalyst. The influence of catalyst bed temperature, steam to biomass ratio, reaction time and tyre ash metals were investigated. The influence of the catalytic activity of tyre ash minerals on composition of syngas and tar decomposition during the steam reforming of biomass was significant as the removal of minerals led to a decrease in the H_2 yield. Raising the steam injection rate and reforming temperature resulted in an increase in H_2 production as steam reforming and char gasification reactions were enhanced. The maximum H_2 content in the product syngas of 56 vol.% was obtained at a reforming temperature of 900 °C and with a steam to biomass mass ratio of 6 (g g^{-1}). Further investigation of the influence of the biomass:steam ratio on syngas quality showed that the H_2:CO molar ratio was increased from 1.8 (steam: biomass ratio; 1.82 g g^{-1}) to 3 (steam: biomass ratio; 6 g g^{-1}).

Keywords; Waste tyre; Pyrolysis; Biomass gasification; Tar removal; Syngas

1. Introduction

Due to increasing concern in regard to environmental issues such as global warming and depletion of fossil fuels, hydrogen is considered as an important fuel of the future, which can reduce the reliance on oil. Hydrogen can be produced via various chemical processes including ion exchange membranes, biomass gasification, ethanol and methanol steam reforming. However, fossil fuel reforming, mainly natural gas, is known to contribute to about 90% of the current total hydrogen production [1, 2]. Therefore, there has been a growing effort to find alternative processes for hydrogen production. Gasification is one of the effective thermochemical conversion processes for biomass energy for producing a hydrogen rich gas which can be used for fuel cell systems and synthesis reactions including Fischer-Tropsch and methanol reactions [3]. Various gasifying agents are used during the gasification process depending on the desired gas composition [4]. Steam is well known to increase the heating value of syngas and produce a gas with a higher content of hydrogen [5]. However, tar formation during biomass gasification is one of the main problems which can prevent the direct use of the producer gas in gas turbines and gas engines. One of the most efficient techniques for tar removal is catalytic steam reforming in which tar compounds can be converted into useful gases and for this purpose various catalysts have been tested [4, 6-8]. To cope with the challenges associated with deactivation of commercial catalysts because of coking or sulphur poisoning, char as a by-product obtained in the pyrolysis of organic matter is cheap and easily replaceable and has been found to be effective for tar reforming during the volatile-char interactions [9-17].

Choi *et al.* [14] investigated the gasification of a sewage sludge with the use of activated carbon as a catalyst and reported that the introduction of steam at 800ºC enhanced the steam reforming reactions and produced a free tar syngas with a high content of hydrogen (35-45 vol.%). The authors concluded that with this process the total condensed liquid decreased from 20 to 14.4

54 wt.% and the product syngas increased from 52.5 to 64.9 wt.%. In contrast, Striugos *et al.* [16]
55 claimed that the conversion of tar during the steam reforming of biomass was only 1% higher than
56 that with no steam. It is well know that biomass has a high percent of moisture, therefore the auto-
57 generated steam during the catalytic cracking could also act as a gasifying agent and enhance the
58 cracking of tar compounds.

59 A comparison study of the catalytic activity of various additives including zeolite, olivine,
60 dolomite and biomass and coal based activated carbons were investigated for tar removal and
61 hydrogen production during air gasification of dried sewage sludge [18]. A large reduction in tar
62 and the highest H_2 production (24.4 vol.%) were found with the use of coal based activated carbon
63 as the tar removal catalyst. The authors attributed the higher activity of coal based activated
64 carbon, among the catalysts used, to its high BET surface area and the large pore size. In another
65 study carried out by Choi *et al.* [14], using original and acid-treated activated commercial carbons,
66 with a BET surface area of 959 $m^2 g^{-1}$, were used as tar cracking additives during the steam/oxygen
67 gasification of dried sewage sludge in a two stage gasifier. The acid treated activated carbon was
68 found to be less effective than the original activated carbon, additionally the syngas obtained with
69 the original activated carbon was found to have the highest H_2 content. It was suggested that the
70 ash minerals present in the original activated carbon had an effective role in promoting tar cracking
71 reactions and enhanced H_2 production during the steam reforming.

72 Tars are known to contain significant concentrations of polycyclic aromatic hydrocarbons
73 (PAH) and according to the reported literature [19, 20], reforming of PAHs in the presence of
74 steam at a temperature below 1000 ºC is very difficult. Therefore, there is a need to use catalysts
75 with steam reforming to ensure cracking of the components of tar even at a temperature of 900 ºC.
76 The tar decomposition using char is suggested to be due to multi steps including tar reforming on
77 the char surface producing coke on char pores followed by steam gasification of the deposited
78 carbon which means that tar reforming does not occur directly [21]. Regarding char gasification

79 during the process of simultaneous reforming/gasification of pyrolysis oil and char, the volatiles
80 formed during the pyrolysis process could be a strong inhibitor for char gasification [22, 23]. The
81 carbon deposits or coke could be formed during the interaction of volatiles with the char surface.
82 However, the presence of minerals could facilitate or enhance the char gasification as was
83 observed by Bayarsaikhan *et al.* [22]. They investigated the steam gasification of the acid-washed
84 char and found that the net char conversion was negative, which suggests that the coke deposits
85 on char surface without being gasified or the tar deposition rate is faster than the steam gasification
86 rate.

87 There has been growing interest in converting wastes into useful products. The pyrolysis
88 of waste tyres produces an oil, char and gas product in addition to the steel reinforcement [24].
89 The oil yield is high (up to ~58 wt.%) from the tyre rubber and has fuel properties similar to a
90 light fuel oil and consequently can be used as a valuable liquid fuel. The yield of gas is about 10
91 wt.% which has a high concentration of hydrocarbon gases with a calorific value in the range of
92 20─65 MJ m^3, depending on process conditions and therefore can be used as process fuel for the
93 pyrolysis system. The char yield is ~35─40 wt.%, and may be used as a solid fuel or low grade
94 carbon black because of the rather high ash content. However, tyre char produced during the
95 pyrolysis of waste tyre has been found to have a high catalytic activity for tar cracking from
96 biomass gasification [25]. The presence of tar in the syngas produced from biomass and wastes is
97 a complex mixture of condensable hydrocarbons and has been shown to be problematic in that it
98 causes blockage of process lines, plugging and corrosion in downstream fuel lines, filters, engine
99 nozzles and turbines.
100 In this study, tyre char is used for tar reforming and hydrogen production through a gas-solid
101 simultaneous reforming/gasification process using a two stage pyrolysis-reforming reactor which
102 could play a major role in increasing the total gas yield. The study investigates the influence of
103 bed temperature, steam to biomass ratio, reaction time and the effects of tyre ash minerals on

104 syngas quality and hydrogen production. Biomass in the form of wood pellets produced from
105 waste wood was used as the feedstock to generate tar/syngas and waste tyre derived pyrolysis char
106 was used as a sacrificial catalyst in a steam reforming process to generate a hydrogen-rich syngas.
107
108 **2. Materials and methods**
109
110 *2.1 Materials*
111
112 Wood pellets with a particle size of 1 mm were used as the biomass feedstock for pyrolysis
113 reforming/steam gasification experiments. The wood pellets were produced as compressed saw
114 dust pellets from waste wood processing by Liverpool Wood Pellets Ltd, Liverpool, UK. Tyre
115 pyrolysis derived char was used as a catalyst for reforming of biomass pyrolysis volatiles and was
116 prepared using a fixed bed reactor. Details of the production of the tyre char are reported elsewhere
117 [25], but briefly the pyrolysis reactor was constructed of stainless steel, externally heated by an
118 electrical furnace and the waste tyre was heated in nitrogen at a heating rate of 10 ºC min^{-1} to a final
119 temperature of 800 ºC and held at that temperature for one hour. The recovered pyrolysis chars were ground
120 and sieved to a particle size of ~1mm and oven-dried for 24h.
121 To study the catalytic effect of ash minerals on biomass tar reforming, tyre char was
122 demineralised using HCl to reduce its ash content. For this purpose, (5M) HCl was added to tyre
123 char followed by boiling the mixture for 20 minutes. Then, the char was washed several times
124 with deionised water until the pH was 7, finally the demineralised tyre char was dried at 105°C
125 for 24h. The elemental composition and ash content of the char samples are shown in Table 1.
126 Tyre char had a high ash content of 18 wt.% and its main metal composition was Zn and the acid
127 treatment was effective for metal removal. After the removal of metals, the carbon content of acid
128 treated char increased while the sulphur and nitrogen contents decreased.
129

130 *2.2 Pyrolysis and reforming reaction system*

131

132 The experimental system consisted of a two stage pyrolysis-reforming reactor (Figure 1)
133 constructed of stainless steel with an inner diameter of 22 mm and of a total length of 160 mm.
134 The pyrolysis of biomass was carried out in the first stage at a temperature of 500 °C, and the
135 evolved pyrolysis gases were passed directly to the second stage where steam catalytic reforming
136 took place with the presence of tyre char. Each of the reactor stages were heated separately using
137 temperature controlled and monitored furnaces. In addition, the biomass sample temperature and
138 the tyre char temperature were monitored separately. Temperature monitoring throughout was via
139 type K thermocouples. The first stage and second stage reactor system was continually purged
140 with nitrogen at a metered flow rate of 90 ml min^{-1}. The reforming temperature was varied between
141 700 and 900 °C. The experimental procedure consisted of initial heating of the second stage hot
142 char reactor to the desired catalyst temperature and once the desired temperature was reached, the
143 biomass sample was then pyrolysed at a heating rate of 40 °C min^{-1} from ambient temperature to
144 a final temperature of 500 °C. At the same time, water was injected via a syringe pump at the
145 feeding rate of 6.64 g h^{-1} (steam/biomass (S/B) ratio of 3.32) into the second stage of the reactor,
146 and mixed with the evolved pyrolysis gas and passed over the tyre char. Further experiments were
147 carried out to investigate the influence of steam to biomass ratio on the gaseous composition and
148 hydrogen production at S/B ratios of 1.82, 3.32, 4.32 and 6g g^{-1}. Downstream from the reactor,
149 the produced gas was passed through two cold traps (-70 °C),where tar compounds and also
150 unreacted water were condensed. The non-condensable gases were collected using a Tedler™ gas
151 sample bag. After the experiment, the gases were analysed using gas chromatography and with
152 the known flow rates and molecular mass of each gas, the total mass of gases could be determined.
153 The influence of the experimental conditions on the gas composition and reforming/gasification

process was investigated. The experimental parameters used in this study were, bed temperature (700-900 °C), S/B mass ratio (1.82 ─ 6.00) and reaction time (1-4h).

2.3 Products analysis

The collected gaseous products were analysed off-line by packed column gas chromatography (GC). The permanent gases (N_2, H_2, CO, CO_2) were analysed using a Varian CP-3380 GC with two separate columns, each one with a thermal conductivity detector, where H_2, CO, O_2 and N_2 were analysed on a column packed with 60-80 mesh molecular sieve with argon carrier gas, while CO_2 was analysed on a80-100 mesh HayeSep column. A separate Varian CP-3380 gas chromatograph fitted with a 60-80 mesh column and a flame ionization detector (FID) was used to analyse the hydrocarbons (C_1-C_4) using nitrogen as carrier gas with a HayeSep GC column.

The condensed liquid was analysed using coupled gas chromatography-mass spectrometry (GC-MS). Prior to analysis the product bio-oil/tar was passed through a sodium sulphate column (Na_2SO_4) to remove any residual water. The GC-MS used was a Varian CP-3800 gas chromatograph coupled with a Varian Saturn 2200 GC- mass spectrometer. An aliquot (2 µl) of the bio-oil/tar dissolved in dichloromethane solvent was injected into the GC injector port at a temperature of 290 °C; the oven programme temperature was 40 °C for 2 min, then ramped to 280 °C at a heating rate of 5 °C min^{-1}, and finally held at 280 °C for 10 min. The transfer temperature line was 280 °C, manifold at 120 °C and the ion trap temperature was held at 200 °C.

The ash content of char samples was analysed using thermogravimetric analysis (TGA) under an air atmosphere. Elemental analysis was carried out with a CE Instruments Flash EA2000. The tyre char minerals of both original and acid treated tyre char were determined by EDX. Fresh

and selected reacted char samples were analysed using a Stanton-Redcroft thermogravimetric analyser (TGA) for carbon deposition. About 15 mg of char sample was placed in an alumina sample pan and heated at a heating rate of 20 to 800 °C and held for 20 min under the atmosphere of air at a flow rate of 50 ml.

3. Results and discussion

3.1 Effects of char ash on tar decomposition

To examine the influence of ash minerals on tar cracking and increasing the hydrogen yield during biomass pyrolysis-reforming/gasification process, tyre char was subjected to acid treatment with HCl for the purpose to remove the minerals. As observed in Table 1, the treatment was effective in removing about 50% of the total ash content of the char, including removal of most of the zinc, calcium and iron. It has been reported [26] that the ash content of a typical tyre is between 5 and 7 wt.% depending on the type of tyre, comprising mainly additives such as silica and clays, in addition to the additives such as zinc and sulphur. The silica and clay (alumina-silicates) additives would not be removed by the acid treatment process and would account for the large majority of the 9 wt.% ash content of the demineralised tyre char. It might be expected that the acid treatment process would remove most of the reactive metal from the tyre char, leaving the silica and alumina-silicate filler material. The porous texture of the treated sample remained unaffected. The original and acid-treated tyre chars were used as catalysts for tar cracking during biomass reforming in the presence of steam. With both chars, the influence of bed temperature on the final gaseous compositions was investigated from 700 to 900 °C, at a steam to biomass mass ratio of 3.32 and a reaction time of 60 min. The final temperature of the pyrolysis of the biomass was always 500 °C.

204 The reforming and cracking of biomass volatile compounds and the gasification of tyre
205 char produce more gaseous products according to the following reactions [27, 28];
206

Water gas (primary)	$C + H_2O \leftrightarrow CO + H_2$	Eq.1
Water gas (secondary)	$C + 2H_2O \leftrightarrow CO_2 + 2H_2$	Eq.2
Boudouard	$C + CO_2 \leftrightarrow 2CO$	Eq.3
Methanation	$C + 2H_2 \leftrightarrow CH_4$	Eq.4
Water gas shift	$CO + H_2O \leftrightarrow CO_2 + H_2$	Eq.5
Steam reforming	$C_nH_m + nH_2O \leftrightarrow nCO + \left(n + \frac{m}{2}\right)H_2$	Eq.6
Methane steam reforming	$CH_4 + H_2O \leftrightarrow CO + 3H_2$	Eq.7

207

208 As can be observed from the experimental results presented in Table 2, with both tyre char
209 samples, total gas yield increased significantly with the increase of temperature to 900 °C, this is
210 due to the reforming of tars (Eq.6) and the char gasification, as in the second stage the reactions
211 of H_2O, CO, H_2 and CO_2 with carbon in the tyre char took place [5]. With the use of original tyre
212 char, the gas yield, hydrogen yield and HHV of the product gas increased from 52.8 to 131.6
213 (wt.%), 8.4 to 39.2 (mmol g^{-1} biomass) and 48.3 to 66.1 (MJ Kg^{-1}) respectively as the tyre char
214 temperature was increased from 700 to 900 °C. According to Franco *et al.* [29], the endothermic
215 char gasification reactions are enhanced at a higher temperature which can be clearly seen from
216 the decrease of tyre char recovered after reaction at higher reaction temperature (Table 2). It is
217 worth mentioning that in the experiment with the use of sand and steam at 900 °C, the total gas

yield decreased by 56%, while the liquid product increased by 27%. Therefore, the increase of gas yield at a higher reforming temperature with the presence of tyre char is mainly due to the catalytic properties of char for reforming of tar and also because of char gasification.

The catalytic effect of the acid treated demineralised tyre char was investigated using the same experimental conditions as with the original tyre char. As presented in Table 2, the acid treated char exhibited a lower catalytic activity than the original tyre char. For example at a temperature of 900 °C, the total gas yield decreased by ~20% with the acid treated tyre char compared to the original gas yield at 900 °C. Additionally, the total liquid product was found to be higher with the acid treated tyre char. The results suggest that the ash metals, present in tyre char, play a significant role in enhancing the tar reforming reactions during the biomass pyrolysis-reforming/gasification process.

As displayed in Figure 2, the tyre char temperature had a clear influence on the gaseous species found in the product syngas. The main gaseous compounds formed during this process was hydrogen. The hydrogen yield increased with temperature, the maximum hydrogen yield of 39.20 (mmol g^{-1}) was obtained at a temperature of 900 °C. However, the removal of minerals as a result of acid treatment, resulted in a decrease in the hydrogen yield to 30 mmol g^{-1}. The decrease in hydrogen yield with the use of acid treated tyre char was also observed at reaction temperatures of 700 and 800 °C. Ma *et al.* [30] obtained a hydrogen yield of 83.3 mol kg^{-1} from the steam gasification of bio char.

With regards to the gaseous composition formed with the use of original and acid treated tyre char, there is an obvious difference between the two types of tyre pyrolysis char, e.g. the hydrogen and CO_2 content were higher with the original tyre char. For example at a temperature of 700 °C, the hydrogen content decreased from 34.6 to 14.3 vol.% after the acid treatment of the tyre char. Additionally, the content of CO, CH_4, C_nH_m increased with the use of acid treated tyre char. This suggest that steam reforming of methane and water gas shift reactions were enhanced

greatly with the presence of metals in the tyre char. The same observation has been found by Zhang *et al.* [31].

Table 2 shows that the H_2/CO molar ratio decreased sharply with the removal of minerals from the tyre pyrolysis char. The results suggest that the ash metals present in the tyre char promote the water gas shift reaction (Eq.5) and the char-steam reactions (Eq.1 & Eq.2). The increase of H_2 concentrations with the original tyre char is mainly attributed to the catalytic effect of mineral metals which play a major role in enhancing the catalytic steam reforming and cracking of tar. Additionally a significant difference was also observed in relation to the hydrocarbon concentration of the product gas with both chars. The same trend was observed by Jiang *et al.* [32], during the steam gasification of rice straw, in which the hydrogen yield was found to decrease from 10 mmol g^{-1} of the original sample to 8.8 mmol g^{-1} of acid treated sample. According to Choi *et al.* [14], the adsorbed tar on the active sites of activated carbon could form coke and with the sequence of thermal and catalytic cracking of tar and coke, hydrogen and light hydrocarbons are produced. The active sites could be the metals, therefore the available active sites on the acid treated tyre char were reduced.

In comparison with the experiments carried out with the use of sand in the second stage catalytic reactor at 900 °C, the concentration of CO decreased with the use of tyre pyrolysis char during the steam reforming of biomass pyrolysis oil, this indicates that the char promotes the CO-shift reaction leading to a high concentration of H_2 and CO_2 [27]. Similar results have been reported by Wang *et al.* [33]. A significant decrease in methane concentration was observed as well. The detected trend in this study agrees with the trend observed by Franco *et al*. [29]. The influence of gas-char interaction on gaseous composition has been studied by Chen *et al.* [34] and concluded that this process had a significant influence on enhancing the hydrogen content from 17 to 37.8 vol.%. According to the reported literature, the water gas shift reaction is promoted at a temperature higher than 700 °C leading to an increase in H_2 and decrease in CO yields [29].

Tyre char promotes the water gas shift reaction at higher temperature leading to a high concentration of H_2. However, the increase in CO_2 composition is not significant. According to Franco *et al*. [29], other reactions may take place at a temperature higher than 830 °C such as Boudouard reaction which results in consuming the CO_2 concentration and this can be observed from the amount of converted tyre char at 900°C which was higher than that at 800 °C. Additionally, char steam gasification reactions and methane reforming reaction are enhanced at 900 °C, resulting in an increase in CO content and a decrease in the CH_4 content. The significant increase in H_2 concentration is also due to hydrocarbon cracking and reforming reactions. Wang *et al.* [9] studied the steam reforming of biomass and found that the steam itself had a minor effect on tar reforming without the presence of char-supported catalyst.

The presented results suggested that tyre ash metal species had a catalytic role in enhancing the hydrogen production. Zhang *et al.* [31] studied the catalytic conversion of model biomass pyrolytic vapour using biochar and demineralised biochar and reported hydrogen yields of 64 and 59 vol.% respectively. Nanou *et al.* [35] investigated the influence of ash on enhancing the steam gasification of wood char and concluded that the addition of ash minerals to the biomass char was effective in enhancing the char gasification as the gasification rate of the impregnated char increased by 30% compared to the original char with no minerals. In this study, this can be observed from the decrease in tyre char recovered at the end of the experiment. At all the studied temperatures, the decrease in the original tyre char recovered was more obvious than the acid treated char (Table 2). This could be due to the presence of metals which could enhance the char gasification. For example at 900 °C, the original and acid treated tyre char yields decreased by 17.5 and 14.5 % respectively.

The catalytic effect of zinc in enhancing the hydrogen yield during biomass gasification has been reported before by other researchers [1]. Gonzalez [1] examined the influence of the presence of $ZnCl_2$ and dolomite on biomass steam gasification and concluded that at a temperature

of 800 °C, the presence of $ZnCl_2$ had a positive effect in promoting the hydrogen production, compared to dolomite, during biomass gasification in the presence of steam. However, at a temperature of 900 °C, the hydrogen concentration remained almost the same even in the presence of $ZnCl_2$. Demirbas [36] compared the catalytic pyrolysis of biomass samples with Na_2CO_3, K_2CO_3 and $ZnCl_2$ and the highest hydrogen yield of 70.3% was obtained from olive husk using 13% $ZnCl_2$ as catalyst at 1025 K. In contrast, Hamad *et al.* [37] claimed that $ZnCl_2$ had a negative influence in which the gas yield was found to decrease with the addition of $ZnCl_2$ to biomass.

The tar compounds found in the condensed liquid were grouped based on the classification system reported by other researchers in which the tar compounds are classified into five classes depending on the number of aromatic rings and the molecular weight [38, 39]. Class 2 includes tar compounds with heterocyclic compouds such as phenols and cresols, Class 3 is referred to as aromatic tar compounds with 1-ring such as ethylbenzene and xylene, Class 4 contains 2-3 ring aromatic compounds such as naphthalene, methylnaphthalenes and phenanthrene and Class 5 tar compounds contain 4-7 ring aromatic compounds such as fluoranthene and pyrene.

The concentration of the classified tar compounds is shown in Figure 3, for the product tars produced using both the original tyre char and the acid-treated tyre char shows that the major tar compounds present came from class 2. The presence of minerals in tyre char seems to promote the cracking of large ring polyaromatic compounds (class 4 & 5) to form light compounds (class 2). Additionally, it can be observed that the concentration of both the light and heavy PAH compounds were increased by 10 and 2 % respectively with the use of acid treated tyre char. In terms of the catalytic activity of the char used in this study, the results show that the original tyre char was more effective in reducing most of the tar compounds than the acid-treated tyre char. Jiang *et al.* [32] studied the catalytic effects of the inherent alkali and alkaline earth metals on tar decomposition during the steam gasification of biomass via using original biomass and demineralised biomass and reported that the inherent alkali minerals present in biomass char had

a significant catalytic effect in enhancing tar reforming, char gasification and water gas shift reactions during the biomass steam gasification [32]. However, char ash consists of various metal species and the catalytic activity of the metals may not be the same, therefore, Zhang *et al.* [31] carried out another study to investigate the catalytic effects of specific metals on biomass pyrolysis tar cracking, for this purpose biochar was impregnated with different metallic species (K, Ca, Mg, Zn, Fe, Al). It was reported that all the studied metallic elements had a catalytic activity except for Al. The presence of zinc in the tyre ash composition plays a significant catalytic role in enhancing tar reforming reactions. For example, in the study by Altuntaş Öztaş and Yürüm [40] coal samples were impregnated with several metals including Zn. The authors observed some catalytic effect of Zn and Ni in decomposing many of the tar compounds.

3.2 Effect of Steam to biomass ratio

The main aim of the combination of biomass pyrolysis and tar and char gasification in the second stage was to enhance the gas yield and obtain the optimum syngas ratio through shifting the reaction from exothermic to endothermic [41, 42]. Therefore, the influence of steam to biomass (S/B) mass ratio over the range of 1.8-6.0 on hydrogen production and reforming/gasification efficiency was investigated at 900 °C and at reaction time of 60 min with the use of the original tyre char. According to the reported literature [33, 43], the metal species in char accelerates the dissociation of water into OH* and O* intermediates which would then react with the cracked molecular hydrocarbons intermediates, formed during the reforming process, thus promoting the water gas shift reaction and generate hydrogen. Therefore, this process depends on the amount of the dissociated species from water (H* and OH*). The hydrogen production yield could be increased by varying the steam to biomass ratio.

342 The influence of steam to biomass mass ratio on the total gas yield and gas compositions
343 is shown in Figure 4. The increase in steam quantity enhanced the steam reforming of tar and tyre
344 pyrolysis char-steam reactions which results in an increase in the gas yield from 94.82 to 132.6
345 wt.% (data calculated in relation to the original mass of biomass). The total gas yield increased by
346 ~28% with the increase of steam flow rate (S/B ratio 1.82 to 3.32). At higher S/B mass ratio of
347 3.32, the effect of steam on gas production was negligible. According to Alipour *et al.* [44], the
348 high steam to biomass ratio does not always contribute to increase the total gas yield.
349 As the steam to biomass ratio was increased from 1.8 to 6.0, the hydrogen concentration
350 increased from 47 to 56 vol.% and the CO concentration decreased from 26 vol.% to 19 vol.%.
351 The increase of H_2 and decrease in CO at higher S/B mass ratio is due to the enhanced char steam
352 gasification (Eq.1) and water gas shift reaction (Eq.5). However, the increase of H_2 concentration
353 was not significant when the S/B mass ratio was higher than 3.32. In a study undertaken by Zhang
354 *et al*. [31], the highest hydrogen yield achieved, during the reforming of bio oil using bio char,
355 was about 60 vol.% at a steam to model pyrolytic vapour ratio of 4 and a reaction time of 30 min.
356 Sattar *et al.* [45] investigated the influence of steam flow rate on the product gases during
357 the gasification of bio-chars and reported an increase in the hydrogen and CO_2 yields with
358 increasing steam flow rate. However in this study both CO and CO_2 yields decreased with an
359 increase in the steam flow rate which could be due to multiple reactions occurring at the same
360 time, such as water gas shift, reforming and char gasification. Yan *et al.* [28] studied the influence
361 of steam on the gasification of biomass char at a temperature of 850°C and reported an increase
362 of H_2 yield from about 2.15 mol kg^{-1} to 57.07 mol kg^{-1} with the increase of steam input from 0 to
363 0.165 g min^{-1} g^{-1} of biomass char.
364 As observed in Figure 5, with the increase of S/B mass ratio, the H_2/CO molar ratio
365 increased while CO/CO_2 decreased which suggests that the water gas shift reaction determines
366 greatly the H_2production. The same trend was observed by Wei *et al.* [46]. The H_2/CO ratio is

important in determining the end use of the syngas. The optimum value of H_2/CO is determined by the required application, for example the upgrading of syngas for fuel cell applications require a higher H_2/CO while a value of 2:1 is needed for Fisher-Tropsch reactions [47]. It is reported that it is costly to produce synthesis gas with a H_2/CO molar ratio of between 1 ─ 2 [48]. In this study, the experiments performed at a steam/biomass ratio of 3.3 and 4.3 produced a syngas ratio of 2 which is more suitable to be used for Fisher-Tropsch synthesis. The HHV increased in the range of the studied S/B ratio to 72 MJ/Kg. Based on the hydrogen concentration and total gas yield, it can be concluded that that the optimum steam to biomass ratio for this system is 3.32. Zhang *et al.* [31] studied the influence of steam on model pyrolytic vapour (2-5 g/g) on the gaseous composition using biochar and concluded that the ratio of 4 was the optimum.

With regards to the tyre char gasification and S/B ratio, the steam enhanced the char conversion as the residual material (reacted tyre char) recovered after the gasification was found to decrease with increasing steam to biomass ratio. The higher S/B mass ratio enhanced the tyre char gasification as the amount of tyre pyrolysis char recovered after reaction was found to decrease from 90% at a S/B ratio of 1.8 to 73.5 at a S/B ratio of 6.0. Therefore the increase of gas yield at a higher S/B ratio was also due to char gasification as has been mentioned before. High steam to carbon ratio is required to avoid coke accumulation on the surface of the tyre char [49]. However, the decrease was not significant, the increase of steam flow rate by about 70% led to a 20 % decrease in the amount of final tyre char recovered. Chen *et al.* [34] reported a 6 % decrease in char yield when the S/B ratio was increased from 1 to 4. The char conversion rate can be better enhanced with a long reaction time.

3.3 Effect of reaction time

391 Further experiments were carried out to investigate the influence of reaction time on tyre
392 char gasification at a temperature of 900 °C, to determine whether the char conversion and total
393 gas production could be enhanced by allowing the reaction to proceed for several hours. The
394 variation in gas compositions with reaction time is shown in Figure 6. With the increase in reaction
395 time the H_2 concentration remained almost constant and the CO concentration increased.
396 Chaudhari *et al.* [47], reported that the hydrogen concentration was found also to remain constant
397 after 1 h reaction time.

398 The increase of hydrogen formation during the biomass gasification is mainly due to the
399 reactions of tars and hydrocarbons with char. As can be observed from the gaseous compositions
400 presented in Figure 6, the hydrogen content remained almost constant with the increase of reaction
401 time from 1h to 2h and only a slight increase was observed at a reaction time of 4h. Additionally,
402 the CO/CO_2 molar ratio increased with time on-stream, while H_2/CO decreased. These results
403 suggest that the reaction time is complete in 60 min and Boudourad (Eq.3) and char reactions with
404 steam (Eq.1) are the dominant reactions after 60 min. This agrees with the evolution of CO/CO_2
405 and H_2/CO with time. The high H_2/CO at a reaction time of 60 min is due to the influence of water
406 gas reactions and over the reaction time of 60 min, the char reactions with CO_2 and steam are more
407 important which could explain the increase in CO/CO_2 ratio. However, a decrease in the ratio of
408 CO/CO_2 was observed with the increase in reaction time from 2 h to 4 h, this is due to the
409 gasification of the total fixed carbon so there was no carbon left in tyre char to react with steam
410 and as a result CO/CO_2decreased.

411 The increase of gas yield with time was found to be correlated with the increase of carbon
412 conversion of tyre char as displayed in Figure 7. The char conversion was calculated from;

413

414 $$C_o - C / C_o$$

415 Where C_o = carbon mass of tyre char before reaction

and C = carbon mass after reaction

For example, the tyre char carbon conversion increased by 50% with the increase in reaction time from 1 h to 2 h and the same percentage of increase was observed in the total gas yield which suggests that the increase in gas yield with time is mainly due to char gasification. For example, the carbon conversion of tyre char increased from 5 to 56% with an increase in reaction time form 1 h to 2 h. Accordingly, the total gas yield increased from 131.55 to 183.40 wt.% (in relation to the original mass of biomass).

As the main aim of this study was to increase the total gas yield through tar reforming and char gasification, the results displayed in Figure 7 shows that the reaction time had a significant influence on decreasing the amount of tyre char recovered after reaction. With a reaction time of 4 h, the final tyre char recovered was 6 wt.%, which included carbon and ash, and from figure 8, the carbon and ash represent 19.3 and 85 wt.% respectively. The carbon content decreased significantly from 80.6 wt.% after one hour to 19.3 wt.% after 4 hours (Figure 8). A complete conversion of tyre char was almost achieved with 4 h reaction time. This is agrees very well with the results presented in Figure 6.

As tyre char is expected to be gasified with the presence of steam at high gasification temperature, blank experiments of tyre char and steam was carried out where tyre char was gasified at 900 C for 1 hour (in the absence of biomass in the first pyrolysis stage) with the same experimental conditions as for biomass steam reforming over tyre char. The total gas yield produced from the gasification of tyre char itself was 35.49 wt.% compared to 131.6 wt.% (Figure 7) obtained with biomass tar reforming over tyre char. Therefore, tyre char gasification contributed to about 26% of the total gas yield obtained with biomass tar reforming experiments. Further experiments at 1.5h, 2h and 4 h showed that the total gas yield from the steam gasification of the tar char (in the absence of biomass) was 55.13 wt.%, 80.36 wt.% and 152.14 wt.% respectively. By comparison

441 with the data in Figure 7, at 1.5 h the contribution of the tyre char gasification to the total gas yield
442 was 35.5%, after 2 h it was 43.8% and after 4 h the total gas yield contributed by the tyre char
443 gasification was 78.9% of the total gas yield.

444 In this work, char derived from the pyrolysis of waste tyres has been shown to be effective
445 for the cracking and degradation of gasification tar-like compounds during the pyrolysis-catalytic
446 steam reforming of biomass. The metallic mineral content of the tyre pyrolysis chars making a
447 significant contribution to the tar degradation. In addition, the char reacts with the steam to
448 generate hydrogen, and also carbon monoxide, and methane which add to the calorific value of
449 the product syngas. Through the reactions of the tyre char with the steam, the char catalyst for
450 reforming/gasification reactions is consumed or 'sacrificed' as a catalyst. An overall process
451 concept could be, pyrolysis of waste tyres to recover, valuable tyre pyrolysis oils which have
452 similar properties to a petroleum derived light fuel oil, recovery of steel from the pyrolysis char
453 for recycling into the steel industry, and a product gas with high calorific value that can be used
454 as process fuel for the tyre pyrolysis process [24]. The product char from tyre pyrolysis may then
455 be used as a catalyst for the cracking/reforming/gasification of tars from the gasification of
456 biomass to produce as clean syngas, whilst also contributing to the yield of the biomass syngas
457 through tyre char gasification reactions.

458

459 **4. Conclusions**

460

461 In this paper, biomass pyrolysis gas and char gasification was investigated to produce
462 hydrogen. The thermal cracking of biomass pyrolysis gases with the presence of steam at a
463 temperature of 900 °C had a small influence on hydrogen production as only 10.94 $mmolg^{-1}$of
464 hydrogen was obtained for the pyrolysis-reforming of biomass with sand. The hydrogen
465 production increased significantly with the use of tyre pyrolysis char in the 2nd stage

466 reforming/gasification reactor to be 39.20 mmol g^{-1} biomass due to the simultaneous reactions of
467 tar reforming and char gasification. On the other hand, acid treated tyre pyrolysis char exhibited a
468 lower catalytic activity as the hydrogen production decreased to 30.4 mmol g^{-1} biomass at 900 °C.
469 The difference in hydrogen production between the original and acid-treated tyre char suggests
470 that the metals in tyre char have a significant catalytic effect in enhancing the water gas shift, tar
471 reforming and char-steam reactions.

472 The influence of operating conditions including catalytic reforming temperature,
473 steam/biomass (S/B) mass ratio and reaction time were investigated for the purpose of obtaining
474 a high hydrogen production. Among the studied variables, the reforming temperature had the
475 greatest influence on hydrogen production. The results showed that the gas yields and hydrogen
476 production increased with the increase of reforming temperature and S/B ratio due to the enhanced
477 char steam gasification and water gas shift reactions.

478

479 **Acknowledgements**

480

481 The support of the Government of Oman through a scholarship for one of us (A.S.A.) is gratefully
482 acknowledged.

483

484

References

[1]. González, JF, Román S, Bragado D, Calderón M. Investigation on the reactions influencing biomass air and air/steam gasification for hydrogen production. Fuel Proc Technol 2008;89(8):764-772.

[2]. Haryanto, A, Fernando S, Murali N, Adhikari S. Current Status of Hydrogen Production Techniques by Steam Reforming of Ethanol: A Review. Energy Fuel 2005;19(5):2098-2106.

[3]. Guan G, Kaewpanha M, Hao X, Abudula A. Catalytic steam reforming of biomass tar: Prospects and challenges. Renew Sust Energy Rev 2016;58,:450-461.

[4]. Shen Y, Zao P, Shao Q, Ma D, Takahashi F, Yoshikawa K. In-situ catalytic conversion of tar using rice husk char-supported nickel-iron catalysts for biomass pyrolysis/gasification. Appl Catal B Environ 2014;152-153(1):140-151.

[5]. Luo S, Xiao B, Hu Z, Liu S, Guo X, He M. Hydrogen-rich gas from catalytic steam gasification of biomass in a fixed bed reactor: Influence of temperature and steam on gasification performance. Int J Hydrogen Energy 2009; 34(5):2191-2194.

[6]. Kuhn JN, Zhao Z, Felix LG, Slimane RB, Choi CW, Ozkan US. Olivine catalysts for methane- and tar-steam reforming. Appl Catal B Environ 2008;81(1-2):14-26.

[7]. Asadullah M, Miyazawa T, Ito SI, Kunimori K, Koyama S, Tomishige K. A comparison of Rh/CeO2/SiO2 catalysts with steam reforming catalysts, dolomite and inert materials as bed materials in low throughput fluidized bed gasification systems. Biomass Bioenergy 2004;26(3):269-279.

[8]. Koike M, Ishikawa C, Li D, Wang L, Nakagawa Y, Tomishige K. Catalytic performance of manganese-promoted nickel catalysts for the steam reforming of tar from biomass pyrolysis to synthesis gas. Fuel 2013;103:122-129.

[9]. Wang D, Yuan W, Ji W. Char and char-supported nickel catalysts for secondary syngas cleanup and conditioning. Appl Energy 2011;88(5):1656-1663.

[10]. Abu El-Rub Z, Bramer EA, Brem G. Review of Catalysts for Tar Elimination in Biomass Gasification Processes. Ind Eng Chem Res 2004;43(22):6911-6919.

[11]. Hosokai S, Norinaga K, Kimura T, Nakano M, Li CZ, Hayashi JI. Reforming of Volatiles from the Biomass Pyrolysis over Charcoal in a Sequence of Coke Deposition and Steam Gasification of Coke. Energy Fuel 2011;25(11):5387-5393.

[12]. Brandt P, Larsen E, Henriksen U. High tar reduction in a two-stage gasifier. Energy Fuel 2000;14(4):816-819.

[13]. Min Z, Yimsiri P, Asadullah M, Zhang S, Li CZ. Catalytic reforming of tar during gasification. Part II. Char as a catalyst or as a catalyst support for tar reforming. Fuel, 2011, 90(7), pp.2545-2552.

[14]. Choi YK, Cho, MH, Kim JS. Steam/oxygen gasification of dried sewage sludge in a two-stage gasifier: Effects of the steam to fuel ratio and ash of the activated carbon on the production of hydrogen and tar removal. Energy 2015;91:160-167.

[15]. Xu C, Donald J, Byambajav E, Ohtsuka Y. Recent advances in catalysts for hot-gas removal of tar and NH3 from biomass gasification. Fuel 2010;89(8):1784-1795.

[16]. Striūgas N, Zakarauskas K, Stravinskas G, Grigaitienė V. Comparison of steam reforming and partial oxidation of biomass pyrolysis tars over activated carbon derived from waste tire. Catal Today 2012;196(1):67-74.

[17]. Song Y, Wang Y, Hu X, Hu S, Xiang J, Zhang L, Zhang S, Min Z, Li CZ. Effects of volatile–char interactions on in situ destruction of nascent tar during the pyrolysis and gasification of biomass. Part I. Roles of nascent char. Fuel 2014;122:60-66.

[18]. Mun TY, Kim JW, Kim JS. Air gasification of dried sewage sludge in a two-stage gasifier: Part 1. The effects and reusability of additives on the removal of tar and hydrogen production. Int J Hydrogen Energy 2013;38(13):5226-5234.

[19]. Mastral AM, Callén MS. A Review on polycyclic aromatic hydrocarbon (PAH) emissions from energy generation. Environ Sci Technol 2000;34(15):3051-3057.

[20]. Hayashi JI, Kudo S, Kim HS, Norinaga K, Matsuoka K, Hosokai S. Low-temperature gasification of biomass and lignite: consideration of key thermochemical phenomena, rearrangement of reactions, and reactor configuration. Energy Fuel 2014;28(1):4-21.

[21]. Hosokai S, Kumabe K, Ohshita M, Norinaga K, Li CZ, Hayashi JI. Mechanism of decomposition of aromatics over charcoal and necessary condition for maintaining its activity. Fuel 2008;87(13–14):2914-2922.

[22]. Bayarsaikhan B, Sonoyama N, Hosokai S, Shimada T, JHayashi JI, Li CZ, Chiba T. Inhibition of steam gasification of char by volatiles in a fluidized bed under continuous feeding of a brown coal. Fuel 2006;85(3):340-349.

[23]. Li CZ. Some recent advances in the understanding of the pyrolysis and gasification behaviour of Victorian brown coal. Fuel 2007;86(12–13):1664-1683.

[24]. Williams PT. Pyrolysis of waste tyres: A review. Waste Manag 2013;33:1714-1728.

[25] Al-Rahbi AS, Onwudili JA, Williams PT. Thermal decomposition and gasification of biomass pyrolysis gases using a hot bed of waste derived pyrolysis char. Bioresource Technol 2016;204:71-79.

[26]. Evans A, Evans R. The composition of a tyre: Typical components, Waste & Resources Action Programme, Banbury Oxford, UK, 2006.

[27]. Ma Z, Zhang SP, Xie DY, Yan YJ. A novel integrated process for hydrogen production from biomass. Int J Hydrogen Energy 2014;39(3):1274-1279.

[28]. Yan F, Luo SY, Hu ZQ, Xiao B Cheng G. Hydrogen-rich gas production by steam gasification of char from biomass fast pyrolysis in a fixed-bed reactor: Influence of temperature and steam on hydrogen yield and syngas composition. Bioresource Technol 2010;101(14):5633-5637.

562 [29]. Franco C, Pinto F, Gulyurtlu I, Cabrita I. The study of reactions influencing the biomass
563 steam gasification process. Fuel 2003;82(7):835-842.

564 [30]. Ma Z, Zhang S, Xie D, Yan Y, Ren Z. Hydrogen production from bio-char via steam
565 gasification in a fluidized-bed reactor. Chem Eng Technol 2013;36(9):1599-1602.

566 [31]. Zhang SP, Chen ZQ, Cai QJ, Ding D. The integrated process for hydrogen production from
567 biomass: Study on the catalytic conversion behavior of pyrolytic vapor in gas–solid
568 simultaneous gasification process. Int J Hydrogen Energy 2016;41(16):66536661.

569 [32]. Jiang L, Hu S, Wang Y, Su S, Sun L, Xu B, He L, Xiang J. Catalytic effects of inherent
570 alkali and alkaline earth metallic species on steam gasification of biomass. Int J Hydrogen
571 Energy 2015;40(45):15460-15469.

572 [33]. Wang YG, Sun JL, Zhang HY, Chen ZD, Lin XC, Zhang S, Gong WB, Fan MH. In Situ
573 Catalyzing Gas Conversion Using Char as a Catalyst/Support during Brown Coal
574 Gasification. Energy Fuel 2015;29(3):1590-1596.

575 [34]. Chen Z, Zhang S, Chen Z, Ding D. An integrated process for hydrogen-rich gas production
576 from cotton stalks: The simultaneous gasification of pyrolysis gases and char in an
577 entrained flow bed reactor. Bioresource Technol 2015;198:586-592.

578 [35]. Nanou P, Gutiérrez-Murillo HE, van Swaaij WPM, van Rossum G, Kersten SRA. Intrinsic
579 reactivity of biomass-derived char under steam gasification conditions-potential of wood
580 ash as catalyst. Chem Eng J 2013;217:289-299.

581 [36]. Demirbaş A. Yields of hydrogen-rich gaseous products via pyrolysis from selected
582 biomass samples. Fuel 2001;80(13):1885-1891.

583 [37]. Hamad MA, Radwan AM, Heggo DA,Moustafa T. Hydrogen rich gas production from
584 catalytic gasification of biomass. Renew Energy 2016;85:1290-1300.

585 [38]. Han J, Kim H. The reduction and control technology of tar during biomass
586 gasification/pyrolysis: An overview. Renew Sus Energy Rev 2008;12(2):397-416.

587 [39]. Morf P, Hasler P, Nussbaumer T. Mechanisms and kinetics of homogeneous secondary
588 reactions of tar from continuous pyrolysis of wood chips. Fuel 2002;81(7):843-853.

589 [40]. Altuntaş Öztaş, N., Y. Yürüm Y., Effect of catalysts on the pyrolysis of Turkish Zonguldak
590 bituminous coal. Energy & Fuels, 2000;14(4):820-827

591 [41] Chen G, Andries J, Luo Z, Spliethoff H. Biomass pyrolysis/gasification for product gas
592 production: the overall investigation of parametric effects. Energy Conv Manag
593 2003;44(11):1875-1884.

594 [42]. Zhao B, Zhang X, Sun L, Meng G, Chen L, Xiaolu Y. Hydrogen production from biomass
595 combining pyrolysis and the secondary decomposition. Int J Hydrogen Energy
596 2010;35(7):2606-2611.

597 [43]. Wang S, Li X, Zhang F, Cai Q, Wang Y, Luo Z. Bio-oil catalytic reforming without steam
598 addition: Application to hydrogen production and studies on its mechanism. Int J
599 Hydrogen Energy 2013;38(36):16038-16047.

600 [44]. Alipour M, Yusup SR, Azlina W, Nehzati S, Tavasoli A. Investigation on syngas
601 production via biomass conversion through the integration of pyrolysis and air–steam
602 gasification processes. Energy Conv Manag 2014;87:670-675.

603 [45]. Sattar A, Leeke GA, Hornung A, Wood J. Steam gasification of rapeseed, wood, sewage
604 sludge and miscanthus biochars for the production of a hydrogen-rich syngas. Biomass
605 Bioenergy 2014;69:276-286.

606 [46]. Wei L, Xu S, Zhang L, Liu C, Zhu H, Liu S. Steam gasification of biomass for hydrogen-
607 rich gas in a free-fall reactor. Int J Hydrogen Energy 2007;32(1):24-31.

608 [47]. Chaudhari ST, Bej SK, Bakhshi NN, Dalai AK. Steam gasification of biomass-derived
609 char for the production of carbon monoxide-rich synthesis gas. Energy Fuel
610 2001:15(3);736-742.

611 [48]. Wender I. Reactions of synthesis gas. Fuel Proc Technol 1996;48(3):189-297.

612 [49]. Hosokai S, Norinaga K, Kimura T, Nakano M, Li CZ, Hayashi JI. Reforming of volatiles
613 from the biomass pyrolysis over charcoal in a sequence of coke deposition and steam
614 gasification of coke. Energy Fuel 2011;25(11):5387-5393.

615

616

617 **Table 1.**

618 Ultimate and mineral content of char

	Original tyre char	Acid treated tyre char
Ash (wt.%)	18.9	9
Ultimate analysis (wt.%)		
Carbon	70.06	86.04
Hydrogen	0.28	0.33
Nitrogen	0.83	0.37
Oxygen (by difference)	4.78	0.73
Ash composition (wt.%)		
Zn	6.5	ND
K	0.05	0.05
Ca	0.95	ND
Fe	0.69	0.08

619

620

621

622 **Table 2.**

623 Influence of char minerals on product distribution and gas characterization

	Tyre char			Acid treated tyre char		
Temperature (°C)	700	800	900	700	800	900
Mass balance based on the biomass sample + water (wt.%)						
Gas	12.1	16.6	33.0	11.6	15.8	26.1
Liquid	82.8	76.87	61.4	84.5	79.9	69.5
Biomass char	5.6	5.8	5.5	5.5	5.9	5.5
Mass Balance	100.5	99.2	99.8	101.6	101.0	97.5
Tyre char recovered (%)	100	91	82.5	101	98	85.5
Mass balance based on the biomass sample (wt.%)						
Gas	50.0	66.7	131.6	48.9	63.1	106.8
Biomass char	23.0	23.3	22.0	22.5	23.5	22.5
Gas characterization						
HHV (MJ/Kg)	48.3	52.5	66.1	27.9	44.3	63.6
H_2 yield (mmol/g)	8.4	12.5	39.2	2.7	8.6	30.5
H_2+CO (mol/mol)	14.8	21.7	57.8	10.2	20.0	52.0
H_2/CO (mol/mol)	1.31	1.37	2.11	0.37	0.75	1.41

624

625

626

627

628

629 **FIGURE CAPTIONS**

630 **Fig. 1.** Schematic diagram of the two-stage pyrolysis-reforming/gasification reaction system

631 **Fig. 2.** Gas compositions and hydrogen yield with original and acid treated tyre chars

632 **Fig. 3.** Concentration of the classified tar compounds in the tar collected from the pyrolysis-
633 reforming/gasification of biomass with tyre char catalyst at 800 °C (Class 2 = heterocyclic
634 compouds e.g. phenols and cresols; Class 3 = 1-ring aromatic compounds e.g. ethylbenzene and
635 xylene; Class 4 = 2-3 ring aromatic compounds e.g. naphthalene and phenanthrene; Class 5 = 4-
636 7 ring aromatic compounds e.g. fluoranthene and pyrene.

637 **Fig. 4.** The influence of steam to biomass (S/B) ratio on gas composition and total gas yield

638 **Fig. 5.** Effect of steam to biomass ratio on H_2yield, HHV, H_2/CO and CO/CO_2.

639 **Fig. 6.** The influence of reaction time on the product gas compositions and H_2/CO and CO/CO_2
640 ratios in the syngas

641 **Fig. 7.** The influence of reaction time on tyre char conversion and total gas yield

642 **Fig. 8.** Carbon and ash content of tyre char from catalytic gasification of biomass at different
643 reaction times

644

645

646

647

648

649

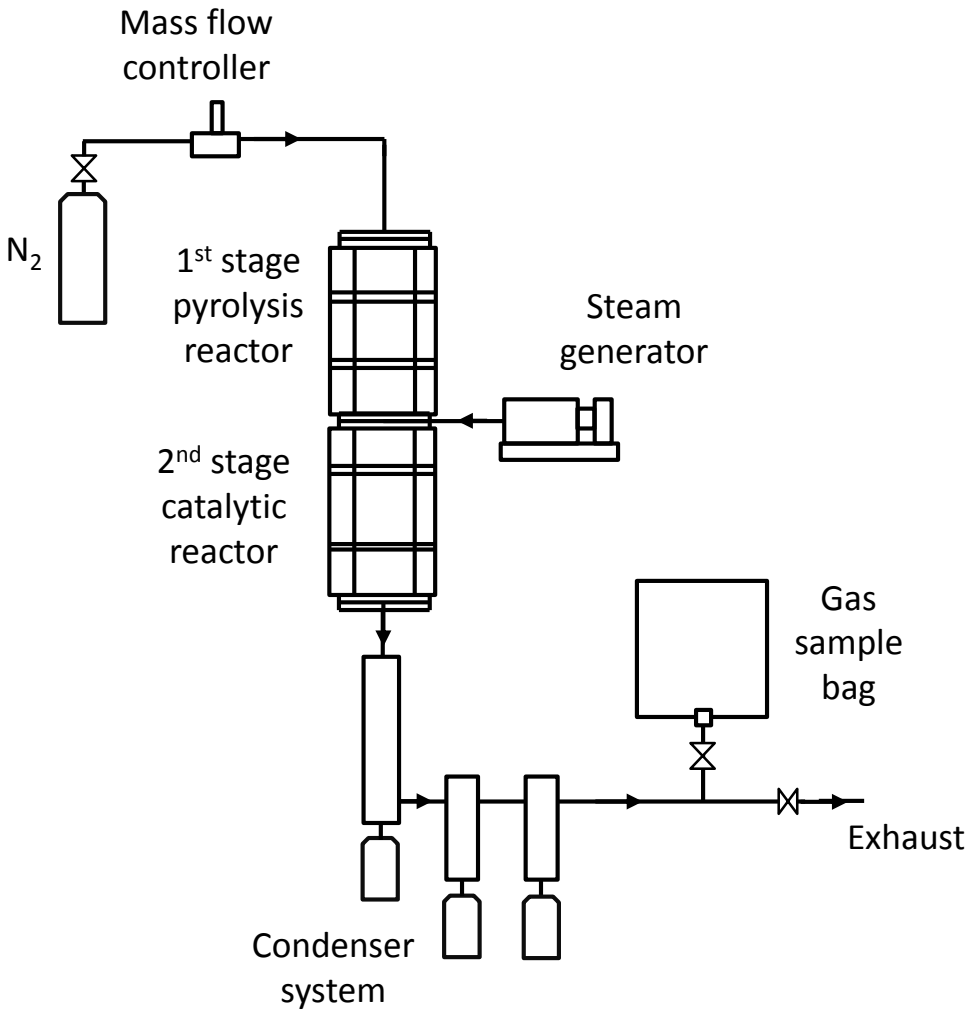

650

651 **Fig. 1.** Schematic diagram of the two-stage pyrolysis-reforming/gasification reaction system

652

653

654

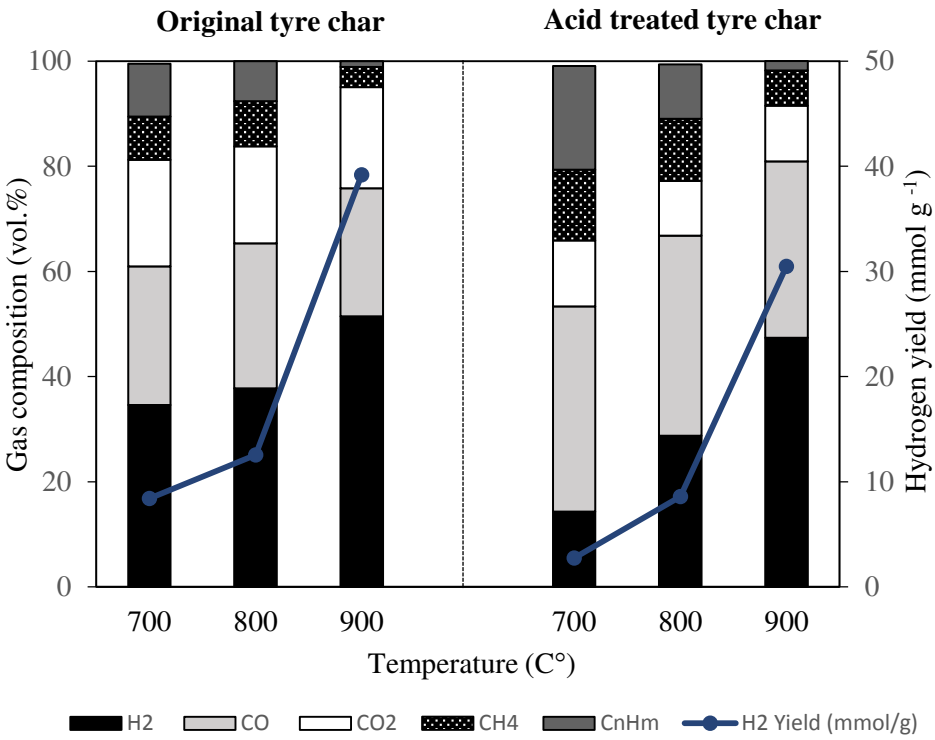

655

656 **Fig. 2.** Gas compositions and hydrogen yield with original and acid treated tyre chars

657

658

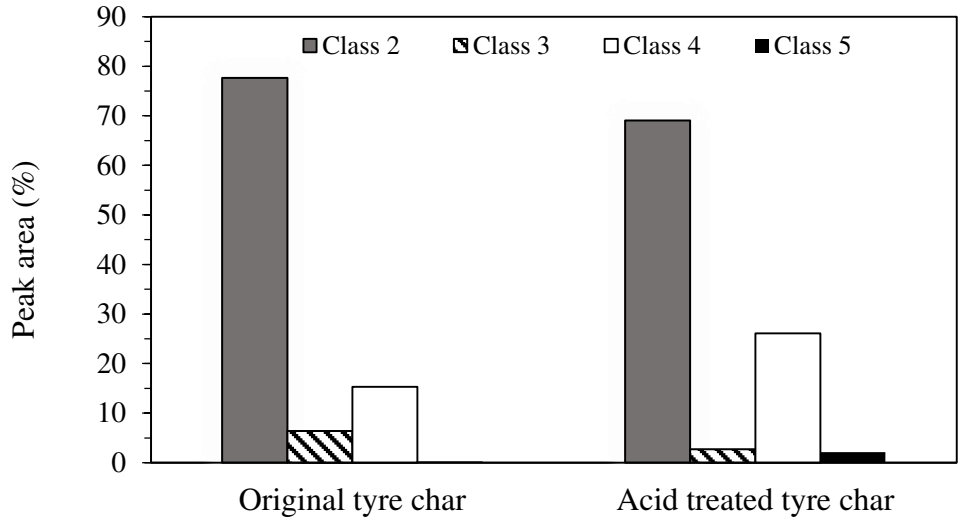

659

660 **Fig. 3.** Concentration of the classified tar compounds in the tar collected from the pyrolysis-
661 reforming/gasification of biomass with tyre char catalyst at 800 °C (Class 2 = heterocyclic
662 compouds e.g. phenols and cresols; Class 3 = 1-ring aromatic compounds e.g. ethylbenzene and
663 xylene; Class 4 = 2-3 ring aromatic compounds e.g. naphthalene and phenanthrene; Class 5 = 4-
664 7 ring aromatic compounds e.g. fluoranthene and pyrene.

665

666

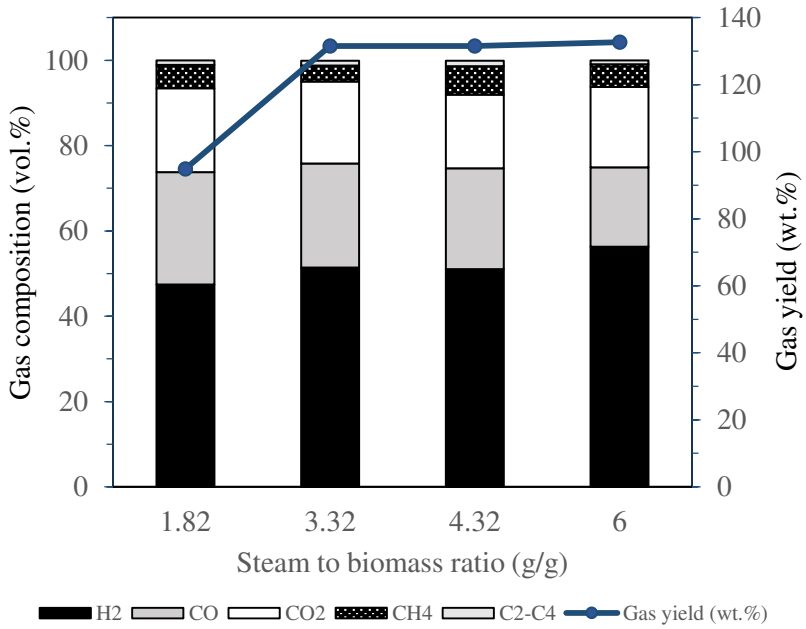

667

668 **Fig. 4.** The influence of steam to biomass (S/B) ratio on gas composition and total gas yield

669

670

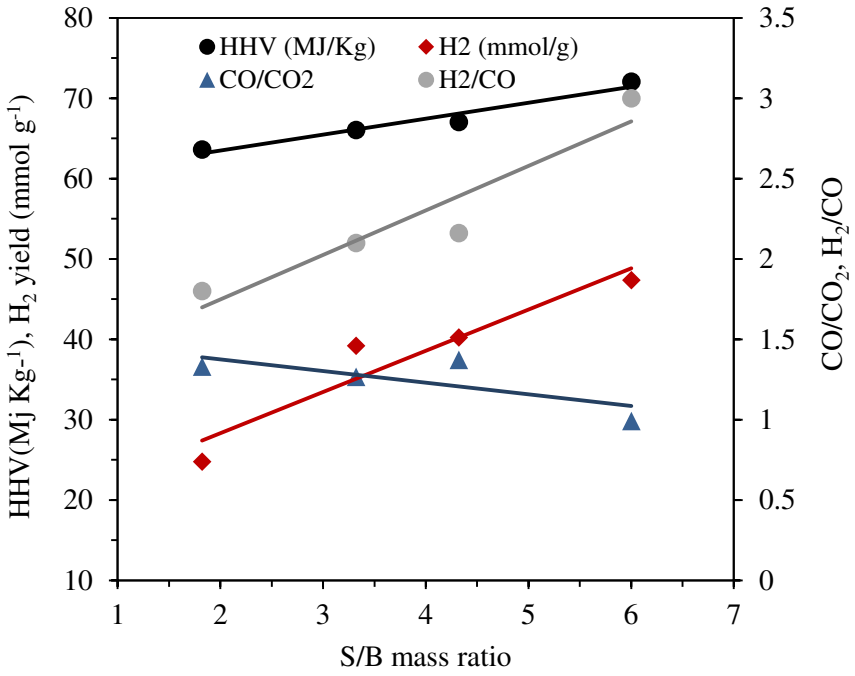

671

672 **Fig. 5.** Effect of steam to biomass ratio on H_2yield, HHV, H_2/CO and CO/CO_2.

673

674

675

676

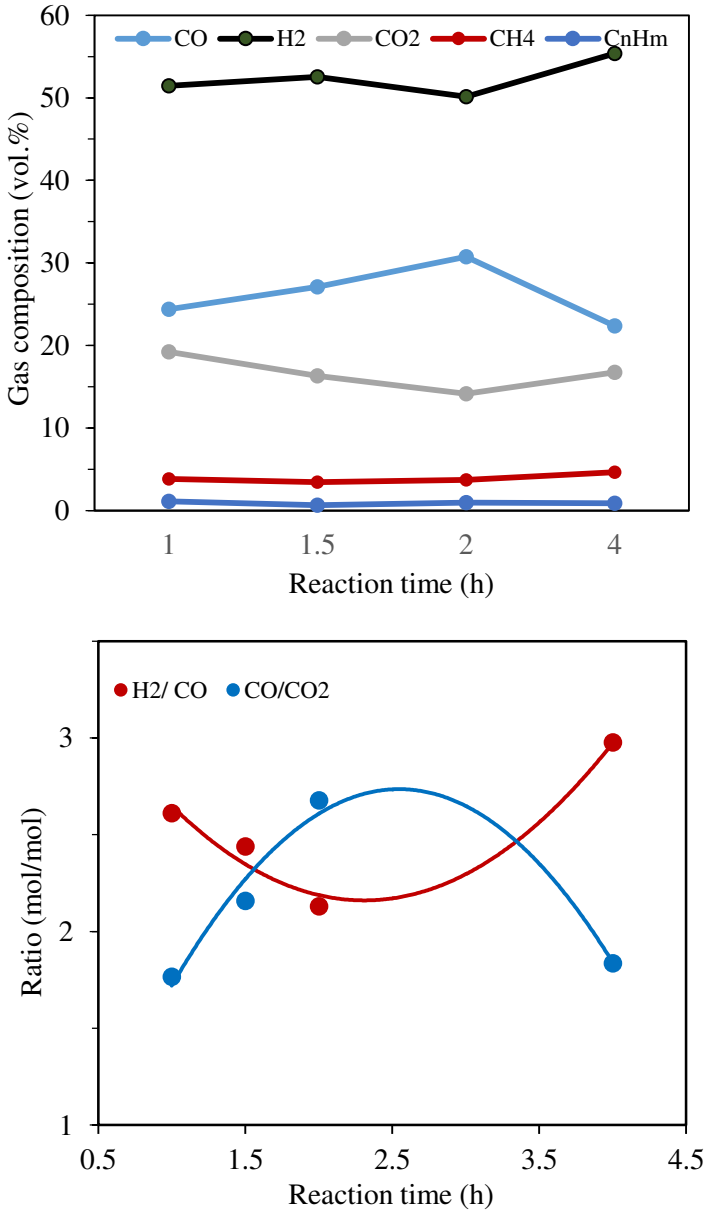

677

678 **Fig. 6.** The influence of reaction time on the product gas compositions and H_2/CO and CO/CO_2
679 ratios in the syngas

680

681

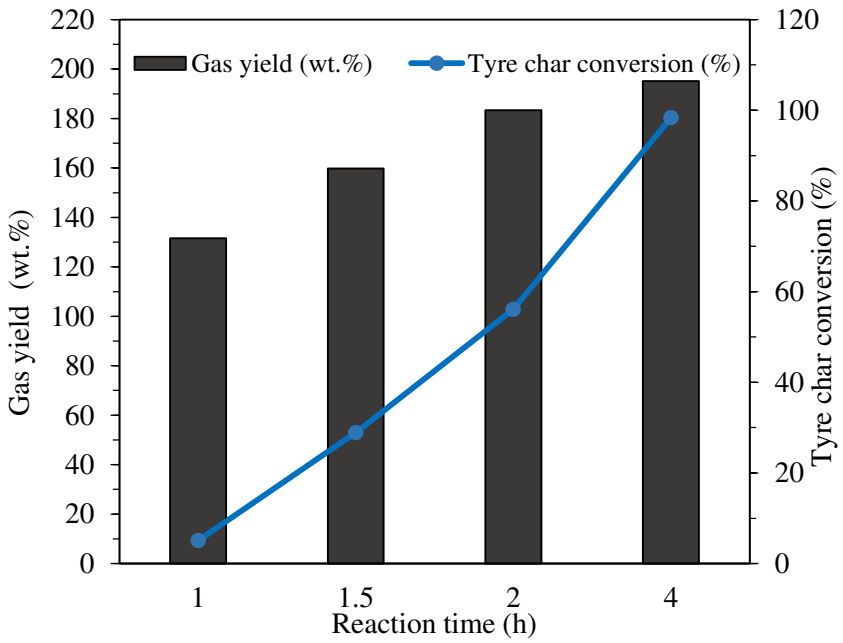

682

683 **Fig. 7.** The influence of reaction time on tyre char conversion and total gas yield for biomass
684 pyrolysis-tyre char gasification.

685

686

687

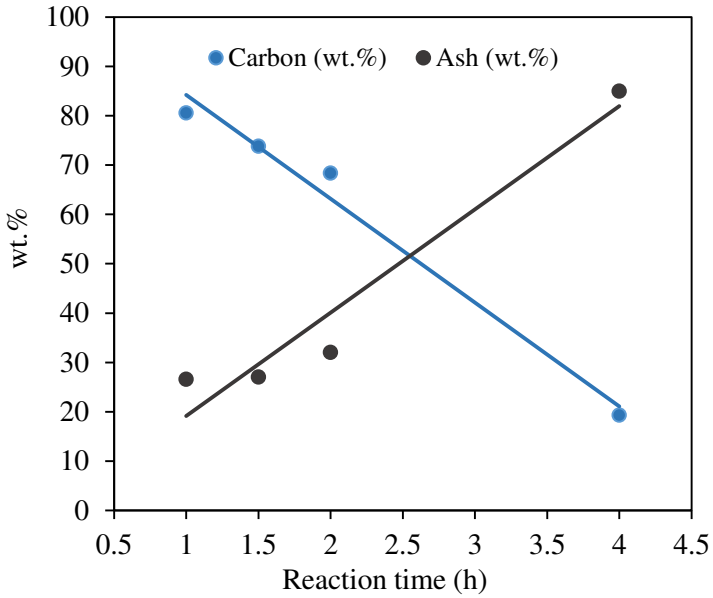

688

689 **Fig. 8.** Carbon and ash content of tyre char from catalytic gasification of biomass at different
690 reaction times

691