



This is a repository copy of *Design and implementation of ergonomic risk assessment feedback system for improved work posture assessment*.

White Rose Research Online URL for this paper:

<https://eprints.whiterose.ac.uk/124209/>

Version: Accepted Version

Article:

Mgbemena, C.E., Oyekan, J., Hutabarat, W. et al. (2 more authors) (2018) Design and implementation of ergonomic risk assessment feedback system for improved work posture assessment. *Theoretical Issues in Ergonomics Science*, 19 (4). pp. 431-455. ISSN 1463-922X

<https://doi.org/10.1080/1463922X.2017.1381196>

Reuse

Items deposited in White Rose Research Online are protected by copyright, with all rights reserved unless indicated otherwise. They may be downloaded and/or printed for private study, or other acts as permitted by national copyright laws. The publisher or other rights holders may allow further reproduction and re-use of the full text version. This is indicated by the licence information on the White Rose Research Online record for the item.

Takedown

If you consider content in White Rose Research Online to be in breach of UK law, please notify us by emailing eprints@whiterose.ac.uk including the URL of the record and the reason for the withdrawal request.



eprints@whiterose.ac.uk
<https://eprints.whiterose.ac.uk/>

DESIGN AND IMPLEMENTATION OF ERGONOMIC RISK ASSESSMENT FEEDBACK SYSTEM FOR IMPROVED WORK POSTURE ASSESSMENT

Mgbemena Chika Edith^{1,2,*}, Oyekan John¹, Windo Hutabarat³, Yuchun Xu⁴,
Tiwari Ashutosh³.

¹School of Aerospace, Transport and Manufacturing, Cranfield University, Cranfield,
Bedfordshire, MK43 0AL, England, United Kingdom.

²Department of Industrial & Production Engineering, Nnamdi Azikiwe University, P.M.B.
5025, Awka, Anambra State, Nigeria.

³Department of Automatic Control and Systems Engineering, The University of Sheffield,
Sheffield, S1 3JD, England, United Kingdom.

⁴School of Engineering & Applied Science, Aston University, Birmingham, B4 7ET,
England, United Kingdom.

*Corresponding Author: Mgbemena Chika Edith, Cranfield University, Cranfield,
Bedfordshire, MK43 0AL, United Kingdom and Nnamdi Azikiwe University, P.M.B. 5025,
Awka, Anambra State, Nigeria. E-mail: c.mgbemena@cranfield.ac.uk,
ce.mgbemena@unizik.edu.ng

DESIGN AND IMPLEMENTATION OF ERGONOMIC RISK ASSESSMENT FEEDBACK SYSTEM FOR IMPROVED WORK POSTURE ASSESSMENT

ABSTRACT

Ergonomic risk factors which include force, repetition and awkward postures, can result in Work-Related Musculoskeletal Disorders (WMSDs) among workers. Hence, systems that provide real-time feedback to the worker concerning his current ergonomic behaviours are desirable. This paper presents the design and implementation of a human-machine interface posture assessment feedback system whose conceptual model is developed through a model-driven development perspective using the UML and Interface flow diagrams. The resulting system provides a shop floor with a simple, cost-effective and automatic tool for real-time display of worker's postures. Testing the system on volunteer participants reveals that it is easy to use, achieves real-time posture assessment and provides easy-to-understand feedback to workers. This system may be useful for reducing the rate of occurrence of awkward postures, one of the contributing factors to risk of WMSDs among workers.

KEYWORDS: Awkward postures; Ergonomics; Manual Handling; User Interface; Real-Time Feedback.

1. Introduction

Operators in a manufacturing shop floor are often required to undertake manual handling activities. These activities, which include lifting, lowering and carrying (Shoaf et al. 1997), if not ergonomically executed, can result in risks that may lead to WMSDs and greatly limit worker's life and health (Valentin et al. 2015; Savino, et. al., 2016). Such ergonomic risks are caused by factors such as forceful exertion, task repetition and awkward postures (Tak et al. 2011; Chander and Cavatorta 2017). Critical postures that increase the rate of development of WMSDs, especially when held for prolonged periods exceeding 45% of the workday (Stuebbe et al. 2002), may be adopted by operators while working (Johnson and Fletcher 2014). Hence, there is need for postural assessment which has been recommended as an ergonomic risk prevention strategy that helps to reduce worker's discomfort as well as minimise costs (Stuebbe et al. 2002).

Awkward postures have been defined by H&S professionals as the posture that occurs when a part of the body deviates from its natural alignment or its neutral position. The neutral position is defined as a position where the joints are naturally aligned with the trunk and head upright, the arms by the side, forearms hanging straight and the wrists not bent or deviated

(OSHA - Hazard Index 2016; Steinberg 2012a; EU-OSHA:E-Fact 45 2016; HSE 2002). To minimise the rate of occurrence of awkward postures, a good ergonomic posture assessment tool with easy-to-use and easy-to-understand feedback interface system is of great importance. Hence, we aimed to design and develop a real-time ergonomic posture assessment feedback system for use in workplaces.

Feedback interface design involves modelling of specific use cases which indicates to users what they have done, where they have been, and where they currently are (Palmas et al. 2014). Attributes of good feedback systems include simplicity, legibility, transparency, and customizability (Claypoole, Schroeder, and Mishler 2016). Interestingly, research suggests that established feedback systems such as the Ovako Working Posture Analysis System (OWAS), were not designed in an easy-to-understand, ergonomic-friendly way (Valentin et al. 2015). In the assessment of ergonomic risk factors on the shop floor, a natural and interactive interface that provides good feedback to the users is of utmost importance (Aromaa and Väänänen 2016) and the design of this interface should capture the most important elements of the system so that both the expert and the novice staff would have a greater capacity to participate (Hoarau, Charron, and Mars 2014). For awkward posture assessment, systems that provide real-time feedback to the worker concerning his current ergonomic behaviours are highly beneficial as they can prompt the worker to optimally adjust postures and result in improved ergonomic workplace conditions. Such systems are also convenient and save time (Johnson and Fletcher 2014; Klippert, et. al., 2012).

Existing work posture assessment tools can be classified as either observation-based or instrument-based. Observation-based tools such as OWAS, Rapid Upper Limb Assessment, RULA, Quick Exposure Check, QEC, and the Rapid Entire Body Assessment, REBA (Vignais et al. 2013), uses visual perception to evaluate the rate at which the body moves away from the neutral position. A comparison of these tools has been made and strengths as well as limitations have been previously described (Savino, Mazza, and Battini 2016; Kale and Vyavahare 2016). The tools enable the user to capture data while observing several operations and perform offline analysis of the data afterwards. The use of the RULA observation tool, for example, requires sufficient training to select for assessment, the most difficult posture. Instrument-based tools assess work postures using instruments (Kee and Karwowski 2007). Currently available instrument-based postural assessment feedback systems require workers to wear inconvenient measurement devices which interfere with work methods (Valentin et al. 2015; IFA-CUELA 2016; Manghisi et al. 2016; Plantard et al. 2015), fail to provide real-time feedback (WSH Institute 2016), requires substantial user

training (Center for Ergonomics), or are difficult to use as they require experts to perform time consuming posture analysis (Manghisi et al. 2016). Again these tools are not suitable for many work places due to space, cost and calibration limitations (Haggag et al. 2013). These limitations can be overcome by employing a cost-effective, easy-to-use, non-invasive, portable and calibration-free tool, which possesses the capability to provide real-time feedback that can inform the worker to adjust awkward postures in time. The Microsoft Kinect (hereafter called the Kinect) has been recommended by many researchers as an easy-to-use, markerless and cost-effective alternative for ergonomic work-posture assessment (Plantard et al. 2015; Dai and Ning 2013; Mgbemena et al. 2016). Kinect has been proved to generate accurate kinematic information needed for ergonomic assessment (Plantard, et. al., 2015), can accurately measure human joint angles (Clark et al., 2012; Diego-Mas and Alcaide-Marzal, 2014; Fernández-Baena, et. al., 2012), and provide real-time feedback to users (Martin et al. 2012; Delpresto et al. 2013). Manghisi et al. (2016) has proved that Kinect is suitable for the detection of awkward postures and can yield moderately accurate posture data.

Our newly designed postural assessment feedback system will therefore use the Kinect as its hardware component to address the limitations of existing tools by providing the workplace with a tool that: i) provides real-time automatic feedback to workers to enable them to adjust awkward postures in time. ii) is easy-to-use, with easy-to-understand feedback to overcome the limitation posed by tools that are difficult, and those that require experts and training iii) is non-intrusive and therefore more convenient as it does not interfere with work methods. iv) is portable, cost-effective and calibration-free.

The system is designed to adopt a similar method as seen in the design by Liu and Lee (2014), with screens which support flexible visualisation methods that enable the user to define their own data for each case study (Palmas et al. 2014).

2. Methodology

The first step in designing the proposed system was to identify the functional requirements through some basic questions, including: a) who are the external users? b) what information does the external user need to give or receive? and c) what format is the information provided?

We used the UK Health and Safety recommendations for personnel involved in risk assessment to identify the external users of the proposed system (Health and Safety Executive 2016).

2.1. Description of the Functional Requirements of the Proposed System

The functional requirements of the proposed system include a system that: a) supports new staff registration, captured in the ‘staff accounts’ use case, b) provides and retains staff details, which also reflects in the ‘staff accounts’ use case, c) reflects workplace information, captured in the ‘workplace reports’ use case d) displays joint information of staff, which reflects in the ‘Display joint’ use case e) retains information on the size of the load handled by the operator as captured in the ‘Load attribute’ use case f) supports viewing, searching and editing of required manual handling tasks, captured in the ‘Select task’ and ‘Select task order’ use cases g) alerts the worker whenever the motion becomes awkward, reflected in the ‘Prompt staff’ use case h) updates the posture assessment information of all operators, which is captured by the ‘Display posture’ use case and updated in the system database i) allows the worker to view previous posture assessment results. This is captured by the ‘Display posture’ use case j) supports change from one task to another, captured by the ‘Select task order’ use case and k) allows update of worker’s activities on the shop floor, captured by the ‘workplace reports’ use case and updated in the system database.

Details of these requirements are outlined on table 1.

2.2. Posture Assessment categories and Scoring method

In the definition of awkward postures as presented in section 1, two posture categories, the neutral (good) and awkward categories, were utilised in the tool’s initial development. A designation of ‘Good’ indicates postures beyond the neutral position range, equivalent to the existing tool’s neutral to mild category or the green colour band for posture classifications using colour bands. The ‘Awkward’ category indicates postures beyond the neutral position range, equivalent to the existing tool’s moderate and severe categories and corresponding to the amber to red colour categories. This decision was made to enable the tool to provide simple, easy-to-understand real-time feedback without the complexities of having several categories of postures that may confuse the workers especially when working in flexible manufacturing systems where immediate response to posture changes is required.

Hence, for ergonomic assessment involving joint angles of the upper body, the neutral figures denote the reference point for each joint and therefore is represented by the 'zero' score.

Therefore, each of the joints of the upper body is set at zero and the definition is programmed for each joint such that any deviation from it beyond the recommended limits results in awkward posture.

The Back posture is scored as Good = $0^{\circ} - 20^{\circ}$ and Awkward = $>20^{\circ}$, based on the definition extracted from the UK HSE, that the back posture is classified as awkward when the back is bent or twisted more than 20 (HSE - Awkward Postures). The Neck posture is scored as Good = $0^{\circ} - 10^{\circ}$ and Awkward = $>10^{\circ}$, based on the RULA scores (McAtamney and Nigel Corlett 1993). The Elbow posture is scored as Good = $0^{\circ} - 90^{\circ}$ and Awkward = $>90^{\circ}$, based on some countries' H&S definitions that the elbows become awkward when held above chest height or bent more than 90° , but neutral when hanging straight by the side or in handshake position (OSHA:Supplemental Information 2017; HSE - Awkward Postures; WSH Council 2014; Steinberg 2012b). The Shoulder posture is scored as Good = $0^{\circ} - 20^{\circ}$ and Awkward = $>20^{\circ}$, based on the RULA scores (McAtamney and Nigel Corlett 1993). The Wrist posture is scored as Good = 0° and Awkward = $>0^{\circ}$, based on some countries' H&S definitions that the wrists should not be bent but should be maintained at straight or neutral position or be assessed as awkward if an obvious angle is observed (OSHA - Hazard Index 2016; HSE - Awkward Postures; WSH Council 2014).

2.3. Detailed System Design

The step by step methods adopted for this design and implementation include;

- I. Detailed System Design. This involves the following; a) identification of the system's external users. b) Modelling the usage requirements, set of actions and performance of the external users using the UML use case diagram. c) modelling the flow and format for information among the external users within the system. d) development of model for the logic captured by the use case model using the UML activity diagrams and e) developing the model for the system's widgets using the user interface flow diagram/storyboards. This is modelled with the information provided by the UML Activity diagram models and shows at a glance, the various widgets of the designed system and depict the final design of the feedback system. The system widgets include the buttons, screens and icons and this is presented in figure 6.

- II. System demonstration. This involves the development of the designed system widgets some of which are presented in figure 7. These widgets are developed using C# programming language in the WPF application of the .NET Framework 4.5 of the visual studio.
- III. System implementation using real-life examples. This involves testing the developed system on some participants to test the system functionalities.

2.4. Experimental Setup for testing the developed System.

To test the functionalities of the developed system, experiments were conducted on two case studies. These are the manual assembly of EGR Valve of a Jaguar diesel engine by six operators and the posture assessment of four PhD researchers while studying. A total of 10 participants aged between 25 to 40 years, participated in the study. The 3D motion sensor utilised in this system is the low-cost Microsoft Kinect sensor (hereafter called the Assessor) which costs approximately £90/\$112 and is readily available in the market. This sensor can capture the skeletal data of workers who are within 0.5m to 4.5m depth range from the sensor, at horizontal and vertical fields of view of 70° and 60° respectively. The developed system requires very little set up time as it only requires the user to place the sensor within the sensor's field of view and to start the system by pressing the start button. The sensor is programmed to simply inform the operator when the posture is good or awkward. This is done by real-time display on the screen and speech communication to the operator on the postures that have been held over prolonged periods. The system is easy-to-implement because the screens are designed in a simple and interactive way.

For this experiment, the sensor is placed at 1.2m Height and 3m object distance from the sensor as obtained from Mgbemena et al. (2017), and shown in Figure 1.



a. Operator Assembling engine valve **b. Researcher studying**
 Experimental Setup for testing the developed system.

Figure 1

2.4.1. *Experimental Procedure*

The participants were asked to setup the system, login and register their various tasks, while the setup times for each participant was recorded. Then their upper body postures were captured and assessed by the system during task execution. Each participant was asked to complete an assessment form to evaluate the system using the following criteria; i) ease of use ii) ease of understanding iii) ability to provide real-time feedback and iv) convenience. By convenience, we meant to assess if the participants were comfortable and satisfied with the feedback provided by the system.

Case 1: Posture Assessment of Operators Assembling Jaguar Engine Valve.

According to the UK HSE's definitions 'The back posture is considered awkward if more than 20° of twisting or bending is observed' ('HSE - ART tool: Awkward postures,' n.d.). In this case study, we examine the system's capability to assess back postures in compliance with HSE guidelines and provide feedback. The upper body postures of six volunteers were captured and assessed with the developed feedback system during the assembly of valve engine components.

These volunteers, employed as cleaners in different workplaces in the United Kingdom, were briefly trained on how to assemble the engine valve. Each volunteer assembled the valve component once – under controlled laboratory conditions - while the system captured his motion data, assessed his posture and provided real-time feedback.

Case 2: Posture Assessment of Seated Researchers

Again, according to the UK HSE, ‘The arm is considered to adopt an awkward posture if the elbow is raised around chest height’ (‘HSE - ART tool: Awkward postures,’ n.d.). Hence, the system’s capability to assess arm postures in compliance with HSE guidelines and provide feedback to four PhD researcher volunteers was examined during a simulated studying task. This case study was selected to test the generalizability of the developed system for use in workplaces involving non-manual handling tasks.

3. Results

The results obtained from the design, development and implementation of the feedback system, are presented in this section.

3.1. System Design Results

Figure 2 displays the external users (system actors) of the system.

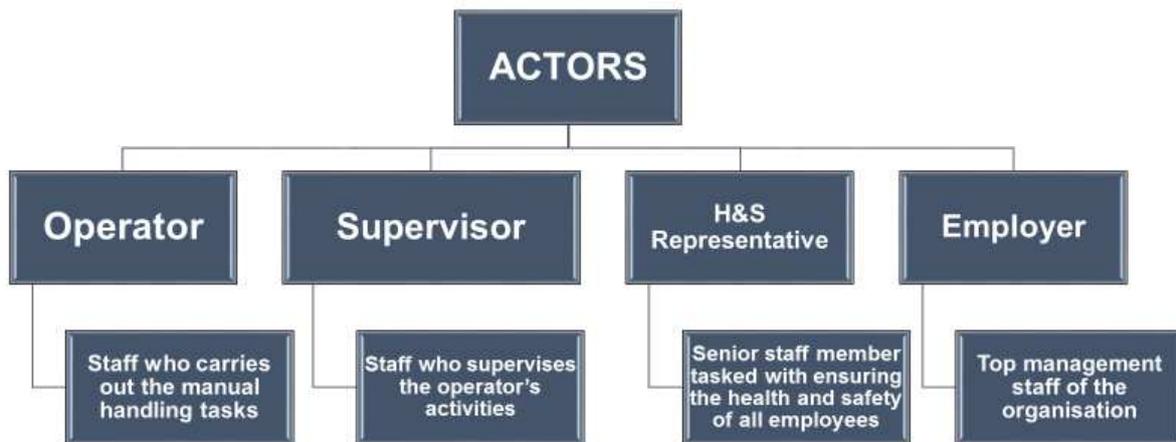


Figure 2 System Actors

The result obtained by modelling the usage requirements of the system, the set of actions on the system, as well as the performance of the external users of the system are represented by the UML use case diagram shown in figure 3. This diagram shows the user's interaction with the system.



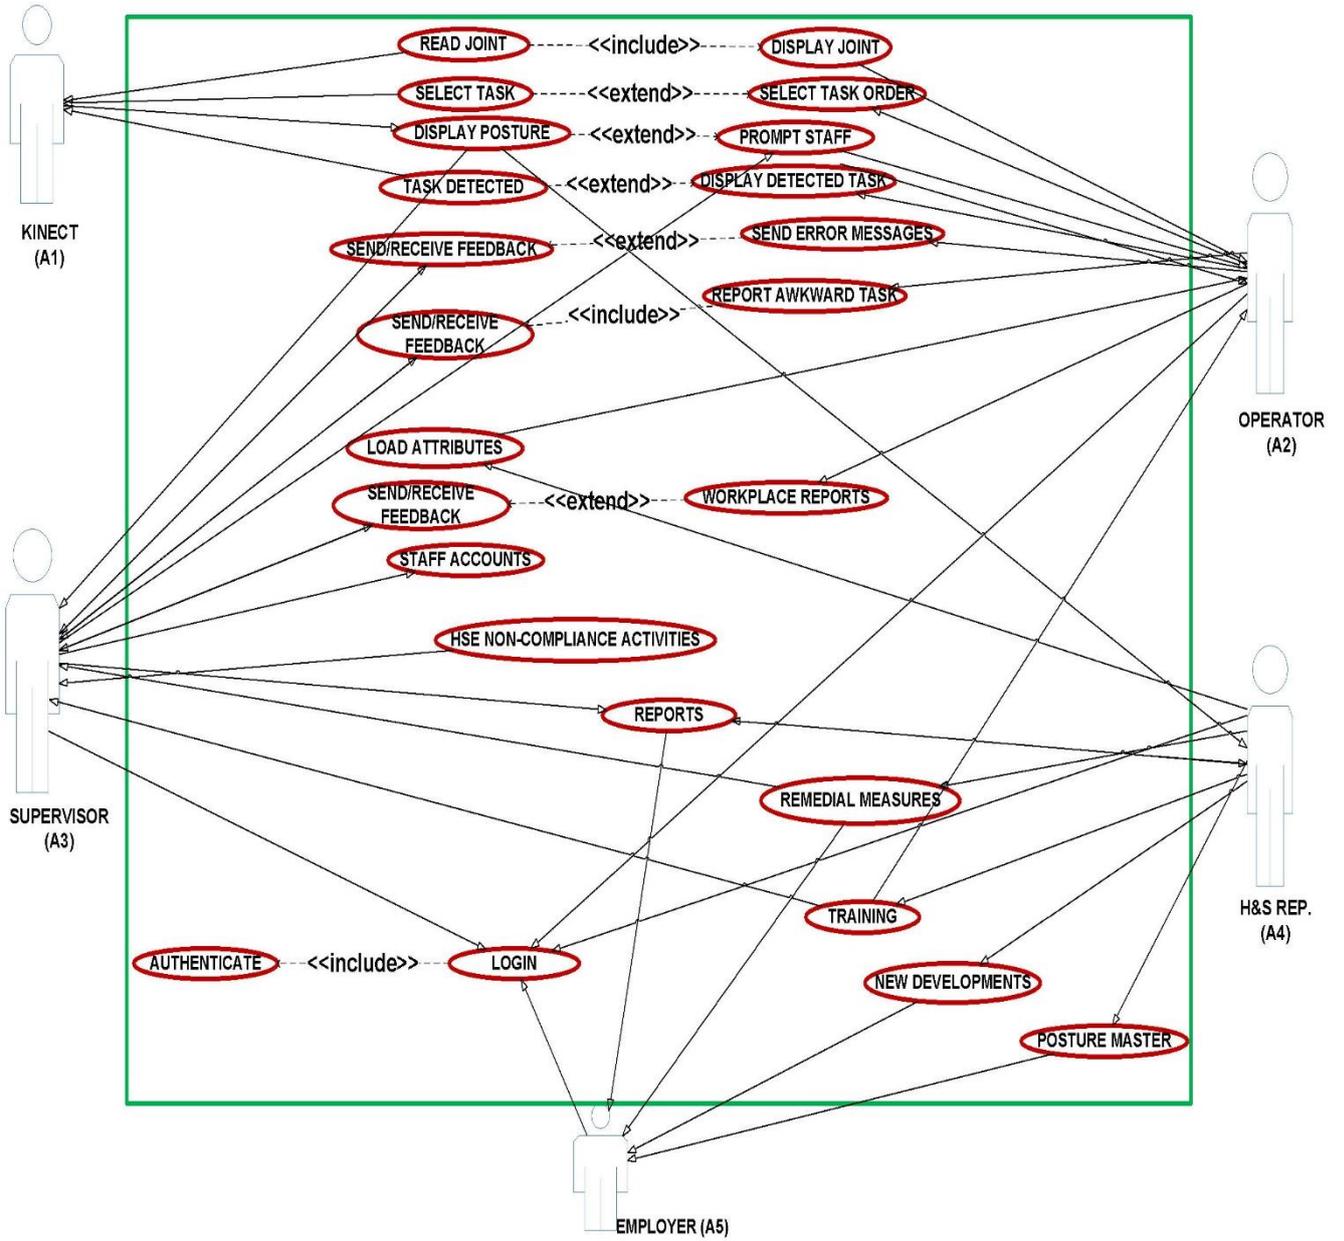


Figure 3 Model of the System using the UML Use Case Diagram


Information flow among external users is depicted in figure 4 with arrows indicating whether information is given or received by each specified actor.

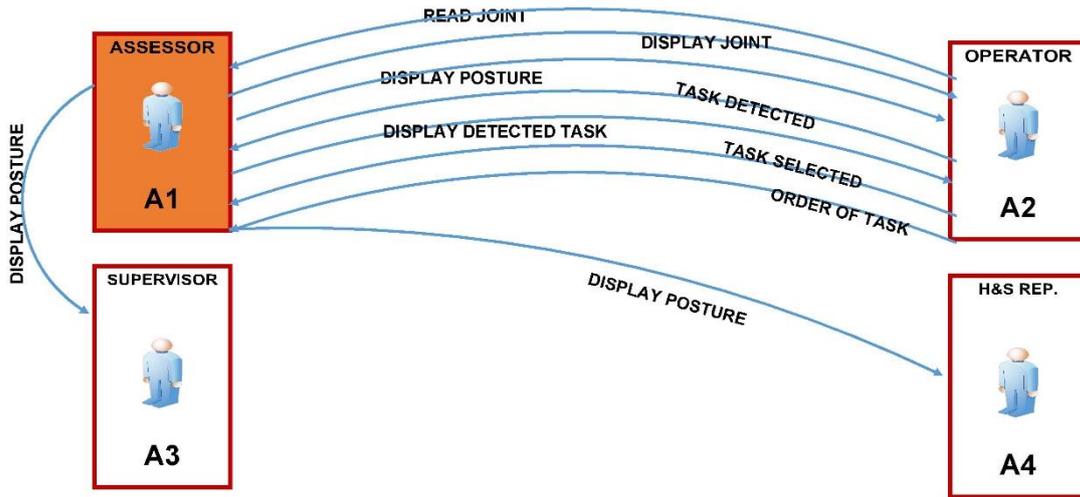


a. Assessor's interaction with other actors

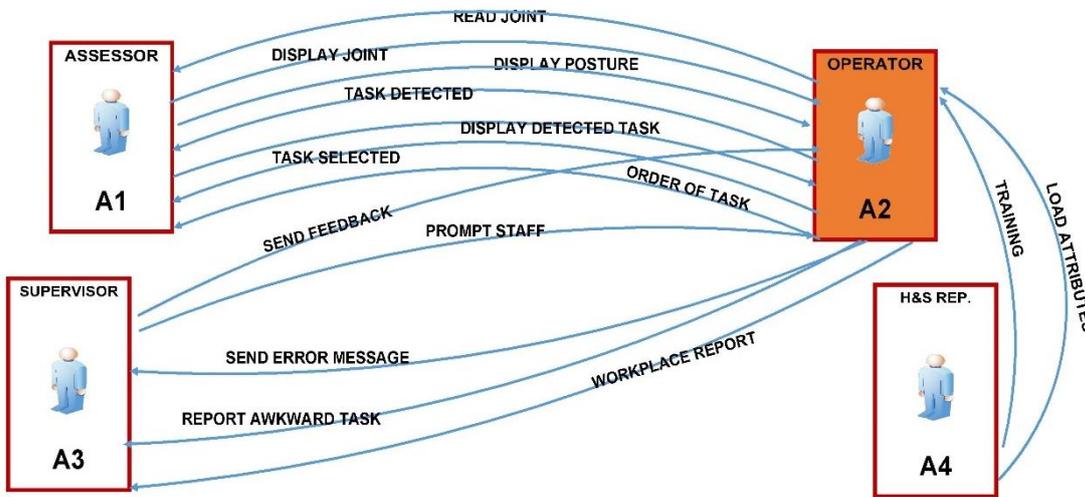

b. Operator interaction with other actors

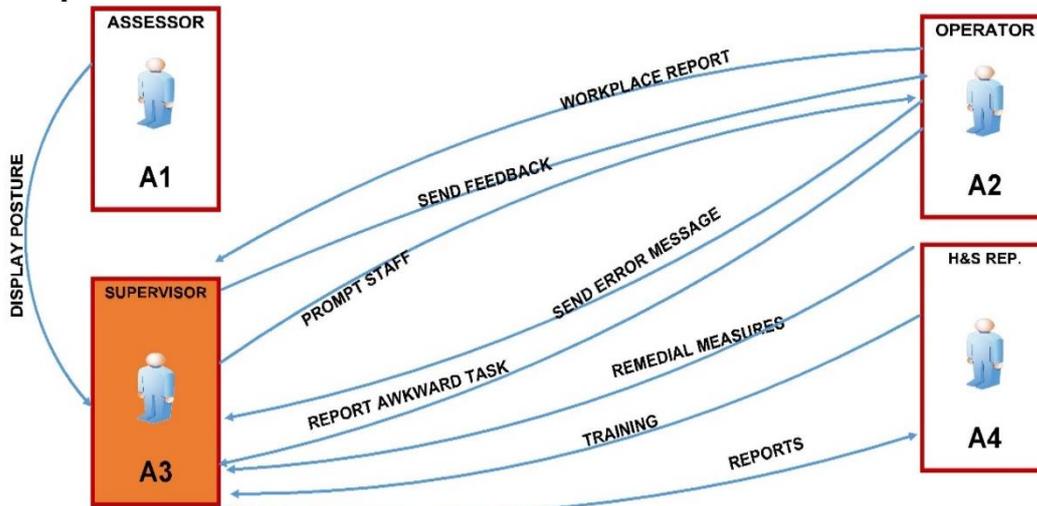

c. Supervisor interaction with other actors

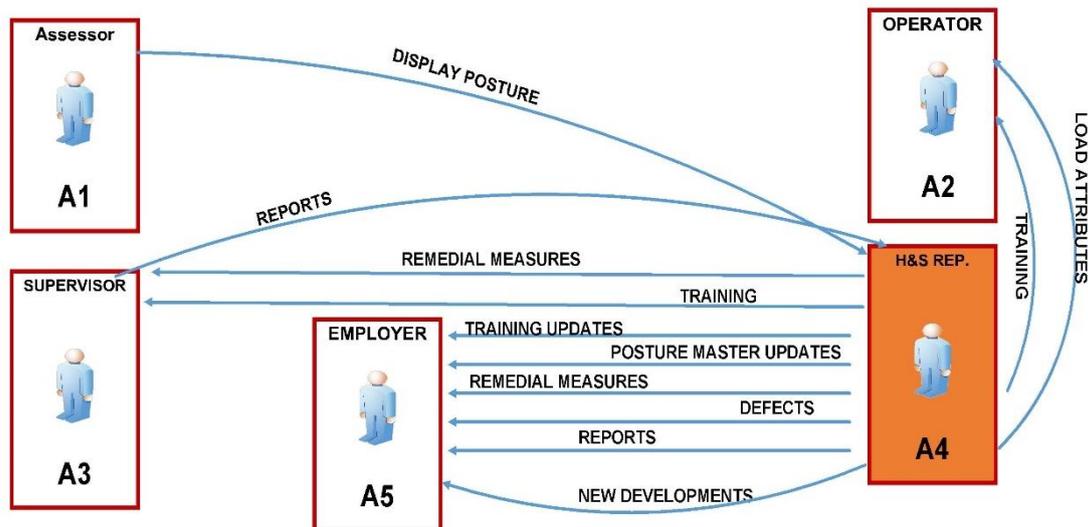

d. H&S Rep. interaction with other actors



e. Employer interaction with other actors

Figure 4 Actor Interaction Flow Diagram

Figure 4 illustrates the flow of information from one actor to another. Table 1 summarises in greater detail the information flow and formats for delivery to each external user. Row 3 of table 1 for example, shows how the posture status of the operators is to be displayed by the assessor in real-time both by display on the screen and by voice alert from the system.

Table 1 Information flow and format among the actors


Information	Description of Information	Nature of Information	Flow	Format
Joint Information	a) The Assessor receives information on the joints of a worker within its field of view. b) It processes the data and display output	a) Real time b) Real time	a) A2 – A1 b) A1 – A2; A1 – A3	Tracked body joints displayed as numerical values in X, Y, Z coordinates.
Posture Status	a)The Assessor displays the posture output to Staff. b) Operator, Supervisor, H&S Rep. receive feedback of Operator’s posture from the Assessor. c)Supervisor & H&S Rep. prompts operator to adjust risky postures	a)Real time b) Real time/ offline c)Real-time /offline	a)A1 – A2 b)A1 – A2/A3/A4 c)A3/A4 – A2	a) Display of Posture updates on screen and voice alert b) Choice of update from database c) Text entry via chat
Gesture	a) The Operator checks if task is	a) Real time	a) A2 –	Matched to manual


detection	detected by the Assessor. b)The Assessor responds.	b) Real time	A1 b) A1 – A2	handling motions.
Task Selected	a)The Assessor receives information from the Operator on the choice of task. b)Operator sends information to the Supervisor requesting help with awkward tasks c)Supervisor sends help	a) Real time b) Real time c) Real-time	a) A2 – A1; A2 – A1 b) A2 – A3 c) A3 – A2	a)Choice of task from a library of task b)Message to signal awkward task c)Text via chat
Login	Login by all actors except the Assessor using assigned Username and Password.	Real time	-	Text input
Workplace	a) Operator notifies the supervisor if the workplace has any ergonomically unacceptable issues such as poor lightning which can lead to altered posture assessment results. b) Supervisor sends feedback c) Operator receives the feedback	a) Real time or offline b) Real time or offline c) Real time or offline	a) A2 – A3 b) A3 – A2 c) A2 – A3	a) Text entry via the chat window. b) Text response via chat. c) Text entry via chat.
Staff Account	Supervisor registers new User and updates existing users.	Offline.	-	Text entry
Error Reports	a) Operator notifies the supervisor when the sensor starts generating erroneous feedback which is informed by failure of the sensor to detect the operator's task. b) Supervisor receive the information and send feedback to the operator.	a) Real time b) Real time or offline	a) A2 – A3 b) A3 – A2	a)Text via chat b)Text via chat
Training	a)H&S Rep. organises training for all staff b)All other staff receives training on the use of the system.	a) Offline b) Offline	a) A4 – A2/A3 b) A2/A3 – A4	Choice of suitable training from library of training log
Reports	a) Supervisor generates and sends report to H&S Rep. b) H&S Rep. receives reports and send to Employer c) Employer receives the report	Offline	a) A3 – A4 b) A4 – A5 c) A4 – A5	Chat or by paperwork.
Archive	Registered staff can assess the past posture updates of Operators any time.	Offline	-	Choice of posture output from the database
Posture Master	a) Employer receives feedback from the H&S Rep., effectiveness of the system and system upgrade.	Offline	a) A4 – A5	a) Text entry via chat or by paperwork

The internal logic of the complex operations involved in the design of the system as modelled by the UML activity diagram is presented on table 2. This shows the activities of each of the users and provides the possible navigation paths and connections to other key data elements necessary for state changes. The models clearly communicate the system functionality, processing and user interface flows for each external user. The Kinect activity diagram


describes how the Kinect receives information and displays results. The operator's activity diagram flow explains his activities from when he logs in to when he completes his task. The supervisor's activity diagram flow also shows him logging into the system, how he can register new staff and monitor operators for awkward posture updates and feedback. The H&S Rep.'s activity diagram depicts the activities of the H&S Rep. at the operator's desk, supervisor's desk and at employer's desk. The employer's activity diagram shows the employer activities. While the use case model shows why and when the users should follow particular paths in the system, the activity diagrams models the roadmap of the user functionality which shows the paths followed by the users (Lieberman 2004).

Table 2 Modelling of the Actor's Activities using UML Activity Diagrams

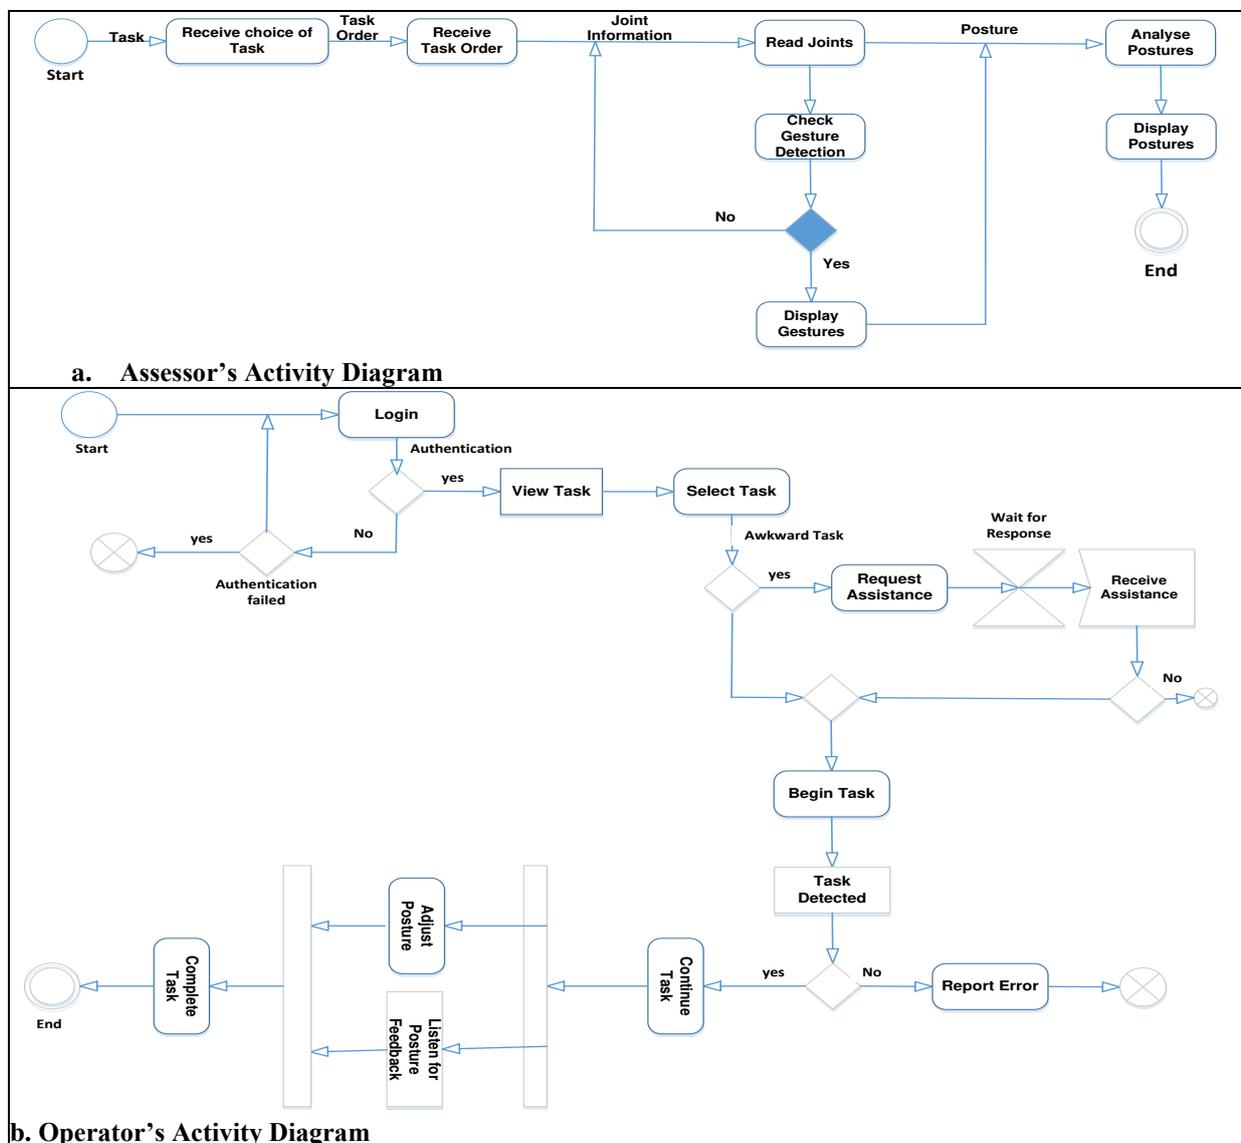


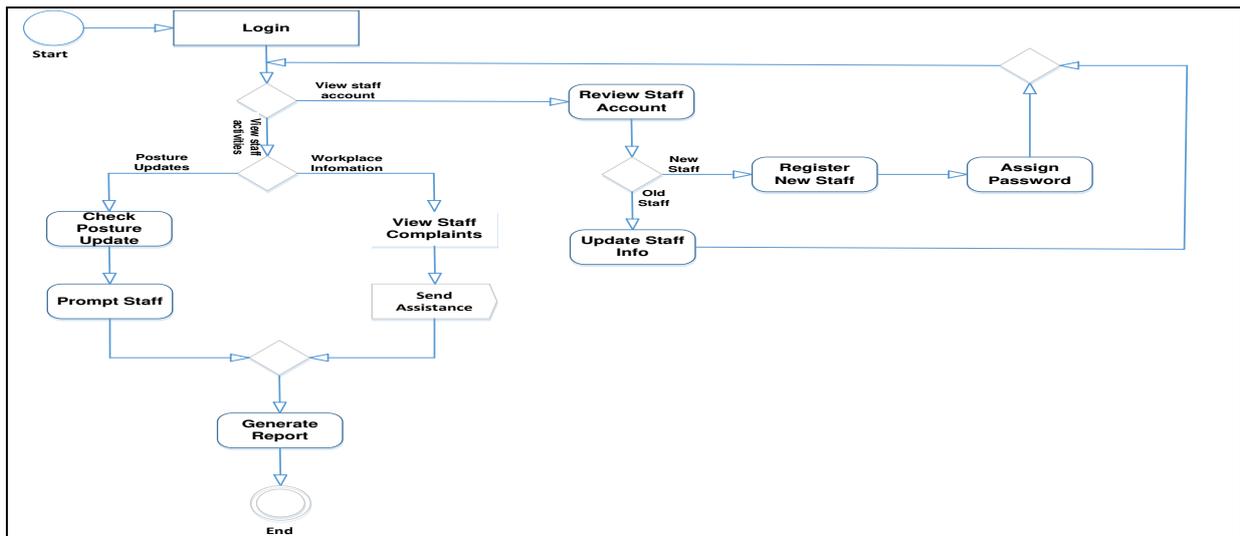

c. Supervisor's Activity Diagram

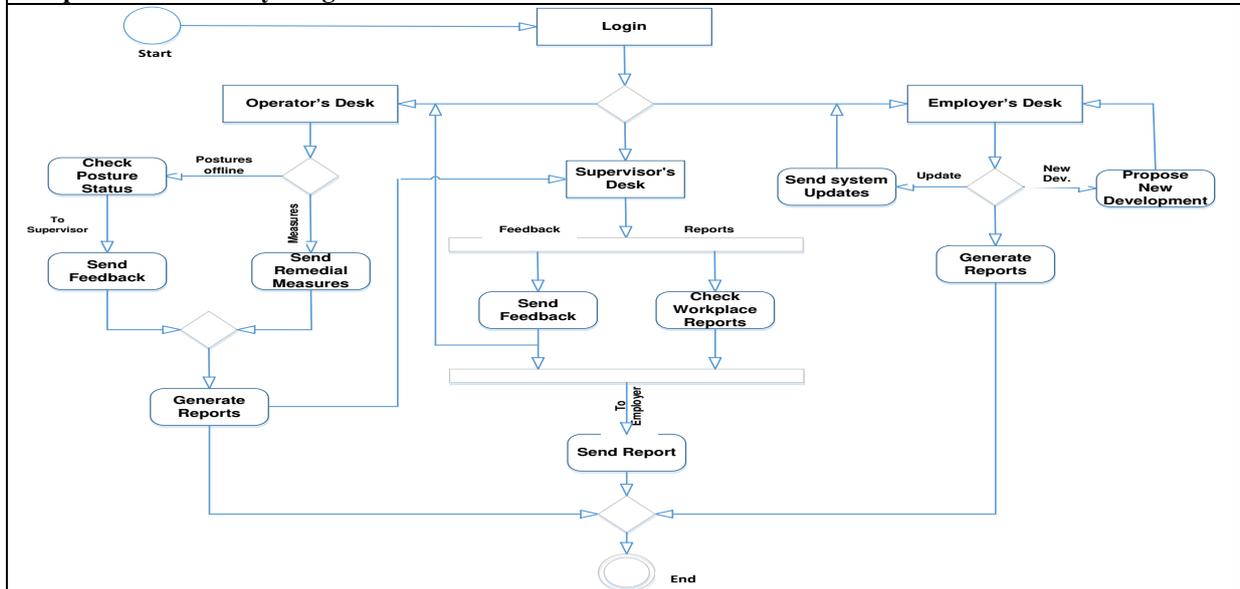

d. H&S Rep's Activity Diagram

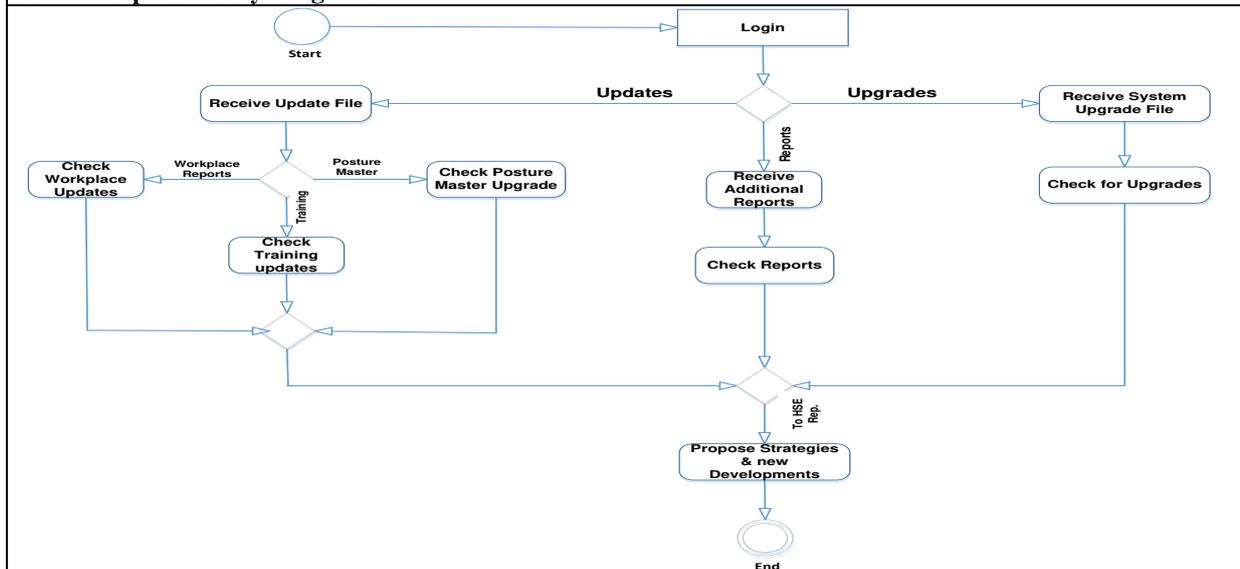

e. Employer's Activity Diagram

Furthermore, the system's site map of figure 5 describes the system's screens and sub screens and summarises the user interface flow diagram.

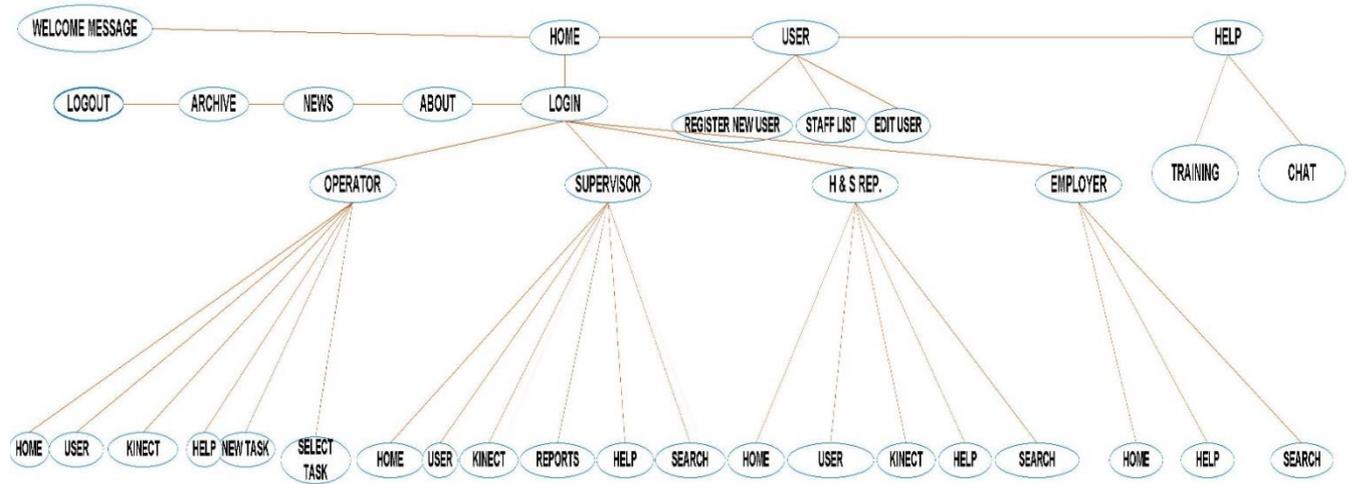


Figure 5 The Site Map of the proposed system

The User Interface Flow Diagram, also known as the Storyboards, employed to model the high-level relationships between the major user interface elements, shows a high-level overview of the feedback system design and is the architectural view of the system as it represents the complete interface system along with its controls as seen in figure 6.


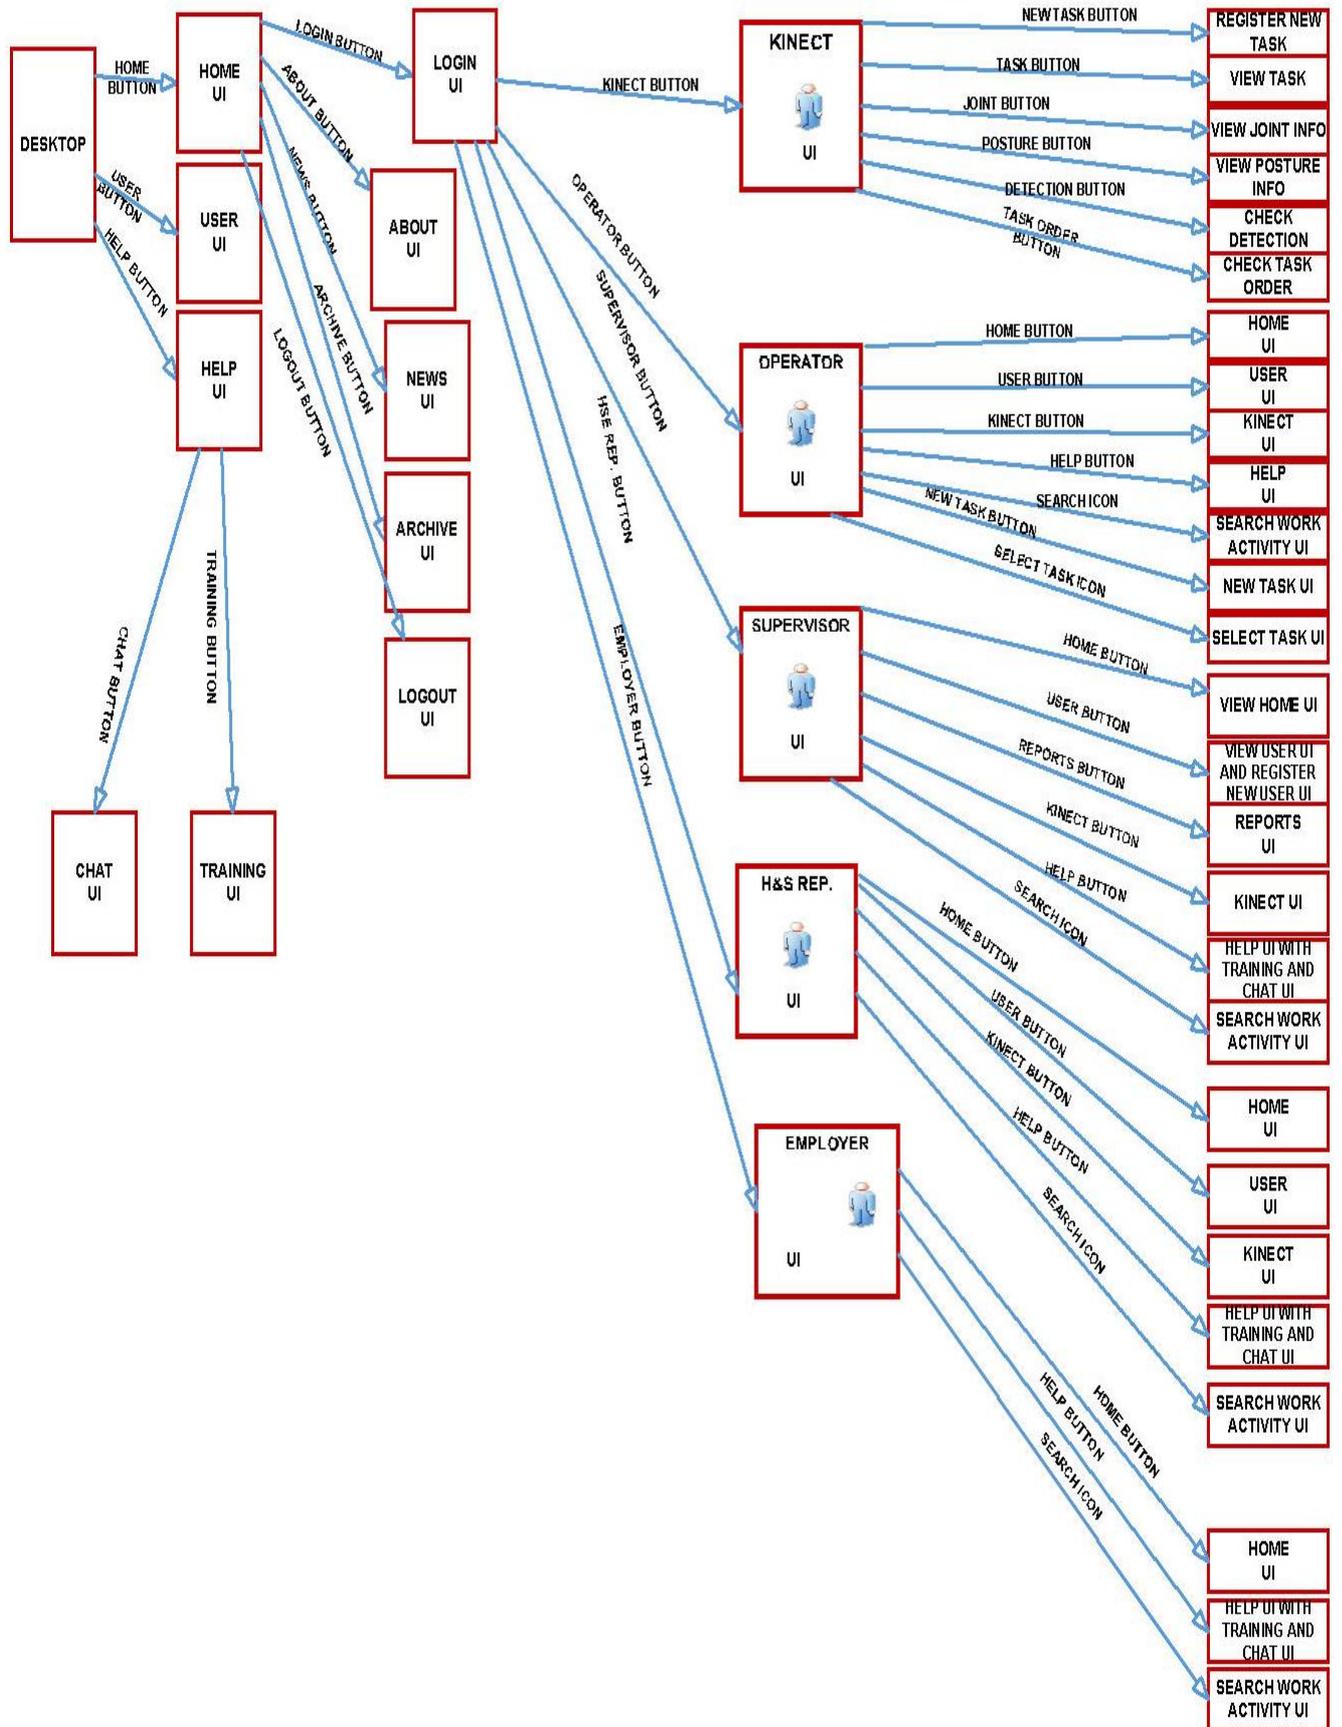


Figure 6 User Interface Flow Diagram (Storyboards) of the proposed Feedback System.


3.2. System Development Results.

The first level screen the user is expected to see after launching the system is the 'Home Screen' which contains the 'Home', 'User' and 'Help' menu buttons as shown in figure 7a. Some of the implemented screens, described on table 3, are represented in figure 7.


Figure 7 shows some developed screens of the posture assessment feedback system.

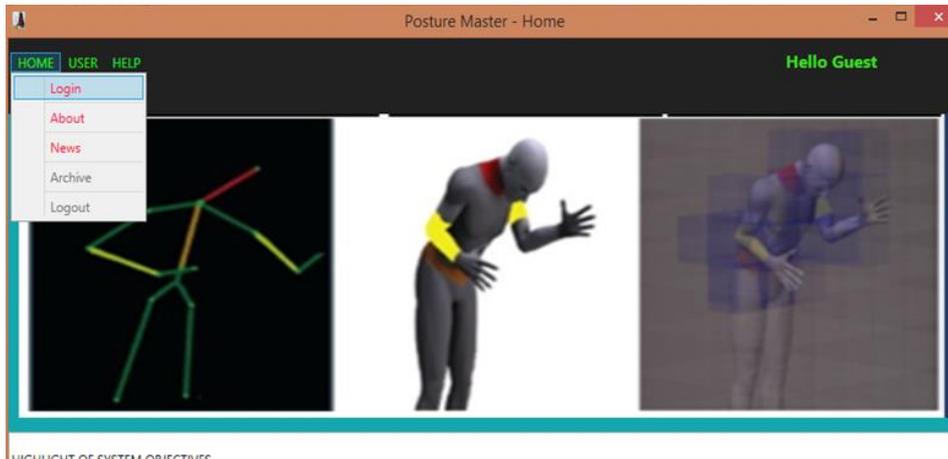


HIGHLIGHT OF SYSTEM OBJECTIVES
a. Home screen displaying the 'Home' Button facilities

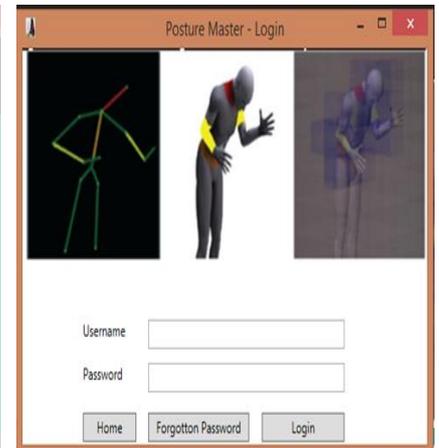


b. Login Screen

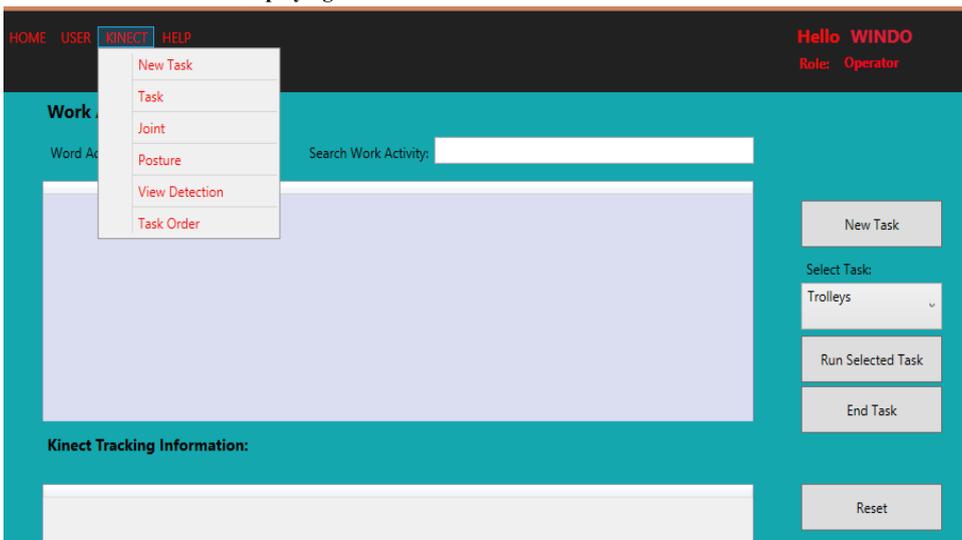

c. Operator's Screen showing 'Kinect' Button facilities

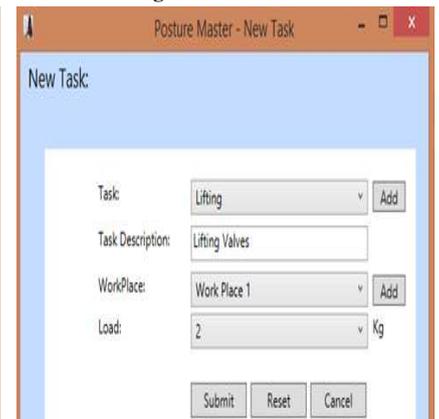


d. Operator's New Task Screen

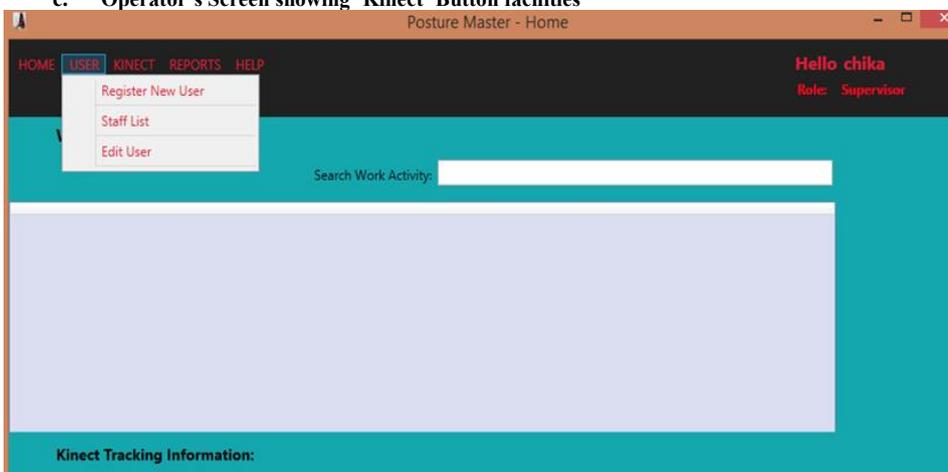

e. Supervisor's Screen showing the 'User' button screen



f. Supervisor's Registration Screen

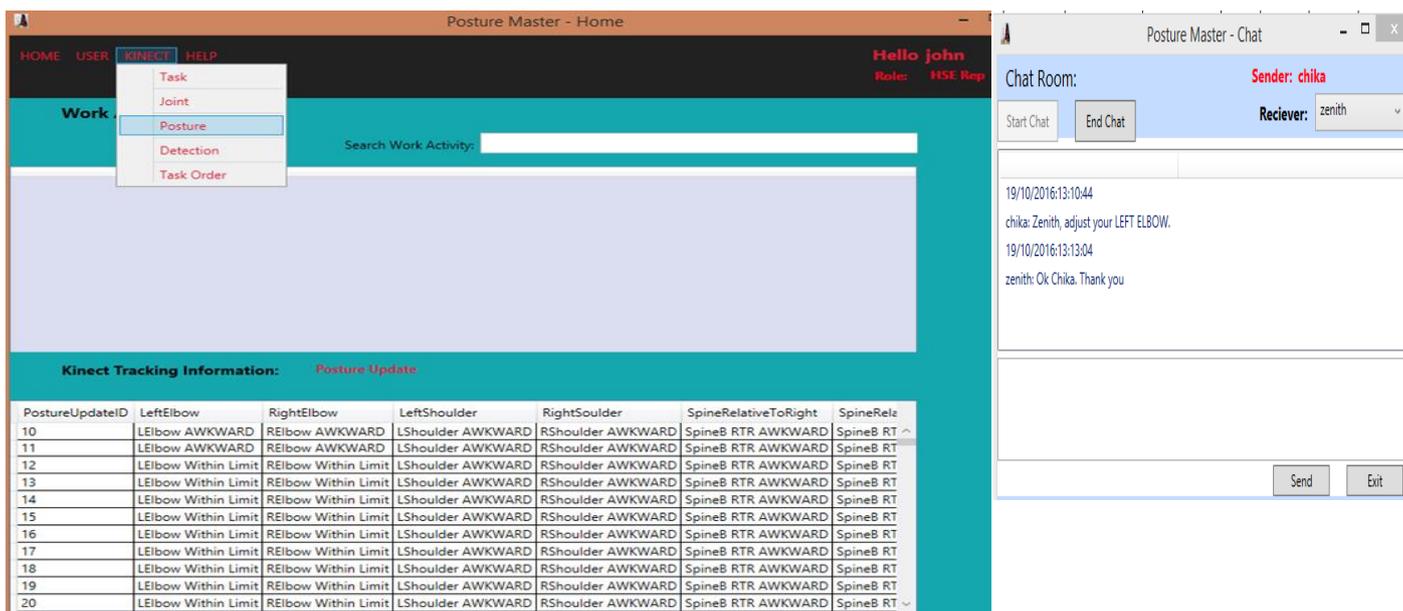

g. HSE Rep.'s Screen showing the 'Kinect Posture' button functionality

h. Chat window

Figure 7 Screenshots of Developed Screens of the Feedback System

Table 3 Description of screens presented on Figure 7

Figure No.	Description of the Figures
Figure 7a	Home Screen showcasing the 'Home', 'User', and 'Help' buttons as well as the system objectives & home button menus. The 'Home button' contains the 'Login button' which when pressed, displays the login screen to all users, the 'About button' which displays information about the system, the 'News button' for display of current news to the users, the 'Archive button' for accessing database updates and the 'logout button' for logging out of the system.
Figure 7b	The Login screen used by all users to sign into the system using assigned Username or password. Forgotten passwords can also be reset and the user can go back to the home screen using the 'home button'.
Figure 7c	Operator's Screen showing Kinect button menus. Its right-hand side contains the 'Task' buttons and icons where new tasks are registered, tasks are selected and 'run' by the Operator. The Kinect button consists of the 'New task button for registering new task, the 'Task button' for viewing all task updates, 'joint button' for viewing the joint information updates from the database, 'posture button' for viewing the posture updates of any of the operators, the 'view detection button' for viewing the task detection updates and the 'Task order button' which shows the order of task for multiple tasks.
Figure 7d	New task screen showing where the Operator registers new tasks. This usually takes less than 15 seconds to complete and submit.
Figure 7e	Supervisor's home screen showing all the buttons and icons especially the User button menu
Figure 7f	Registration page used by Supervisor to register new user, view staff list and edit new user.
Figure 7g	Kinect task button capability of H&S Rep.'s screen showing how he culls previous posture updates of Operators from database
Figure 7h	Chat window showing how the users can send and receive information through chat.

3.3. System Implementation Results

In this section, the results of testing the designed and developed feedback system are presented.

Tables 4 and 5 show the response of the participants on the assessment form.

Table 4 Researcher's Responses


PARTICIPANT	RESEARCHER 1 (MALE)	RESEARCHER 2 (MALE)	RESEARCHER 3 (MALE)	RESEARCHER 4 (FEMALE)
Parameter				
Age	30	34	35	25
Set-up Time including new task registration time (s)	32	30	37	39
Is the system convenient to use?	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/> Maybe <input type="checkbox"/>	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Maybe <input type="checkbox"/>	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Maybe <input type="checkbox"/>	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Maybe <input type="checkbox"/>
Ease of Use	Very Easy <input checked="" type="checkbox"/> Easy <input type="checkbox"/> Difficult <input type="checkbox"/>	Very Easy <input checked="" type="checkbox"/> Easy <input type="checkbox"/> Difficult <input type="checkbox"/>	Very Easy <input type="checkbox"/> Easy <input checked="" type="checkbox"/> Difficult <input type="checkbox"/>	Very Easy <input type="checkbox"/> Easy <input checked="" type="checkbox"/> Difficult <input type="checkbox"/>
Is the system easy understand?	Very Easy <input checked="" type="checkbox"/> Easy <input type="checkbox"/> Difficult <input type="checkbox"/>	Very <input checked="" type="checkbox"/> Easy <input type="checkbox"/> Difficult <input type="checkbox"/>	Very Easy <input checked="" type="checkbox"/> Easy <input type="checkbox"/> Difficult <input type="checkbox"/>	Very <input checked="" type="checkbox"/> Easy <input type="checkbox"/> Difficult <input type="checkbox"/>
Was real-time feedback provided concerning awkward postures?	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Maybe <input type="checkbox"/>	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Maybe <input type="checkbox"/>	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Maybe <input type="checkbox"/>	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Maybe <input type="checkbox"/>
Which feedback format did you find easier to understand?	Voice Alert only <input type="checkbox"/> Screen display only <input type="checkbox"/> Both by voice alert and screen display <input checked="" type="checkbox"/>	Voice Alert only <input type="checkbox"/> Screen display only <input type="checkbox"/> Both by voice alert and screen display <input checked="" type="checkbox"/>	Voice Alert only <input type="checkbox"/> Screen display only <input type="checkbox"/> Both by voice alert and screen display <input checked="" type="checkbox"/>	Voice Alert only <input type="checkbox"/> Screen display only <input type="checkbox"/> Both by voice alert and screen display <input checked="" type="checkbox"/>

Table 5 Operator's Responses


PARTICIPANT	OPERATOR 1 (FEMALE)	OPERATOR 2 (MALE)	OPERATOR 3 (FEMALE)	OPERATOR 4 (MALE)	OPERATOR 5 (MALE)	OPERATOR 6 (FEMALE)
Parameter						
Age	28	35	29	30	40	55
Set-up Time including new task registration time (s)	38	30	31	32	30	37
Is the system convenient to use?	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Maybe <input type="checkbox"/>	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Maybe <input type="checkbox"/>	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Maybe <input type="checkbox"/>	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/> Maybe <input type="checkbox"/>	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Maybe <input type="checkbox"/>	Yes <input type="checkbox"/> No <input type="checkbox"/> Maybe <input checked="" type="checkbox"/>
Ease of Use	Very Easy <input checked="" type="checkbox"/> Easy <input type="checkbox"/> Difficult <input type="checkbox"/>	Very Easy <input checked="" type="checkbox"/> Easy <input type="checkbox"/> Difficult <input type="checkbox"/>	Very Easy <input checked="" type="checkbox"/> Easy <input type="checkbox"/> Difficult <input type="checkbox"/>	Very Easy <input type="checkbox"/> Easy <input checked="" type="checkbox"/> Difficult <input type="checkbox"/>	Very Easy <input checked="" type="checkbox"/> Easy <input type="checkbox"/> Difficult <input type="checkbox"/>	Very Easy <input type="checkbox"/> Easy <input type="checkbox"/> Difficult <input checked="" type="checkbox"/>
Is the feedback from the system easy understand?	Very Easy <input checked="" type="checkbox"/> Easy <input type="checkbox"/> Difficult <input type="checkbox"/>	Very Easy <input checked="" type="checkbox"/> Easy <input type="checkbox"/> Difficult <input type="checkbox"/>	Very Easy <input checked="" type="checkbox"/> Easy <input type="checkbox"/> Difficult <input type="checkbox"/>	Very Easy <input type="checkbox"/> Easy <input checked="" type="checkbox"/> Difficult <input type="checkbox"/>	Very Easy <input checked="" type="checkbox"/> Easy <input type="checkbox"/> Difficult <input type="checkbox"/>	Very Easy <input type="checkbox"/> Easy <input checked="" type="checkbox"/> Difficult <input type="checkbox"/>
Was real-time feedback provided concerning awkward postures?	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Maybe <input type="checkbox"/>	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Maybe <input type="checkbox"/>	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Maybe <input type="checkbox"/>	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Maybe <input type="checkbox"/>	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Maybe <input type="checkbox"/>	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Maybe <input type="checkbox"/>
	Voice Alert only <input type="checkbox"/> Screen display only <input type="checkbox"/> Both by voice and screen display <input type="checkbox"/>	Voice Alert only <input type="checkbox"/> Screen display only <input type="checkbox"/> Both by voice alert and screen display <input type="checkbox"/>	Voice Alert only <input type="checkbox"/> Screen display only <input type="checkbox"/> Both by voice <input type="checkbox"/>	Voice Alert only <input type="checkbox"/> Screen display only <input type="checkbox"/> Both by voice <input type="checkbox"/>	Voice Alert only <input type="checkbox"/> Screen display only <input type="checkbox"/> Both by voice <input type="checkbox"/>	Voice Alert only <input type="checkbox"/> Screen display only <input type="checkbox"/> Both by voice <input type="checkbox"/>

	alert and screen display <input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	alert and screen display <input checked="" type="checkbox"/>			
--	--	-------------------------------------	--	--	--	--


Figures 8 and 9 present the posture assessments of an operator and a researcher carrying out their assigned tasks. This data is retrieved from the system database and plotted in SPSS software to analyse the frequency of the back-posture quality. Frequency is computed as the rate at which the joint is held either awkward or good at a time.

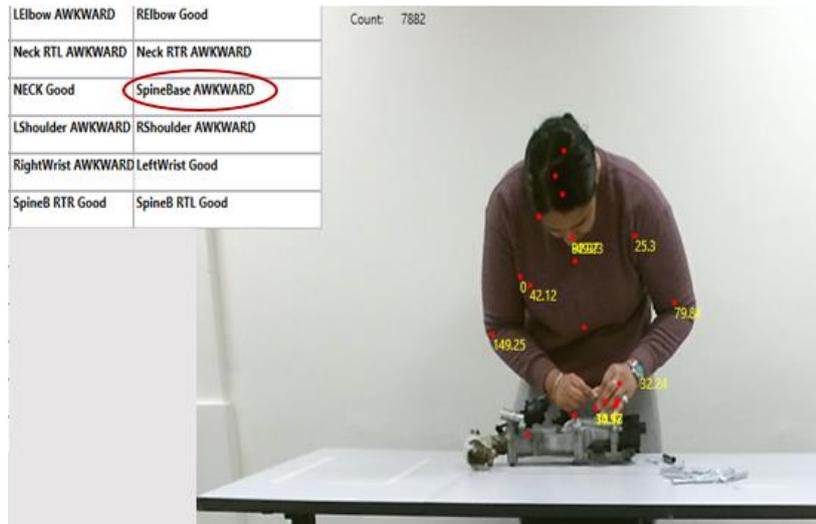


a. Real-Time tracking/feedback to an Operator showing awkward back posture assessment during assembly task

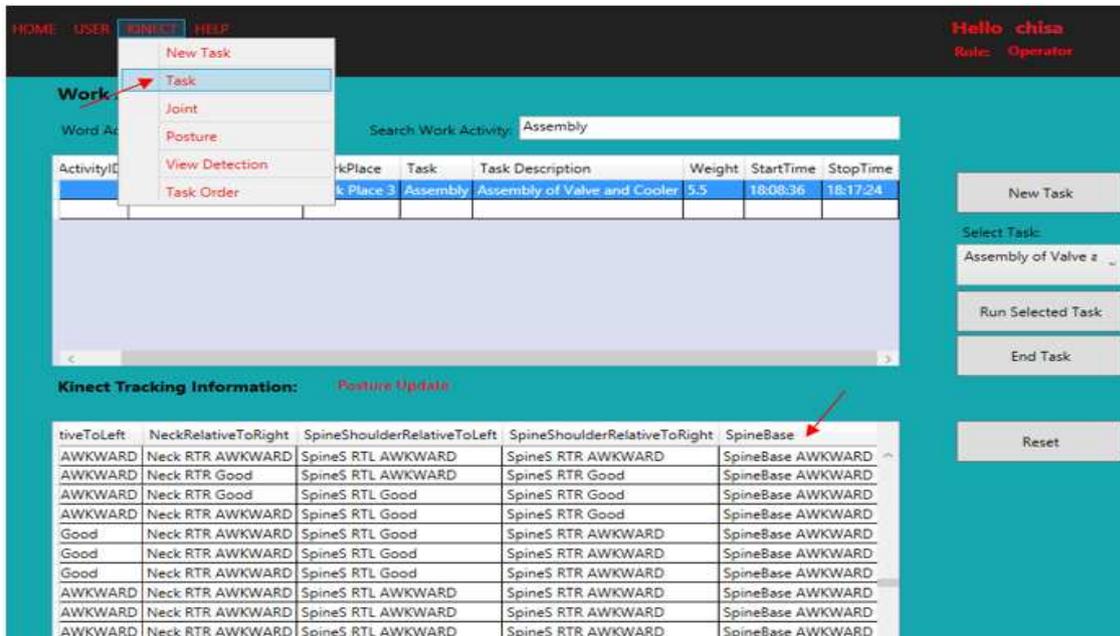


b. Back posture updates of the Operator from the database

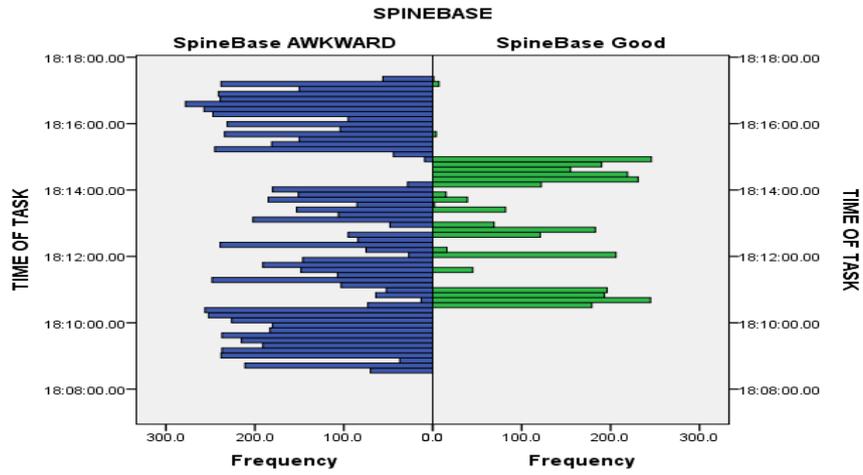


c. Back Posture Quality vs frequency for Assembly Task
 Figure 8 Feedback System Implementation on Assembly Task Operator

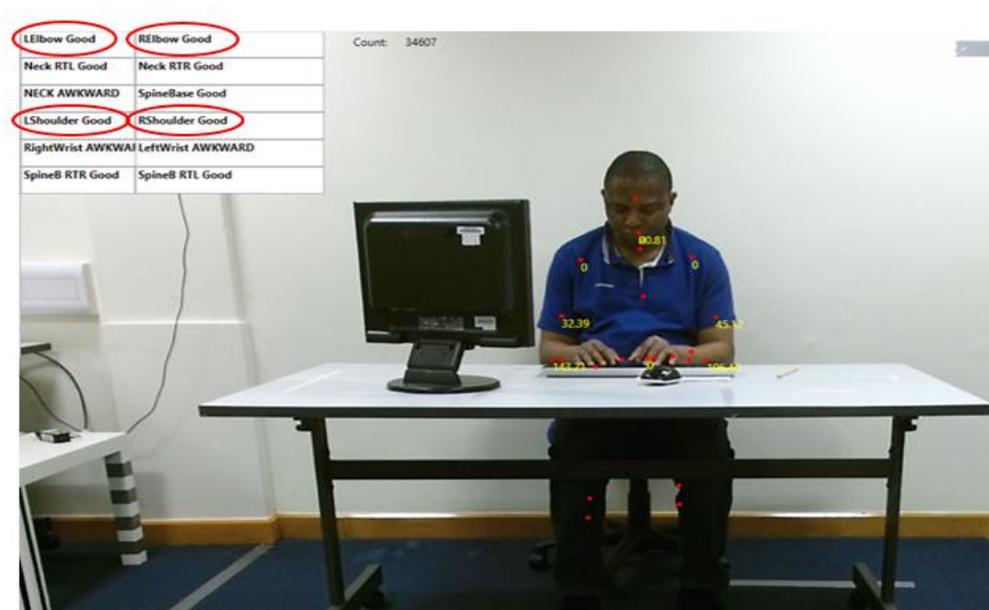

a. Real-Time tracking/feedback to Researcher showing good arm posture assessment

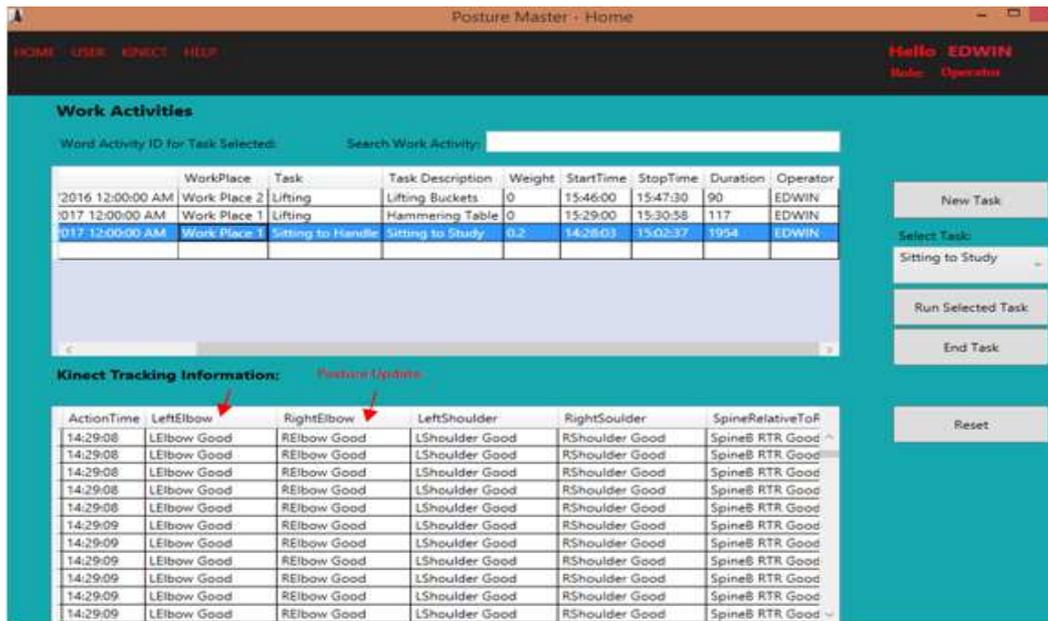

b. Researcher's posture update showing the elbow postures

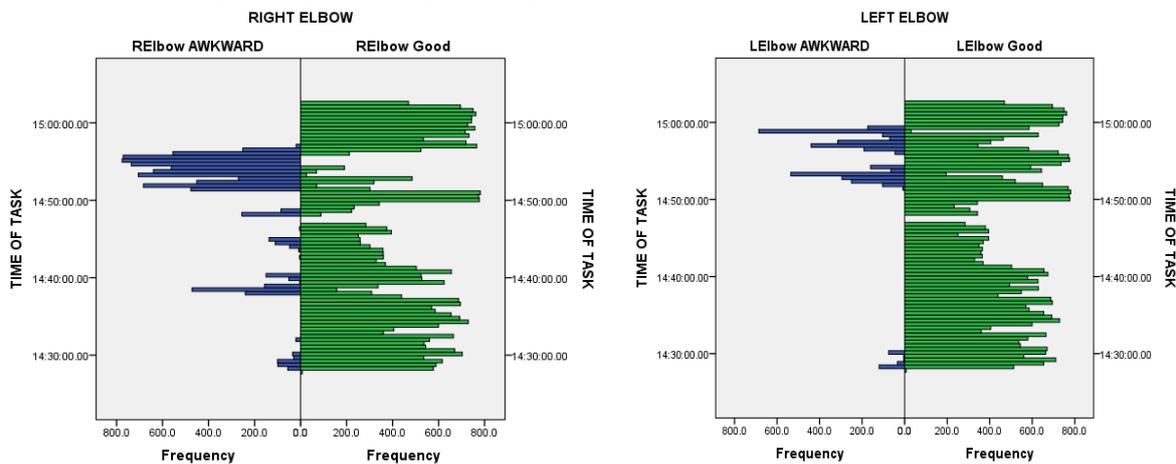

c. Right Elbow posture quality vs frequency for Researcher 3

d. Left elbow posture quality vs frequency for Researcher 3

Figure 9 Feedback System Implementation on Seated Researcher

4. Discussion of Results

This paper describes the design and implementation of a human-machine interface feedback system that displays the real-time ergonomic posture assessment updates to a worker and provide a manufacturing shop floor with a simple, low-cost, easy-to-implement, feedback mechanism.

The system design was initiated by the establishment of some basic questions which helped to establish the external users of the system, information flow from one user to another and the format the information was delivered to the end user. The UK HSE's recommended requirements on personnel to involve in risk assessment was used to identify the various users in the system. The system's models were developed using the UML use diagrams as well as the user interface flow diagram.

Testing of the developed system's functionalities on ten volunteers provides evidence that the system delivers useful, real-time postural feedback. For example, all the participants were found to receive their posture assessment feedback both by display on the screen and by voice alert which helped prompt them to adjust awkward postures. As an additional mechanism to prompt workers to adjust awkward postures, the chat screen could be used by supervisors and/or H&S reps.

Figure 8a shows the real-time feedback of the back-posture assessment feedback of one of the operators. As shown, the back posture was assessed as represented by 'SpineBase Awkward' and displayed to the operator on the Kinect window, at the time of capture.

Figure 8b shows how the operator may view his posture update and task information using the 'Kinect menu button'. The task display window depicts information on all previously captured tasks carried out by the operator. Detailed information for those tasks can be displayed in the posture update window by pressing either the Kinect 'task' button or the Kinect 'posture' button. Similarly, pressing the Kinect joint button displays the angular joint data for each of the joints (not shown). Availability of this information via the stored database may help inform future ergonomic interventions and actions.

Figure 8c depicts the analysis of the back-posture quality data in accordance with its frequency of occurrence. As illustrated, the 'SpineBase Awkward' occurred with much higher frequency than the 'SpineBase Good' during assembly tasks. Further analysis showed the operator maintained risky back postures for 78% of the assembly task duration. This result in an actual work environment would indicate the need for immediate ergonomic interventions and possible workplace re-design and training.

Figure 9 depicts the real-time tracking/feedback to researcher showing good arm posture assessment. Note that both the right and left elbows were displayed as 'Good' in 9a and held for a long time as 'Good' in Figure 9b when viewed offline by the researcher. Figure 9c shows that the right elbow been held as 'Good' for longer periods of up to 80% of the task duration while in figure 9d, the left elbow was held as 'Good' for longer periods of up to 91% of the task duration. This indicates that the researcher does not require any immediate ergonomic intervention.

The analysis of these experimental results illustrates the potential utility of our newly developed real-time ergonomic postural assessment feedback system to document occurrence and frequency of risky postures during task performance and thereby inform ergonomic interventions. Such information will enable both H&S representatives and workers to recognize and correct awkward postures in a timely manner.

Assessments completed by the participants revealed that eight of the ten rated the system as convenient to use. Six participants found the system very easy to use, two found it easy while one rated it as a difficult system. Eight participants found the feedback from the system very easy to understand while two rated it as easy. All the participants agreed that the system provided real-time feedback by both voice alert and screen display. When asked why they thought that the feedback was easy to understand, the participants stated that the voice alert that enabled the system to communicate verbally to them concerning their posture, was very simple and very easy to understand. The operator who found the system difficult to use said that she was not used to being monitored while working and did not like to be distracted. Operator 4 and researcher 1, who rated the system as not convenient, said the prompting by the system made them lose concentration. The average setup time required, including starting the system and registering a new task was 33.6 seconds.

Limitations of this system include its inability to assess other ergonomic risk factors and the occlusion issues associated with the Microsoft Kinect. To use the system, the worker must be facing the sensor.

Future work will focus on assessing the reliability of this newly developed system.

5. Conclusion

In this paper, we designed and implemented a human-machine interface feedback system whose function is to capture, analyse, classify and display the postures of workers in real time. This is made possible with the aid of a Microsoft Kinect sensor which is cost-effective, readily available and convenient to use. The developed system enables ergonomic posture analysis of the operator with real-time display in an easy-to-understand and simple interface thereby prompting the worker to adjust any possible awkward posture that may occur during any manual handling activity in the workplace.

During the design, the Health and Safety requirements were studied to establish the personnel requirements in risk assessment and three basic questions were answered to establish the conceptual models of the system as well as the system requirements. These models were developed using the UML use case diagrams, the UML activity diagrams, and the Interface prototype was modelled using the User Interface Flow Diagram (Storyboards).

The designed system provides feedback visualisation Interface with screens designed to support the visualisation of posture outputs. The developed system showed real-time posture

analysis and feedback to workers when tested on different participants during manual handling tasks. The generalizability of the system to workplaces involving non-manual handling tasks was tested on desk-based seated researchers with results showing the potential for use among seated industrial workers.

Workplaces will most likely benefit from the developed system because it can inform workers about their posture while working. This may help reduce the rate of occurrence of awkward postures and the risk of WMSDs among workers in the workplace.

Acknowledgment

The authors would like to acknowledge the Petroleum Technology Development Fund, PTDF Nigeria for sponsoring the PhD of the lead author from which this paper is derived.

Disclosure statement

No potential conflict of interest was reported by the authors.

5. References

- Aromaa, Susanna, and Kaisa Väänänen. 2016. "Suitability of Virtual Prototypes to Support Human Factors/ergonomics Evaluation during the Design." *Applied Ergonomics* 56 (September): 11–18. doi:10.1016/j.apergo.2016.02.015.
- Center for Ergonomics. "3DSSPP Software." <https://c4e.engin.umich.edu/tools-services/3dsspp-software/>.
- Chander, Divyaksh Subhash, and Maria Pia Cavatorta. 2017. "An Observational Method for Postural Ergonomic Risk Assessment (PERA)." *International Journal of Industrial Ergonomics* 57: 32–41. doi:10.1016/j.ergon.2016.11.007.
- Clark, Ross a, Yong-Hao Pua, Karine Fortin, Callan Ritchie, Kate E Webster, Linda Denehy, and Adam L Bryant. 2012. "Validity of the Microsoft Kinect for Assessment of Postural Control." *Gait & Posture* 36 (3). Elsevier B.V.: 372–377. doi:10.1016/j.gaitpost.2012.03.033.
- Claypoole, V. L., B. L. Schroeder, and A. D. Mishler. 2016. "Keeping in Touch: Tactile Interface Design for Older Users." *Ergonomics in Design: The Quarterly of Human Factors Applications* 24 (1). SAGE Publications: 18–24. doi:10.1177/1064804615611271.
- Dai, F., and X. Ning. 2013. "Remote Sensing Enabling Technologies for Assessment of

- Construction Worker's Musculoskeletal Disorder Risks: A Review and Future Extension." In *ISARC 2013 - 30th International Symposium on Automation and Robotics in Construction and Mining, Held in Conjunction with the 23rd World Mining Congress*. Delpresto, J., Chuhong Chuhong Duan, L. M. Layiktez, E. G. Moju-Igbene, M. B. Wood, and P. A. Beling. 2013. "Safe Lifting: An Adaptive Training System for Factory Workers Using the Microsoft Kinect." In *2013 IEEE Systems and Information Engineering Design Symposium*, 64–69. IEEE. doi:10.1109/SIEDS.2013.6549495.
- Diego-Mas, Jose Antonio, and Jorge Alcaide-Marzal. 2014. "Using Kinect™ Sensor in Observational Methods for Assessing Postures at Work." *Applied Ergonomics* 45 (4): 976–985. doi:10.1016/j.apergo.2013.12.001.
- EU-OSHA:E-Fact 45. 2016. "E-Fact 45 - Checklist for Preventing Bad Working Postures - Safety and Health at Work - EU-OSHA." Accessed November 18. <https://osha.europa.eu/en/publications/e-facts/efact45/view>.
- Fernández-Baena, A., A. Susín, and X. Lligadas. 2012. "Biomechanical Validation of Upper-Body and Lower-Body Joint Movements of Kinect Motion Capture Data for Rehabilitation Treatments." In *Proceedings of the 2012 4th International Conference on Intelligent Networking and Collaborative Systems, INCoS 2012*, 656–661. Bucharest; Romania: IEEE. doi:10.1109/iNCoS.2012.66.
- Haggag, H., M. Hossny, S. Nahavandi, and D. Creighton. 2013. "Real Time Ergonomic Assessment for Assembly Operations Using Kinect." In *2013 UKSim 15th International Conference on Computer Modelling and Simulation*, 495–500. IEEE. doi:10.1109/UKSim.2013.105.
- Health and Safety Executive. 2016. *Manual Handling. Manual Handling Operations Regulations 1992. Guidance on Regulations L23*. 4th ed. <http://www.hse.gov.uk/pubns/priced/l23.pdf>.
- Hoarau, Marie, Camilo Charron, and Franck Mars. 2014. "Activity Analysis of Expert and Novice Operators in a Semi-Automated Manufacturing Process." In *Proceedings of the 2014 European Conference on Cognitive Ergonomics - ECCE '14*, 1–4. New York, New York, USA: ACM Press. doi:10.1145/2637248.2637271.
- HSE. 2002. *Upper Limb Disorders in the Workplace*. 2nd ed. Surrey: HSE Books. <http://www.hse.gov.uk/pubns/priced/hsg60.pdf>.
- HSE - Awkward Postures. "HSE - ART Tool: Awkward Postures." <http://www.hse.gov.uk/msd/uld/art/awkpostures.htm>.
- IFA-CUELA. 2016. "IFA - Ergonomics: The CUELA Measuring System." Accessed

- November 15. <http://www.dguv.de/ifa/fachinfos/ergonomie/cuela-messsystem-und-rueckenmonitor/index-2.jsp>.
- Johnson, Teegan, and Sarah Fletcher. 2014. "A Computer Software Method for Ergonomic Analysis Utilising Non-Optical Motion Capture." In *Contemporary Ergonomics and Human Factors 2014*, 93–100. Taylor & Francis. doi:10.1201/b16742-23.
- Kale, P N, and R T Vyavahare. 2016. "Ergonomic Analysis Tools: A Review." *International Journal of Current Engineering International Journal of Current Engineering and Technology* 6 (4). <http://inpressco.com/category/ijcet>.
- Kee, Dohyung, and Waldemar Karwowski. 2007. "A Comparison of Three Observational Techniques for Assessing Postural Loads in Industry." *International Journal of Occupational Safety and Ergonomics* 13 (1). Taylor & Francis: 3–14. doi:10.1080/10803548.2007.11076704.
- Klippert, Juergen, Thomas Gudehus, and Juergen Zick. 2012. "A Software-Based Method for Ergonomic Posture Assessment in Automotive Preproduction Planning: Concordance and Difference in Using Software and Personal Observation for Assessments." *Human Factors and Ergonomics in Manufacturing & Service Industries* 22 (2). Wiley Subscription Services, Inc., A Wiley Company: 156–175. doi:10.1002/hfm.20370.
- Lieberman, Benjamin. 2004. "UML Activity Diagrams: Detailing User Interface Navigation." <http://www.ibm.com/developerworks/rational/library/4697.html>.
- Liu, Shuo-Fang, and Yann-Long Lee. 2014. "A Simple and Reliable Health Monitoring System for Shoulder Health: Proposal." *JMIR Research Protocols* 3 (1): e11. doi:10.2196/resprot.2584.
- Manghisi, V.M., A.E. Uva, M. Fiorentino, V. Bevilacqua, G.F. Trotta, and G. Monno. 2016. "Real Time RULA Assessment Using Kinect v2 Sensor." *Applied Ergonomics*. doi:10.1016/j.apergo.2017.02.015.
- Martin, C. C., D. C. Burkert, K. R. Choi, N. B. Wieczorek, P. M. McGregor, R. A. Herrmann, and P. A. Beling. 2012. "A Real-Time Ergonomic Monitoring System Using the Microsoft Kinect." In *2012 IEEE Systems and Information Engineering Design Symposium*, 50–55. IEEE. doi:10.1109/SIEDS.2012.6215130.
- McAtamney, L, and E Nigel Corlett. 1993. "RULA: A Survey Method for the Investigation of Work-Related Upper Limb Disorders." *Applied Ergonomics* 24 (2): 91–99. <http://www.ncbi.nlm.nih.gov/pubmed/15676903>.
- Mgbemena, Chika Edith., John Oyekan, Windo Hutabarat, Sarah Fletcher, Yuchun XU, and Ashutosh Tiwari. 2017. "Optimum Kinect Setup for Real-Time Ergonomic Risk

- Assessment on the Shop Floor.” In *Contemporary Ergonomics and Human Factors 2017*, edited by John Charles, Rebecca & Wilkinson, 2017thed., 265–272. London, UK: Chartered Institute of Ergonomics and Human Factors.
- <http://www.ergonomics.org.uk/product/contemporary-ergonomics-human-factors-2017/>.
- Mgbemena, Chika Edith, John Oyekan, Ashutosh Tiwari, Yuchun Xu, Sarah Fletcher, Windo Hutabarat, and Vinayak Prabhu. 2016. “Gesture Detection Towards Real-Time Ergonomic Analysis for Intelligent Automation Assistance.” In *Advances in Ergonomics of Manufacturing: Managing the Enterprise of the Future*, edited by Christopher Schlick and Stefan Trzcieliński, 217–228. Springer International Publishing. doi:10.1007/978-3-319-41697-7_20.
- OSHA:Supplemental Information. 2017. “Ergonomics eTool: Solutions for Electrical Contractors - Supplemental Information: Ergonomic Principles Index.” Accessed March 27.
- <https://www.osha.gov/SLTC/etools/electricalcontractors/supplemental/principles.html#posture>.
- OSHA - Hazard Index. 2016. “Ergonomics eTool: Solutions for Electrical Contractors - Supplemental Information: Hazard Index.” Accessed November 16.
- <https://www.osha.gov/SLTC/etools/electricalcontractors/supplemental/hazardindex.html#static>.
- Palmas, Gregorio, Myroslav Bachynskyi, Antti Oulasvirta, Hans-Peter Seidel, and Tina Weinkauff. 2014. “MovExp: A Versatile Visualization Tool for Human-Computer Interaction Studies with 3D Performance and Biomechanical Data.” *IEEE Transactions on Visualization and Computer Graphics* 20 (12): 2359–2368.
- doi:10.1109/TVCG.2014.2346311.
- Plantard, Pierre, Edouard Auvinet, Anne-Sophie Pierres, and Franck Multon. 2015. “Pose Estimation with a Kinect for Ergonomic Studies: Evaluation of the Accuracy Using a Virtual Mannequin.” *Sensors* 15 (1). Multidisciplinary Digital Publishing Institute: 1785–1803. doi:10.3390/s150101785.
- Savino, Matteo, Antonio Mazza, and Daria Battini. 2016. “New Easy to Use Postural Assessment Method through Visual Management.” *International Journal of Industrial Ergonomics* 53: 48–58. doi:10.1016/j.ergon.2015.09.014.
- Shoaf, C., A. Genaidy, W. Karwowski, T. Waters, and D. Christensen. 1997. “Comprehensive Manual Handling Limits for Lowering, Pushing, Pulling and Carrying Activities.” *Ergonomics* 40 (11): 1183–1200. doi:10.1080/001401397187432.

- Steinberg, Ulf. 2012a. *Leitmerkmalmethode Manuelle Arbeitsprozesse 2011 : Bericht Über Die Erprobung, Validierung Und Revision; Forschung Projekt F2195*. Bundesanstalt für Arbeitsschutz und Arbeitsmedizin.
- Steinberg, Ulf. 2012b. “New Tools in Germany: Development and Appliance of the First Two KIM (’lifting, Holding and Carrying’ and pulling and Pushing’) and Practical Use of These Methods.” *Work* 41: 3990–3996. doi:10.3233/WOR-2012-0698-3990.
- Stuebbe, P., A. Genaidy, W. Karwowski, Y. Guk Kwon, and A. Alhemood. 2002. “The Relationships between Biomechanical and Postural Stresses, Musculoskeletal Injury Rates, and Perceived Body Discomfort Experienced by Industrial Workers: A Field Study.” *International Journal of Occupational Safety and Ergonomics* 8 (2): 259–280. doi:10.1080/10803548.2002.11076528.
- Tak, SangWoo, Bryan Buchholz, Laura Punnett, Susan Moir, Victor Paquet, Scott Fulmer, Helen Marucci-Wellman, and David Wegman. 2011. “Physical Ergonomic Hazards in Highway Tunnel Construction: Overview from the Construction Occupational Health Program.” *Applied Ergonomics* 42 (5): 665–671. doi:10.1016/j.apergo.2010.10.001.
- Valentin, Christina Di, Andreas Emrich, Dirk Werth, and Peter Loos. 2015. “User-Centric Workflow Ergonomics in Industrial Environments: Concept and Architecture of an Assistance System.” In *2015 International Conference on Computational Science and Computational Intelligence (CSCI)*, 754–759. IEEE. doi:10.1109/CSCI.2015.116.
- Vignais, Nicolas, Markus Miezal, Gabriele Bleser, Katharina Mura, Dominic Gorecky, and Frédéric Marin. 2013. “Innovative System for Real-Time Ergonomic Feedback in Industrial Manufacturing.” *Applied Ergonomics* 44 (4): 566–574. doi:10.1016/j.apergo.2012.11.008.
- WSH Council. 2014. *Workplace Safety and Health Guidelines Improving Ergonomics in the Workplace*. Workplace Safety and Health Council in collaboration with the Ministry of Manpower. https://www.wshc.sg/files/wshc/upload/cms/file/2014/WSH_Guidelines_ImprovingErgonomicsintheWorkplace.pdf.
- WSH Institute. 2016. “ergo@WSH.” Accessed November 21. <http://www.mom.gov.sg/eservices/ergo-wsh>.