



UNIVERSITY OF LEEDS

This is a repository copy of *Design characteristics of a workload manager to aid drivers in safety-critical situations*.

White Rose Research Online URL for this paper:
<http://eprints.whiterose.ac.uk/131281/>

Version: Accepted Version

Article:

Teh, E, Jamson, SL orcid.org/0000-0001-8166-0403 and Carsten, O orcid.org/0000-0003-0285-8046 (2018) Design characteristics of a workload manager to aid drivers in safety-critical situations. *Cognition, Technology and Work*, 20 (3). pp. 401-412. ISSN 1435-5558

<https://doi.org/10.1007/s10111-018-0490-2>

© 2018, Springer Verlag. This is a post-peer-review, pre-copyedit version of an article published in *Cognition, Technology and Work*. The final authenticated version is available online at: <http://dx.doi.org/10.1007/s10111-018-0490-2>

Reuse

Items deposited in White Rose Research Online are protected by copyright, with all rights reserved unless indicated otherwise. They may be downloaded and/or printed for private study, or other acts as permitted by national copyright laws. The publisher or other rights holders may allow further reproduction and re-use of the full text version. This is indicated by the licence information on the White Rose Research Online record for the item.

Takedown

If you consider content in White Rose Research Online to be in breach of UK law, please notify us by emailing eprints@whiterose.ac.uk including the URL of the record and the reason for the withdrawal request.



eprints@whiterose.ac.uk
<https://eprints.whiterose.ac.uk/>

Evona Teh^a, Samantha Jamson^b, Oliver Carsten^b

^aSpecial Vehicle Operation, Jaguar Land Rover, Fen End, CV8 1NQ, United Kingdom

^bInstitute for Transport Studies, University of Leeds, LS2 9JT, United Kingdom

Corresponding author:

Evona Teh

Email: eteh@jaguarlandrover.com

Tel: +44-1926-923982

Abstract

The objective of this study was to evaluate a workload manager designed to supervise the presentation of in-vehicle information for two age groups of drivers during safety-critical situations. The benefits of a workload manager were compared in various dual-task conditions involving a preceding or a concurrent in-vehicle alert during critical traffic situations. Objective measures such as drivers' brake response times and secondary task response times as well as subjective measures of driver workload were used. Although older drivers performed worse in the dual task scenario with longer response times and poorer performance on the secondary task in comparison to the younger drivers, results indicated that both age groups benefited from the implementation of a workload manager. There was a consistent trend of improved driving and secondary task performance when the workload manager delayed non-critical information during safety-critical situations, indicating benefits for some otherwise distracted drivers. Implications for the design of a workload manager are discussed.

Keywords: Workload Manager; Braking; Secondary Task; Ageing; Workload

Acknowledgements

The authors wish to acknowledge the kind assistance of all participants in this study as well as the members of staff at the University of Leeds Driving Simulator (Tony Horrobin, Michael Daly). This research was conducted in collaboration with the Jaguar Land Rover Human Machine Interface Research Department team.

1 Introduction

Instrument clusters in modern passenger cars increasingly display sophisticated information relating to the engine management and braking systems as well as faults in, for example, airbag systems. Apart from their obvious attention-attracting properties, some messages will also necessitate cognitive engagement as

drivers decide whether to take action in the short term and what that action should be. Such messages have the potential to be both visually and cognitively distracting.

Secondary tasks with a visual component can disrupt natural eye movement patterns resulting in errors in heading direction and hence lateral position (Godthelp et al. 1984). Whilst interface guidelines have been developed regarding the visual component of a secondary task (e.g. Rockwell 1988; SAE 2004; JAMA 2004; ESOP 2006), the cognitive component is more difficult to standardise. This difficulty is partly due to there being conflicting results from studies evaluating non-visual tasks, particularly when using vehicle lateral deviations as a performance indicator. On the one hand, some studies report increases in lateral deviation (e.g. Salvucci and Beltowska 2008) whilst others report the opposite effect (e.g. Reimer 2009). This conflict may, in part, be due to differences in the behavioural parameters chosen to represent lateral deviations and their computation (e.g. standard deviation of lane position versus time-to-line crossing, Li et al. in press). With increases in cognitive activity, changes in gaze concentration, or “visual tunnelling” have also been observed whereby drivers appear to focus more on the road ahead, at the expense of periphery events (Victor et al. 2005). Motor actions are also negatively affected: when car-following, drivers performing a cognitively distracting task take longer to release the accelerator pedal (Hurwitz and Wheatley 2001; Lee et al. 2002). Foot movement time and responses to braking events are influenced by the type of distracter task and the order of in-vehicle task presentation, leading to improvements in braking performance when the braking task is presented after the in-vehicle task (Hibberd et al. 2013). Therefore, manipulation of distracter task modality may not be a completely effective method for the removal of an in-vehicle distraction effect (Vollrath and Totzke 2005) but accurate timing of the secondary tasks is rather important to prevent the driver from being overloaded or engaging in “mind wandering” at safety critical time points. Such mind wandering (i.e. a diversion of thought away from the primary task of driving) has been associated with longer response times to sudden events, increased speeds and shorter headway distances (Yanko and Spalek 2014; Geden and Feng 2015).

Whilst traffic and vehicle safety information can be useful to the driver, there are some possible negative side effects in terms of increased task demand and capacity overload (Pauzié and Alauzet 1991; Verwey 2000; Blanco et al. 2006), especially for some older drivers, who may have decreased perceptual, motor, and cognitive functioning due to normal ageing (Anstey et al. 2005). While driving is generally self-paced and compensating strategies can be executed to limit the interference of secondary tasks (Becic et al. 2010; Tractinsky et al. 2013), the previous research has indicated that drivers still engage in distracting tasks such as calling or texting, even though they report them as being dangerous (McEvoy et al. 2007; Nelson et al. 2009; Atchley et al. 2011). This might be explained by the concept of “comparative optimism” whereby risks associated with one’s own behaviour are perceived as lower than those associated with others’. For example, in a re-analysis of White, Eiser and Harris’ (2004) data, risk perceptions relating to mobile phone use while driving depended on whether they related to perceptions of oneself or others (White, Eiser, Harris and Pahl (2007). In addition, drivers rate proactive engagement as more risky than reactive engagement (Atchley et al. 2011; Nelson et al. 2009). Therefore, system (vehicle)-initiated messages may be deemed by the driver as being less distracting and the inappropriate timing of their presentation could result in driver overload or inattention. This is particularly important in less predictable safety-critical situations in which attempted self-regulation may not be timely and accurate.

A way of reducing the potential negative impact of system-initiated messages is via a workload manager. Workload management functions are designed to prevent excessive workload and distraction by dynamically supporting the driver to manage both driving and non-driving-related tasks. They can control information initiated by in-vehicle systems and limit the system functionality available to the driver in potentially demanding situations. A number of studies have examined the effectiveness of workload managers in simulator, track and on-road environments (Piechulla et al. 2003; Uchiyama et al. 2004; Donmez et al. 2006; Wu et al. 2008; Tijerina et al. 2011). Research suggests that workload managers may provide some benefits to the driver via intervention strategies such as “locking” an in-vehicle information system to deny access to initiate a task function (Tijerina et al. 2011). Although this strategy promotes consistently quick response in braking, Tijerina et al. (2011) suggested that implementation of a locking strategy on an in-vehicle task that is already underway should be avoided due to additional cognitive processing in interpreting why the task was interrupted. This is particularly important in driving conditions which suddenly grow more intense, requiring drivers’ attention to the driving task to maintain safe driving. An example of such a safety-critical scenario could be a sudden event requiring the driver to perform a braking response; a short response window is available and the failure to detect changes in the environmental complexity due to inattention, distraction or attentional tunnelling could result in a crash (Baddeley 1972; Endsley 1995; Endsley 2006). A workload manager may therefore help to manage any potential system-controlled information available to drivers, in the event that a safety-critical driving situation is detected via in-vehicle sensors (e.g. radar).

In this study, a workload manager was designed which delayed system (vehicle)-initiated messages in order to minimise driver distraction and maintain performance of the safety-critical aspects of the driving task — in this case, a braking response to a critical cut-in performed by neighbouring vehicle. This particular scenario has been found to significantly increase drivers’ workload from a baseline level as well as being one which drivers underestimate in terms of workload (Teh et al. 2014; 2018). Drivers were required to respond to the messages (as a secondary task) under various conditions either with the workload manager engaged or not. With the projected increase of older drivers on the roads (Department for Transport 2012), it becomes necessary to ensure that the development of support systems such as a workload manager considers not only the comfort and safety of younger drivers, but also older drivers. Thus two age groups of drivers were considered. We hypothesised that a workload manager would improve driver performance in a safety-critical scenario by reducing their workload. We also expected to observe differences in performance between the age groups, which may be mitigated by the workload manager.

2 Method

2.1 Apparatus

The study was conducted in the motion-base, high fidelity University of Leeds Driving Simulator, Fig. 1. The driving simulator’s vehicle cab is a complete 2005 Jaguar S-type model with all driver controls fully operational. Participants had full control of the longitudinal and lateral motion of the vehicle and were encouraged to operate the controls as they would in their own vehicle. The vehicle is right-hand drive and uses an automatic transmission. Data are collected continuously at 60Hz.



Fig. 1 University of Leeds Driving Simulator

Verbal responses to the secondary task were collected via a Sony ICD-200X Digital Voice Recorder attached to a Griffin Lapel Microphone. The voice files were post-processed using the Praat audio playback program with sound spectral analysis capability. The files were converted from WMA to WAV format and using the Praat software sound spectral analysis capability, the sound stimulus and speech response could then be identified and thus the verbal reaction time measured to +/-1 millisecond accuracy.

2.2 Participants

Drivers were recruited from an existing database, via responses to a University of Leeds website and a local poster advertisement. To avoid the issue of older drivers driving less distance annually compared to younger drivers (Rimmö and Hakamies-Blomqvist 2002; Hu and Reuscher 2004; Alvarez and Fierro 2008) due to the changes in lifestyle after retirement, all recruited participants were drivers who still used their vehicle more than four times a week, with a self-reported minimum annual mileage of 5000 miles.

A total of fifty drivers were recruited, all holders of a valid driving license for over five years with normal or corrected-to-normal vision and hearing. Six participants did not complete the experiment — four participants due to simulator sickness and technical complications, and two older participants due to their large amount of errors in the driving task during the practice stage. Twenty-six drivers aged between 25 to 49 years (13 males, Mage= 32; 13 females, Mage= 33) and eighteen drivers aged between 60 to 72 years old (10 males, Mage=66; 8 females, Mage=66) successfully completed the experiment. The mean annual mileage for the younger and older drivers was 9588 miles and 8450 miles respectively. All drivers were paid for their participation (£15).

2.3 Driving Task

A three-lane motorway was simulated and participants were instructed to drive in the middle lane, maintain a speed of 65 mph and not pass the lead vehicle. Adjacent vehicles pulled in front of the participants, either from the slow or the fast lane. Ambient vehicles in the slow lane maintained 60 mph while fast lane vehicles travelled at 70 mph. The adjacent vehicle was programmed to pull in at a certain distance from the front of the participant's vehicle. A critical lane change distance was defined as approximately 5m (+/-2m) upon crossing the lane boundary and a non-critical lane change was defined as a lane change beyond 20m from the participant vehicle. These values were obtained from Teh et al. (2018) whereby the highest

levels of workload were reported at the 5m cut-in distance and no change in workload was observed for cut-ins beyond 20m. Participants completed two drives (35 minutes each); one drive with the workload manager off and the other drive with the workload manager on. Each drive contained twenty events involving a mix of critical and non-critical lane changes as well as sections where no lane changes took place to avoid predictability. The order of the two drives was counterbalanced.

2.4 Secondary task and design of the workload manager

The system-initiated messages (18 vehicle-system and 18 non-vehicle-system related messages) were obtained from a vehicle manufacturer and presented on the instrument cluster, Fig. 2.



Fig. 2 Location of the system-initiated messages

An example of a vehicle system message is “COOLANT LEVEL LOW” while a non-vehicle system message could be “HEAVY TRAFFIC AHEAD”. Participants were required to provide a verbal answer ‘Yes’ to indicate if it was a vehicle system-related message or ‘No’ to indicate if it was another type of message. This was defined as the secondary task. The messages were initiated either just before a critical lane change or concurrent with a critical lane change as workload arises not only from each task but also from task switching itself (Pashler 2000). In the concurrent task situation, a driver will have to make an evaluation of the effort required for the secondary task as compared to the effort required for the primary task in order to decide whether to surrender the secondary task. The principles of resource competition suggest that the concurrent presentation of a secondary task during a critical cut-in requiring accelerator pedal release should produce greater task interference than when presented after the critical cut-in (Wickens 2002). Messages were also presented during no-lane-change conditions in each drive to reduce predictability.

Each message appeared for 2.5 seconds before being overwritten by the next. The message initiation was contingent on the development of the lane change scenario to ensure that the task was performed at the critical moment – that is when the adjacent vehicle initiated the lane change. With each incoming message, an audible ‘beep’ was presented to alert the driver. Verbal response time was calculated as the time delay between the audible beep and onset of the verbal response. Response errors on the secondary task (number of missed and wrong responses) was also measured.

Table 1 provides an overview of how the secondary task was presented to the participants when the workload manager was either on or off and depending on whether the task was presented before or concurrently with the critical cut-in. Also shown is how the secondary task response times were calculated (SecRT).

Table 1 Workload manager design and calculation of secondary task response times

	Workload manager off						Workload manager on								
<i>Before</i>	(a)						(c)								
	Secondary task	1	2	3	4	5	6	Secondary task	1	2	3	Delay (12sec)	4	5	6
	Traffic				Cut-in			Traffic			Cut-in				
	SecRT				X	X	X	SecRT					X	X	X
<i>Concurrent</i>	(b)						(d)								
	Secondary task	1	2	3				Secondary task	Delay (12 or 21 sec)			1	2	3	
	Traffic		Cut-in					Traffic	Cut-in						
	SecRT	X	X	X			SecRT					X	X	X	

In the drive with the workload manager off, no delays to the messages were implemented during the critical cut-in.

- (a) When message onset commenced before the cut-in, in total six messages were played and the lane change was initiated at the end of the third message. Thus the driver had to respond to the cut-in during the fourth message. Average response time to the 4th, 5th and 6th messages was calculated.
- (b) For the concurrent cut-in condition three in-vehicle messages were initiated when the adjacent vehicle started a lane change. Average response time to the 1st, 2nd and 3rd messages was calculated.

In the drive with the workload manager on, the messages were managed by delaying them for either 12 or 21 seconds duration following a lane change. These two values were derived from a previous study (Teh et al. 2018) which ascertained the mean workload recovery period (i.e. defined as the time taken to achieve steady-state workload or baseline workload) following a non-critical and critical lane-change. The minimum workload recovery period was found to be 12s and the mean was 21s; these two values were thus implemented as the “workload manager delay”.

- (c) When message onset commenced before the cut-in, again six messages were presented but after the third a delay of 12s was introduced before the final three messages. Since this constitutes a task interruption, a delay of 21s was not used due to the assumption that a task which has been started should be allowed to resume as soon as possible. Average response time to the 4th, 5th and 6th messages was calculated.
- (d) Where the message onset was concurrent with a cut-in, the two delay timings were manipulated whereby incoming messages were delayed either for 12s or 21s. Average response time to the 1st, 2nd and 3rd messages was calculated.

2.5 Driving performance measures

To evaluate the safety benefits of the workload manager, brake response time (BRT) – defined as the time between the activation of the cutting-in vehicle indicator light to the moment of initial brake pedal depression – was calculated. In addition, the number of trials involving a collision with the cutting-in vehicle was also recorded.

2.6 Subjective workload measures

Two measures of subjective workload were elicited; overall workload (via the NASA-RTLX and RSME) and continuous subjective rating (CSR). Subjective measures are not only to be sensitive to the overall changes in traffic complexity but also more superior than other types of measures in capturing fluctuations in workload (Carsten, 2014). The NASA Task Load Index (Byers et al. 1989) is an example of a commonly used subjective mental workload scale which reflects the multidimensional property of mental workload. The NASA-RTLX, a reduced version of the NASA-TLX originally proposed by Hart and Staveland (1988), was developed because the collection and analysis of the original TLX scale was cumbersome and labour intensive. It contains six sub-scales and on each a single point is marked to reflect workload. The RSME scale Zijlstra (1993) is a uni-dimensional scale, whereby mental effort is rated on a 150mm long vertical line marked with nine anchors points, ranging from ‘absolutely no effort’ (close to the 0 point), to ‘rather much effort’ (approximately 57 on the scale) to ‘extreme effort’ (approximately 112 on the scale). Both the RSME and NASA-RTLX were administered at the end of each drive. Fluctuations in driver workload were measured at various points during the drives via a verbal 10-point rating scale (CSR) as described previously in Teh et al. (2014).

2.7 Procedure

Upon arrival at the simulator, participants were given the briefing sheet and a consent form to complete. They then conducted a practise drive (approximately 15 minutes) to ensure familiarity with the vehicle controls and the tasks to be conducted. In the practise drive, a series of critical and non-critical lane changes as well as blocks of in-vehicle messages were presented. The participant then performed the two experimental drives. After the completion of the second drive, they were debriefed and paid for their time.

3 Results

Data from 44 participants were compiled to form a database of 1232 lane change events. Each variable was checked for normal distribution and homogeneity of variance using the Kolmogorov Smirnov test and Levene’s tests respectively. Greenhouse Geisser correction was applied where necessary. All data were analysed using two way repeated-measures ANOVA with the Lane Origin (slow, fast) and Workload Manager (on, off) as within-subject factors and Age as the between factor (younger, older). These tests were applied to all analyses undertaken, and thus will not be described in detail for each. The BRTs were analysed separately depending on whether message onset was before or concurrent with a lane change.

3.1 Brake response time

3.1.1 Secondary task onset before a critical cut-in

There were significant main effects of Workload Manager ($F(1,42)=17.406$, $p<0.001$) and Lane Origin ($F(1,42)=34.05$, $p<0.001$) on BRT. With the workload manager on ($M=1.714s$), participants responded 263ms more quickly as compared to when off ($M=1.917s$), see Fig. 3. BRTs were quicker when the cutting-in car was joining from the slow lane ($M=1.53s$) compared to the fast lane ($M=2.15s$). There was no main effect of Age.

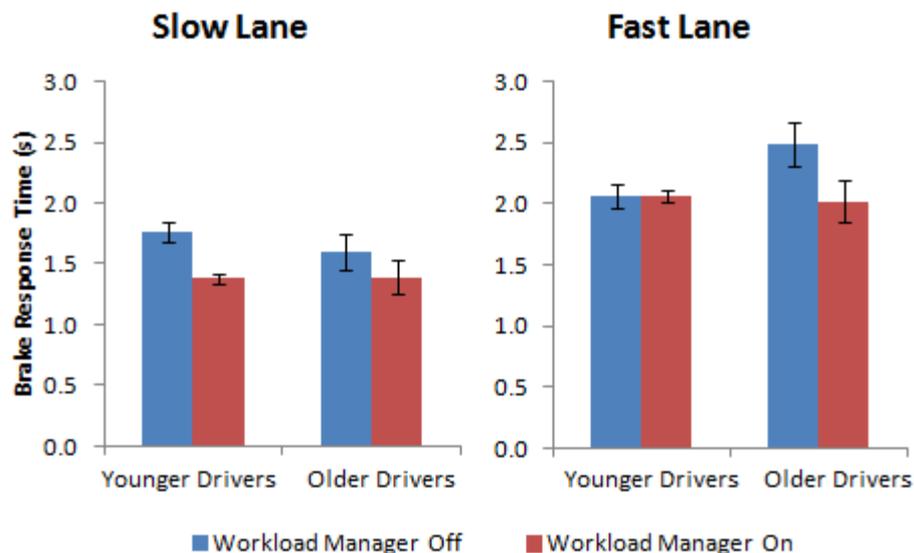


Fig. 3 Brake response time for secondary task onset before a critical cut-in

A significant three-way interaction of Lane Origin x Workload Manager x Age ($F(1,42)=5.494$, $p=0.024$) on BRT was found and paired sample t-tests indicated that when the workload manager was on, both age groups exhibited faster braking performance when the lane change originated from the slow lane ($M_{diff\ older}=0.203s$, $M_{diff\ younger}=0.380s$). However, for fast lane cut-ins, improvement in braking performance was only found for older drivers ($M_{diff\ older}=0.467s$). This improvement with the workload manager on, brought them in line with the BRT of the younger drivers, in the same scenario.

3.1.2 Secondary task onset concurrent with a critical cut-in

Again, significant main effects of Workload Manager ($F(1,42)=19.61$, $p<0.001$) and Lane Origin ($F(1,42)=99.83$, $p<0.001$) on BRT were found. When the workload manager was on and when vehicles pulled in from the slow lane, BRTs were quicker, Fig. 4. No main effects of Age were found, nor were there any interaction effects.

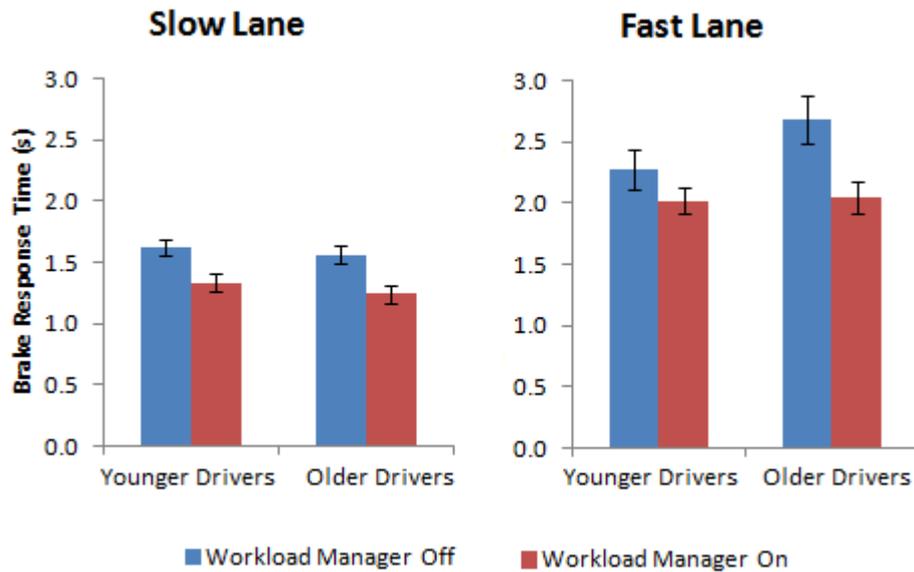


Fig. 4 Brake response time for secondary task onset concurrent with a critical cut-in

3.2 Collisions

Only descriptive data are presented since the number of collisions across the entire experiment was not sufficient to perform statistical analysis. Nevertheless, as Table 2 demonstrates, there was an indication that more collisions occurred when the workload manager was off compared to when the workload manager was on. Further analysis of the number of collisions in the workload manager off condition showed that these could be attributed mainly (85%) to younger drivers.

Table 2: Number of collisions per scenario

Workload manager	Secondary task onset before a critical cut-in		Secondary task onset concurrent with a critical cut-in	
	Number of collisions	% Events with collision	Number of collisions	% Events with collision
Workload manager off	26	14.77	15	8.52
Workload manager on	2	0.01	0	0.00

3.3 Driver Workload

3.3.1 Overall workload

For overall workload, measured via RSME and NASA-RTLX, paired-sample t-tests were carried out to compare the differences in workload between the two drives (workload manager on or off). Results showed a substantial reduction in average workload ($p < .05$) with the use of a workload manager (Fig. 5).

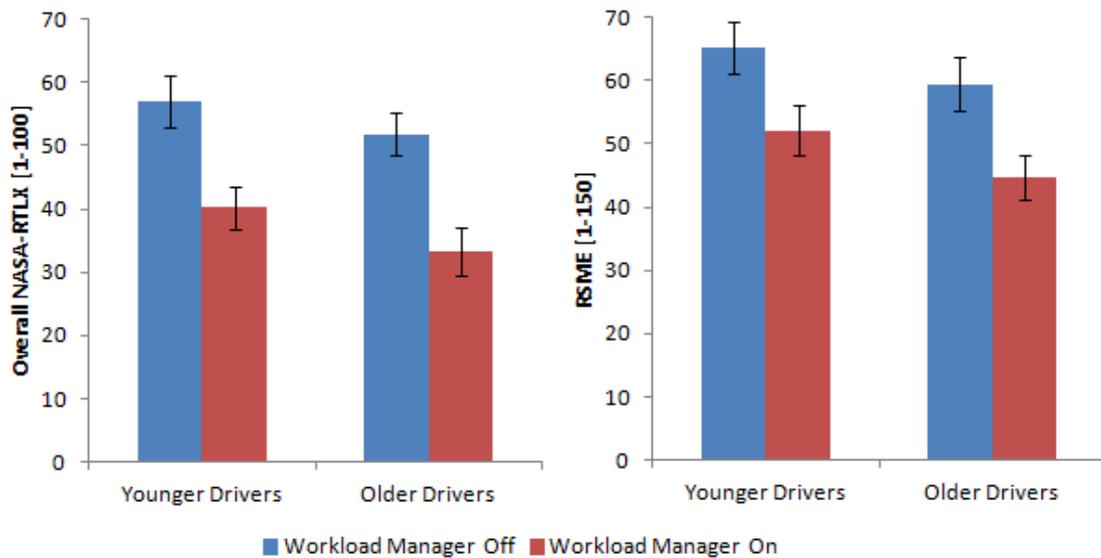


Fig. 5 Workload manager effect on overall NASA-RTLX and RSME

With respect to Age, both age groups of drivers reported overall lower workload (as measured by NASA-RTLX and RSME) when the workload manager was on ($p < .05$). Although older drivers, in general, provided lower ratings of workload and effort in comparison to the younger drivers in all conditions, the average reduction in workload and effort with the workload manager on, was similar between the age groups.

3.3.2 Continuous workload

Momentary workload was elicited via the CSR (collected using the 1-10 point rating scale) at the end of each cut-in event within a drive. These data allowed the examination of differences between slow and fast lane cut-ins as well as differences between secondary task onset (before or concurrent with the lane change).

When the secondary task onset came before a critical cut-in, there was a significant main effect of Workload Manager ($F(1,42)=38.22, p < 0.001$) with workload being lower when it was active. Lane Origin ($F(1,42)=47.72, p < 0.001$) was also significant whereby drivers' momentary workload in slow lane cut-in situations ($M=5.949$) was higher than for fast lane cut-ins ($M=4.778$), see Fig. 6. Similar to the findings on NASA-RTLX and RSME, a significant main effect of Age on workload ratings was also found, ($F(1,42)=7.107, p=0.011$). Younger drivers in general rated workload higher than the older drivers.

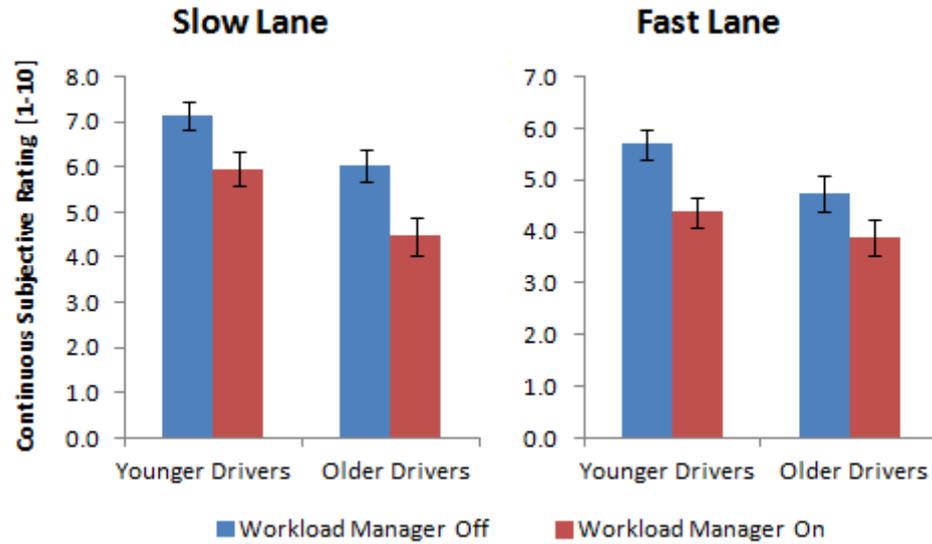


Fig. 6 Continuous workload for secondary task onset before a critical cut-in

When the secondary task was concurrent with a critical cut-in, a main effect of Workload Manager was found ($F(2,84)=36.927, p<0.001$). Reported workload reduced with the increasing delay duration (0s=5.726, 12s=4.403, 21s=3.911), however pairwise comparisons showed that there was no difference between the two delays (12 and 21 secs). Lane Origin was also significant ($F(1,42)=33.915, p<0.001$); workload ratings were higher in a slow lane critical cut-in ($M=5.442$) as compared to fast lane critical cut-in ($M=3.918$). Again, older drivers ($M=4.316$) provided a lower rating than younger drivers ($M=5.045$, Mean difference=0.729, $SE=0.140, p<0.001$) for all critical cut-in situations (Fig. 7).

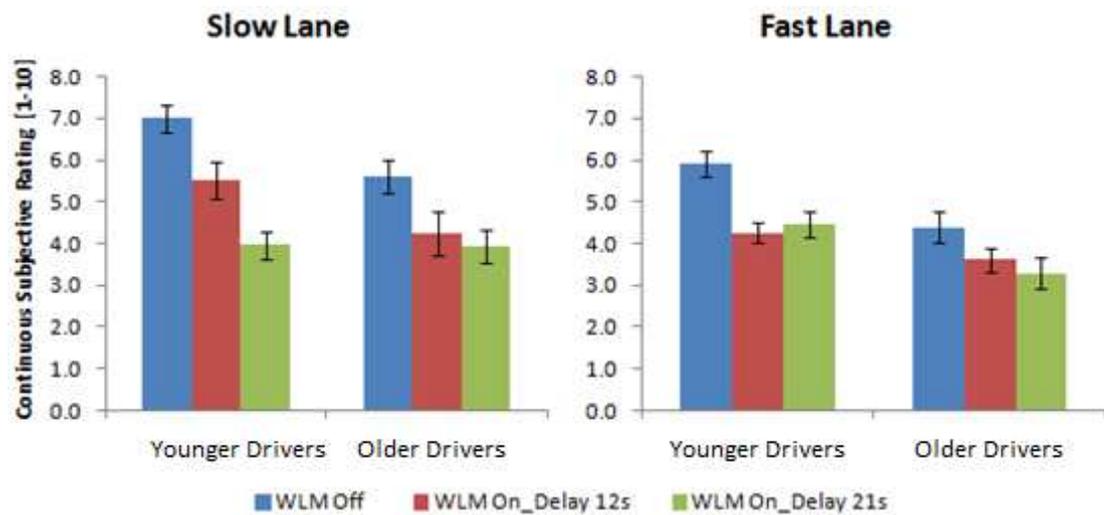


Fig. 7 Continuous workload for secondary task onset concurrent with a critical cut-in

3.4 Secondary Task Performance

A summary of secondary task response times and error rates for younger and older drivers in all dual-task conditions is shown in Fig.8.

3.4.1 Secondary task onset before a critical cut-in

The secondary task response times prior to a critical cut-in were defined as the baseline, which was then compared with the secondary task response times following a critical cut-in with the workload manager off or on (i.e. 12s delay). A three-way repeated-measures ANOVA with Workload Manager (baseline, off, on) and Lane Origin (slow, fast) as within-subject factors and Age as the between factor was carried out on the participants' verbal response times. A main effect of Workload Manager was found ($F(2,84)=123.66$, $p<0.001$), and post hoc testing revealed that response times were slowest when the Workload Manager was off in the critical cut in. Lane Origin was also significant with response times being slower in a slow lane cut-in ($F(1,42)=122.16$, $p<0.001$). With regards to Age, compared to younger drivers, older drivers were found to respond more slowly to the secondary task ($F(1,42)=27.43$, $p<0.001$). A significant interaction between Age and Workload Manager revealed that the effect of a critical cut-in on response times was particularly strong in older drivers ($F(2,84)=10.75$, $p<0.001$) as shown by the large increase in response times with the workload manager off.

Analyses of the percentage of errors made on the secondary task revealed a main effect of Workload Manager ($F(1,42)=146.89$, $p<0.001$) whereby participants made more errors when the workload manager was off ($M=16.40\%$) than when on ($M=1.57\%$). For Lane Origin ($F(1,42)=73.84$, $p<0.001$) participants performed worse during slow lane critical cut-ins ($M=13.00\%$) as compared to fast lane cut-ins ($M=4.97\%$). There was also an Age effect ($F(1,42)=7.14$, $p=0.011$) with older drivers ($M=11.00\%$) making more errors than younger drivers. Age interacted significantly with Workload Manager ($F(1,42)=9.21$, $p=0.004$): both age groups performed poorly with the workload manager off, but a larger percentage of these errors was attributed to older drivers ($M=20.62\%$).

3.4.2 Secondary task onset concurrent with a critical cut-in

A three way repeated-measures ANOVA with Workload Manager having three levels (off with 0s delay, on with 12s delay, on with 21s delay) and Lane Origin (slow, fast) as within-subject factors and Age as the between factor was carried out on the participants verbal response times. There was a significant main effect of Workload Manager ($F(2,84)=19.01$, $p<0.001$) whereby participants' response times were the longest when there was no delay provided. On average, response times were 0.2s faster when a delay was introduced (regardless of length). There was a main effect of Lane Origin ($F(1,42)=112.85$, $p<0.001$) such that responses were slower for a slow lane cut-in and a main effect of Age whereby older participants responded 397ms slower than younger participants ($F(1,42)=27.25$, $p<0.001$). A significant interaction was found between Lane Origin and Workload Manager, $F(2,84)=23.53$, $p<0.001$) and to examine the simple effects of the interaction, a one way ANOVA was conducted on each Lane Origin. Results showed that while response times reduced with increasing delay, the benefit of longer delay onset (21s delay) was found only in slow-lane critical cut-ins. Pairwise comparisons showed that the response times for 12s and 21s delay were not significantly different in fast-lane critical cut-ins.

In terms of percentage error, participants made significantly fewer errors with the Workload Manager on ($F(2,84)=85.57$, $p<0.001$). Additionally, drivers were also found to make more errors in slow-lane than in fast lane cut-ins ($F(1,42)=21.77$, $p<0.001$). Similar to other dual-task conditions, there was also an age effect ($F(1,42)=6.50$, $p=0.017$) whereby older drivers on average had 4.21% more errors than younger drivers.

Inspection of the contribution of missed responses in percentage errors by age group, indicates that the overall increase of errors in dual-tasking for older drivers is due to their having more misses than younger drivers when simultaneously performing the driving task and the secondary task.

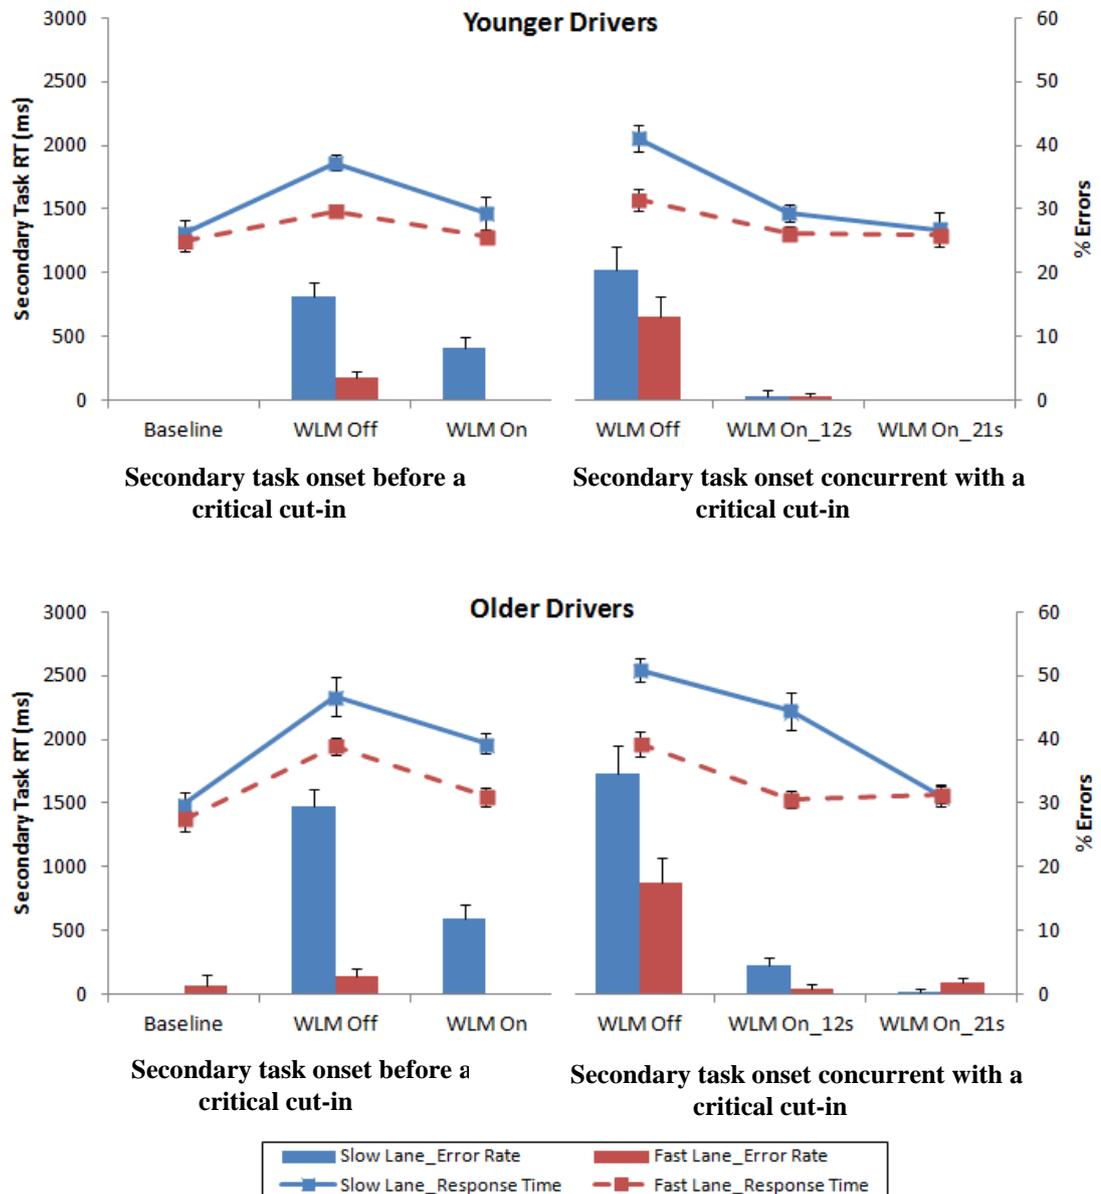


Fig.8 Mean secondary task response times (with standard errors) with mean percentage error (with standard errors)

Overall, both age groups of drivers benefited from the workload manager that implemented a delay of 12s during critical cut-in conditions. Longer delays of up to 21s had a significant impact on improving drivers' secondary task performance, particularly in slow lane critical cut-in conditions. Considering that older drivers performed more poorly than younger drivers in the secondary tasks, older drivers may actually benefit more than younger drivers with the implementation of longer delays.

4 Discussion

Various automobile companies are focusing on developing more advanced workload managers which monitor driving performance in real time and help drivers stay focused on the road during high-demand situations. Although workload managers have been partially developed, to date they have not taken into account the moment-to-moment demands arising from the external traffic environment. This study investigated how a workload manager might benefit drivers by applying delays to incoming messages, when the demand placed on the driver by other traffic was high. Results showed that drivers' brake response times were impaired by the secondary task, of having to respond to a system-initiated message, suggesting that they were allocating less attention to the surroundings and were thus less aware of the unfolding driving situation. Across all measures of performance and subjective workload, the workload manager was beneficial, although there were varying effects depending on the movement of the surrounding traffic and the age of the participants. The main effects are shown in summary in Table 3, applying equally to both secondary task timings (concurrent and before vehicle cut-in) and the significant interactions are discussed below.

Table 3: Summary of main effects

	Workload Manager On	Lane Origin Slow	Age Older
Brake response time	Quicker	Quicker	No effect
NASA/RSME workload	Lower	N/A	Lower
Continuous workload	Lower	Higher	Lower
Secondary task response time	Quicker	Slower	Slower
% error on secondary task	Less	More	More

The secondary task alert was given either before a lane change or concurrently with it and under both conditions without a workload manager, brake response times were around 2.04s and decreased to 1.66s when the workload manager was active. With the use of a workload manager, the requirement to respond to both tasks simultaneously can be avoided; with this assistance, there was also a reduction in driver workload. Additionally, there was a trend towards drivers being involved in fewer collisions when the workload manager was on, as they could now allocate more attention to the primary task of driving. A delay of 12 seconds in the secondary task was found to be useful in reducing driver workload and improving driver performance, and findings from this study suggest that implementation of such a delay was appropriate for all critical cut-in situations (i.e. regardless of whether the adjacent vehicle originated from the slow lane or the fast lane).

There was also evidence of how different age groups behaved in dual-task conditions. For example, when comparing the BRTs for the two different age groups, older drivers performed more slowly in both driving and secondary tasks, as compared to the younger drivers. Older participants were more affected by dual task performance, showing longer secondary response times and poorer performance (i.e. a higher error rate) in the secondary task in comparison to the younger drivers. They appeared to surrender performance on the secondary task at a high workload level as indicated by a high percentage of missed signals on the secondary task compared to younger drivers. Although this suggests that these older drivers might not have the resources for task switching, they did manage the dual-tasking to some extent. Gwyther and Holland

(2012) had shown that with controlled driving experience, older drivers do perform greater self-regulation than younger drivers. Older drivers needed more time to inspect the visual messages on the dashboard and therefore have partly given up the secondary task and focused on the driving task. But this also indicates that they were more cautious in driving as older drivers were also involved in fewer collisions as compared to the younger participants, despite slower reaction times. This is possibly due to the higher number of years of driving among older drivers despite the fact that both age groups had similar annual mileage. With greater driving experience and perhaps due to older drivers choosing to surrender the secondary task, they had also experienced lower levels of effort in completing the driving task (i.e. lower rating in RSME, NASA-RTLX and CSR) in comparison to younger drivers who chose not to surrender the secondary task.

Participants of both age groups benefitted from the use of a workload manager (i.e. delay of the in-vehicle messages) in all critical cut-in situations via an improvements in workload and driving performance. Additionally, the percentage of collisions among the younger drivers was also reduced. This suggests that the use of a workload manager in these dual-task situations may have merit not only for older drivers but also for the younger drivers, who may otherwise be overwhelmed by the workload arising from the two tasks.

5 Conclusion & Recommendations

This work has demonstrated that alerting drivers to potential safety critical scenarios (in a manner that does not unwittingly increase workload) warrants further investigation. This is particularly relevant given the current technological limitations of radar used in forward collision warning systems. These are currently limited to operational millimeter wave (short range) radar and laser radar systems with a horizontal field of view of up to $\pm 15^\circ$, while horizontal field of view for a vision-based system might be $\pm 30^\circ$ to $\pm 40^\circ$. When an obstacle appears suddenly in a driver's path, such as in critical scenarios involving lane changes performed by a neighbouring vehicle, a forward collision warning system would perhaps need to present drivers with an additional alert to refocus their attention more quickly.

Previous research by Donmez et al. (2006) demonstrated that drivers trust visual feedback the most due to their reliance on sight throughout their daily lives. Visual feedback requires a high level of driver attention and is most effective in vehicles when combined with another form of feedback (Dingus et al. 1997). Auditory feedback can also produce excellent results when used as a driver warning feedback method (Jensen et al. 2007) and was found to reduce crash rate especially for older drivers (warning tone of 1000Hz; May et al. 2006). Some studies however have shown auditory warnings to lengthen reaction times and to be the cause of confusion when combined with auditory disturbances such as road noise (Wiese and Lee 2004). To direct a person's attention to a particular location (such as the forward view), studies have indicated a cross-modal connection in spatial attention between vision and touch (Butter, Buchtel and Santucci 1989; Spence and Driver 2004). Tactile warning signals not only can direct driver's attention to the spatial direction, but also can trigger a driver to respond appropriately (such as a braking response). Ho, Reed and Spence (2006) demonstrated that incorporating vibrotactile feedback (with vibrotactile frequency of 290Hz) through tactors fastened to the driver's stomach and back, decreased braking response times and directed visual attention to the appropriate location, thus helping to prevent front and rear-end collision. Such haptic alerts via the steering wheel have proven effective in reducing reaction times for lane departure (Suzuki and Jansson 2003) and improvement in avoiding hitting obstacles when introduced a supplemental feedback to the driver.

Therefore in the presence of a critical lane change performed by a neighbouring vehicle, there may be benefits in providing a vibrotactile cue to alert the driver of the potential danger and to provide time-critical information. With the use of such alerts, drivers' reaction times to braking may perhaps improve further, particularly to those who were busy dual-tasking in the event of a critical cut-in.

References

- Alvarez FJ, Fierro I (2008) Older drivers, medical condition, medical impairment and crash risk. *Crash Analysis and Prevention* 40(1):55–60
- Anstey KJ, Wood J, Lord S, Walker JG (2005) Cognitive, sensory, and physical factors enabling driving safety in older adults. *Clinical Psychology Review* 25(1):45–65
- Atchley P, Atwood S, Boulton A (2011) The choice to text and drive in younger drivers: behavior may shape attitude. *Accident Analysis and Prevention* 43(1):134–142
- Baddeley AD (1972) Selective attention and performance in dangerous environments. *British Journal of Psychology* 63:37–546
- Becic E, Dell GS, Bock K, Garnsey SM, Kubose T, Kramer AF (2010) Driving impairs talking. *Psychon. Bull. Rev.* 17(1):15–21
- Blanco M, Biever WJ, Gallagher JP, Dingus TA (2006) The impact of secondary task cognitive processing demand on driving performance. *Accident Analysis and Prevention* 38(5):895–906
- Butter CM, Buchtel HA, Santucci R (1989) Spatial attentional shifts: Further evidence for the role of polysensory mechanisms using visual and tactile stimuli. *Neuropsychologia* 27:1231–1240
- Byers JC, Bittner AC, Hill SG (1989) Traditional and raw task load index (TLX) correlations: Are paired comparisons necessary? In: A. Mital, Editor, *Advances in industrial ergonomics and safety*. London: Taylor and Francis:481–485
- Carsten, O. (2014). Introduction to the special section: Can workload take the strain? *Cognition, Technology & Work* 16: 284-287
- Department for Transport (2012) *National Travel Survey: Statistical Release 2012*, London: Department for Transport
- Dingus T, McGehee D, Manakkal N, Jahns S, Carney C, Hankey J (1997) Human factors field evaluation of automotive headway/collision warning devices. *Human Factors* 38(2):16–229
- Donmez B, Boyle LN, Lee JD (2006) The impact of driver distraction mitigation strategies on driving performance. *Human Factors* 48(4):785-804
- Endsley MR (1995) Toward a theory of situation awareness in dynamic systems. *Human Factors* 37(1):32–64
- Endsley MR (2006) Situation awareness. In *Handbook Of Human Factors and Ergonomics*, 3rd volume. Wiley, New York
- European Commission (2006) *European Statement of Principles on the Design of Human Machine Interaction*. http://eur-lex.europa.eu/LexUriServ/site/en/oj/2007/l_032/l_03220070206_en02000241.pdf
- Geden M, Feng J (2015) *Simulated Driving Environment Impacts Mind Wandering*. *Proceedings of the Human Factors and Ergonomics Society 59th Annual Meeting*
- Gwyther, H. & Holland, C. (2012). The effect of age, gender and attitudes on self-regulation in driving. *Accident Analysis and Prevention* 45:19-28

- Hart SG, Staveland LE (1988) Development of NASA-TLX (Task Load Index): results of empirical and theoretical research. In P.A. Hancock, and N. Meshkati, Human mental workload, Amsterdam: Elsevier Science:139–183
- Hibberd DL, Jamson SL, Carsten OMJ (2013) Mitigating the effects of in-vehicle distractions through use of the Psychological Refractory Period paradigm. *Accident Analysis and Prevention* 50:1096–1103
- Ho C, Reed N, Spence C (2006) Assessing the effectiveness of intuitive vibrotactile warning signals in preventing front-to-rear-end collision in a driving simulator. *Accident Analysis and Prevention* 38(5):988–996
- Hu PS, Reuscher TR (2004) Summary of Travel Trends: 2001 National Household Travel Survey. U.S. Department of Transportation Federal Highway Administration; Washington, DC
- Hurwitz J B, Wheatley DJ (2001) Driver Choice of Headway with Auditory Warnings. Paper presented at the 2001 Meeting of the Human Factors and Ergonomics Society, Minneapolis, MN
- Japan Automobile Manufacturers Association (2004) Guideline for In-vehicle Display Systems, version 3.0, Tokyo, Japan: Japan Automobile Manufacturers Association (JAMA), www.jama-english.jp/release/release/2005/In-vehicle_Display_GuidelineVer3.pdf
- Jensen M, Wagner J, Alexander K, Pidgeon P (2007) A customizable human/vehicle interface for enhanced operator performance, In: *Proceeding ASME, IMECE*, Seattle, WA:33–41
- Lee JD, McGehee DV, Brown TL, Reyes ML (2002) Collision warning timing, driver distraction, and driver response to imminent rear-end collisions in a high-fidelity driving simulator. *Human Factors* 44(2):314–334
- Li P, Merat N, Zheng Z, Markkula G, Li Y, Wang Y (2017) Does cognitive distraction improve or degrade lane keeping performance? Analysis of time-to-line crossing safety margins. *Transportation Research Part F* (in press)
- May JF, Baldwin CL, Parasuraman R (2006) Prevention of Rear-End Crashes in Drivers with Task-Induced Fatigue through the Use of Auditory Collision Avoidance Warnings. In *Proceedings of Human Factors and Ergonomics Society 50th Annual Meeting*, San Francisco, CA, USA
- McEvoy SP, Stevenson MR, Woodward M (2007) The contribution of passengers versus mobile phone use to motor vehicle crashes resulting in hospital attendance by the driver. *Accident Analysis and Prevention* 39 (6):1170–1176
- Najm WG, Mironer M, Koziol JS, Wang JS, Knipling RR (1995) Examination of Target Vehicular Crashes and Potential ITS Countermeasures. Report for Volpe National Transportation Systems Center, May. In: W. Barfield, T.A. Dingus (Eds.), *Human Factors in Intelligent Transportation Systems*. Lawrence Erlbaum Associates, Mahwah, NJ
- Nelson E, Atchley P, Little TD (2009) The effects of perception of risk and importance of answering and initiating a cellular phone call while driving. *Accident Analysis and Prevention* 41 (3):438–444
- Pashler H (2000) Task switching and multitask performance. In Monsell, S., and Driver, J. (Eds.). *Attention and Performance XVIII: Control of mental processes* (pp. 277-307). Cambridge, MA: MIT Press
- Pauzié A, Alauzet A (1991) Specificity of elderly drivers and road safety, in "Designing for Everyone". Paris: Taylor and Francis

- Piechulla W, Mayser C, Gehrke H, König W (2003) Reducing drivers' mental workload by means of an adaptive man-machine interface. *Transportation Research Part F* 6(4):233–249
- Reimer B (2009) Impact of cognitive task complexity on drivers' visual tunnelling. *Transportation Research Record* 2138:13–19
- Rimmö PA, Hakamies-Blomqvist L (2002) Older drivers' aberrant driving behaviour, impaired activity and health as reasons for self-imposed driving limitation. *Transportation Research Part F* 5:345–360.
- Rockwell T (1988) Spare Visual Capacity I Driving Revisited, New Empirical Results for an Old Idea, *Vision in Vehicles II*:317–324
- Salvucci DD, Beltowska J (2008) Effects of memory rehearsal on driver performance: experiment and theoretical account. *Human Factors* 50 (5):834–844
- Society of Automotive Engineers (2004) *Navigation and Route Guidance Function Accessibility while Driving*, (SAE Recommended Practice J2364), Warrendale, PA: Society of Automotive Engineers
- Spence C, Driver J (Eds.) (2004) *Crossmodal space and crossmodal attention*. Oxford, UK: Oxford University Press
- Suzuki K, Jansson H (2003) An analysis of driver's steering behaviour during auditory or haptic warnings for the designing of lane departure warning systems. *JSAE Review*, 24(4):65-70
- Teh E, Jamson S, Carsten O (2018) Mind the gap: drivers underestimate the impact of the behaviour of other traffic on their workload. *Applied Ergonomics* 67:125-132
- Teh E, Jamson S, Carsten O, Jamson H (2014) Temporal fluctuations in driving demand: The effect of traffic complexity on subjective measures of workload and driving performance. *Transportation Research Part F* 22:207–217
- Tijerina L, Blommer M, Curry R, Greenberg J, Kochhar D, Simonds C, Watson D (2011) Simulator study on effects of alternative distraction mitigation strategies in driver workload manager. *Transportation Research Record* 2248:81–86
- Tractinsky N, Ram ES, Shinar D (2013) To call or not to call—that is the question (while driving). *Accident Analysis and Prevention* 56:59–70
- Uchiyama Y, Kojima S, Hongo T, Terashima R, Toshihiro W (2004) Voice Information System That Adapts to Driver's Mental Workload. *RandD Review of Toyota CRDL* 39(1):16–22
- Verwey WB (2000) On-line driver workload estimation: Effects of road situation and age on secondary task measures. *Ergonomics* 43(2):187–209
- Victor TW, Harbluk J, Engström JA (2005) Sensitivity of eye-movement measures to in-vehicle task difficulty. *Transportation Research Part F* 8, pp. 167–190
- Vollrath M, Totzke I (2005) Secondary tasks while driving effects and countermeasures. *Advances in Transportation Studies an International Journal*, B(7), p.67–80
- White, M. P., Eiser, J. R., & Harris, P. (2004) Risk perceptions of mobile phone use while driving. *Risk Analysis*, 24, 323–334
- White, M. P., Eiser, J. R., Harris, P. and Pahl, S. (2007) Who Reaps the Benefits, Who Bears the Risks? Comparative Optimism, Comparative Utility, and Regulatory Preferences for Mobile Phone Technology. *Risk Analysis*, 27, 741-753

- Wickens CD (2002) Multiple resources and performance prediction. *Theoretical Issues in Ergonomics Science* 3(2):159–177
- Wiese E, Lee J (2004) Auditory alerts for in-vehicle information systems: The effects of temporal conflict and sound parameters on driver attitudes and performance. *Ergonomics* 47(9):965–986
- Wu C, Tsimhoni O, Liu Y (2008) Development of an adaptive workload management system using the Queuing Network-Model Human Processor (QN-MHP). *IEEE Transactions on Intelligent Transportation Systems* 9(3):463–475
- Yanko MR, Spalek TM (2014) Driving with the wandering mind: the effect that mind-wandering has on driving performance. *Human Factors* 6(2):60–69