



UNIVERSITY OF LEEDS

This is a repository copy of *A Systematic Review of Visualization in Building Information Modeling*.

White Rose Research Online URL for this paper:
<http://eprints.whiterose.ac.uk/146384/>

Version: Accepted Version

Article:

Ivson, P, Moreira, A, Queiroz, F et al. (2 more authors) (2020) A Systematic Review of Visualization in Building Information Modeling. *IEEE Transactions on Visualization and Computer Graphics*, 26 (10). pp. 3109-3127. ISSN 1077-2626

<https://doi.org/10.1109/TVCG.2019.2907583>

(c) 2018 IEEE. Personal use of this material is permitted. Permission from IEEE must be obtained for all other uses, in any current or future media, including reprinting/republishing this material for advertising or promotional purposes, creating new collective works, for resale or redistribution to servers or lists, or reuse of any copyrighted component of this work in other works.

Reuse

Items deposited in White Rose Research Online are protected by copyright, with all rights reserved unless indicated otherwise. They may be downloaded and/or printed for private study, or other acts as permitted by national copyright laws. The publisher or other rights holders may allow further reproduction and re-use of the full text version. This is indicated by the licence information on the White Rose Research Online record for the item.

Takedown

If you consider content in White Rose Research Online to be in breach of UK law, please notify us by emailing eprints@whiterose.ac.uk including the URL of the record and the reason for the withdrawal request.



eprints@whiterose.ac.uk
<https://eprints.whiterose.ac.uk/>

A Systematic Review of Visualization in Building Information Modeling

Paulo Ivson, André Moreira, Francisco Queiroz, Wallas Santos, Waldemar Celes

Abstract—Building Information Modeling (BIM) employs data-rich 3D CAD models for large-scale facility design, construction, and operation. These complex datasets contain a large amount and variety of information, ranging from design specifications to real-time sensor data. They are used by architects and engineers for various analysis and simulations throughout a facility's life cycle. Many techniques from different visualization fields could be used to analyze these data. However, the BIM domain still remains largely unexplored by the visualization community. The goal of this article is to encourage visualization researchers to increase their involvement with BIM. To this end, we present the results of a systematic review of visualization in current BIM practice. We use a novel taxonomy to identify main application areas and analyze commonly employed techniques. From this domain characterization, we highlight future research opportunities brought forth by the unique features of BIM. For instance, exploring the synergies between scientific and information visualization to integrate spatial and non-spatial data. We hope this article raises awareness to interesting new challenges the BIM domain brings to the visualization community.

Index Terms—Visualization techniques and methodologies, information visualization, computer-aided design, building information modeling, survey.

1 INTRODUCTION

BUILDING Information Modeling (BIM) is a set of methods and tools to improve management of large-scale construction projects [1], [2]. These enterprises require millions in investments and tight coordination among expert teams across several years of design, construction, and operation. BIM employs data-rich 3D CAD models as a central database for all physical, functional, and life-cycle information of a facility [3]. This integrated environment enables automated work processes and virtual simulations that increase productivity and reduce costs.

Visualization plays a key role in several kinds of analysis in BIM: calling attention to inconsistencies in designs [4], combining spatial and temporal information for virtual construction planning [5], [6], highlighting hazardous work areas [7], and even plotting energy performance to evaluate environmental sustainability [8], [9], [10].

In all these use cases, the 3D CAD model acts as the main connector of information throughout the building life cycle. It represents a high-fidelity virtual replica of the physical world: geometry shapes, sizes, and locations accurately identify real components. Moreover, complex designs can amount to gigabytes of interdependent, quantitative, and qualitative metadata. The 3D CAD model also acts as an intuitive interface for architects and engineers to understand data patterns together with spatial context. This has led to an increasing demand for visualization techniques based on richer BIM datasets, called nD models [11]. Despite all these challenges and opportunities, the BIM domain still remains largely unexplored by the visualization community.

The goal of this article is to encourage researchers of various visualization fields to increase their involvement with BIM. To this end, we present a comprehensive domain characterization to help understand the goals and motivations of current practice. We hope this opens-up BIM as an interesting test bed for different kinds of visualization research. Solving its unique challenges can lead to new and interesting techniques that would also benefit other domains. Therefore, this survey aims to answer the following research questions:

- Q1. What are the main use cases of BIM that employ visualization?
- Q2. What are the project life-cycle phases where each use case applies?
- Q3. What kinds of information are required by each use case?
- Q4. What are the pros and cons of the current methods for visualizing this information?
- Q5. What are the unique aspects of BIM that challenge visualization research?
- Q6. How can the visualization community get more involved with BIM?

We have organized the results and contributions of our review in five sections. Section 4 first proposes a taxonomy to classify previous BIM research using four dimensions: Life Cycle Phases, Use Cases, Information, and Visualizations. Section 5 then identifies the main application areas of visualization in BIM (Q1, Q2). Afterwards, Section 6 presents a critical analysis of the visualization techniques employed in these selected use cases (Q3, Q4). Based on our findings, Section 7 highlights unique challenges for visualization research in BIM (Q5). Finally, Section 8 concludes our research and gives advice on increasing the cooperation between visualization and BIM communities (Q6).

• P. Ivson, A. Moreira, F. Queiroz, W. Celes are with Tecgraf Institute/PUC-Rio. E-mail: {psantos, asouza, chico, celes}@tecgraf.puc-rio.br

• W. Santos is with IBM. E-mail: wallas.sousa@ibm.com

Manuscript received July XX, 2018; revised December XX, 2018.

2 RELATED WORK

Previous surveys on BIM have focused either on industry adoption or on specific visualization applications. The current article builds upon these results to conduct a rigorous categorization of visualization across an entire facility's life cycle. To the best of our knowledge, no previous work has assembled such a comprehensive analysis.

2.1 BIM Adoption in Industry

Early surveys found that BIM applications focused mainly on design coordination and review [12], [13]. Later years showed growing interest in construction planning [14], sustainable design [15], and facility management [16]. Still, researchers highlighted many barriers and unexplored applications in later project phases [17], [18].

Around 2015, case studies indicated BIM was being used for clash detection, construction scheduling, and maintenance management [19]. Meanwhile, practitioners identified emerging areas related to energy management, safety management, and code checking [20], [21]. During 2016 and 2017, surveys in the UK found BIM use mainly in construction scheduling [22], [23]. At the same time, implementations in the Middle East still focused more on design review and clash analysis [24]. In 2018, a survey in the US indicated BIM had greater potential for adoption in facility management [25].

2.2 BIM Visualizations

Seminal research found that time animations within the 3D CAD model (4D animations) improved comprehension and highlighted inconsistencies in construction plans [26], [27], [28]. Later reports investigated the benefits of coordinated-multiple-views for these kinds of analysis [29], [30], [31].

User studies and interviews have been employed to improve thermal analysis [32], 4D animations [33], [34], and facility operation [35]. Many of these works criticized traditional 4D animations that changed geometry visibility since it hindered the users' judgment and lowered their understanding of the construction sequence. Meanwhile, another approach augmented traditional Gantt charts and network diagrams with annotations and highlights [36]. More recent surveys indicated emerging challenges related to visual analysis and exploration of large datasets [37], [38].

3 SYSTEMATIC REVIEW METHOD

Systematic literature reviews have been successfully employed in numerous areas of science [39], [40], [41], [42]. They provide a means to present a fair evaluation of a research topic by using a trustworthy, rigorous, and auditable methodology. We adopted this scheme to maximize our survey's reach while also enabling future work to build upon our findings. Nevertheless, covering the tens of thousands of articles in the entire BIM literature simply is not feasible.

Therefore, we focused this first major survey on the more common desktop visualizations applied throughout a facility's life cycle. We also required sufficient evidence that the techniques were used in real-world practice. More specific topics such as immersive visualizations or BIM for historic buildings (HBIM) have been left for future surveys.

This way, we aim to present an introductory overview of current state of affairs for the visualization community.

We selected academic full papers published in peer-reviewed international journals using the Scopus digital library [43]. It not only features a powerful search mechanism but also covers a wide journal range, especially in Engineering fields [44]. Initial search results consisted of 372 articles, which were then filtered down to 140 using our inclusion and exclusion criteria. In the end, we applied the proposed classification taxonomy and proceeded to an in-depth analysis of each work. A more detailed description of our systematic method is available as supplementary material to this paper. The complete dataset of reviewed articles is available at IEEE DataPort [45].

4 CLASSIFICATION TAXONOMY

We propose a taxonomy to analyze current visualization practice in BIM using 4 dimensions: Life Cycle Phases (Section 4.1), Use Cases (Section 4.2), Information (Section 4.3), and Visualizations (Section 4.4). They were designed to clarify the motivation of previous solutions as well as to provide common ground for comparing their visualization techniques. The following subsections detail each of these dimensions.

4.1 Life Cycle Phases

The first dimension identifies the phases of a facility's life cycle. Each phase consists of different activities geared towards common goals. Most of the information produced in one phase is consumed in the others afterwards. This dimension should help a visualization researcher understand the temporal sequencing of different BIM analysis. We reuse the same organization of 3 main phases, with 3 sub-phases each, first proposed by Succar [46]:

Design

- *Conceptualization, Programming and Cost Planning*: initial draft of construction scope for bidding.
- *Architectural, Structural and Systems Design*: designs are produced by various engineering disciplines.
- *Analysis, Detailing, Coordination and Specification*: integration and verification of produced designs.

Construction

- *Construction Planning and Construction Detailing*: planning of activities to be conducted in the field.
- *Construction, Manufacturing and Procurement*: components are purchased, fabricated, and assembled.
- *Commissioning, As-Built and Handover*: systems testing and certification for facility operation.

Operation

- *Occupancy and Operations*: monitoring of facility use and systems performance.
- *Asset Management and Facility Maintenance*: life expectancy and maintenance of components.
- *Decommissioning and Major Re-Programming*: preparing steps for renovations or demolition.

4.2 Use Cases

From previous work (Section 2), we have assembled 35 different use cases that employ visualization. These use cases are organized around themes that follow the terminology commonly used in the BIM domain [11]. Within each theme, use cases share common goals and are typically interrelated (e.g. the results of one analysis affect the inputs of others).

Design Review

- *Requirements Analysis*: verification if the design meets the defined engineering specifications.
- *Structural and Mechanical Analysis*: numerical computations to validate the facility's physical integrity.
- *Regulatory Compliance Checking*: verification of building codes and other technical/legal regulations.
- *Clash Detection*: identification and correction of spatial interferences among facility components.
- *Change Management*: tracking of sources and consequences of changes in design.
- *Constructability Analysis*: assessment of the ease of constructing a given design.

Work Planning

- *Site Layout Planning*: spatial organization of workforce, materials, machinery, and structures.
- *Quantity Take Off*: computation of materials totals for procurement and fabrication.
- *Risk Management*: analysis of safety, quality, schedule, cost, environmental, and social risk factors.
- *Cost Management*: budgeting and tracking of expenses related to activities, resources, and others.
- *Task Scheduling*: programming of activities in time.
- *Workspace Conflict Analysis*: inconsistencies in work plans due to physical overlap of activities.
- *Field Work Simulation*: detailed animations and numerical simulations of construction activities.

Work Execution

- *Digital Fabrication*: automated fabrication of components from geometric designs.
- *Resource Management*: available, allocated, and free workforce, materials, machinery, and structures.
- *Field Management*: detailed coordination and live feedback of work in the field.
- *Positioning and Navigation*: use of digital drawings to locate areas and components of interest in the field.
- *Progress Tracking*: monitoring of task execution status.
- *Productivity Monitoring*: metrics to compute and compare actual productivity with original benchmarks.
- *Quality Management*: defect inspection and tracking.
- *Procurement and Expediting*: purchase of goods and tracking their shipping.
- *Logistics Management*: storage and routing of workforce, materials, machinery, and structures.

Sustainability Analysis

- *Lighting Analysis*: degree of illumination from natural lighting and artificial fixtures.
- *Thermal Analysis*: heat absorbed and emitted by individual components and areas.

- *Ventilation Analysis*: air circulation, speed, and movement around and across internal areas a facility.
- *Energy Analysis*: amount of electrical energy produced and consumed by the building's installations.
- *Emission Analysis*: environmental impact in water, air, soil, thermal, radioactive, noise, light, and waste.
- *Natural Resource Use*: amount of resources necessary to conduct activities.

Facility Management

- *Remote Operation*: monitoring and electronic control of a facility's equipment and automation systems.
- *Maintenance Management*: component physical integrity and maintenance plans.
- *Damage Assessment*: structural resistance and failure against sources of physical damage.
- *Emergency Management*: simulation of disaster scenarios, evacuation, and contingency plans.
- *Security Management*: isolation from outside threats.
- *Signage Placement*: best locations to place signs to inform occupants and improve circulation.
- *Space Management*: space ownership and occupancy.

4.3 Information

This taxonomy dimension consolidates all information we found to be visualized in the 140 surveyed papers. We organized them in a two-level hierarchy inspired by basic principles of Object-Oriented design [47]. The higher level (in **bold**) represents "packages" of information pertaining to the same kinds of BIM analysis. The lower level (in *italic*) represents "classes" of information about the same conceptual entities. Each class lists some examples of the actual information visualized in BIM. For instance, "Schedule (task)" identifies information related to tasks within a Schedule analysis, such as task start and finish dates.

Scope

- *Item*: id, type, relationships.
- *Quantity*: counts, lengths, areas, weight.
- *Spatial*: component size, position, distances.
- *Technical*: engineering specifications, standards.

Schedule

- *Task*: id, start, finish, duration, progress, workspace.

Cost

- *Total*: cost per component, task, resource.

Sustainability

- *Ambient*: lighting, temperature, humidity.
- *Material*: heat transmission and absorption.
- *Use*: usage of energy, water, gas, fuel.
- *Emission*: emissions of pollutants in air, water, soil.
- *Level*: degree of environmental sustainability.

Facility

- *Occupancy*: management of occupants across spaces.
- *Degradation*: efficiency loss and remaining lifetime.
- *Sensor*: id, type, readings, automation control.

- *Problem*: type, causes, consequences.
- *Work Log*: staff id, actions taken, access routes.

Risk

- *ID*: risk id, type.
- *Quantity*: probability, impact, count, rate.
- *Relationships*: causes and effects.
- *Action*: prevention and contingencies.

Resource

- *ID*: resource id, type.
- *Quantity*: total capacity, available, allocated.
- *Manufacturing*: fabrication capacity.

Supply Chain

- *Procurement*: supplier orders, shipping, delivery.
- *Logistics*: storage areas, transportation, capacities.

Security

- *Access Control*: access points, perimeter protection.
- *Sensor*: coverage, operating status, detection status.
- *Assessment*: thread probability, impact, security level.

Mechanical

- *Physical*: force/stress over component.
- *Damage*: structural integrity, physical damage.

Quality

- *Inconsistency*: inconsistency type and amount.

4.4 Visualizations

The last dimension organizes the visualization techniques in BIM using two categorizations. First, we distinguish the display of information either through spatial views (2D/3D CAD) or abstract views (Charts). The former should follow the precepts of spatial and scientific visualization. The latter should tap into the field of information visualization. Our goal here is to understand which kinds of BIM analysis are more appropriate to each graphical display.

View

- *2D CAD*: schematic drawings, blueprints, maps.
- *3D CAD*: actual shapes of physical entities.
- *Chart*: tables, hierarchies, graphs, diagrams, plots.

The second categorization describes how each visualization technique displays information within each view. We employ the concept of Marks and Channels from Munzner [48]. Marks represent graphical entities while Channels correspond to their visual properties. We combined some of the author's original Marks/Channels with new ones designed to facilitate analysis of the BIM domain.

The first new Marks are: original geometry, 2D geometry, and 3D geometry. These help evaluating the pros and cons of using the actual building components to convey information. These original geometries can best take advantage of the user's familiarity with the virtual design. However, some information such as hazard areas may require additional 2D/3D geometries to be displayed properly. In this case, care must be taken to avoid increasing visual clutter and occlusion in complex 3D scenes.

We also indicate other graphical entities common in BIM, such as: lines, glyphs, icons, and text. The first two are already established Marks in the visualization literature. Meanwhile, icons in BIM typically mimic traffic signs that vary in shape and color Channels. Finally, the text Mark helps to identify missed opportunities of adopting more intuitive graphical displays.

Regarding Channels, we reuse some already proposed by Munzner: color, shape, size, orientation, and position. In addition, some BIM applications preserve geometry colors but change their outline color/weight/stipple, shading (illumination model), or texture. For example, a different outline color and shading can be used to highlight components of interest [49]. We also observed a handful of visualizations that varied the degree of geometry transparency according to a numerical quantity. On the other hand, visibility is often used to indicate categorical information, such as construction status. We also propose an ordering Channel to make evident when relative positioning between Marks is more important than absolute.

Mark

- *Original Geometry*: original facility components.
- *2D Geometry*: additional planar objects.
- *3D Geometry*: additional 3D objects.
- *Line*: straight lines and curves.
- *Text*: identifiers, annotations, strings in general.
- *Icon*: image that represents a logical concept.
- *Glyph*: abstract graphical symbols.

Channel

- *Color*: hue used to fill the surface of a graphical entity.
- *Shading*: surface illumination model.
- *Outline Color*: hue used for contour lines.
- *Outline Weight*: thickness of contour lines.
- *Outline Stipple*: dashed patterns on contour lines.
- *Visibility*: whether a graphical entity is drawn.
- *Transparency*: degree of blending with background.
- *Shape*: geometric form of a graphical entity.
- *Size*: length, width, height of a graphical entity.
- *Orientation*: tilt angles of graphical entities.
- *Position*: absolute spatial location.
- *Texture*: surface color patterns.
- *Ordering*: relative spatial location.

5 APPLICATION AREAS OF VISUALIZATION

This section presents the results of our literature review regarding the frequency of use of visualization in BIM. From the 140 articles returned by the systematic search procedure, we have identified 248 different visualization applications. This is because many research articles apply their solutions in more than one use case and project phase. We identify the main application areas of visualization, how they are related, and what are the trending topics in recent history.

5.1 Statistical Distribution

Fig. 1 presents the statistical distribution of visualization applications in different use cases across a facility's life cycle. The top part of the figure contains a histogram of life

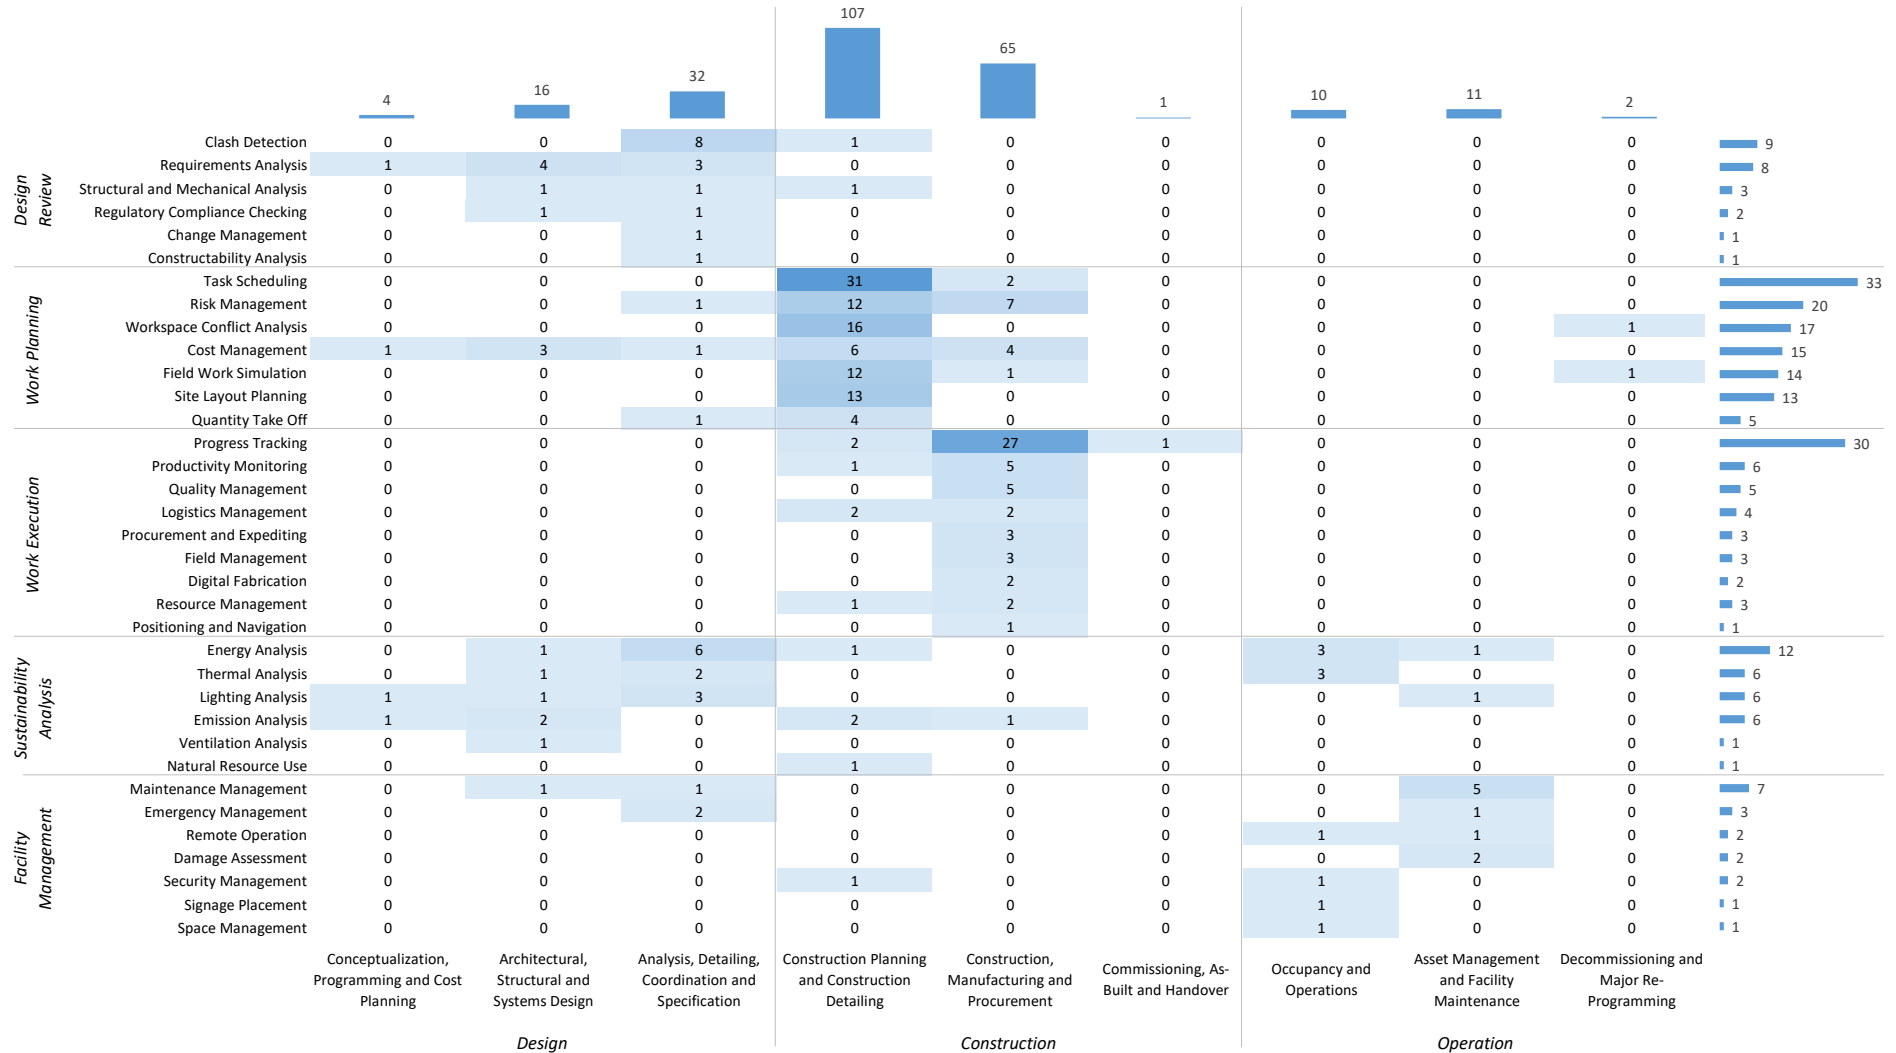


Fig. 1: Heat map and histograms showing the statistical distribution of the 248 surveyed applications of visualization in BIM. The horizontal axis contains life cycle phases from Section 4.1 and the vertical axis follows the use cases from Section 4.2. Each heat map cell indicates its corresponding number of visualization applications. Darker cells indicate higher quantities.

cycle phases from Section 4.1. The right part of the figure presents another histogram that follows the use cases from Section 4.2. The central part of the figure consists of a 2D histogram (heat map) that correlates these two frequencies in a single view. Each cell indicates its corresponding number of visualization applications and is colored accordingly (darker cells indicate higher quantities).

The histogram on the top of Fig. 1 has maximum values at “Construction Planning and Construction Detailing”. This sub-phase alone covers 107 (43%) of all 248 visualization applications. The second most frequent sub-phase corresponds to “Construction, Manufacturing and Procurement”. These probably follow from the success of 4D animations since very early BIM research. Note a significant gap in the last construction sub-phase, probably due to limitations already identified by previous work [19].

Remaining visualization applications tend towards the “Design” phase. The increasing frequency through each sub-phase reflects the increasing usefulness of the 3D CAD model as design evolves. Curiously, the heat map shows significant interest in using BIM for “Sustainability Analysis” still during design. Indeed, the heat map reveals that these applications are relatively spread throughout all life cycle phases and sub-phases. Regarding the “Operation” phase, we observed no research in the last “Decommissioning and Major Re-Programming” sub-phase.

The use case histogram to the right of Fig. 1 indicates the highest frequencies at “Task Scheduling” and “Progress Tracking” use cases. In contrast, the “Facility Management” theme contains the lowest number of research overall. We have also observed a significant difference in the distributions between “Work Planning” and “Work Execution” themes. In the former, almost all use cases show relatively high frequencies. In the latter, the “Progress Tracking” use case greatly overwhelms the others. This indicates that BIM visualizations for construction planning are relatively more mature and widespread. Meanwhile, visualizations for managing work execution remain largely unexplored.

5.2 Historical Development

Fig. 2 displays stacked area charts with the frequency of visualization applications in the past years. Fig. 2a summarizes the works in life cycle phases from Section 4.1. Fig. 2b organizes the results by use cases from Section 4.2. We have chosen a color scheme that follows the natural correlation of use cases and life cycle phases, as discussed in Section 5.1.

Overall, the figures show a growing trend of visualization applications in BIM: from 1 article in 1996 to 39 articles in 2017. According to Fig. 2a, “Construction” has always been the major area. As expected, it closely follows research in “Work Planning” and “Work Execution” in Fig. 2b. Another natural correlation is found between “Operation” phase in Fig. 2a and “Facility Management” theme in Fig. 2b.

The charts indicate that, from 2012 onward, the “Design” phase saw a great increase in published works. Looking at Fig. 2b, we find a strong correlation with the sudden growth in “Sustainability Analysis” during the same period. It is curious to note that this movement started around the same year as “Facility Management” research also gained momentum.

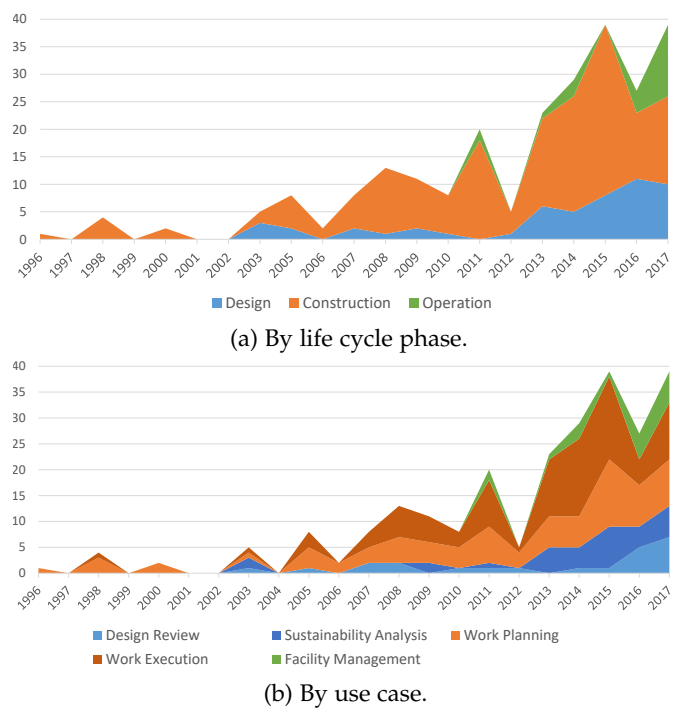


Fig. 2: Number of visualization applications in BIM over the years.

We hypothesize the increase in both these subject areas has been motivated mainly by the United Kingdom (UK). First, the UK is the second largest source of BIM research, only after the US. Second, sustainability was a key consideration in the London 2012 Olympic Games. Third, the UK government disclosed in 2013 an industrial strategy to promote the use of BIM for sustainable design [50].

Until 2012, “Construction” held an average of 85% of all research. Just 5 years later, research in “Construction” decreased to 41%, with an increase to 33% for “Operation” and 26% for “Design”. Indeed, 2017 saw a fairly balanced interest among each use case. We expect research to maintain this trend, with visualization applications in BIM spread uniformly across all use cases and life cycle phases.

5.3 Research Opportunities

The preceding analysis suggests three main avenues for the visualization community to approach the BIM domain. The first possibility is to explore already established use cases, such as “Work Planning” and “Work Execution” themes. Researchers could validate and propose improvements to existing visualizations through design studies and user evaluations [42], [51]. Another option is to participate in the rising interest for “Sustainability Analysis” [10] and “Facility Management” [16]. We refer to our analysis in Sections 6.4, 6.5, and 6.6 for visualization opportunities in these areas.

A third possibility is to help fill the gaps in the use of BIM throughout a facility’s life cycle. Anticipating analysis from later phases reduces impact of changes and can bring significant savings later on [52], [53]. For example, buildings designed for efficient “Facility Management” can reduce maintenance costs over decades of operation. Visualization

research could also work towards generalizing existing solutions for other use cases. For instance, “*Work Planning*” and “*Work Execution*” techniques, typically applied to the “*Construction*” phase, could be adapted for similar analysis during “*Operation*”. Moreover, visual analytics tools for “*Sustainability Analysis*” could be employed during “*Construction*” phase.

6 CRITICAL ANALYSIS OF VISUALIZATION TECHNIQUES

This section presents a detailed analysis of the visualization techniques employed in the main use cases from Fig. 1:

- *Design Review*: Clash Detection.
- *Work Planning*: Task Scheduling.
- *Work Execution*: Progress Tracking.
- *Sustainability Analysis*: Energy Analysis.
- *Facility Management*: Maintenance Management.

These use cases alone involve 70 of the 140 reviewed articles. From this subset, we identified 25 different visualizations, as follows:

2D/3D CAD View

- Attention Management
 - 1) Annotation
 - 2) Component Highlight
- Time Animation
 - 3) Cascade Animation
 - 4) Highlight Animation
 - 5) Visibility Animation
- Field Work
 - 6) Physical Entity
 - 7) Spatial Region

Chart View

- Quantitative Analysis
 - 8) Area Chart
 - 9) Bar Chart
 - 10) Heat Map
 - 11) Line Chart
 - 12) Scatter Plot
 - 13) Stacked Area Chart
 - 14) Stacked Bar Chart
 - 15) Surface Plot
- Processes and Relationships
 - 16) Flowchart
 - 17) Graph
 - 18) Hierarchy
 - 19) Sankey Diagram
 - 20) Schematic Diagram
- Temporal Analysis
 - 21) Gantt Chart
 - 22) PERT Network
 - 23) Time-Distance Diagram

- Text-Based
 - 24) List
 - 25) Table

The majority of techniques (18) are based on the more traditional Chart view. Note the fairly large diversity of charts, plots, and diagrams. These help with analysis of numerical data, relationships among CAD components, and temporal information. Meanwhile, lists and tables present BIM information mainly using text.

Only 7 visualization techniques are used within 2D/3D CAD views. The first two employ visual effects to call the user’s attention: Annotation and Component Highlight. Typically, the former overlays 2D geometries and text while the latter changes original geometries’ color and/or transparency Channels. Highlight, Visibility, and Cascade Animations also change visual attributes of CAD objects but to convey time information. The remaining 2 visualizations enrich the 3D CAD model with additional geometries: Physical Entities or Spatial Regions. These indicate the locations and affected areas of heavy machinery, temporary structures, and other field work in general.

Table 1 describes how these visualization techniques were applied to the main BIM use cases. The third column indicates associated information classes using the taxonomy from Section 4.3. Note that the same visualization is used to convey different information in varying scenarios. Moreover, some articles are referenced multiple times, indicating a greater variety of visualizations within the same work.

In the next subsections, we analyze the pros and cons of these visualizations within each use case. We make use of Alluvial/Sankey diagrams to better understand and compare the techniques [123], [124]. Unlike other approaches, such as Parallel Coordinates, Alluvial diagrams enable us to make evident which Views, Marks, Channels, and Information are more frequently used.

6.1 Clash Detection

Designing facilities with 3D CAD models enables automated checking of physical inconsistencies. For example, geometry overlaps can cause severe delays and rework during construction, also increasing overall project costs. BIM systems should help engineers locate these physical overlaps using some kind of visual feedback over the 3D CAD model. In addition, the experts need to identify which components are involved, their degree of inconsistency, and corresponding engineering specifications.

Fig. 3 describes how BIM applications visualize information related to “*Clash Detection*”. The second and third columns indicate major use of the 3D CAD model through Annotations, Component Highlights, and Spatial Regions. These are often supplemented by two common Chart views: Hierarchies and Tables. Both display context-sensitive information such as CAD component IDs and engineering specifications mainly through text.

The Annotation visualization uses overlay 2D geometries whose color and shape together indicate the type of design inconsistency (Fig. 4a). These are often accompanied by texts with distance values, component IDs, and other technical information [125]. Glyphs of varying sizes are also

TABLE 1: Visualization techniques and related information organized by the main BIM use cases.

Visualization	View	Information Classes	Reviewed Work
<i>Clash Detection</i>			
Annotation	3D CAD	Scope (spatial, technical), Quality (inconsistency)	[54], [55], [56], [57], [58], [59]
Hierarchy	Chart	Scope (item, technical), Quality (inconsistency)	[57], [60]
Component Highlight	3D CAD	Quality (inconsistency)	[57], [61], [62]
Spatial Region	3D CAD	Scope (spatial), Quality (inconsistency)	[57]
Table	Chart	Scope (item), Quality (inconsistency)	[60]
<i>Task Scheduling</i>			
Gantt Chart	Chart, 3D CAD	Scope (item), Schedule (task)	[57], [61], [63], [64], [65], [66], [67], [68], [69], [70], [71], [72]
Visibility Animation	3D CAD	Schedule (task)	[54], [57], [59], [62], [63], [64], [65], [66], [68], [69], [70], [71], [73], [74], [75], [76], [77], [78], [79], [80], [81], [82], [83], [84], [85]
Table	Chart	Scope (item, technical), Schedule (task), Resource (quantity)	[63], [69], [72], [73], [82], [83], [86], [87]
Annotation	2D/3D CAD	Scope (item, technical), Schedule (task)	[63], [64], [72], [76], [80], [88]
Hierarchy	Chart	Scope (item), Schedule (task)	[63], [64], [66], [69], [87]
Highlight Animation	2D/3D CAD	Schedule (task)	[86], [88], [89], [90]
PERT Network	Chart	Schedule (task), Resource (quantity)	[87]
Component Highlight	3D CAD	Schedule (task)	[72]
Time-Distance Diagram	Chart	Schedule (task)	[74]
Cascade Animation	3D CAD	Schedule (task)	[72]
<i>Progress Tracking</i>			
Table	Chart	Scope (quantity, item), Schedule (metric, task), Resource (ID, quantity)	[49], [67], [75], [78], [86], [91], [92], [93], [94]
Gantt Chart	Chart	Schedule (task)	[95], [96], [97], [98], [99], [100]
Highlight Animation	2D/3D CAD	Scope (item), Schedule (task)	[49], [70], [75], [83], [86], [93], [94], [96], [97], [98], [101], [102], [103], [104]
Visibility Animation	3D CAD	Schedule (task)	[67], [71], [76], [91], [92], [95], [99], [100], [105], [106]
Time-Distance Diagram	Chart	Schedule (task), Resource (ID, quantity)	[67], [75], [105]
Bar Chart	Chart	Schedule (metric, task)	[75], [91]
Graph	Chart	Scope (item), Schedule (task)	[97]
Spatial Region	3D CAD	Schedule (task)	[94]
Annotation	3D CAD	Scope (technical), Schedule (task)	[76], [98], [104]
Physical Entity	2D CAD	Facility (sensor)	[91]
Hierarchy	Chart	Scope (item)	[75]
<i>Energy Analysis</i>			
Line Chart	Chart	Scope (item, technical), Sustainability (use), Facility (sensor)	[88], [107], [108], [109], [110], [111], [112]
Table	Chart	Scope (item, quantity, technical), Sustainability (use, metric), Facility (sensor)	[109], [113], [114]
Bar Chart	Char	Scope (item), Sustainability (use), Facility (sensor, work log)	[89], [108], [112], [114]
Component Highlight	2D CAD	Scope (item), Sustainability (ambient, emission, use)	[111], [112]
Hierarchy	Chart	Scope (item), Facility (sensor), Sustainability (metric)	[110], [115]
Sankey Diagram	Chart	Scope (item), Sustainability (use), Facility (sensor)	[112]
Stacked Bar Chart	Chart	Scope (item), Sustainability (use)	[111]
Heat Map	Chart	Sustainability (use)	[111]
Scatter Plot	Chart	Quality (inconsistency)	[111]
Spatial Region	3D CAD	Sustainability (ambient)	[89]
<i>Maintenance Management</i>			
Annotation	2D/3D CAD	Scope (item, technical), Facility (degradation, problem, sensor)	[116], [117]
Table	Chart	Scope (item, technical), Facility (problem, sensor, work log)	[110], [118], [119]
Component Highlight	2D/3D CAD	Scope (item), Facility (degradation, problem, sensor), Schedule (task), Quality (inconsistency)	[110], [116], [118], [120], [121]
Schematic Diagram	Chart	Scope (item), Facility (sensor, problem)	[116]
Spatial Region	3D CAD	Schedule (task), Quality (inconsistency), Facility (work log)	[120], [122]
Hierarchy	Chart	Scope (item)	[118]
Physical Entity	3D CAD	Facility (work log)	[122]



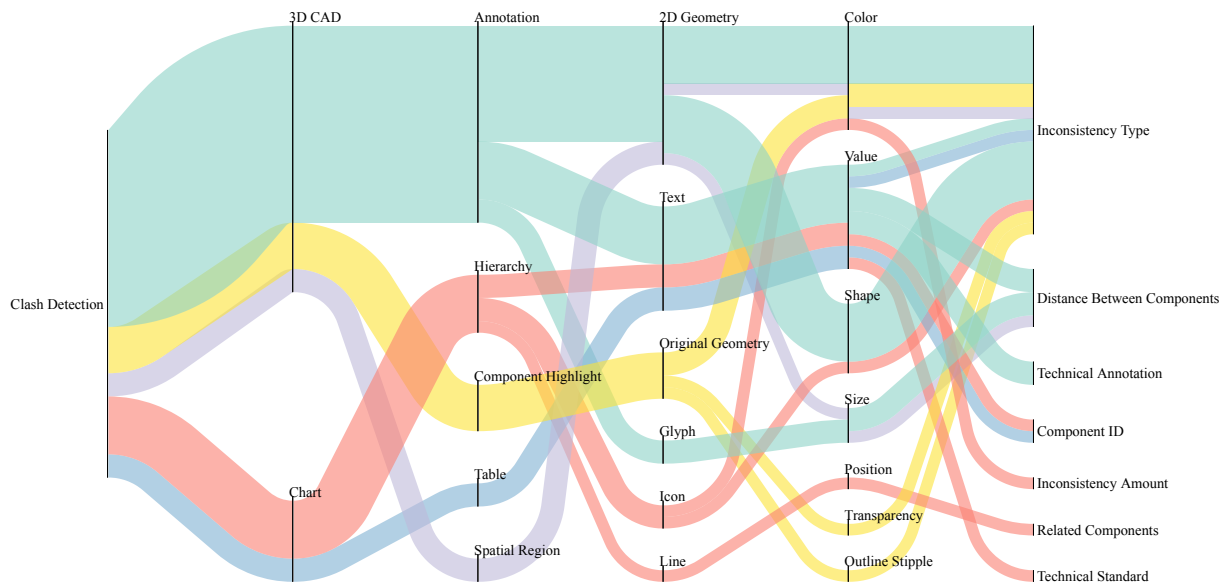


Fig. 3: Correlations among Views, Visualizations, Marks, Channels, and Information in “Clash Detection”. Flow widths indicate frequency of use and colors distinguish visualization techniques.

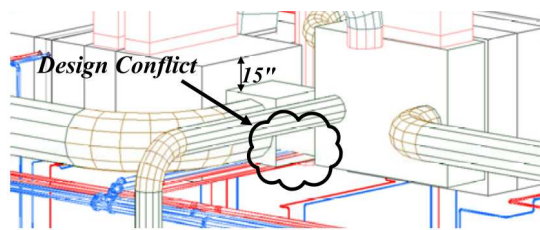

(a) Annotation [54].

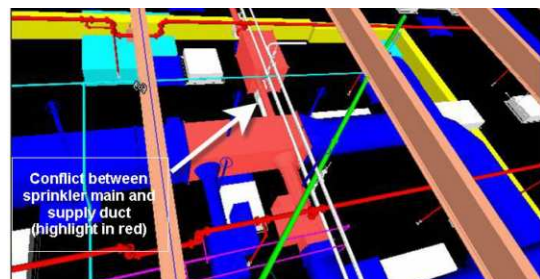

(b) Component Highlight [55].

Fig. 4: Examples of visualizations in “Clash Detection”.

used to indicate distances between CAD components [126], [127]. The main limitation we observed in our survey is that Annotations had to be manually inserted by the user.

Works that use Component Highlights change the color, outline stipple, and/or transparency of original geometries to indicate inconsistency type. Although colors can accurately indicate this categorical data, they may not adequately emphasize a 3D CAD geometry against other colored components (see Fig. 4b). Likewise, transparency seems inappropriate for these purposes. The faded geometry blends with background objects and makes it harder for the user to distinguish shapes and sizes [128], [129].

Finally, we found several examples of clashes that in-

involved 3D CAD geometries surrounded by many others. However, there were no mechanisms implemented to reduce visual clutter and/or overcome occlusion. This forces engineers to spend too much time navigating around the scene to accurately identify and analyze inconsistencies.

6.2 Task Scheduling

As demonstrated in Section 5.2, virtual construction planning has always been the major use case of BIM. It consists of 4D animations (3D + time) that indicate the sequence of activities in the job site. Combining temporal with spatial information allows engineers to avoid many scheduling problems, such as inconsistent assembly ordering and workspace conflicts. It also improves understanding of work plans among designers, planners, and field personnel.

Figure 5 indicates a large variety of visualizations used for “Task Scheduling”. Slightly more information is displayed in Chart views than 3D CAD views, with only a few exceptions using a 2D CAD view. Main techniques include: Gantt Chart, Visibility Animation, Table, and Annotation. As shown in (Fig. 6a), Gantt charts plot time using a spatial dimension in an intuitive graph-like view [130].

Regarding the 3D CAD view, the most popular 4D visualization is the Visibility Animation (Fig. 6b). In this scheme, facility components not yet built remain invisible. As simulation time progresses, geometries suddenly turn visible to indicate their construction has commenced. However, these discrete snapshots make it impossible to overview the entire schedule: parts of the 3D model that correspond to future tasks remain hidden. Moreover, no Mark/Channel is used to display activity duration: it must be inferred from the length of time that 3D objects are colored as “in-progress”. Similarly, predecessor/successor relationships must be deduced by the sequence of appearing geometries. For these reasons, previous research have long criticized this spatio-temporal visualization [33], [34], [86].



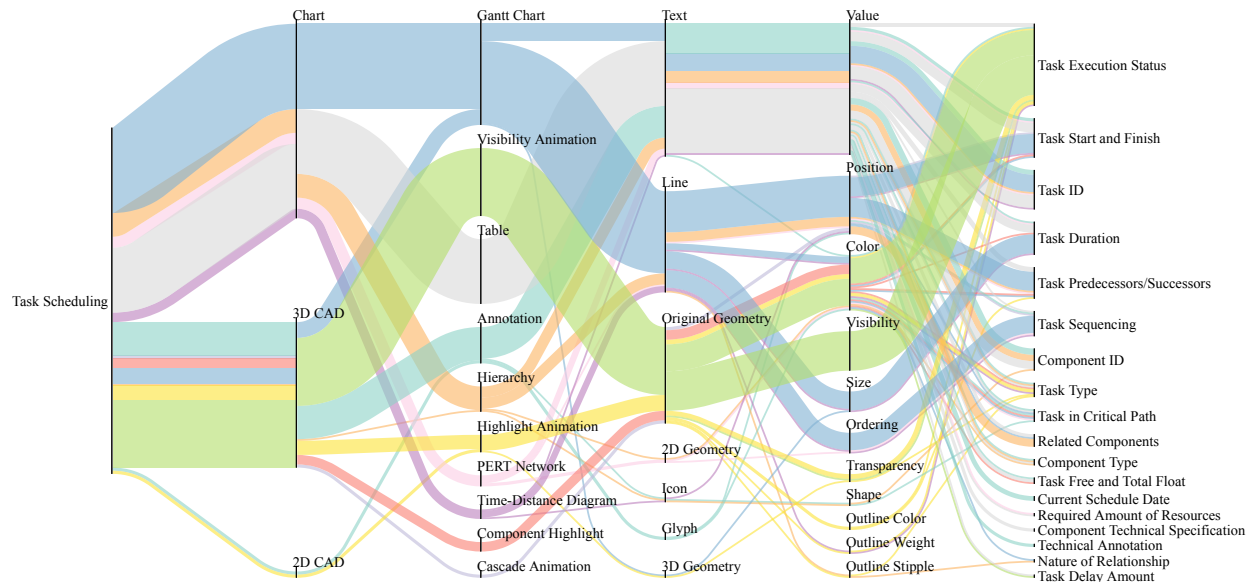


Fig. 5: Correlations among Views, Visualizations, Marks, Channels, and Information in “Task Scheduling”. Flow widths indicate frequency of use and colors distinguish visualization techniques.



(a) Gantt Chart [61].

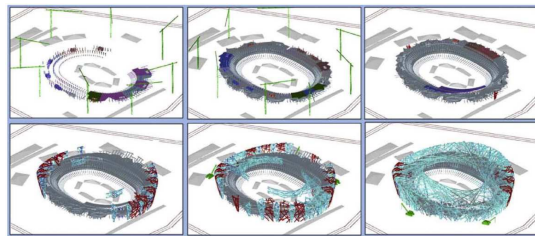

(b) Visibility Animation [78].

Fig. 6: Examples of visualizations in “Task Scheduling”.

An alternative 4D animation is the Highlight Animation. It changes several color-related Channels associated with original 3D geometries to display task execution status. However, quantitative information such as task durations are indicated by Tables or must be deduced from when the 3D geometries change in appearance. This results in many of the same limitations found in the Visibility Animation described above.

A more recent method of displaying spatio-temporal information is the Cascade Animation [72]. It uses the vertical direction to plot time as a spatial dimension within the 3D CAD model, similar to a space-time cube [131]. In this approach, continuous animations highlight task sequencing while preserving relative positioning of nearby tasks [132]. The technique overcomes previous limitations by combining several Marks/Channels to display schedule-related data directly within the 3D scene.

6.3 Progress Tracking

Project managers need to closely follow construction execution to make sure activities remain in accord with the original schedule. Main challenges include tracking many ongoing activities and calling attention to problems and delays. Traditionally, project management uses the same methods and tools for planning and controlling work execution. Many schedule analysis systems already have the ability to track task delays by enriching their visualizations.

It was expected that Fig. 7 would show similar visualization techniques as the previous use case. Although Chart and 3D CAD views are still predominant, we observe many differences in the ranking of visualizations in the third column. Tables are now the most prominent mechanism of conveying information, closely followed by Gantt Charts, Highlight, and then Visibility Animations.

Tables continue to convey mostly textual information related to task execution (Fig. 8a). Meanwhile, Gantt Charts are seldom employed in the current use case. One reason could be a lack of adequate progress tracking tools within BIM visualization systems [36].

In the 3D CAD view, most information is visualized using Highlight Animations (Fig. 8b). These are more frequent when compared to “Task Scheduling”. This is probably because task delays can be easily highlighted using colors. Unfortunately, this creates a very ambiguous visualization. The color Channel of original 3D geometries now conveys both categorical (task type and execution status) and quantitative (task progress and delay amount) information.

6.4 Energy Analysis

Section 5.2 found a growing trend in sustainable design using BIM in the last 5 years. Today’s governments face environmental pressure from several factors: global warming studies, increasing costs of fossil fuels, elevated pollution in large metropolis, etc. Ever stricter regulations are



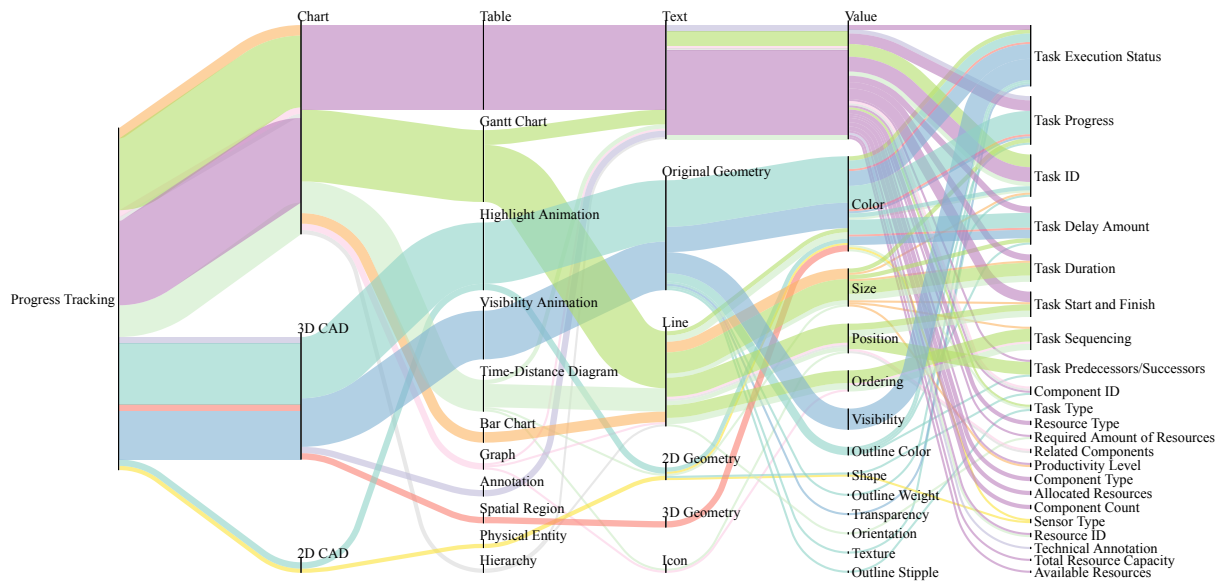


Fig. 7: Correlations among Views, Visualizations, Marks, Channels, and Information in “Progress Tracking”. Flow widths indicate frequency of use and colors distinguish visualization techniques.

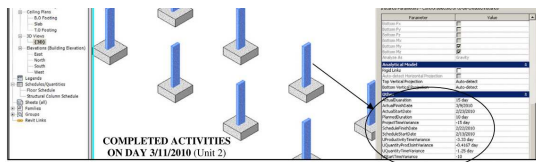

(a) Table [67].

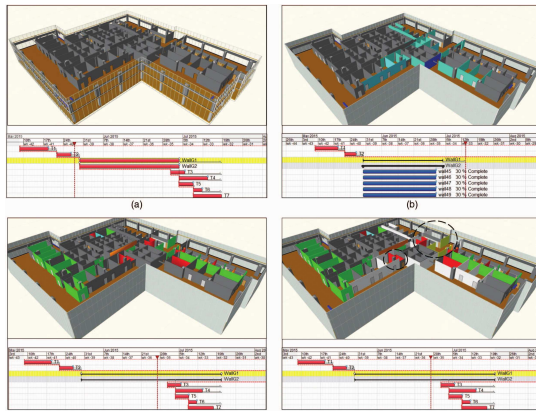

(b) Highlight Animation [98].

Fig. 8: Examples of visualizations in “Progress Tracking”.

forcing construction companies to improve their practice. Certificates systems such as the Leadership in Energy and Environmental Design (LEED) were created to promote and award efficient buildings [9]. As an added benefit, energy-efficient designs also contribute with cost savings during operation phase.

Fig. 9 shows that the overwhelming majority of “Energy Analysis” information is displayed using a Chart view. The second most frequent view is 2D CAD, followed by 3D CAD in last place. This is very different from previously

analyzed use cases, where 3D CAD and Chart views shared the highest ranks. As described below, we hypothesize this is due to the specific nature of energy-related information.

The main technique, Line Chart, shows simulated or actual energy use over time (Fig 10a). Displaying continuous data as a time series is a well-known and intuitive visualization technique [133]. The predominance of quantitative information also leads to the frequent use of Bar Charts (Fig. 10b) to display and compare numeric values [134]. Many other kinds of charts are used for these same purposes: Sankey Diagrams, Stacked Bar Charts, Heat Maps, and Scatter Plots.

Looking at the right of Fig. 9, we see a great diversity of categorical and quantitative information. Note how the Table visualization relates to almost all of them: it is very easy to simply present everything in tabular form. Unfortunately, this makes it harder to understand important data patterns when compared to graphical displays.

The “Energy Analysis” use case brings a rather unique set of visualization challenges. The main information is quantitative in nature and understanding their change over time is one of the main user tasks. This is probably the principal reason why Chart views are so popular: many established techniques already meet these demands. Linked 2D CAD views are then only employed to provide associated geometry highlights. Nevertheless, displaying energy performance within a 3D CAD view could make evident hidden patterns and relationships among nearby areas.

6.5 Maintenance Management

One of the main activities during “Operation” is maintaining a facility’s physical integrity. Structures suffer continuous degradation from exposure to elements. Hydraulic, mechanical, and electronic systems lose efficiency and can malfunction over time. Facility managers employ several different



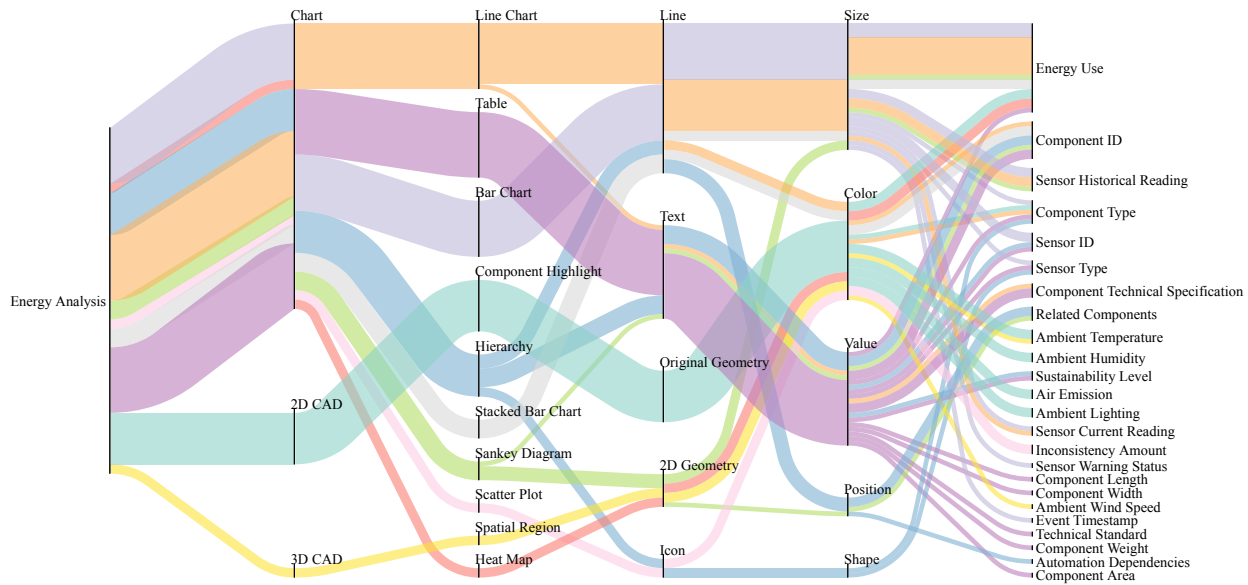


Fig. 9: Correlations among Views, Visualizations, Marks, Channels, and Information in “Energy Analysis”. Flow widths indicate frequency of use and colors distinguish visualization techniques.

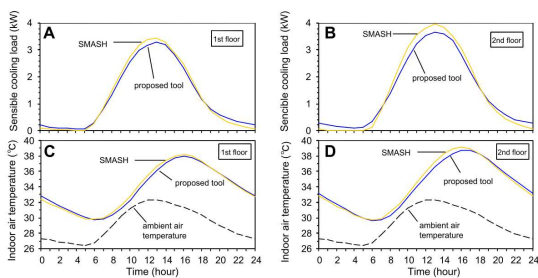

(a) Line Chart [107].

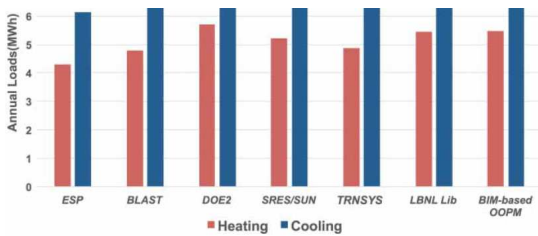

(b) Bar Chart [108].

Fig. 10: Examples of visualizations in “Energy Analysis”.

maintenance strategies [135]. Each has varying task and data requirements, as well as different implementation costs.

Fig. 11 describes how BIM is used for facility maintenance. Information are visualized mainly with 3D CAD and Chart views, with a few exceptions using 2D CAD. This distribution is very similar to previous use cases, except for “Energy Analysis”.

Within the 3D CAD view, Annotation is the main visualization. It conveys three major types of information: maintenance problems, sensor readings, and component specifications. Once again, applications tend to display too much textual data, overwhelming the user’s perception.

As with previous use cases, Tables are the main Chart visualization. They often provide context-sensitive information from Component Highlights in 2D/3D CAD views (Fig. 12a). Meanwhile, Schematic Diagrams are specific to “Maintenance Management” (Fig. 12b). This visualization combines several Marks and Channels to make evident the logical relationships among facility components.

Overall, we have found that many visualization techniques in “Maintenance Management” are quite similar to “Clash Detection”. Both use Annotations and Component Highlights over the 3D CAD model to call attention to problems and inconsistencies. The current use case is also similar to “Energy Analysis”: both investigate quantitative measurements from sensors. However, BIM applications for maintenance simply show these information as text within Tables or Annotations. For further details, we refer to our previous analysis of these techniques in Sections 6.1 and 6.4.

6.6 Research Opportunities

According to the preceding analysis, the visualization community could help to improve several limitations in current BIM practice. One of the main problems is the abundance of textual displays that hinder analysis of complex datasets. Replacing these with Charts combined with 2D/3D CAD views could bring forth yet unexplored data patterns and relationships [48], [136], [137], [138].

Another issue is the lack of spatial context from the exclusive use of Chart views by many applications. In contrast, 2D/3D CAD views can help the users understand problems and effects on surroundings. One approach is adding data layers to 3D CAD models similar to geographic information systems (GIS) [139], [140]. Another possibility is coordinating spatial and abstract views with linking and brushing [141], [142], [143], [144]. A third option is using scientific visualizations to display numerical data directly within the 3D scene [145], [146], [147].

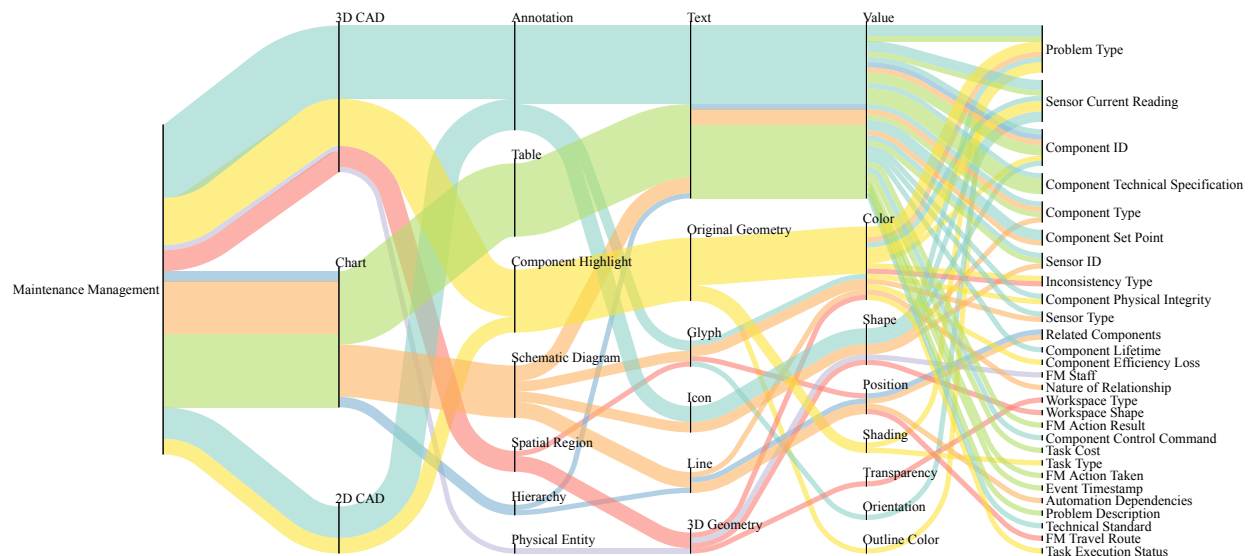


Fig. 11: Correlations among Views, Visualizations, Marks, Channels, and Information in “Maintenance Management”. Flow widths indicate frequency of use and colors distinguish visualization techniques.

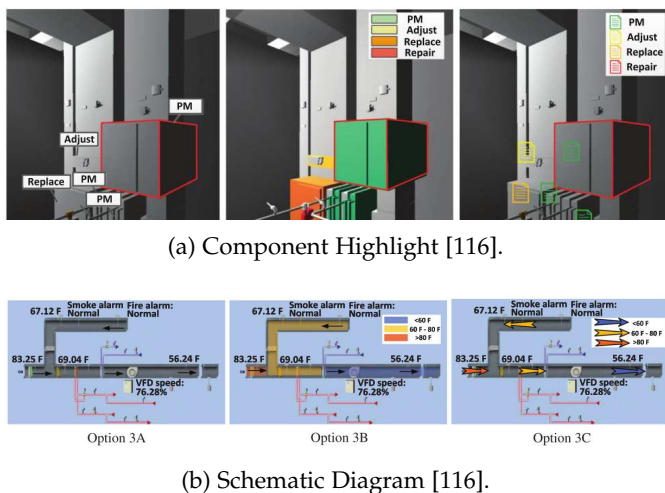


Fig. 12: Examples of visualizations in “Maintenance Management”.

Regarding the 3D CAD view, existing applications could improve on their use of colors in Highlight Animations and Component Highlights. Typical approaches mix qualitative and quantitative information using the same Marks/Channels. Visualization best practices can help choosing adequate color schemes for different analysis in the BIM domain [148], [149], [150].

Many of the surveyed 4D animations employ discrete visibility changes that fail to convey important temporal information. Instead, researchers could use animations to call attention to objects of interest [151] and also to preserve context during smooth transitions between views [152], [153], [154]. We also did not observe any mechanism to improve user perception in complex 3D CAD models. Several techniques are already available to manage occlusion [155], [156], reduce clutter [157], [158], [159], and highlight features of interest [160].

7 VISUALIZATION CHALLENGES IN BIM

This section describes the unique features of BIM that bring forth interesting challenges for the visualization community. BIM datasets contain large amounts of varied information, produced and consumed by diverse experts throughout the entire facility’s life cycle. Many techniques from the areas of visual analytics and data visualization could help analyzing these complex datasets. In addition, the importance of the 3D CAD model open up interesting opportunities for integrating spatial and non-spatial visualization. This correlation between digital and physical worlds also enables the use of immersive techniques. Table 2 identifies which visualization fields could best explore these opportunities.

Scientific and information visualization. In BIM, the 3D CAD model acts as the main connector between all relevant data throughout the facility’s life cycle. Our review has shown that some data are more suitable to scientific visualization and others to information visualization. Therefore, BIM provides a unique opportunity to investigate the possible synergies between these two fields [161], [162]. Perhaps traditional information visualization techniques could be somehow embedded in the 3D CAD model, like Gantt charts in the Cascade Animation [72]. Other research have explored a similar strategy to provide spatial context to building performance data [163], [164]. An interesting challenge would be to adapt traditional interaction techniques to the 3D environment [165], [166]. Another possibility is to use transparency to highlight 3D objects with relevant meta-data, similar to transfer functions in volume rendering [167].

Multidimensional visualization. Visual data analytics is a yet unexplored field in BIM that could help extract valuable knowledge from complex datasets [136], [168], [169], [170]. Section 4.3 identified 31 “classes” of information with an average of 5 attributes each. This amounts to more than 150 structured/non-structured and categorical/quantitative data. Many BIM activities could benefit from multidimensional visualization, such as: problem root

TABLE 2: Challenging features of BIM and corresponding visualization fields that could explore them.

BIM Feature	Visualization Fields	References
3D CAD model as information hub	Scientific and information visualization	[72], [161], [162], [163], [164], [165], [166], [167]
Various information categories	Multidimensional visualization	[136], [168], [169], [170]
Complex data relationships	Graph and network visualization	[130], [171], [172], [173]
Hierarchical data organization	Hierarchical visualization	[174], [175], [176]
Dynamic processes and activities	Temporal visualization	[36], [133], [177], [178], [179], [180], [181], [182]
Diverse stakeholder perspectives	Intelligent user interfaces	[183], [184], [185], [186], [187], [188]
Digital replica of physical world	Virtual and augmented reality	[189], [190], [191], [192], [193]

cause finding, process optimization, resource allocation, and cost reduction.

Graph and network visualization. BIM information is highly interdependent in nature. Facility components share many design relationships, such as dimensional and structural constraints. Moreover, the control logic of building automation systems interconnects sensors and mechanical equipment. Many other kinds of BIM data have cause and effect relationships. For instance, task durations depend on the size of work crews, both of which contribute to project costs. We believe graph and network visualizations could make evident these interdependencies to better inform decision makers [130], [171], [172], [173].

Hierarchical visualization. The product hierarchy is one of the main artifacts generated in the “*Design*” phase. This classification helps engineers navigate and filter building components according to engineering disciplines, systems, and types. Different kinds of BIM analysis operate at different levels within this hierarchy. Some queries may inspect individual building components, while others may consolidate and compare information across different systems. Presenting relevant BIM information in these drill down and zoom out operations should be interesting challenges for hierarchical visualization research [174], [175], [176].

Temporal visualization. BIM requires coordinating the activities of various teams that use different systems across all life cycle phases. Tools such as Information Delivery Manuals (IDM) have been devised to control the flow of data in these processes [177]. Temporal visualizations could bring new insights into the evolution of BIM datasets and help managing changes in project scope, durations, and costs [178], [179]. There is also opportunity to investigate new approaches related to task scheduling [36], [180] and time series analysis [133], [181], [182].

Intelligent user interfaces. Construction projects involve several engineering disciplines: structural, mechanical, electrical, etc. Many stakeholders participate in these enterprises: project managers, construction planners, facility managers, etc. Each of these actors performs different analysis using different information from the same BIM dataset. Visual analytics tools could intelligently adapt to different task requirements and goals [183], [184], [185]. For example, focus+context techniques could highlight features of interest

according to the needs of each user profile [186], [187], [188].

Virtual and Augmented reality. In its essence, BIM uses the 3D CAD model as a high-fidelity digital replica of the physical world. There are many opportunities for visualization research to explore the inherent connection between these virtual and real environments. Virtual reality allows building designers to find problems and collaborate on improvements [189]. Augmented reality applications range from tracking construction progress to assisting in maintenance works [190], [191]. Emerging research areas such as immersive analytics can also help BIM professionals explore and understand complex datasets [192], [193]. We suggest conducting a more specific literature review about this visualization field in BIM to provide detailed guidance.

8 CONCLUSIONS

This work described the findings of a systematic literature review of visualization in BIM. We analyzed previous work using a taxonomy of Life Cycle Phases, Use Cases, Information, and Visualizations. This scheme enabled identifying the main application areas of visualization in BIM and the critical analysis of currently employed techniques. Based on these findings, Sections 5.3, 6.6, and 7 highlighted many unexplored opportunities for future visualization research.

We suggest four different strategies for the visualization community to approach BIM. First, governments committed to BIM adoption regularly make available research grants in this theme [194]. Second, construction companies could create research partnerships to develop innovative solutions and gain competitive advantage. Third, major hardware and software vendors on the cutting edge of BIM technology often work together with academia [195]. Finally, several open BIM datasets in the IFC format [196] are readily available for download [197], [198], [199], [200], [201], [202].

We expect research interest in BIM to continue to grow for many years to come. Our survey has found significant potential that remains yet unexplored by current practice. Just as we identified many existing visualizations that could be applied to BIM, we believe that solving its unique challenges can contribute back with new and improved techniques that would benefit other domains. We hope this article raises awareness to interesting research opportunities the BIM domain brings to the visualization community.

ACKNOWLEDGMENTS

The authors would like to thank the editor and reviewers for their helpful comments and suggestions. This work has been supported by CNPq, Conselho Nacional de Desenvolvimento Científico e Tecnológico - Brasil (process 140933/2014-0).

REFERENCES

- [1] C. Eastman, P. Teicholz, R. Sacks, and K. Liston, *BIM Handbook: A Guide to Building Information Modeling for Owners, Managers, Designers, Engineers and Contractors*. Hoboken, NJ, USA: John Wiley & Sons, 2011, doi: 10.1002/9780470261309.
- [2] B. Hardin and D. McCool, *BIM and Construction Management: Proven Tools, Methods, and Workflows*. Hoboken, NJ, USA: John Wiley & Sons, 2015.
- [3] BuildingSMART, "BuildingSMART - Technical Vision," 2018, last accessed 2018-12-13. [Online]. Available: <https://www.buildingsmart.org/standards/technical-vision/>
- [4] E. Collier and M. Fischer, "Four-dimensional modeling in design and construction." Center for Integrated Facility Engineering - CIFE, Stanford University, Tech. Rep. 101, 1995.
- [5] K. McKinney, J. Kim, M. Fischer, and C. Howard, "Interactive 4D-CAD," in *Proceedings of the Congress on Computing in Civil Engineering*. ASCE, Anaheim, CA, Jun, 1996, pp. 17–19.
- [6] M. A. Fischer and F. Aalami, "Scheduling with computer-interpretable construction method models," *Journal of Construction Engineering and Management*, vol. 122, no. 4, pp. 337–347, 1996, doi: 10.1061/(ASCE)0733-9364(1996)122:4(337).
- [7] W. Zhou, J. Whyte, and R. Sacks, "Construction safety and digital design: A review," *Automation in Construction*, vol. 22, pp. 102–111, 2012, doi: 10.1016/j.autcon.2011.07.005.
- [8] A. Schlueter and F. Thesseling, "Building information model based energy/exergy performance assessment in early design stages," *Automation in Construction*, vol. 18, no. 2, pp. 153–163, 2009, doi: 10.1016/j.autcon.2008.07.003.
- [9] S. Azhar, W. A. Carlton, D. Olsen, and I. Ahmad, "Building information modeling for sustainable design and LEED® rating analysis," *Automation in Construction*, vol. 20, no. 2, pp. 217–224, 2011.
- [10] J. K. W. Wong and J. Zhou, "Enhancing environmental sustainability over building life cycles through green BIM: A review," *Automation in Construction*, vol. 57, pp. 156–165, 2015, doi: 10.1016/j.autcon.2015.06.003.
- [11] L. Ding, Y. Zhou, and B. Akinci, "Building information modeling (BIM) application framework: The process of expanding from 3D to computable nD," *Automation in Construction*, vol. 46, pp. 82–93, 2014, doi: 10.1016/j.autcon.2014.04.009.
- [12] T. Hartmann, J. Gao, and M. Fischer, "Areas of application for 3D and 4D models on construction projects," *Journal of Construction Engineering and Management*, vol. 134, no. 10, pp. 776–785, 2008, doi: 10.1061/(ASCE)0733-9364(2008)134:10(776).
- [13] B. Becerik-Gerber and S. Rice, "The perceived value of building information modeling in the U.S. building industry," *Journal of Information Technology in Construction*, vol. 15, no. 15, pp. 185–201, 2010, doi: 10.13140/2.1.2951.8084.
- [14] J. Park, B. Kim, C. Kim, and H. Kim, "3D/4D CAD applicability for life-cycle facility management," *Journal of Computing in Civil Engineering*, vol. 25, no. 2, pp. 129–138, 2011, doi: 10.1061/(ASCE)CP.1943-5487.0000067.
- [15] B. Becerik-Gerber and K. Kensek, "Building information modeling in architecture, engineering, and construction: Emerging research directions and trends," *Journal of Professional Issues in Engineering Education and Practice*, vol. 136, no. 3, pp. 139–147, 2010, doi: 10.1061/(ASCE)EI.1943-5541.0000023.
- [16] B. Becerik-Gerber, F. Jazizadeh, N. Li, and G. Calis, "Application areas and data requirements for BIM-enabled facilities management," *Journal of Construction Engineering and Management*, vol. 138, no. 3, pp. 431–442, 2012, doi: 10.1061/(ASCE)CO.1943-7862.0000433.
- [17] R. Eadie, M. Browne, H. Odeyinka, C. McKeown, and S. McNiff, "BIM implementation throughout the UK construction project lifecycle: An analysis," *Automation in Construction*, vol. 36, pp. 145–151, 2013, doi: 10.1016/j.autcon.2013.09.001.
- [18] R. Volk, J. Stengel, and F. Schultmann, "Building information modeling (BIM) for existing buildings - literature review and future needs," *Automation in Construction*, vol. 38, pp. 109–127, 2014, doi: 10.1016/j.autcon.2013.10.023.
- [19] S. Azhar, M. Khalafan, and T. Maqsood, "Building information modelling (BIM): now and beyond," *Construction Economics and Building*, vol. 12, no. 4, pp. 15–28, 2015, doi: 10.5130/ajceb.v12i4.3032.
- [20] M. Yalcinkaya and V. Singh, "Patterns and trends in building information modeling (BIM) research: A latent semantic analysis," *Automation in Construction*, vol. 59, pp. 68–80, 2015, doi: 10.1016/j.autcon.2015.07.012.
- [21] H. Guo, Y. Yu, and M. Skitmore, "Visualization technology-based construction safety management: A review," *Automation in Construction*, vol. 73, pp. 135–144, 2017, doi: 10.1016/j.autcon.2016.10.004.
- [22] B. J. Gledson and D. J. Greenwood, "Surveying the extent and use of 4D BIM in the UK," *Journal of Information Technology in Construction*, vol. 21, pp. 57–71, 2016. [Online]. Available: <https://www.itcon.org/2016/4>
- [23] B. J. Gledson and D. Greenwood, "The adoption of 4D BIM in the UK construction industry: An innovation diffusion approach," *Engineering, Construction and Architectural Management*, vol. 24, no. 6, pp. 950–967, 2017, doi: 10.1108/ECAM-03-2016-0066.
- [24] M. Gerges, S. Austin, M. Mayouf, O. Ahiakwo, M. Jaeger, A. Saad, and T.-E. Gohary, "An investigation into the implementation of building information modeling in the Middle East," *Journal of Information Technology in Construction*, vol. 22, pp. 1–15, 2017. [Online]. Available: <https://www.itcon.org/2017/1>
- [25] P. Gholizadeh, B. Esmaeili, and P. Goodrum, "Diffusion of building information modeling functions in the construction industry," *Journal of Management in Engineering*, vol. 34, no. 2, p. 04017060, 2018, doi: 10.1061/(ASCE)ME.1943-5479.0000589.
- [26] K. McKinney, M. Fischer, and J. Kunz, "Visualization of construction planning information," in *Proceedings of the International Conference on Intelligent User Interfaces*, 1998, pp. 135–138, doi: 10.1145/268389.268414.
- [27] G. Aouad, "Trends in information visualisation in construction," in *Proceedings of the International Conference on Information Visualization*. IEEE, Jan 1999, pp. 590–594, doi: 10.1109/IV.1999.781617.
- [28] D. Bouchlaghem, H. Shang, J. Whyte, and A. Ganah, "Visualisation in architecture, engineering and construction (AEC)," *Automation in Construction*, vol. 14, no. 3, pp. 287–295, 2005, doi: 10.1016/j.autcon.2004.08.012.
- [29] S. Kubicki, G. Halin, and A. Guerriero, "Multi-visualization of the cooperative context in building construction activity: A model-based approach to design AEC-specific visualization interfaces," in *Proceedings of the International Conference on Information Visualization*. IEEE, 2007, pp. 590–595, doi: 10.1109/IV.2007.79.
- [30] C.-H. Kuo, M.-H. Tsai, and S.-C. Kang, "A framework of information visualization for multi-system construction," *Automation in Construction*, vol. 20, no. 3, pp. 247–262, 2011, doi: 10.1016/j.autcon.2010.10.003.
- [31] C. Botton, S. Kubicki, and G. Halin, "Designing adapted visualization for collaborative 4D applications," *Automation in Construction*, vol. 36, pp. 152–167, 2013, doi: 10.1016/j.autcon.2013.09.003.
- [32] M. Pilgrim, D. Bouchlaghem, D. Loveday, and M. Holmes, "Abstract data visualisation in the built environment," in *Proceedings of the International Conference on Information Visualization*. IEEE, 2000, pp. 126–134, doi: 10.1109/IV.2000.859747.
- [33] H.-S. Chang, S.-C. Kang, and P.-H. Chen, "Systematic procedure of determining an ideal color scheme on 4D models," *Advanced Engineering Informatics*, vol. 23, no. 4, pp. 463–473, Oct 2009, doi: 10.1016/j.aei.2009.05.002.
- [34] F. Castronovo, S. Lee, D. Nikolic, and J. I. Messner, "Visualization in 4D construction management software: A review of standards and guidelines," in *Proceedings of the Computing in Civil and Building Engineering*. Reston, VA: American Society of Civil Engineers, Jun 2014, pp. 315–322, doi: 10.1061/9780784413616.040.
- [35] X. Yang and S. Ergan, "Evaluation of visualization techniques for use by facility operators during monitoring tasks," *Automation in Construction*, vol. 44, pp. 103–118, 2014, doi: <https://doi.org/10.1016/j.autcon.2014.03.023>.
- [36] M. Tory, S. Staub-French, D. Huang, Y.-L. Chang, C. Swindells, and R. Pottinger, "Comparative visualization of construction schedules," *Automation in Construction*, vol. 29, pp. 68–82, 2013, doi: 10.1016/j.autcon.2012.08.004.


- [37] M. Golparvar-Fard, P. Tang, Y. K. Cho, and M. K. Siddiqui, "Grand challenges in data and information visualization for the architecture, engineering, construction, and facility management industries," in *Proceedings of the ASCE International Workshop on Computing in Civil Engineering*, 2013, pp. 849–856, doi: 10.1061/9780784413029.106.
- [38] F. Leite, Y. Cho, A. H. Behzadan, S. Lee, S. Choe, Y. Fang, R. Akhavan, and S. Hwang, "Visualization, information modeling, and simulation: Grand challenges in the construction industry," *Journal of Computing in Civil Engineering*, vol. 30, no. 6, 2016, doi: 10.1061/(ASCE)CP.1943-5487.0000604.
- [39] D. Budgen and P. Brereton, "Performing systematic literature reviews in software engineering," *Proceedings of the International Conference on Software Engineering*, p. 1051, 2006, doi: 10.1145/1134285.1134500.
- [40] M. Petticrew and H. Roberts, *Systematic Reviews in the Social Sciences: A Practical Guide*. Ames, IA, USA: Blackwell publishing, 2008, doi: 10.1002/9780470754887.
- [41] J. Sterne, M. Egger, D. Moher, J. Higgins, and S. Green, *Cochrane Handbook for Systematic Reviews of Interventions*. Wiley Online Library, 2011, doi: 10.1002/9780470712184.
- [42] T. Isenberg, P. Isenberg, J. Chen, M. Sedlmair, and T. Möller, "A systematic review on the practice of evaluating visualization," *IEEE Transactions on Visualization and Computer Graphics*, vol. 19, no. 12, pp. 2818–2827, 2013, doi: 10.1109/TVCG.2013.126.
- [43] Elsevier, "Scopus digital library," 2018, last accessed 2018-12-13. [Online]. Available: <https://www.scopus.com>
- [44] M. E. Falagas, E. I. Pitsouni, G. A. Malietzis, and G. Pappas, "Comparison of PubMed, Scopus, Web of Science, and Google Scholar: strengths and weaknesses," *The FASEB Journal*, vol. 22, no. 2, pp. 338–342, Feb 2008, doi: 10.1096/fj.07-9492LSE.
- [45] P. Ivson, A. Moreira, F. Queiroz, W. Santos, and W. Celes, "Database of analyzed articles from a systematic review of visualization in building information modeling," *IEEE Dataport*, 2018. [Online]. Available: <http://dx.doi.org/10.21227/kpvm-g087>
- [46] B. Succar, "Building information modelling framework: A research and delivery foundation for industry stakeholders," *Automation in Construction*, vol. 18, no. 3, pp. 357–375, May 2009, doi: 10.1016/J.AUTCON.2008.10.003.
- [47] J. Rumbaugh, M. Blaha, W. Premerlani, F. Eddy, W. E. Lorensen et al., *Object-Oriented Modeling and Design*. Englewood Cliffs, NJ: Prentice-hall, 1991, vol. 199, no. 1.
- [48] T. Munzner, *Visualization Analysis & Design*. Boca Raton, FL: AK Peters, 2014.
- [49] Y. Turkan, F. Bosché, C. T. Haas, and R. Haas, "Tracking of secondary and temporary objects in structural concrete work," *Construction Innovation*, vol. 14, no. 2, pp. 145–167, 2014, doi: 10.1108/CI-12-2012-0063.
- [50] HM Government, "Construction 2025. Industrial Strategy: Government and industry in partnership," *UK Government*, p. 78, 2013. [Online]. Available: https://assets.publishing.service.gov.uk/government/uploads/system/uploads/attachment_data/file/210099/bis-13-955-construction-2025-industrial-strategy.pdf
- [51] M. Sedlmair, M. Meyer, and T. Munzner, "Design study methodology: Reflections from the trenches and the stacks," *IEEE Transactions on Visualization and Computer Graphics*, vol. 18, no. 12, pp. 2431–2440, Dec 2012, doi: 10.1109/TVCG.2012.213.
- [52] AIA, "Integrated project delivery: A guide," *American Institute of Architects*, 2007. [Online]. Available: https://info.aia.org/siteobjects/files/ipd_guide_2007.pdf
- [53] W. Lu, A. Fung, Y. Peng, C. Liang, and S. Rowlinson, "Demystifying construction project time-effort distribution curves: BIM and non-BIM comparison," *Journal of Management in Engineering*, vol. 31, no. 6, p. 04015010, 2015.
- [54] S. Staub-French and A. Khanzode, "3D and 4D modeling for design and construction coordination: Issues and lessons learned," *Journal of Information Technology in Construction*, vol. 12, pp. 381–407, 2007. [Online]. Available: <https://www.itcon.org/2007/26>
- [55] A. Khanzode, M. Fischer, and D. Reed, "Benefits and lessons learned of implementing building virtual design and construction (VDC) technologies for coordination of mechanical, electrical, and plumbing (MEP) systems on a large healthcare project," *Journal of Information Technology in Construction*, vol. 13, pp. 324–342, 2008. [Online]. Available: <https://www.itcon.org/paper/2008/22>
- [56] M. Trebbe, T. Hartmann, and A. Dorée, "4D CAD models to support the coordination of construction activities between contractors," *Automation in Construction*, vol. 49, no. PA, pp. 83–91, 2015, doi: 10.1016/j.autcon.2014.10.002.
- [57] A. L. C. Ciribini, S. Mastrolembo Ventura, and M. Paneroni, "Implementation of an interoperable process to optimise design and construction phases of a residential building: A BIM pilot project," *Automation in Construction*, vol. 71, pp. 62–73, 2016, doi: 10.1016/j.autcon.2016.03.005.
- [58] A. M. Abd and A. S. Khamees, "As built case studies for BIM as conflicts detection and documentation tool," *Cogent Engineering*, vol. 4, no. 1, 2017, doi: 10.1080/23311916.2017.1411865.
- [59] W. Xie, W. Fu, B. Lyu, Z. Li, J. Huang, and F. Xu, "Incorporating building information modeling (BIM) into the super high-rise industrialized housing project: A case study," *Boletín Técnico/Technical Bulletin*, vol. 55, no. 13, pp. 234–243, 2017. [Online]. Available: <https://boletintecnico.com/index.php/bt/article/view/1249>
- [60] S. C. W. Kong, "A case study of applying virtual prototyping in construction," *World Academy of Science, Engineering and Technology*, vol. 65, no. 5, pp. 226–231, 2010, doi: doi.org/10.5281/zenodo.1075958.
- [61] B. de Vries and J. M. J. Harink, "Generation of a construction planning from a 3D CAD model," *Automation in Construction*, vol. 16, no. 1, pp. 13–18, 2007, doi: 10.1016/j.autcon.2005.10.010.
- [62] L. Lin, M. Huang, J. Li, X. Song, and Y. Sun, "The application and exploration of the TSTL in construction management based on BIM," *Journal of Applied Science and Engineering*, vol. 20, no. 3, pp. 309–317, 2017, doi: 10.6180/jase.2017.20.3.05.
- [63] K. McKinney and M. Fischer, "Generating, evaluating and visualizing construction schedules with CAD tools," *Automation in Construction*, vol. 7, no. 6, pp. 433–447, 1998, doi: 10.1016/S0926-5805(98)00053-3.
- [64] B. Koo and M. Fischer, "Feasibility study of 4D CAD in commercial construction," *Journal of Construction Engineering and Management*, vol. 126, no. 4, pp. 251–260, 2000, doi: 10.1061/(ASCE)0733-9364(2000)126:4(251).
- [65] A. M. Tanyer and G. Aouad, "Moving beyond the fourth dimension with an IFC-based single project database," *Automation in Construction*, vol. 14, no. 1, pp. 15–32, 2005, doi: 10.1016/j.autcon.2004.06.002.
- [66] L.-S. Kang, H.-S. Moon, S.-Y. Park, C.-H. Kim, and T. S. Lee, "Improved link system between schedule data and 3D object in 4D CAD system by using WBS code," *KSCE Journal of Civil Engineering*, vol. 14, no. 6, pp. 803–814, 2010, doi: 10.1007/s12205-010-0960-4.
- [67] E. Elbeltagi and M. Dawood, "Integrated visualized time control system for repetitive construction projects," *Automation in Construction*, vol. 20, no. 7, pp. 940–953, 2011, doi: 10.1016/j.autcon.2011.03.012.
- [68] W. Zhou, P. Georgakis, D. Heesom, and X. Feng, "Model-based groupware solution for distributed real-time collaborative 4D planning through teamwork," *Journal of Computing in Civil Engineering*, vol. 26, no. 5, pp. 597–611, 2012, doi: 10.1061/(ASCE)CP.1943-5487.0000153.
- [69] L. S. Kang, S.-K. Kim, H. S. Moon, and H. S. Kim, "Development of a 4D object-based system for visualizing the risk information of construction projects," *Automation in Construction*, vol. 31, pp. 186–203, 2013, doi: 10.1016/j.autcon.2012.11.038.
- [70] H. Tauscher and R. J. Scherer, "Specifying complex visualization configurations with hierarchically nested mapping rule sets," *Journal of Information Technology in Construction*, vol. 20, pp. 40–50, 2015. [Online]. Available: <https://www.itcon.org/paper/2015/3>
- [71] A. Candelario Garrido, J. García-Sanz-Calcedo, D. R. Salgado, and A. G. González, "Planning, monitoring and control of mechanics projects by the BIM," *Engineering Transactions*, vol. 65, no. 1, pp. 25–30, 2017.
- [72] P. Ivson, D. Nascimento, W. Celes, and S. D. J. Barbosa, "CasCADE: A novel 4D visualization system for virtual construction planning," *IEEE Transactions on Visualization and Computer Graphics*, vol. 24, no. 1, pp. 687–697, 2018, doi: 10.1109/TVCG.2017.2745105.
- [73] K. J. Kim, C. K. Lee, U. R. Kim, E. Y. Shin, and M. Y. Cho, "Collaborative work model under distributed construction en-

- vironments," *Canadian Journal of Civil Engineering*, vol. 32, no. 2, pp. 299–313, 2005, doi: 10.1139/104-061.
- [74] S. Staub-French, A. Russell, and N. Tran, "Linear scheduling and 4D visualization," *Journal of Computing in Civil Engineering*, vol. 22, no. 3, pp. 192–205, 2008, doi: 10.1061/(ASCE)0887-3801(2008)22:3(192).
- [75] A. Russell, S. Staub-French, N. Tran, and W. Wong, "Visualizing high-rise building construction strategies using linear scheduling and 4D CAD," *Automation in Construction*, vol. 18, no. 2, pp. 219–236, 2009, doi: 10.1016/j.autcon.2008.08.001.
- [76] A. Mahalingam, R. Kashyap, and C. Mahajan, "An evaluation of the applicability of 4D CAD on construction projects," *Automation in Construction*, vol. 19, no. 2, pp. 148–159, 2010, doi: 10.1016/j.autcon.2009.11.015.
- [77] C. Kim, H. Kim, T. Park, and M. K. Kim, "Applicability of 4D CAD in civil engineering construction: Case study of a cable-stayed bridge project," *Journal of Computing in Civil Engineering*, vol. 25, no. 1, pp. 98–107, 2011, doi: 10.1061/(ASCE)CP.1943-5487.0000074.
- [78] Z. Hu and J. Zhang, "BIM- and 4D-based integrated solution of analysis and management for conflicts and structural safety problems during construction: 2. development and site trials," *Automation in Construction*, vol. 20, no. 2, pp. 155–166, 2011, doi: 10.1016/j.autcon.2010.09.013.
- [79] W. A. Abdelhameed, "Virtual reality applications in project management scheduling," *Computer-Aided Design and Applications*, vol. 9, no. 1, pp. 71–78, 2012, doi: 10.3722/cadaps.2012.71-78.
- [80] G. Gelisen and F. H. Griffis, "Automated productivity-based schedule animation: Simulation-based approach to time-cost trade-off analysis," *Journal of Construction Engineering and Management*, vol. 140, no. 4, 2014, doi: 10.1061/(ASCE)CO.1943-7862.0000674.
- [81] W. Zhou, D. Heesom, P. Georgakis, and J. H. M. Tah, "User-centred design for collaborative 4D modelling," *Construction Innovation*, vol. 14, no. 4, pp. 493–517, 2014, doi: 10.1108/CI-01-2014-0008.
- [82] M.-H. Tsai, S.-C. Kang, and S.-H. Hsieh, "Lessons learnt from customization of a BIM tool for a design-build company," *Journal of the Chinese Institute of Engineers, Transactions of the Chinese Institute of Engineers, Series A/Chung-kuo Kung Ch'eng Hsueh Kan*, vol. 37, no. 2, pp. 189–199, 2014, doi: 10.1080/02533839.2013.781791.
- [83] Y. Zhou, L. Ding, X. Wang, M. Truijens, and H. Luo, "Applicability of 4D modeling for resource allocation in mega liquefied natural gas plant construction," *Automation in Construction*, vol. 50, no. C, pp. 50–63, 2015, doi: 10.1016/j.autcon.2014.10.016.
- [84] H. Moon, H. Kim, V. R. Kamat, and L. Kang, "BIM-based construction scheduling method using optimization theory for reducing activity overlaps," *Journal of Computing in Civil Engineering*, vol. 29, no. 3, 2015, doi: 10.1061/(ASCE)CP.1943-5487.0000342.
- [85] V. K. Bansal, "Integrated CAD and GIS-based framework to support construction planning: Case study," *Journal of Architectural Engineering*, vol. 23, no. 3, 2017, doi: 10.1061/(ASCE)AE.1943-5568.0000262.
- [86] V. Benjaoran and S. Bhokha, "Enhancing visualization of 4D CAD model compared to conventional methods," *Engineering, Construction and Architectural Management*, vol. 16, no. 4, pp. 392–408, 2009, doi: 10.1108/09699980910970860.
- [87] H. Kim, K. Anderson, S. Lee, and J. Hildreth, "Generating construction schedules through automatic data extraction using open BIM (Building Information Modeling) technology," *Automation in Construction*, vol. 35, pp. 285–295, 2013, doi: 10.1016/j.autcon.2013.05.020.
- [88] J. I. Kim, J. Kim, M. Fischer, and R. Orr, "BIM-based decision-support method for master planning of sustainable large-scale developments," *Automation in Construction*, vol. 58, pp. 95–108, 2015, doi: 10.1016/j.autcon.2015.07.003.
- [89] C. Kam, M. Fischer, R. Hänninen, A. Karjalainen, and J. Laitinen, "The product model and fourth dimension project," *Journal of Information Technology in Construction*, vol. 8, pp. 137–166, 2003. [Online]. Available: <https://www.itcon.org/paper/2003/12>
- [90] S. Zhang, K. Sulankivi, M. Kiviniemi, I. Romo, C. M. Eastman, and J. Teizer, "BIM-based fall hazard identification and prevention in construction safety planning," *Safety Science*, vol. 72, pp. 31–45, 2015, doi: 10.1016/j.ssci.2014.08.001.
- [91] S. Chin, S. Yoon, C. Choi, and C. Cho, "Rfid+4D CAD for progress management of structural steel works in high-rise buildings," *Journal of Computing in Civil Engineering*, vol. 22, no. 2, pp. 74–89, 2008, doi: 10.1061/(ASCE)0887-3801(2008)22:2(74).
- [92] C. Kim, B. Kim, and H. Kim, "4D CAD model updating using image processing-based construction progress monitoring," *Automation in Construction*, vol. 35, pp. 44–52, 2013, doi: 10.1016/j.autcon.2013.03.005.
- [93] H.-P. Tserng, S.-P. Ho, and S.-H. Jan, "Developing BIM-assisted as-built schedule management system for general contractors," *Journal of Civil Engineering and Management*, vol. 20, no. 1, pp. 47–58, 2014, doi: 10.3846/13923730.2013.851112.
- [94] J. Park, H. Cai, P. S. Dunston, and H. Ghasemkhani, "Database-supported and web-based visualization for daily 4D BIM," *Journal of Construction Engineering and Management*, vol. 143, no. 10, 2017, doi: 10.1061/(ASCE)CO.1943-7862.0001392.
- [95] C. Kim, C. Kim, and H. Son, "Automated construction progress measurement using a 4D building information model and 3D data," *Automation in Construction*, vol. 31, pp. 75–82, 2013, doi: 10.1016/j.autcon.2012.11.041.
- [96] K. K. Han, D. Cline, and M. Golparvar-Fard, "Formalized knowledge of construction sequencing for visual monitoring of work-in-progress via incomplete point clouds and low-lod 4D BIMs," *Advanced Engineering Informatics*, vol. 29, no. 4, pp. 889–901, 2015, doi: 10.1016/j.aei.2015.10.006.
- [97] A. Braun, S. Tuttas, A. Borrmann, and U. Stilla, "A concept for automated construction progress monitoring using BIM-based geometric constraints and photogrammetric point clouds," *Journal of Information Technology in Construction*, vol. 20, pp. 68–79, 2015. [Online]. Available: <https://www.itcon.org/paper/2015/5>
- [98] H. Hamledari, B. McCabe, S. Davari, and A. Shahi, "Automated schedule and progress updating of IFC-based 4D BIMs," *Journal of Computing in Civil Engineering*, vol. 31, no. 4, 2017, doi: 10.1061/(ASCE)CP.1943-5487.0000660.
- [99] H. Son, C. Kim, and Y. Kwon Cho, "Automated schedule updates using as-built data and a 4D building information model," *Journal of Management in Engineering*, vol. 33, no. 4, 2017, doi: 10.1061/(ASCE)ME.1943-5479.0000528.
- [100] K. K. Han and M. Golparvar-Fard, "Potential of big visual data and building information modeling for construction performance analytics: An exploratory study," *Automation in Construction*, vol. 73, pp. 184–198, 2017, doi: 10.1016/j.autcon.2016.11.004.
- [101] F. Bosché, A. Guillemet, Y. Turkan, C. T. Haas, and R. Haas, "Tracking the built status of mep works: Assessing the value of a scan-vs-BIM system," *Journal of Computing in Civil Engineering*, vol. 28, no. 4, 2014, doi: 10.1061/(ASCE)CP.1943-5487.0000343.
- [102] H. Wang, L. Li, Y.-Y. Jiao, X.-R. Ge, and S.-C. Li, "A relationship-based and object-oriented software for monitoring management during geotechnical excavation," *Advances in Engineering Software*, vol. 71, pp. 34–45, 2014, doi: 10.1016/j.advengsoft.2014.02.001.
- [103] L. Chen and H. Luo, "A BIM-based construction quality management model and its applications," *Automation in Construction*, vol. 46, pp. 64–73, 2014, doi: 10.1016/j.autcon.2014.05.009.
- [104] K. K. Han and M. Golparvar-Fard, "Appearance-based material classification for monitoring of operation-level construction progress using 4D BIM and site photologs," *Automation in Construction*, vol. 53, pp. 44–57, 2015, doi: 10.1016/j.autcon.2015.02.007.
- [105] A. Björnfort and R. Jongeling, "Application of line-of-balance and 4D CAD for lean planning," *Construction Innovation*, vol. 7, no. 2, pp. 200–211, 2007, doi: 10.1108/14714170710738559.
- [106] M. Golparvar-Fard, F. Peña-Mora, and S. Savarese, "Integrated sequential as-built and as-planned representation with D4AR tools in support of decision-making tasks in the AEC/FM industry," *Journal of Construction Engineering and Management*, vol. 137, no. 12, pp. 1099–1116, 2011, doi: 10.1061/(ASCE)CO.1943-7862.0000371.
- [107] J. He, A. Hoyano, and T. Asawa, "A numerical simulation tool for predicting the impact of outdoor thermal environment on building energy performance," *Applied Energy*, vol. 86, no. 9, pp. 1596–1605, 2009, doi: 10.1016/j.apenergy.2008.12.034.
- [108] W. Jeong, J. B. Kim, M. J. Clayton, J. S. Haberl, and W. Yan, "A framework to integrate object-oriented physical modelling with building information modelling for building thermal simulation," *Journal of Building Performance Simulation*, vol. 9, no. 1, pp. 50–69, 2016, doi: 10.1080/19401493.2014.993709.
- [109] A. H. Oti, W. Tizani, F. H. Abanda, A. Jaly-Zada, and J. H. M. Tah, "Structural sustainability appraisal in BIM,"


- Automation in Construction*, vol. 69, pp. 44–58, 2016, doi: 10.1016/j.autcon.2016.05.019.
- [110] F. Shalabi and Y. Turkan, “IFC BIM-based facility management approach to optimize data collection for corrective maintenance,” *Journal of Performance of Constructed Facilities*, vol. 31, no. 1, 2017, doi: 10.1061/(ASCE)CF.1943-5509.0000941.
- [111] T. Gerrish, K. Ruitkar, M. Cook, M. Johnson, M. Phillip, and C. Lowry, “BIM application to building energy performance visualisation and management: Challenges and potential,” *Energy and Buildings*, vol. 144, pp. 218–228, 2017, doi: 10.1016/j.enbuild.2017.03.032.
- [112] A. Abdelalim, W. O’Brien, and Z. Shi, “Data visualization and analysis of energy flow on a multi-zone building scale,” *Automation in Construction*, vol. 84, pp. 258–273, 2017, doi: 10.1016/j.autcon.2017.09.012.
- [113] M. Rahmani Asl, S. Zarrinmehr, M. Bergin, and W. Yan, “BPOpt: A framework for BIM-based performance optimization,” *Energy and Buildings*, vol. 108, pp. 401–412, 2015, doi: 10.1016/j.enbuild.2015.09.011.
- [114] K. McGlenn, B. Yuce, H. Wicaksono, S. Howell, and Y. Rezgui, “Usability evaluation of a web-based tool for supporting holistic building energy management,” *Automation in Construction*, vol. 84, pp. 154–165, 2017, doi: 10.1016/j.autcon.2017.08.033.
- [115] I.-C. Wu and S. Chang, “Visual Req calculation tool for green building evaluation in Taiwan,” *Automation in Construction*, vol. 35, pp. 608–617, 2013, doi: 10.1016/j.autcon.2013.01.006.
- [116] X. Yang and S. Ergan, “Design and evaluation of an integrated visualization platform to support corrective maintenance of HVAC problem-related work orders,” *Journal of Computing in Civil Engineering*, vol. 30, no. 3, 2016, doi: 10.1061/(ASCE)CP.1943-5487.0000510.
- [117] J. Patacas, N. Dawood, D. Greenwood, and M. Kassem, “Supporting building owners and facility managers in the validation and visualisation of asset information models (AIM) through open standards and open technologies,” *Journal of Information Technology in Construction*, vol. 21, pp. 434–455, 2016. [Online]. Available: https://www.itcon.org/papers/2016_27.content.00686.pdf
- [118] D. Hallberg and V. Tarandi, “On the use of open BIM and 4D visualisation in a predictive life cycle management system for construction works,” *Journal of Information Technology in Construction*, vol. 16, pp. 445–466, 2011. [Online]. Available: <https://www.itcon.org/paper/2011/26>
- [119] X. Wang, P. E. D. Love, M. J. Kim, C.-S. Park, C.-P. Sing, and L. Hou, “A conceptual framework for integrating building information modeling with augmented reality,” *Automation in Construction*, vol. 34, pp. 37–44, 2013, doi: 10.1016/j.autcon.2012.10.012.
- [120] R. Liu and R. R. A. Issa, “Design for maintenance accessibility using BIM tools,” *Facilities*, vol. 32, no. 3, pp. 153–159, 2014, doi: 10.1108/F-09-2011-0078.
- [121] G. Williams, M. Gheisari, P.-J. Chen, and J. Irizarry, “BIM2MAR: An efficient BIM translation to mobile augmented reality applications,” *Journal of Management in Engineering*, vol. 31, no. 1, 2014, doi: 10.1061/(ASCE)ME.1943-5479.0000315.
- [122] Y. Wang, X. Wang, J. Wang, P. Yung, and G. Jun, “Engagement of facilities management in design stage through BIM: Framework and a case study,” *Advances in Civil Engineering*, vol. 2013, 2013, doi: 10.1155/2013/189105.
- [123] M. Rosvall and C. T. Bergstrom, “Mapping change in large networks,” *PLOS ONE*, vol. 5, no. 1, pp. 1–7, Jan 2010, doi: 10.1371/journal.pone.0008694. [Online]. Available: <https://doi.org/10.1371/journal.pone.0008694>
- [124] R. C. Lupton and J. M. Allwood, “Hybrid sankey diagrams: Visual analysis of multidimensional data for understanding resource use,” *Resources, Conservation and Recycling*, vol. 124, pp. 141–151, 2017, doi: 10.1016/j.resconrec.2017.05.002.
- [125] C. Li, C. McMahon, and L. Newnes, “Annotation in design processes: Classification of approaches,” in *Proceedings of the International Conference on Engineering Design*, vol. 8, Stanford, CA, 2009, pp. 8–251 – 8–262. [Online]. Available: <https://www.designsociety.org/download-publication/28818/Annotation+in+Design+Processes+%3A+Classification+of+Approaches>
- [126] R. Borgo, J. Kehrer, D. H. Chung, E. Maguire, R. S. Laramée, H. Hauser, M. Ward, and M. Chen, “Glyph-based visualization: Foundations, design guidelines, techniques and applications.” in *Proceedings of the Eurographics - State of the Art Reports*, 2013, pp. 39–63, doi: 10.2312/conf/EG2013/stars/039-063.
- [127] J. Fuchs, P. Isenberg, A. Bezerianos, and D. Keim, “A systematic review of experimental studies on data glyphs,” *IEEE Transactions on Visualization and Computer Graphics*, vol. 23, no. 7, pp. 1863–1879, 2017, doi: 10.1109/TVCG.2016.2549018.
- [128] M. Tory and T. Moller, “Human factors in visualization research,” *IEEE Transactions on Visualization and Computer Graphics*, vol. 10, no. 1, pp. 72–84, 2004, doi: 10.1109/TVCG.2004.1260759.
- [129] L. Bartram, B. Cheung, and M. Stone, “The effect of colour and transparency on the perception of overlaid grids,” *IEEE Transactions on Visualization and Computer Graphics*, vol. 17, no. 12, pp. 1942–1948, 2011, doi: 10.1109/TVCG.2011.242.
- [130] I. Herman, G. Melançon, and M. S. Marshall, “Graph visualization and navigation in information visualization: A survey,” *IEEE Transactions on Visualization and Computer Graphics*, vol. 6, no. 1, pp. 24–43, 2000, doi: 10.1109/2945.841119.
- [131] P. O. Kristensson, N. Dahlback, D. Anundi, M. Bjornstad, H. Gillberg, J. Haraldsson, I. Martensson, M. Nordvall, and J. Stahl, “An evaluation of space time cube representation of spatiotemporal patterns,” *IEEE Transactions on Visualization and Computer Graphics*, vol. 15, no. 4, pp. 696–702, July 2009, doi: 10.1109/TVCG.2008.194.
- [132] C. Healey and J. Enns, “Attention and visual memory in visualization and computer graphics,” *IEEE Transactions on Visualization and Computer Graphics*, vol. 18, no. 7, pp. 1170–1188, 2012, doi: 10.1109/TVCG.2011.127.
- [133] W. Javed, B. McDonnell, and N. Elmquist, “Graphical perception of multiple time series,” *IEEE Transactions on Visualization and Computer Graphics*, vol. 16, no. 6, pp. 927–934, Nov 2010, doi: 10.1109/TVCG.2010.162.
- [134] J. Talbot, V. Setlur, and A. Anand, “Four experiments on the perception of bar charts,” *IEEE Transactions on Visualization and Computer Graphics*, vol. 20, no. 12, pp. 2152–2160, 2014, doi: 10.1109/TVCG.2014.2346320.
- [135] A. Garg and S. Deshmukh, “Maintenance management: literature review and directions,” *Journal of Quality in Maintenance Engineering*, vol. 12, no. 3, pp. 205–238, 2006, doi: 10.1108/13552510610685075.
- [136] D. Keim, “Information visualization and visual data mining,” *IEEE Transactions on Visualization and Computer Graphics*, vol. 8, no. 1, pp. 1–8, 2002, doi: 10.1109/2945.981847.
- [137] D. Keim, F. Mansmann, J. Schneidewind, and H. Ziegler, “Challenges in visual data analysis,” in *Proceedings of the International Conference on Information Visualization*. IEEE, 2006, pp. 9–16, doi: 10.1109/IV.2006.31.
- [138] S. C. Few, *Now You See It: Simple Visualization Techniques for Quantitative Analysis*. Berkeley, CA: Analytics Press, 2009.
- [139] R. P. Haining, *Spatial Data Analysis: Theory and Practice*. Cambridge University Press, 2003.
- [140] M.-J. Kraak and F. J. Ormeling, *Cartography: Visualization of Spatial Data*. Routledge, 2013.
- [141] C. North and B. Shneiderman, “Snap-together visualization: can users construct and operate coordinated visualizations?” *International Journal of Human-Computer Studies*, vol. 53, no. 5, pp. 715–739, 2000, doi: 10.1006/ijhc.2000.0418.
- [142] M. Q. Wang Baldonado, A. Woodruff, and A. Kuchinsky, “Guidelines for using multiple views in information visualization,” in *Proceedings of the Working Conference on Advanced Visual Interfaces*. ACM, 2000, pp. 110–119, doi: 10.1145/345513.345271.
- [143] J. C. Roberts, “State of the art: Coordinated & multiple views in exploratory visualization,” in *Proceedings of the International Conference on Coordinated and Multiple Views in Exploratory Visualization*. IEEE, 2007, pp. 61–71, doi: 10.1109/CMV.2007.20.
- [144] D. Keefe, M. Ewert, W. Ribarsky, and R. Chang, “Interactive coordinated multiple-view visualization of biomechanical motion data,” *IEEE Transactions on Visualization and Computer Graphics*, vol. 15, no. 6, pp. 1383–1390, 2009, doi: 10.1109/TVCG.2009.152.
- [145] P. C. Wong and R. D. Bergeron, “30 years of multidimensional multivariate visualization,” *Scientific Visualization*, vol. 2, pp. 3–33, 1994.
- [146] G. Nielson, H. Hagen, and H. Muller, *Scientific Visualization*. New Jersey, USA: IEEE, 1997.
- [147] K. W. Brodli, L. Carpenter, R. Earnshaw, J. Gallop, R. Hubbard, A. Mumford, C. Osland, and P. Quarendon, *Scientific Visualization: Techniques and Applications*. Berlin: Springer Science & Business Media, 2012.

- [148] M. Harrower and C. A. Brewer, "Colorbrewer.org: an online tool for selecting colour schemes for maps," *The Cartographic Journal*, vol. 40, no. 1, pp. 27–37, 2003, doi: 10.1179/000870403235002042.
- [149] S. Silva, B. S. Santos, and J. Madeira, "Using color in visualization: A survey," *Computers & Graphics*, vol. 35, no. 2, pp. 320–333, 2011, doi: 10.1016/j.cag.2010.11.015.
- [150] L. Zhou and C. D. Hansen, "A survey of colormaps in visualization," *IEEE Transactions on Visualization and Computer Graphics*, vol. 22, no. 8, pp. 2051–2069, 2016, doi: 10.1109/TVCG.2015.2489649.
- [151] L. Bartram and C. Ware, "Filtering and brushing with motion," *Information Visualization*, vol. 1, no. 1, pp. 66–79, 2002, doi: 10.1057/palgrave.ivs.9500005.
- [152] J. Heer and G. Robertson, "Animated transitions in statistical data graphics," *IEEE Transactions on Visualization and Computer Graphics*, vol. 13, no. 6, pp. 1240–1247, 2007, doi: 10.1109/TVCG.2007.70539.
- [153] M. Shanmugasundaram, P. Irani, and C. Gutwin, "Can smooth view transitions facilitate perceptual constancy in node-link diagrams?" in *Proceedings of Graphics Interface*. ACM, 2007, pp. 71–78, doi: 10.1145/1268517.1268531.
- [154] P. Dragicic, A. Bezerianos, W. Javed, N. Elmquist, and J.-D. Fekete, "Temporal distortion for animated transitions," in *Proceedings of the ACM Conference on Human Factors in Computing Systems*. ACM, 2011, pp. 2009–2018, doi: 10.1145/1978942.1979233.
- [155] N. Elmquist and P. Tsigas, "A taxonomy of 3D occlusion management for visualization," *IEEE Transactions on Visualization and Computer Graphics*, vol. 14, no. 5, pp. 1095–1109, 2008, doi: 10.1109/TVCG.2008.59.
- [156] W. Li, M. Agrawala, B. Curless, and D. Salesin, "Automated generation of interactive 3D exploded view diagrams," *ACM Transactions on Graphics*, vol. 27, no. 3, p. 101, 2008, doi: 10.1145/1360612.1360700.
- [157] G. Ellis and A. Dix, "A taxonomy of clutter reduction for information visualisation," *IEEE Transactions on Visualization and Computer Graphics*, vol. 13, no. 6, pp. 1216–1223, 2007.
- [158] N. Elmquist and J.-D. Fekete, "Hierarchical aggregation for information visualization: Overview, techniques, and design guidelines," *IEEE Transactions on Visualization and Computer Graphics*, vol. 16, no. 3, pp. 439–454, 2010, doi: 10.1109/TVCG.2009.84.
- [159] A. Semmo, M. Trapp, J. E. Kyprianidis, and J. Döllner, "Interactive visualization of generalized virtual 3D city models using level-of-abstraction transitions," *Computer Graphics Forum*, vol. 31, no. 3pt1, pp. 885–894, 2012, doi: 10.1111/j.1467-8659.2012.03081.x.
- [160] C. Tominski, S. Gladisch, U. Kister, R. Dachselt, and H. Schumann, "Interactive lenses for visualization: An extended survey," *Computer Graphics Forum*, vol. 36, no. 6, pp. 173–200, 2017, doi: 10.1111/cgf.12871.
- [161] T. Butkiewicz, W. Dou, Z. Wartell, W. Ribarsky, and R. Chang, "Multi-focused geospatial analysis using probes," *IEEE Transactions on Visualization and Computer Graphics*, vol. 14, no. 6, pp. 1165–1172, 2008, doi: 10.1109/TVCG.2008.149.
- [162] J. Sorger, T. Ortner, C. Luksch, M. Schwärzler, E. Gröller, and H. Piringer, "LiteVis: integrated visualization for simulation-based decision support in lighting design," *IEEE Transactions on Visualization and Computer Graphics*, vol. 22, no. 1, pp. 290–299, 2016, doi: 10.1109/TVCG.2015.2468011.
- [163] E. Hailemariam, M. Glueck, R. Attar, A. Tessier, J. McCrae, and A. Khan, "Toward a unified representation system of performance-related data," in *Proceedings of the IBPSA-Canada eSim Conference*, 2010, pp. 117–124. [Online]. Available: <https://www.autodeskresearch.com/publications/unifiedrep>
- [164] R. Attar, E. Hailemariam, S. Breslav, A. Khan, and G. Kurtenbach, "Sensor-enabled cubicles for occupant-centric capture of building performance data," *ASHRAE Transactions*, vol. 117, no. 2, 2011. [Online]. Available: <https://www.autodeskresearch.com/publications/sensecube>
- [165] J. S. Yi, Y. ah Kang, and J. Stasko, "Toward a deeper understanding of the role of interaction in information visualization," *IEEE Transactions on Visualization and Computer Graphics*, vol. 13, no. 6, pp. 1224–1231, 2007.
- [166] J. Jankowski and M. Hachet, "A survey of interaction techniques for interactive 3d environments," in *Proceedings of the Eurographics - State of the Art Reports*, 2013, doi: 10.2312/conf/EG2013/stars/065-093.
- [167] I. Viola, A. Kanitsar, and M. E. Groller, "Importance-driven feature enhancement in volume visualization," *IEEE Transactions on Visualization and Computer Graphics*, vol. 11, no. 4, pp. 408–418, 2005, doi: 10.1109/TVCG.2005.62.
- [168] C. Stolte, D. Tang, and P. Hanrahan, "Polaris: A system for query, analysis, and visualization of multidimensional relational databases," *IEEE Transactions on Visualization and Computer Graphics*, vol. 8, no. 1, pp. 52–65, 2002, doi: 10.1145/1400214.1400234.
- [169] M. F. De Oliveira and H. Levkowitz, "From visual data exploration to visual data mining: a survey," *IEEE Transactions on Visualization and Computer Graphics*, vol. 9, no. 3, pp. 378–394, 2003, doi: 10.1109/TVCG.2003.1207445.
- [170] J. Kehrer and H. Hauser, "Visualization and visual analysis of multifaceted scientific data: A survey," *IEEE Transactions on Visualization and Computer Graphics*, vol. 19, no. 3, pp. 495–513, 2013, doi: 10.1109/TVCG.2012.110.
- [171] G. D. Battista, P. Eades, R. Tamassia, and I. G. Tollis, *Graph Drawing: Algorithms for the Visualization of Graphs*. Upper Saddle River, NJ, USA: Prentice Hall PTR, 1998.
- [172] M. Kaufmann and D. Wagner, *Drawing Graphs: Methods and Models*. London, UK: Springer, 2003, vol. 2025, doi: 10.1007/3-540-44969-8.
- [173] T. Von Landesberger, A. Kuijper, T. Schreck, J. Kohlhammer, J. J. van Wijk, J.-D. Fekete, and D. W. Fellner, "Visual analysis of large graphs: State-of-the-art and future research challenges," *Computer Graphics Forum*, vol. 30, no. 6, pp. 1719–1749, 2011, doi: 10.1111/j.1467-8659.2011.01898.x.
- [174] D. Holten, "Hierarchical edge bundles: Visualization of adjacency relations in hierarchical data," *IEEE Transactions on Visualization and Computer Graphics*, vol. 12, no. 5, pp. 741–748, 2006, doi: 10.1109/TVCG.2006.147.
- [175] G. M. Draper, Y. Livnat, and R. F. Riesenfeld, "A survey of radial methods for information visualization," *IEEE Transactions on Visualization and Computer Graphics*, vol. 15, no. 5, pp. 759–776, 2009, doi: 10.1109/TVCG.2009.23.
- [176] H.-J. Schulz, S. Hadlak, and H. Schumann, "The design space of implicit hierarchy visualization: A survey," *IEEE Transactions on Visualization and Computer Graphics*, vol. 17, no. 4, pp. 393–411, 2011, doi: 10.1109/TVCG.2010.79.
- [177] C. Eastman, Y.-S. Jeong, R. Sacks, and I. Kaner, "Exchange model and exchange object concepts for implementation of national BIM standards," *Journal of Computing in Civil Engineering*, vol. 24, no. 1, pp. 25–34, 2009, doi: 10.1061/(ASCE)0887-3801(2010)24:1(25).
- [178] D. Guo, J. Chen, A. M. MacEachren, and K. Liao, "A visualization system for space-time and multivariate patterns (VIS-STAMP)," *IEEE Transactions on Visualization and Computer Graphics*, vol. 12, no. 6, pp. 1461–1474, 2006, doi: 10.1109/TVCG.2006.84.
- [179] N. Ferreira, J. Poco, H. T. Vo, J. Freire, and C. T. Silva, "Visual exploration of big spatio-temporal urban data: A study of new york city taxi trips," *IEEE Transactions on Visualization and Computer Graphics*, vol. 19, no. 12, pp. 2149–2158, 2013, doi: 10.1109/TVCG.2013.226.
- [180] J. Jo, J. Huh, J. Park, B. Kim, and J. Seo, "LiveGantt: Interactively visualizing a large manufacturing schedule," *IEEE Transactions on Visualization and Computer Graphics*, vol. 20, no. 12, pp. 2329–2338, 2014, doi: 10.1109/TVCG.2014.2346454.
- [181] G. Kumar and M. Garland, "Visual exploration of complex time-varying graphs," *IEEE Transactions on Visualization and Computer Graphics*, vol. 5, pp. 805–812, 2006, doi: 10.1109/TVCG.2006.193.
- [182] P. Xu, H. Mei, L. Ren, and W. Chen, "Vidz: Visual diagnostics of assembly line performance in smart factories," *IEEE Transactions on Visualization and Computer Graphics*, vol. 23, no. 1, pp. 291–300, 2017, doi: 10.1109/TVCG.2016.2598664.
- [183] C. D. Stolper, A. Perer, and D. Gotz, "Progressive visual analytics: User-driven visual exploration of in-progress analytics," *IEEE Transactions on Visualization and Computer Graphics*, vol. 20, no. 12, pp. 1653–1662, 2014, doi: 10.1109/TVCG.2014.2346574.
- [184] K. Wongsuphasawat, D. Moritz, A. Anand, J. Mackinlay, B. Howe, and J. Heer, "Voyager: Exploratory analysis via faceted browsing of visualization recommendations," *IEEE Transactions on Visualization and Computer Graphics*, no. 1, pp. 1–1, 2016, doi: 10.1109/TVCG.2015.2467191.
- [185] D. Ceneda, T. Gschwandtner, T. May, S. Miksch, H.-J. Schulz, M. Streit, and C. Tominski, "Characterizing guidance in visual analytics," *IEEE Transactions on Visualization and Computer Graphics*, vol. 23, no. 1, pp. 111–120, 2017, doi: 10.1109/TVCG.2016.2598468.

- [186] H. Qu, H. Wang, W. Cui, Y. Wu, and M.-Y. Chan, "Focus+ context route zooming and information overlay in 3D urban environments," *IEEE Transactions on Visualization and Computer Graphics*, vol. 15, no. 6, pp. 1547–1554, 2009, doi: 10.1109/TVCG.2009.144.
- [187] A. Cockburn, A. Karlson, and B. B. Bederson, "A review of overview+ detail, zooming, and focus+ context interfaces," *ACM Computing Surveys*, vol. 41, no. 1, p. 2, 2009, doi: 10.1145/1456650.1456652.
- [188] C. Pindat, E. Pietriga, O. Chapuis, and C. Puech, "Drilling into complex 3D models with gimlenses," in *Proceedings of the ACM Symposium on Virtual Reality Software and Technology*. ACM, 2013, pp. 223–230, doi: 10.1145/2503713.2503714.
- [189] P. S. Dunston, L. L. Arns, J. D. Mcglothlin, G. C. Lasker, and A. G. Kushner, "An immersive virtual reality mock-up for design review of hospital patient rooms," in *Collaborative Design in Virtual Environments*. Springer, 2011, pp. 167–176, doi: 10.1007/978-94-007-0605-7_15.
- [190] H.-L. Chi, S.-C. Kang, and X. Wang, "Research trends and opportunities of augmented reality applications in architecture, engineering, and construction," *Automation in Construction*, vol. 33, pp. 116–122, 2013, doi: 10.1016/j.autcon.2012.12.017.
- [191] X. Wang, M. J. Kim, P. E. Love, and S.-C. Kang, "Augmented reality in built environment: Classification and implications for future research," *Automation in Construction*, vol. 32, pp. 1–13, 2013, doi: 10.1016/j.autcon.2012.11.021.
- [192] T. Chandler, M. Cordeil, T. Czauderna, T. Dwyer, J. Glowacki, C. Goncu, M. Klapperstueck, K. Klein, K. Marriott, F. Schreiber et al., "Immersive analytics," in *Proceedings of the International Symposium on Big Data Visual Analytics*. IEEE, 2015, pp. 1–8, doi: 10.1145/2992154.2996365.
- [193] R. Sicat, J. Li, J. Choi, M. Cordeil, W.-K. Jeong, B. Bach, and H. Pfister, "DXR: A toolkit for building immersive data visualizations," *IEEE Transactions on Visualization and Computer Graphics*, 2018, doi: 10.1109/TVCG.2018.2865152.
- [194] Centre for Digital Built Britain, "Open funding calls," 2018, last accessed 2018-12-13. [Online]. Available: <https://www.cdbb.cam.ac.uk/CDBBResearchBridgehead/FundingCalls>
- [195] Autodesk Research, "Research opportunities," 2018, last accessed 2018-12-13. [Online]. Available: <https://www.autodeskresearch.com/opportunities>
- [196] M. Laakso, A. Kiviniemi et al., "The IFC standard: A review of history, development, and standardization, information technology," *Journal of Information Technology in Construction*, vol. 17, no. 9, pp. 134–161, 2012.
- [197] R. Attar, V. Prabhu, M. Glueck, and A. Khan, "210 king street: a dataset for integrated performance assessment," in *Proceedings of the Spring Simulation Multiconference*. Society for Computer Simulation International, 2010, p. 177, doi: 10.1145/1878537.1878722.
- [198] Symposium on Simulation for Architecture and Urban Design, "Open datasets," 2018, last accessed 2018-12-13. [Online]. Available: <http://www.simaud.org/datasets/>
- [199] National Institute of Building Sciences, "Common building information model files and tools," 2018, last accessed 2018-12-13. [Online]. Available: https://www.nibs.org/page/bsa_commonbimfiles
- [200] Vectorworks, "Common building information model files and tools," 2018, last accessed 2018-12-13. [Online]. Available: <https://www.vectorworks.net/bim/projects/140>
- [201] Karlsruhe Institute of Technology, "Kit IFC examples," 2018, last accessed 2018-12-13. [Online]. Available: http://www.ifcwiki.org/index.php?title=KIT_IFC_Examples
- [202] University of Auckland, "Open IFC model repository," 2018, last accessed 2018-12-13. [Online]. Available: <https://openifcmodel.cs.auckland.ac.nz/Model>




Paulo Ivson is a technical consultant at Tecgraf Institute, PUC-Rio. For the last 10 years, he has coordinated several R&D projects with partners in the Oil & Gas, AEC/FM and Manufacturing industries. He is a computer engineer with PhD and MSc in computer graphics. His current research explores synergies between data science, visualization, real-time rendering, computer-aided design, building information modeling, and lean production.



André Moreira is currently working toward his Ph.D. degree at the Pontifical Catholic University of Rio de Janeiro (PUC-Rio) in the subject of cloud rendering of massive CAD models. He is also a member of Tecgraf Institute (PUC-Rio) working with R&D projects for oil and gas industry. His fields of interest are computer graphics, computer vision, machine learning, and data mining.



Francisco Queiroz received a BA degree in Social Communication from PUC-Rio, an MA degree in Digital Games Design from the University for the Creative Arts, and a PhD in Design from PUC-Rio – where he worked as a lecturer from 2007 to 2018 at the Department of Arts and Design. Francisco also worked as design consultant for the Tecgraf Institute. He is currently a lecturer in Digital, Graphic and Interactive Design at the University of Leeds, UK, and his research interests include a broad range of digital and interactive design fields and application such as gamification, immersive technologies, and scientific software.



Wallas Santos holds a Ph.D. in informatics from PUC-Rio. In his thesis, he investigated procedural generation techniques applied to massive CAD scenes for model description and interactive visualization. Currently, he is a Research Software Engineer at IBM Research working with AI applied in the natural resources domain. His main research interest includes AI with emphasis on knowledge representation and multimodal reasoning, real-time rendering, and scientific information visualization.



Waldemar Celes is an associate professor of computer science at PUC-Rio, the Pontifical Catholic University of Rio de Janeiro, Brazil, and an associate researcher at Tecgraf/PUC-Rio Institute, where he supervises projects on scientific visualization and numerical simulation in cooperation with the industry. He is a co-author of the Lua programming language.