White Rose Research Online

eprints@whiterose.ac.uk
https://eprints.whiterose.ac.uk
Universities of Leeds, Sheffield and York

Deposited via The University of Leeds.

White Rose Research Online URL for this paper:
https://eprints.whiterose.ac.uk/id/eprint/175627/

Version: Accepted Version

Article:
Xu, Y, Gao, C, Wang, Z et al. (2022) Newton method for computing the adaptation coefficient in the CIE system of mesopic photometry. Color Research & Application, 47 (1). pp. 49-54. ISSN: 0361-2317

https://doi.org/10.1002/col.22703

© 2021 Wiley Periodicals LLC. This is the peer reviewed version of the following article: Xu, Y, Gao, C, Wang, Z et al. (3 more authors) (2022) Newton method for computing the adaptation coefficient in the CIE system of mesopic photometry. Color Research & Application, 47 (1). pp. 49-54. ISSN 0361-2317, which has been published in final form at https://doi.org/10.1002/col.22703. This article may be used for non-commercial purposes in accordance with Wiley Terms and Conditions for Use of Self-Archived Versions. This article may not be enhanced, enriched or otherwise transformed into a derivative work, without express permission from Wiley or by statutory rights under applicable legislation. Copyright notices must not be removed, obscured or modified. The article must be linked to Wiley's version of record on Wiley Online Library and any embedding, framing or otherwise making available the article or pages thereof by third parties from platforms, services and websites other than Wiley Online Library must be prohibited. Uploaded in accordance with the publisher's self-archiving policy.

Reuse
Items deposited in White Rose Research Online are protected by copyright, with all rights reserved unless indicated otherwise. They may be downloaded and/or printed for private study, or other acts as permitted by national copyright laws. The publisher or other rights holders may allow further reproduction and re-use of the full text version. This is indicated by the licence information on the White Rose Research Online record for the item.

Takedown
If you consider content in White Rose Research Online to be in breach of UK law, please notify us by emailing eprints@whiterose.ac.uk including the URL of the record and the reason for the withdrawal request.

UNIVERSITY OF LEEDS
University of Sheffield
UNIVERSITY of York

Newton method for computing the adaptation coefficient in the CIE system of mesopic photometry

Yang Xu[1], Cheng Gao[1,2], Zhifeng Wang[1], Kaida Xiao[3], Michael Pointer[3], Changjun Li[1]

[1] School of Computer and Software Engineering, University of Science and Technology Liaoning, Anshan 114051, China

[2] School of Electronics and Information Engineering, University of Science and Technology Liaoning, Anshan 114051, China

[3] School of Design, University of Leeds, Leeds, UK

Correspondence

Changjun Li, School of Computer and Software Engineering, University of Science and Technology Liaoning, Anshan, 114051, China. Email: cjliustl@sina.com

Abstract

Gao et al. (Opt. Express 25(15), 18365-18377 (2017)) found that the Newton method may not converge for certain combinations of the photopic luminance and the ratio of scotopic and photopic luminance for computing the adaptation coefficient $\boldsymbol{m}$, for the CIE MES2 system. Hence, they proposed to use the Bisection-Newton method. In this short note we propose the Newton method with a new initial guess for computing $\boldsymbol{m}$. Numerical simulation has shown the proposed method not only converges, but also converges faster than the Bisection-Newton method.

KEYWORDS

Mesopic vision, MES2 system, Photometry, Newton method, Fixed-point iteration

1. INTRODUCTION

The CIE spectral luminous efficiency functions $V(\lambda)$ for photopic and $V'(\lambda)$ for scotopic vision were standardized in 1924 and 1951 respectively. The wavelength dependent factors $V(\lambda)$ and $V'(\lambda)$ convert the radiant energy measures to luminance or photometric measures. Thus, the photopic luminance (denoted by L_p) and scotopic luminance (L_s) for a given spectral radiance $E(\lambda)$ (in W m^{-2} sr^{-1}) are defined by:

$$L_p = 683\int_{380}^{780} V(\lambda)E(\lambda)d\lambda,\ \ L_s = 1699\int_{380}^{780} V'(\lambda)E(\lambda)d\lambda, \tag{1}$$

Note that the constant in Eq. (1), 1699, was originally given as 1700 [1]. In order to be consistent with the CIE MES2 system (see the constant, *C*, in Eqs. (5) and (6) below) the value 1700 is now replaced by 1699.

In 2010, CIE[1] recommended the MES2 system for computing the mesopic luminance L_{mes} (in cd m^{-2}). Firstly, the luminance efficient function $V_{mes}(\lambda)$ for mesopic vision with L_s and L_p satisfying[2]:

$$L_s > 0.005 \text{ cd m}^{-2} \quad \text{and} \quad L_p < 5.0 \text{ cd m}^{-2}. \tag{2}$$

is defined as

$$M(\boldsymbol{m})V_{mes} = \boldsymbol{m}V(\lambda) + (1-\boldsymbol{m})V'(\lambda), \tag{3}$$

where $\boldsymbol{m}$ is a coefficient of adaptation in the range $0 \le \boldsymbol{m} \le 1$, $M(\boldsymbol{m})$ is a normalization constant such that $V_{mes}(\lambda)$ attains a maximum value of 1. Hence the mesopic luminance L_{mes} (in cd m^{-2}), for a given light source with a spectral radiance $E(\lambda)$ (in W m^{-2} sr^{-1}), is given by

$$L_{mes} = \frac{683}{V_{mes}(\lambda_0)} \int_{380}^{780} V_{mes}(\lambda)E(\lambda)d\lambda, \tag{4}$$

where $\lambda_0 = 555$ nm. It can also be verified that

$$L_{mes}(\boldsymbol{m}) = \frac{\boldsymbol{m}L_p + (1-\boldsymbol{m})L_s C}{\boldsymbol{m} + (1-\boldsymbol{m})C}. \tag{5}$$

with $C = V'(\lambda_0) = 683/1699$. However, to compute the mesopic luminance using Equation (4) or (5), the coefficient of adaptation $\boldsymbol{m}$ in Equation (3) must first be computed. If we let

$$F(\boldsymbol{m}) = \frac{\boldsymbol{m}L_p + (1-\boldsymbol{m})L_s C}{\boldsymbol{m} + (1-\boldsymbol{m})C} - 10^{\frac{\boldsymbol{m}-a}{b}}, \tag{6}$$

with

$$a = 0.7670, \qquad b = 0.334. \tag{7}$$

then the coefficient of adaptation $\boldsymbol{m}$, is the solution of the equation $F(\boldsymbol{m}) = 0$. Note that Gao et al.[2] showed that the problem $F(\boldsymbol{m}) = 0$ may have no solution, and may have more than one solution, which is certainly not desirable. Therefore, they suggested that a and b defined by Equation (7) should be redefined by:

$$a = 1 - \frac{log_{10}5}{3}, \qquad b = \frac{1}{3}. \tag{8}$$

With the definition of a and b using Equation (8), Gao et al.[2] proved the problem $F(\boldsymbol{m}) = 0$ has a unique solution. So, from now on, with the CIE MES2 system, we assume the parameters a and b as defined using Equation (8).

Let

$$g(\boldsymbol{m}) = a + b\ log_{10}\left[L_{mes}(\boldsymbol{m})\right], \tag{9}$$

where $L_{mes}(\boldsymbol{m})$ is defined by Equation (5). Thus, $F(\boldsymbol{m}) = 0$ is equivalent to $\boldsymbol{m} = g(\boldsymbol{m})$. Therefore, the coefficient of adaptation $\boldsymbol{m}$ is a fixed point of the function $g(\boldsymbol{m})$. To compute the value of $\boldsymbol{m}$, satisfying $\boldsymbol{m} = g(\boldsymbol{m})$, the CIE[1] has recommended the fixed-point iteration method[3]

$$\boldsymbol{m}_{n+1} = g(\boldsymbol{m}_n), \qquad \text{for} \qquad n = 0,1,\ldots \tag{10}$$

with $\boldsymbol{m}_0 = 0.5$, until 'convergence' or the inequality (11) defined below is achieved.

$$\left|\boldsymbol{m}_{n+1} - \boldsymbol{m}_n\right| \le \varepsilon. \tag{11}$$

ε in the inequality Eq. (11) is a predefined small tolerance. Therefore, when the inequality Eq. (11) is achieved, the value of $\boldsymbol{m}_{n+1}$ is accepted as the solution of the equation $\boldsymbol{m} = g(\boldsymbol{m})$.

It is clear that the function g, or the fixed-point iteration method, is dependent on both, L_p and the ratio L_s / L_p. In this paper, the ratio L_s / L_p will be denoted in an abbreviated form as S/P, i.e.,

$$S/P = L_s / L_p. \tag{12}$$

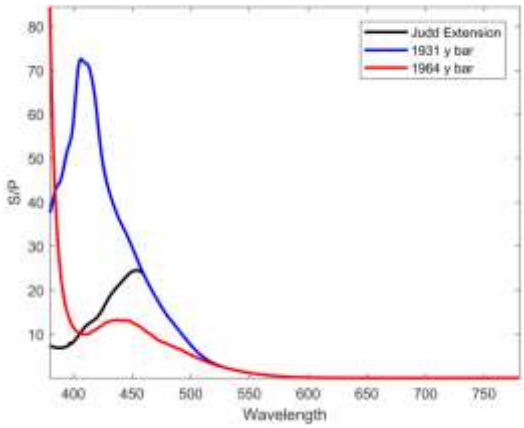

FIGURE 1 The S/P ratios for monochromatic lights between 380 nm and 780 nm when $V(\lambda)$ is chosen as the Judd extension, CIE 1931 $\bar{y}(\lambda)$, and CIE 1964 $\bar{y}_{10}(\lambda)$ respectively.

Recently, Shpak et al.[4] and Gao et al.[2] have reported that the convergence of the fixed-point iteration method depends on the ratio S/P, and for large values of S/P the method does not converge. Shpak et al.[4] suspected that, to achieve convergence, the ratio S/P cannot be larger than 17. Let

$$C_1 = \frac{Cb}{log\ 10} \approx 0.0582, \quad \text{and} \quad C_2 = \frac{1+C_1}{C_1} \approx 18.1834. \tag{13}$$

Gao et al.[5] showed that the fixed-point iteration method (Equation (10)) is convergent for $S/P < C_2$, whenever a proper initial value $\boldsymbol{m}_0$ is chosen. They also provided a better choice for the initial guess $\boldsymbol{m}_0$. Let

$$g_0 = g(0) = a + b\ log_{10}(L_s) \quad \text{and} \quad g_1 = g(1) = a + b\ log_{10}(L_p) \tag{14}$$

The new initial value $\boldsymbol{m}_0$ is given by

$$\boldsymbol{m}_0 = \begin{cases} 0.5(g_0 + g_1) & \text{if} \quad L_s \le 5 \\ 0.5(1 + g_1) & \text{if} \quad L_s > 5 \end{cases}, \tag{15}$$

Up to now, one may ask how large can the ratio S/P be? Hung et al.[6] considered the theoretical spectral radiance of a light source as a vector with 81 components sampled from 380 nm to 780 nm at 5 nm intervals, and then investigated the maximum luminous efficiency of radiation for a certain level of color rendering index and fixed correlated color temperature. Using a similar theoretical strategy, Gao et al.[2] found the ratio S/P can be greater than 50. In fact, Figure 1 shows the S/P ratios for the monochromatic light using the Judd correction $V_M(\lambda)$ [7], $\bar{y}(\lambda)$ from CIE 1931 colour matching functions (CMFs), and $\bar{y}_{10}(\lambda)$ from CIE 1964 CMFs as the spectral luminous efficiency functions

$V(\lambda)$. The S/P ratios depend on which set of $V(\lambda)$ is used. The maximum S/P ratio can be as large as 84.4 if $\bar{y}_{10}(\lambda)$ is used as $V(\lambda)$, up to 72.6 if $\bar{y}(\lambda)$ is used as $V(\lambda)$, and up to 24.5 if $V_M(\lambda)$ is used as $V(\lambda)$. Fotios and Yao[8] used $\bar{y}_{10}(\lambda)$ as $V(\lambda)$ for computing the S/P ratio.

From the above discussion, the S/P ratio can be larger than C_2 defined by Equation (13), hence the CIE recommended fixed point iteration cannot be used when S/P is larger than C_2. Gao et al.[2] considered the Newton method:

$$\boldsymbol{m}_{n+1} = \boldsymbol{m}_n - \frac{F(\boldsymbol{m}_n)}{\frac{dF}{dm}(\boldsymbol{m}_n)}, \text{ for } n = 0,1,\ldots \text{with } \boldsymbol{m}_0 = 0.5 \tag{16}$$

for solving $F(\boldsymbol{m}) = 0$ for the adaptation coefficient $\boldsymbol{m}$. Here, $\frac{dF}{dm}(\boldsymbol{m}_n)$ is the derivative of $F(\boldsymbol{m})$ evaluated at $\boldsymbol{m}_n$. As is well-known, the convergence of the Newton method[3] depends on the initial guess $\boldsymbol{m}_0$. If $\boldsymbol{m}_0$ is in the convergence interval, the Newton method converges very fast. However, if $\boldsymbol{m}_0$ is not a good choice, the Newton method may diverge. Gao et al.[2] found that the Newton method does not converges for certain S/P ratios. Hence, they used the Bisection method[3] first to generate a sequence $\boldsymbol{m}_n$, and in a later stage, the Newton method is used for fast convergence, resulting in the Bisection-Newton method[2] for computing the adaptation coefficient $\boldsymbol{m}$ for the CIE MES2 system.

2. The Proposed Newton Method

The Bisection-Newton method[2] was shown to be convergent. However, it is more complicated than the Newton method and it has a low convergence rate during the usage of the Bisection method. In this paper we use the initial guess $\boldsymbol{m}_0$ defined by Equation (15) rather than using the Bisection method to get a better initial guess for the Newton method. The full procedure for the proposed Newton method is the following:

$$\boldsymbol{m}_{n+1} = \boldsymbol{m}_n - \frac{F(\boldsymbol{m}_n)}{\frac{dF}{dm}(\boldsymbol{m}_n)}, \text{ for } n = 0,1,\ldots \text{with } \boldsymbol{m}_0 = \begin{cases} 0.5(g_0 + g_1) & \text{if } L_s \le 5 \\ 0.5(1 + g_1) & \text{if } L_s > 5 \end{cases}, \tag{17}$$

Note that $\frac{dF}{dm}(\boldsymbol{m}_n)$, the derivative of the function $F(\boldsymbol{m})$ in Eq. (17) is well defined and is given by Eq. (18):

$$\frac{dF}{dm} = \frac{\left[L_p C\left(1 - L_s / L_p\right)\right]}{\left[m + (1-m)C\right]^2} - \frac{1}{b}\ln(10)10^{(m-a)/b} \tag{18}$$

It is expected that the above Newton method converges for all S/P ratios and converges faster than the Bisection-Newton method.

3. Performance of The Proposed Newton Method

In order to test our proposed method numerically, we have taken selected values for L_p from 0.1 to 4.9, namely 0.1, 0.3, 0.5, 0.7, ..., 4.9, that is a total number of 25 values for L_p. Similarly, we have taken selected values for the ratio S/P from 0.1 to 0.95, namely 0.1, 0.15, 0.2, 0.25, ..., 0.95, and from 1 to 85 at 1 unit steps, giving a total number of 61 values for the ratio S/P. Therefore, we have considered $1525 = 25 \times 61$ cases to test the performance of the proposed Newton method defined by Equation (17), together with the

Newton method defined by Equation (16) considered by Gao et al.[2], and the Bisection-Newton method[2]. We have fixed tolerance $\varepsilon = 10^{-5}$ for the convergence, and have limited the number of iterations to 200, in order to avoid the program running for a long time.

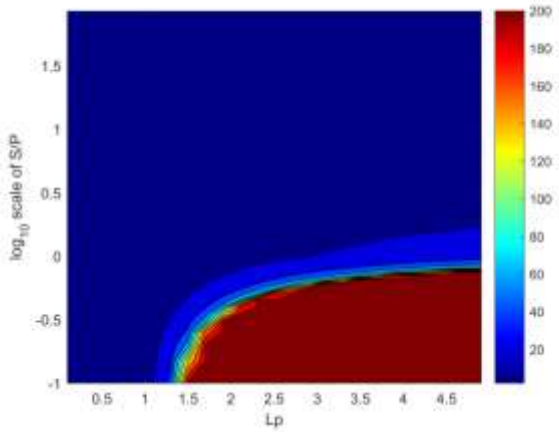

FIGURE 2 Contours plots with the number of iterations for the convergence of the Newton method defined Equation (16) considered by Gao et al.[2], as a function of S/P and L_p. Different colors represent different numbers of iterations needed, as shown on the vertical bar on the right.

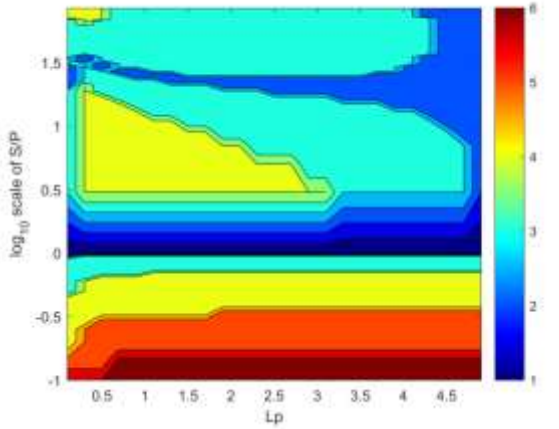

FIGURE 3 Contours plots showing the number of iterations for the convergence of the proposed Newton method defined by Equation (17), as a function of S/P and L_p. Different colors represent different numbers of iterations needed, as shown by the vertical bar on the right.

Figures 2 and 3 show the contour plots of the Newton method defined Equation (16) and the proposed Newton method defined by Equation (17) in terms of the number of iterations used for each of the 1525 combinations of the photopic luminance L_p and ratio S/P. A decimal logarithmic scale was used in Figures 2 and 3 for S/P, to show more detail of the performance for smaller S/P values without discarding potential higher theoretical values. The numbers in the vertical colour bars on the right of each of the Figures 2 and 3 indicate the number of iterations needed for convergence. It can be seen, that for the combination of L_p and S/P in the lower-right red region of Figure 2, the Newton method defined Equation (16) did not converge after 200 iterations. And it can be seen from Figure 3 that the proposed Newton method defined Equation (17) converges for all the combinations of L_p and S/P and the maximum number for the convergence of the proposed Newton method is 6. Figure 4 shows the contour plot for comparing the proposed Newton method with the

Bisection-Newton method[2] in terms of the difference between the numbers of iterations needed for each of the two methods. The combination of L_p and S/P in blue region shows the number of iterations needed for the proposed Newton method is less than the number of iterations needed for the Bisection-Newton method, and the green region shows the opposite. The red region shows the two methods need the same number of iterations for the convergence. It can be seen that the area of the blue region is much larger than the area of the red region, hence in general, the proposed Newton method converges faster than the Bisection-Newton method.

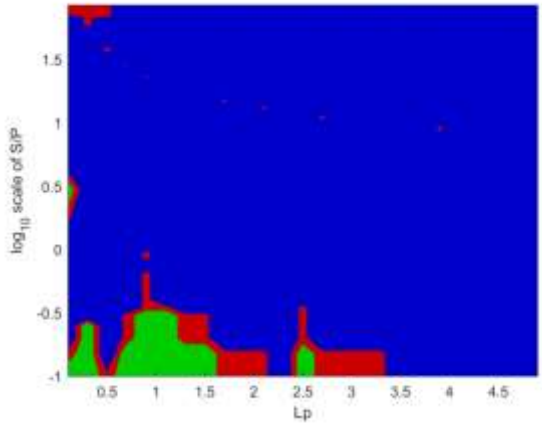

FIGURE 4 Contours plots for comparing the proposed Newton method (see Equation (17)) with the Bisection-Newton method[2] in terms of number of iterations and the combinations of S/P and L_p in the blue area show the proposed Newton method is better than the Bisection-Newton method, in the red area show equal performance for both methods and in the green area show the Bisection-Newton method is better than the proposed Newton method.

Furthermore, we also compared the proposed Newton method with the Bisection-Newton method in terms of CPU time using the 1525 samples. It was found that on average, the proposed Newton method took 61 percent of the CPU time needed for the Bisection-Newton method. Hence the proposed method is more efficient.

4. Conclusion

In conclusion, we propose the Newton method with a new initial guess for $\boldsymbol{m}_0$ defined by Equation (15). Numerical simulation has shown the proposed Newton method (see Equation (17)) converges for all the combinations sampled from the theoretical region for the photopic luminance between 0.1 and 4.9, and for the S/P ratio between 0.1 and 85. Numerical simulation has also shown the proposed Newton method converges faster than the Bisection-Newton method and the proposed Newton method took about 61 percent of the CPU time needed for the Bisection-Newton method. Hence it is recommended to use the proposed Newton method for computing the adaptation coefficient for the CIE MES2 system[1].

Funding information

National Natural Science Foundation of China (Grant numbers: 61575090, 61775169).

ORCID

Changjun Li https://orcid.org/0000-0002-9942-7690

Data Availability Statement

The data used to support the findings of this study are available from the corresponding author upon request. The data are not publicly available due to privacy restrictions.

REFERENCES

[1] CIE 191:2010. Recommended system for mesopic photometry based on visual performance. Vienna: CIE; 2010.

[2] Gao C., Xu Y., Wang Z., Melgosa M., Pointer M., Luo M. R., Xiao K., and Li C.. Improved computation of the adaptation coefficient in the CIE system of mesopic photometry. *Opt. Express*. 2017; 25(15): 18365-18377.

[3] Burden R. L. and Faires J. D.. Numerical Analysis, 9th Edition. Brooks/Cole, Cengage Learning, 2011.

[4] Shpak M., Kärhä P., and Ikonen E.. Mathematical limitations of the CIE mesopic photometry system. *Light. Res. Technol.* 2017; 49: 111-121.

[5] Gao C., Zhang X., Xu Y., Wang Z., Melgosa M., Quesada-Molina J. J., Xiao K. and Li C.. Theoretical consideration on the convergence of the fixed-point iteration method in the CIE mesopic photometry system MES2. *Opt. Express*. 2018; 26(24): 31351-31362.

[6] Hung P. C. and Tsao J. Y.. Maximum white luminous efficacy of radiation versus color rendering index and color temperature: Exact results and a useful analytic expression. *J. Disp. Technol.*. 2013; 9(6): 405-412.

[7] CIE 86:1988. CIE 1988 2 degree spectral luminous efficient functions for photopic vision. Vienna: CIE; 2010.

[8] Fotios S. and Yao Q.. The association between correlated colour temperature and scotopic/photopic ratio. *Lighting Research & Technology*. 2019; 51(5): 803-813 .

AUTHOR BIOGRAPHIES

Yang Xu is an associate professor in the School of Computer Science and Software Engineering, University of Science and Technology Liaoning, Ashan, China. She received the B.S. degree in computer science and technology from Shenyang JIANZHU University, China, 2003, the M.S. degree in computer application from University of Science and Technology Anshan in 2006 and the Ph.D degree from Northeastern University in 2012. Her research focuses on image processing, computer vision and colour science.

Cheng Gao is a research assistant in the Department of Computer Science, University of Science and Technology Liaoning. He received BS (2015), and MS (2018) degrees in software engineering from this university. His current research interests are spectrum optimization of LED, color appearance modeling, and mesopic luminance computation.

Zhifeng Wang received his B.Sc. (2001) in applied mathematics, and M.Sc. (2005) in control theory and control engineering from Shenyang University of Technology, China and Ph.D（2008） in pattern recognition and intelligent system from Shenyang Institute of Automation, Chinese Academy of Sciences. Currently, he is an associate professor in the Department of Computer Science, University of Science and

Technology Liaoning. His research focuses on image processing based on partial differential equation and color appearance model investigation and spectral reflectance reconstruction.

Kaida Xiao is an Associate Professor in the Colour and Imaging Science in the School of Design, University of Leeds, UK. His research interests are 3D colour image reproduction, 3D colour printing, 3D printing facial prostheses, medical image capture and analysis, colour appearance modelling and image quality enhancement.

Michael R. Pointer received a Ph.D. from Imperial College, London in 1972, working with David Wright. He then worked in the Research Division of Kodak Limited. After periods at the University of Westminster and the National Physical Laboratory, he is now a Visiting Professor at the University of Leeds and technical advisor to the Color Engineering Laboratory at Zhejiang University, Hangzhou, China. In 1997, he received the Fenton Medal, The Royal Photographic Society's award for services to the Society. In 2004, he received a Silver Medal from the Society of Dyers and Colourists for “contributions to color science.” He is also an Honorary Member of the Colour Group of Great Britain and was awarded the 2014 Newton Medal by the Group. He is a Fellow of The Royal Photographic Society and UK Associate Editor of the journal Color Research and Application.

Changjun Li is a Professor at the Department of Computer Science, University of Science and Technology Liaoning, Anshan, China. He received his B.Sc.(1979), M.Sc. (1982), Ph.D (1989) in computational mathematics from Peking University (China), Chinese Academy of Science, and Loughborough University (UK) respectively. His current research interests are chromatic adaptation transform, colour appearance modeling, uniform colour spaces, and computational colour constancy. Currently he is the Chair of CIE JTC10 on CIECAM16.