



UNIVERSITY OF LEEDS

This is a repository copy of *Liquid-Crystal-Based Optics for use at THz-QCL Frequencies*.

White Rose Research Online URL for this paper:

<https://eprints.whiterose.ac.uk/187229/>

Version: Presentation

Conference or Workshop Item:

Dunn, A orcid.org/0000-0002-7369-1469, Zhang, Z, Horbury, MD et al. (12 more authors) (Accepted: 2022) *Liquid-Crystal-Based Optics for use at THz-QCL Frequencies*. In: 9th International Optical Terahertz Science and Technology, 19-24 Jun 2022, Budapest, Hungary. (Unpublished)

This is an author produced version of a conference paper originally presented at the 9th International Conference on Optical Terahertz Science and Technology, Budapest, Hungary, 19-24 June 2022.

Reuse

Items deposited in White Rose Research Online are protected by copyright, with all rights reserved unless indicated otherwise. They may be downloaded and/or printed for private study, or other acts as permitted by national copyright laws. The publisher or other rights holders may allow further reproduction and re-use of the full text version. This is indicated by the licence information on the White Rose Research Online record for the item.

Takedown

If you consider content in White Rose Research Online to be in breach of UK law, please notify us by emailing eprints@whiterose.ac.uk including the URL of the record and the reason for the withdrawal request.



eprints@whiterose.ac.uk
<https://eprints.whiterose.ac.uk/>

Liquid-Crystal-Based Optics for use at THz-QCL Frequencies

Aniela Dunn¹, Zhaopeng Zhang², Michael D. Horbury³, Eleanor Nuttall³, Yingjun Han³, Mohammed Salih³, Lianhe Li³, Abigail Bond², Ehab Saleh⁴, Russell Harris⁴, Diego Pardo⁵, Brian Ellison⁵, Andrew D. Burnett¹, Helen F. Gleeson², and Alexander Valavanis³.

¹ School of Chemistry, University of Leeds, Leeds LS2 9JT, UK

² School of Physics and Astronomy, University of Leeds, Leeds LS2 9JT, UK

³ School of Electrical and Electronic Engineering, University of Leeds, Leeds LS2 9JT, UK

⁴ School of Mechanical Engineering, University of Leeds, Leeds LS2 9JT, UK

⁵ STFC Rutherford Appleton Laboratory Space Department, Didcot, OX11 0QX, UK

Terahertz-frequency (THz) radiation sources and detectors have seen considerable progress in recent years, along with their potential applications. However, development of practical THz systems is hindered by the limited availability of optical components that operate in this frequency range. Several adaptive optical devices have been proposed to modulate the amplitude and phase of THz radiation dynamically. However, few of these operate above 2.5 THz. As such, there remains a need for devices compatible with high bandwidth or narrowband high-frequency THz sources such as quantum-cascade lasers. Liquid crystal (LC) materials are widely used at optical wavelengths, and several have demonstrated birefringence at sub-to-low THz frequencies (< 2 THz). Here, we present the first controllable LC attenuators designed for operation in the 2–4 THz band and demonstrate their potential use in controlling the emission power of a 3.4-THz QCL with modulation depths in excess of 40%.

The devices fabricated for this study were based on an LC material layer enclosed within planar THz transparent cells; a commercially available nematic LC mixture, E7, was selected for this study based on prior measurements of its large birefringence from 0.2–2.0 THz ($\Delta n = 0.13$ –0.15) [1]. As most materials used in the construction of conventional visible or infrared LCDs have poor transparency at THz frequencies, fused quartz and a conductive polymer (PEDOT:PSS) were chosen for the LC windows and electrode layer respectively, with a long-chain polyimide (SE-3510) layer used to achieve monodomain alignment of the LC molecules.

THz time-domain spectroscopy was used to characterize the materials over a 0.3–8 THz bandwidth [2] at a range of bias voltages, applied across the LC layer as a 5-kHz sinusoid. A birefringence of 0.14–0.18 was determined in the 0.3–4.0-THz range, limited by a phonon at 5 THz in the fused quartz windows.

A linearly polarized, collimated beam from a 3.4-THz QCL [3] was passed through the LC device, orientated so the director was parallel to the polarization direction, and the transmitted power was measured using a helium-cooled bolometer. Modulation depths of up to 40% were seen for a 100 μm LC layer thickness. This modulation was caused by a combination of effects, namely the linear dichroism between the two optical axes of the LC material, and etalon interference between the LC/electrode/quartz interfaces, with the former effect being dominant.

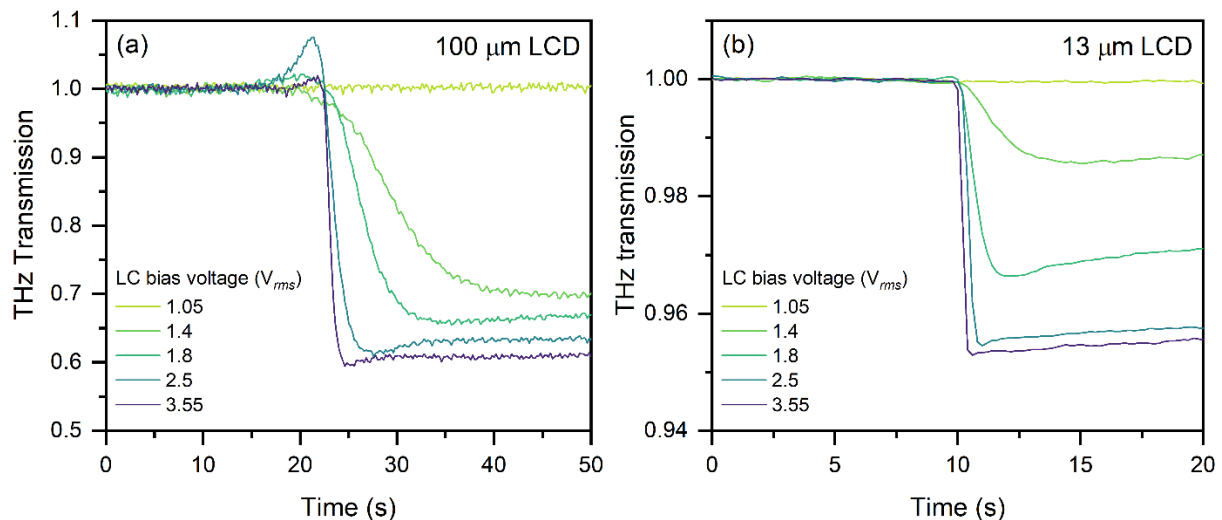


Fig. 1. (a) Transmission of linearly polarised THz radiation from a 3.4-THz QCL through the extraordinary axis of two liquid-crystal devices with nominal thicknesses of (a) 100 μm and (b) 13 μm as a function of the V_{rms} voltage applied.

References

[1] Yang *et al.*, *J. Opt. Soc. Am. B* **27**, 1866-1873 (2010),
[2] Bacon *et al.*, *Optics Express* **28**, 17219-17231 (2020)

[3] Ellison *et al.*, *Int. J. Microw. Wirel. Technol.* **11**, 909-917 (2019).