

SYSTEMATIC REVIEW OPEN ACCESS

A Quantitative Review of Natural Flood Management Research

 Qiuyu Zhu¹  | Megan Klaar¹  | Thomas Willis^{1,2}  | Joseph Holden¹ 
¹water@leeds, School of Geography, University of Leeds, Leeds, UK | ²School of Geography and the Environment, University of Oxford, Oxford, UK

Correspondence: Qiuyu Zhu (gyqzh@leeds.ac.uk)

Received: 9 January 2024 | **Revised:** 15 October 2024 | **Accepted:** 1 November 2024

Co-Editors-in-Chief: Jan Seibert and Wendy Jepson

Funding: Support from the School of Geography and water@leeds at the University of Leeds is acknowledged, but there were no external funders.

Keywords: catchment management | effectiveness | flood mitigation | natural flood management | quantitative analysis

ABSTRACT

Natural flood management (NFM), a subset of nature-based solutions (NBS) in catchment management, attempts to utilize and mimic natural processes in the landscape to reduce flood hazards, and it has been widely applied across Europe and other regions. Despite the wide use of NFM techniques, there is a lack of quantitative evidence for the effectiveness of NFM interventions in flood reduction. This paper examined 454 NFM relevant articles over the past 30 years, and the data they contain. Word frequency and cluster analyses showed changing trends and associations among nature-based flood mitigation research topics, including shifts from localized flood mitigation to catchment-wide flood management strategies, and from wood-related studies to a broader assessment of ecosystem services. Content analysis was conducted on literature directly related to NFM and NBS, revealing that research in large-scale catchments continues to be dominated by modeling approaches. While past reviews have suggested that increased catchment scale and rainfall intensity may diminish the effectiveness of NFM, we did not find strong empirical evidence (field monitoring and modeling) for this in our systematic review, although research at large catchment scale is still lacking. By assessing the confidence in NFM studies, the paper concludes that integrated understanding of a network of combined NFM interventions at a large catchment scale is necessary for future nature-based flood mitigation strategies.

1 | Introduction

Hard engineering solutions to flooding are often difficult to justify and resource across large parts of river basins and flood management is shifting from defense to ecosystem-based adaptation (Iacob et al. 2014). Natural flood management (NFM), a subset of nature-based solutions (NBS), attempts to utilize and mimic natural processes in the landscape to reduce flood hazards (Cooper et al. 2021; Dadson et al. 2017). NFM interventions are considered to provide additional co-benefits including enhancing ecosystem services and improved cost effectiveness of engineered flood management

measures (Bark, Martin-Ortega, and Waylen 2021; Dadson et al. 2017). Enhancing temporary and permanent catchment water storage capacity by reforestation, offline storage areas, online (instream) storage via leaky dams, blocking ditches or gullies, changing land cover and soil management, seeks to delay flood peak time and reduce discharge during a rainfall event (Bond et al. 2022; Gao, Holden, and Kirkby 2016; Gao, Ma, and Fu 2016; Ghimire, Wilkinson, and Gillian 2014; Goudarzi et al. 2021; Grayson, Holden, and Rose 2010; Gunnell et al. 2019; Marshall et al. 2009; Nicholson et al. 2012; Nicholson et al. 2020; Quinn et al. 2013; Shuttleworth et al. 2019; Wilkinson et al. 2019). Land cover changes and soil

This is an open access article under the terms of the [Creative Commons Attribution](https://creativecommons.org/licenses/by/4.0/) License, which permits use, distribution and reproduction in any medium, provided the original work is properly cited.

© 2024 The Author(s). *WIREs Water* published by Wiley Periodicals LLC.

aeration techniques adopted as part of NFM aim to increase soil porosity and encourage infiltration to slow water travel times to main channels (Alaoui et al. 2018; Dixon et al. 2016; Franklin et al. 2007; Marshall et al. 2014; Murphy et al. 2021; Palmer and Smith 2013; Wahren, Schwarzel, and Feger 2012). Some land cover changes seek to increase surface roughness to reduce overland flow velocity and increase peak flow lag times (Archer et al. 2013; Bond et al. 2019; Holden et al. 2008; Roni et al. 2015).

The impact of NFM interventions on flooding at different scales is unclear (Black et al. 2021; Fennell et al. 2022; Goudarzi et al. 2021; Hankin et al. 2020; Lane 2017). Small catchments, in particular, have greater spatial and temporal heterogeneity in response to rainfall events (Merot 2003). NFM benefits to flood reduction observed at smaller scales may also not translate to larger scales (Dixon et al. 2016; Hankin et al. 2021; Wilkinson et al. 2019). For example, simulation of different NFM land cover scenarios in the Rhine basin showed that scenarios that have a significant impact in a sub-catchment do not necessarily have an impact in a larger catchment (Hurkmans et al. 2009), and some studies have concluded that there is no evidence to support the idea that land-cover changes and river restoration measures have the same flood mitigation effects from the plot to hillslope and catchment scales (O'Connell et al. 2007; Rogger et al. 2017; Rowinski et al. 2018).

Despite the wide use of NFM techniques, the effectiveness of NFM interventions in flood reduction lacks quantitative evidence (Dadson et al. 2017; Lane 2017; Wilkinson et al. 2019; Wingfield et al. 2019). To enhance confidence in implementing NFM interventions for flood mitigation, it is imperative that a quantitative synthesis of NFM research literature be used to assess NFM impacts on flood characteristics, including flood peaks and duration. The aim of this paper is to categorize NFM-related studies and determine the nature of the evidence for NFM in impacting flow peaks and lag times. We screened and categorized research outputs according to specific interventions, the rationale of the interventions, and study regions. We quantitatively analyzed word frequencies in the literature to identify research trends on NFM-related topics. We also undertook content analysis and quantitative analysis of numerical results to determine what has been reported in modeling and fieldwork studies at different scales in terms of flood peak reduction and lag time changes. Thus, our paper generated a confidence evaluation for distinctions between study methods, type of interventions, catchment size, and rainfall intensity to help determine the impact and effectiveness of NFM on flood mitigation.

2 | Data and Methods

2.1 | Literature Search

We constructed a dataset of NFM-related techniques and research. To capture journal articles containing potentially related topics, we searched ISI Web of Science (WoS) from

1 January 1900 to 14 November 2022, with search terms as shown:

```
TS=(“flood*” AND (“river*” OR “catchment*” OR “river basin*” OR “watershed*”) AND (“natural flood management” OR “work* with natur*” OR “nature based solution*” OR “nature-based” OR “build* with nature” OR “slow the flow” OR “leaky dam*” OR “logjam*” OR “woody dam*” OR “in-stream wood*” OR “leaky barrier*” OR “woody debris*” OR “offline storage area*” OR “re-meander*” OR “embankment remov*” OR “reconnect*” OR “soil and land management” OR “soil aeration” OR “sub-soil*” OR “woodland management” OR “floodplain woodland*” OR “riparian woodland*” OR “afforest*” OR “reforest*” OR “grassland management” OR “unimproved grassland*” OR “peatland* restoration” OR “hedge*” OR “headwater drainage” OR “runoff attenuation feature*” OR “grip block*” OR “gully block*” OR “ditch block*” OR “buffer strip*”).
```

This yielded 1561 papers from 1991 to 2023 (one paper available in November 2022 was formally published in a journal issue in 2023) which included peer-reviewed manuscript articles, conference papers, and book sections. We also identified 132 relevant references that were not found on WoS via Google Scholar, including articles, books, and theses. Studies focused on biology, zoology, water quality, carbon, and wildfire, which did not cover flood impacts were excluded, resulting in a total of 1335 references remaining in the dataset for further screening and categorization (Figure 1).

2.2 | Literature Classification

After excluding 881 non-NFM related articles, each article was screened and manually categorized into one of three main categories (Figure 1): (1) “NFM Basis” group (164 articles), which represents references focused on the basic principles of NFM or NBS techniques, but which did not specifically use the terms NFM or NBS. These sources typically included related research on the role of soil characteristics, vegetation, geomorphology, and landscape restoration in affecting runoff generation processes in river catchments during rainfall events; (2) “NFM Global” group (93 articles). This group represents journal articles and conference papers working at sites outside of Europe referring directly to or mentioning NFM or NBS for flood protection, catchment runoff management, or ecosystem services benefits; (3) “NFM Europe” group (197 articles). These sources were European specific research (including UK) that directly mentioned or utilized NFM and NBS concepts and techniques, including modeling and field research. The dataset of 454 literature was also classified into regions based on the research locations of the studies for spatial analysis, which included: Europe (excluding UK), United States, United Kingdom, Canada, Oceania, China, Asia (excluding China), Africa, South America, and global scale studies.

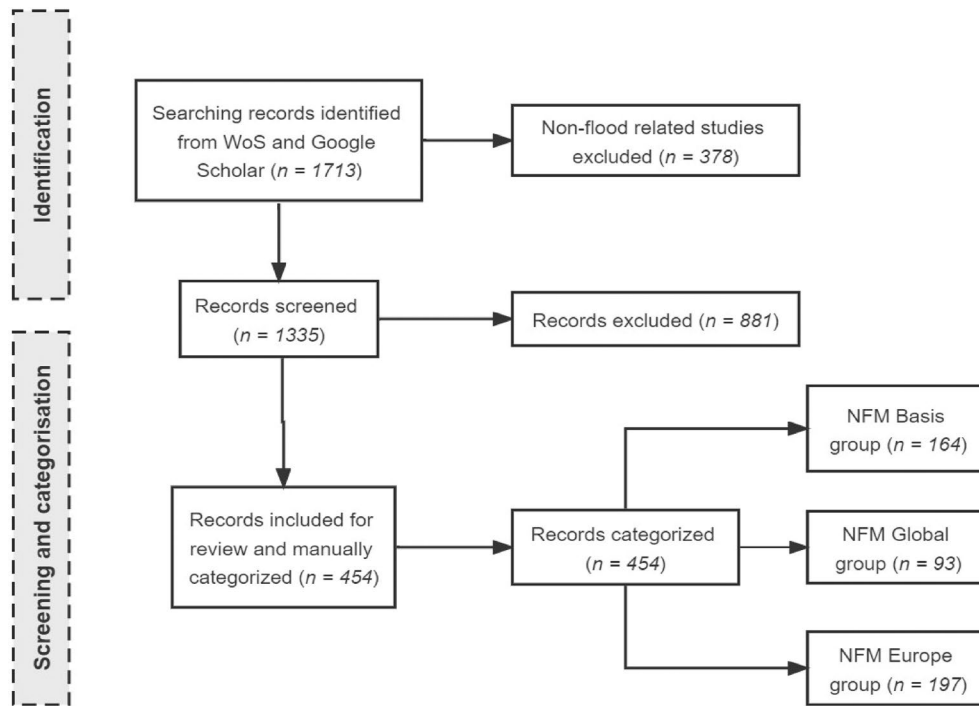


FIGURE 1 | Flow diagram of the literature search, screening protocol, and categorization.

2.3 | Quantitative Analysis

Analysis of words in titles and abstracts was undertaken to assess the main NFM study topics among the three literature groups—NFM Basis, NFM Global, and NFM Europe—during the period 1991–2022 using word frequency and hierarchical clustering analysis. A quantitative analysis of reported information including catchment size, rainfall intensity, and flood mitigation effects reported in 197 articles within the NFM Europe group was undertaken. The NFM Europe group shared similar nature-based techniques and measures for flood mitigation, and contained similar implementation, modeling, and experimental data and results of these techniques and measures, making articles within the NFM Europe group comparable so that confidence could be assessed to the same degree.

2.3.1 | Word Frequency and Hierarchical Clustering Analysis

Word frequency and hierarchical clustering analysis of word content in titles and abstracts were performed using the “quanteda” and “rainette” packages in R (Barnier 2023; Benoit et al. 2018). Wordclouds were constructed using the “quanteda.textplots” package in R based on the word frequency of each literature group (Benoit et al. 2018). The “rainette” method used in this study was developed from the “Reinert” method (Barnier 2023; Reinert 1983). Hierarchical clustering groups data samples by building a hierarchy of clusters. The simple clustering method by “rainette” is a divisive (top-down) hierarchical clustering applied to a document-term matrix. After removing symbols, English stop words (e.g., an or the), and other distractions in the content, such as publisher

information, we identified four main clusters via the Rainette method (Barnier 2023), based on words that occurred at least 15 times. We computed χ^2 values of the grouped matrix and kept the grouping, which corresponds to the highest χ^2 values, as χ^2 values are an indicator of the estimated “distance” between two clusters regarding their term distributions: the higher the value, the more different the two clusters are from each other and *vice versa* (Barnier 2023). Each segment was paired and a χ^2 value was calculated between them and retained in the cluster whose χ^2 values are at a similar level. This process was repeated in the grouped array until there was no reassignment to make the χ^2 higher. Next, we applied hierarchical clustering analysis for NFM Europe to determine any change of topics between two different periods (2006–2018 and 2021–2022). These periods were chosen so that there was an equal number of articles (76 articles) in each group, which means there is a similar chance of words and topics occurring.

2.3.2 | Quantitative Content Analysis

To understand the confidence in the effectiveness of the different NFM or NBS techniques, NFM Europe papers were categorized according to their purpose. The categorization was based mainly on the location of the measures (offline and online), and the two different impacts on surface flow during a rainfall event: increasing water storage capacity and reducing water velocity. Then, articles in NFM Europe were separated using intervention types, resulting in eight separate groupings by NFM techniques plus subgrouping by UK or European study location (Table 1).

We constructed four indicators (flood reduction and delay, the exact value of reduction, researching multiple catchment sizes,

TABLE 1 | Number of articles for NFM techniques and measures grouped by purpose, with the confidence of their effectiveness and references based on Europe and UK research (the “EU” in the table refers to Europe excluding UK) (confidence level details and key references in Table S1).

	Purpose of intervention	NFM technique	Number of articles (n)	Confidence in the effectiveness on downstream flood risk reduction
Group A	Slow catchment flow generation and rainfall-runoff processes (off-channel)	Cross slope reforestation Floodplain/riparian reforestation	n = 19 (UK) n = 17 (EU)	UK: Low to Medium confidence EU: Medium confidence <i>Balanced proportion of research methods with several flood reduction conclusions reported; reduced effectiveness highly depends on rainfall intensity and initial soil conditions.</i>
		Soil and land management (soil aeration, sub-soiling, peatland, woodland, grassland, hedges)	n = 17 (UK) n = 11 (EU)	UK: Medium to high confidence EU: Medium to high confidence <i>Effectiveness results at multiple catchment scales with balanced proportion of research methods reported; lack of empirical evidence at larger scales.</i>
		Peatland restoration (including gully blocking) Floodplain restoration/reconnection	n = 9 (UK) n = 17 (EU)	UK: Low to high confidence EU: Low confidence <i>Studies in the UK and the EU are dominated by modeling approaches; moderate flood reduction results reported but without empirical evidence for larger-scale effects.</i>
Group B	Increase surface and subsurface water storage in offline/online areas	Offline storage areas (water retention/detention ponds)	n = 10 (UK) n = 2 (EU)	UK: Low to high confidence EU: Low to high confidence <i>Relatively even proportion of research methods; lack of large catchment scale studies.</i>
		Online storage areas (grip blocking, drainage/ditch blocking, buffer strips, beaver dams)	n = 6 (UK) n = 2 (EU)	UK: Low to high confidence EU: Low confidence <i>Studies are dominated by evidence from field measurements; lack of upscaling studies.</i>
		Land cover changes (floodplain/riparian reforestation, floodplain restoration/reconnection, grassland, hedges)	n = 11 (UK) n = 5 (EU)	UK: Medium to high confidence EU: Low to high confidence <i>Relatively even proportion of research methods; moderate flood reduction results of increasing water table depth and soil water storage reported but limited by catchment scales and rainfall intensities.</i>

(Continues)

TABLE 1 | (Continued)

	Purpose of intervention	NFM technique	Number of articles (n)	Confidence in the effectiveness on downstream flood risk reduction
Group C	Reduce water velocity in channel	Leaky barriers Woody logjams	n = 15 (UK) n = 7 (EU)	UK: Low confidence EU: Low confidence <i>Studies are dominated by evidence from field measurements and indoor physical experiments; lack of upscaling studies; effectiveness highly depends on the catchment scale.</i>
Group D	Integrated catchment management	Multiple NFM interventions	n = 29 (UK) n = 35 (EU)	UK: Medium to high confidence EU: Medium to high confidence <i>Studies are dominated by research methods of perceptual/conceptual analysis and modeling; effectiveness reported at multiple catchment scales; flood reduction strongly dependent on the location and extension of interventions and limited by rainfall intensity.</i>

and researching multiple rainfall intensities) to understand the confidence level of each subgroup. Among the eight subgroups for the UK and Europe separately, the number of papers investigating or reporting any of these four indicators was counted in each subgroup. The number of papers was calculated as a percentage of the total number of papers in each subgroup. Weight of confidence was evaluated as low (33rd percentile), medium (33rd–66th percentile), and high (66th percentile) according to the percentage within each subgroup. Further details are provided in Data S2.

For content analysis, papers that recorded exact flood reduction or delay values were classified by their research methods: modeling, fieldwork, hybrid modeling and fieldwork, and perceptual/conceptual analysis. Modeling refers to sources using physically based or statistical modeling, while perceptual/conceptual sources focus on using perception and concept-based evidence to summarize or predict NFM benefits. Next, we extracted reported values of flood discharge reduction and peak discharge delay time, catchment sizes, and rainfall intensities from the NFM Europe group. This was the only group with comparable nature-based flood mitigation interventions.

3 | Spatial and Temporal Analysis of Nature-Based Flood Mitigation Research

3.1 | Spatial and Temporal Distribution of Research Topics

The total number of relevant articles per year progressively increased from 1991 onwards, but NFM Global and NFM Europe articles did not appear until 2003 and 2011, respectively (Figure 2a). Meanwhile, the number of articles each year in NFM Basis (articles focussed on the basic principles of NFM or NBS techniques, but which did not specifically use the terms NFM or NBS) tended to even out and decreased substantially since 2017. The spatial distribution of NFM Basis was found to be consistent with the overall distribution of three literature groups, with a notable emphasis on relevant studies in Europe, particularly in the United Kingdom (Figure 2b).

Forest and wood-related studies were distributed evenly across time and were identified across all regions examined. Studies from 1991 to 2000 focused on understanding the impact of riparian woodland management and previous afforestation (Bren 1993; Brown, Harper, and Peterken 1997; Buttle 1994; Decamps, Pinay, and Naiman 1998; Fahey and Jackson 1997; Nelson et al. 2000; Piegay 1997; Piegay and Bravard 1997; Youngblood and Zasada 1991). In several studies, woodland management was studied for flood mitigation purposes (Al-Weshah and El-Khoury 1999; Bren 1993; Fahey and Jackson 1997), and some studies quantified the influence of forests on catchment hydrological conditions (Buttle 1994; Cadier 1996; Nagasaka and Nakamura 1999; Nelson et al. 2000; Piegay 1997; Piegay and Bravard 1997). Studies in the US, Canada, and Japan suggested that land clearing and tree harvesting as a result of agricultural and industrial practices beginning in the 1950s have significantly heightened flood risks in riparian and floodplain areas (Nelson

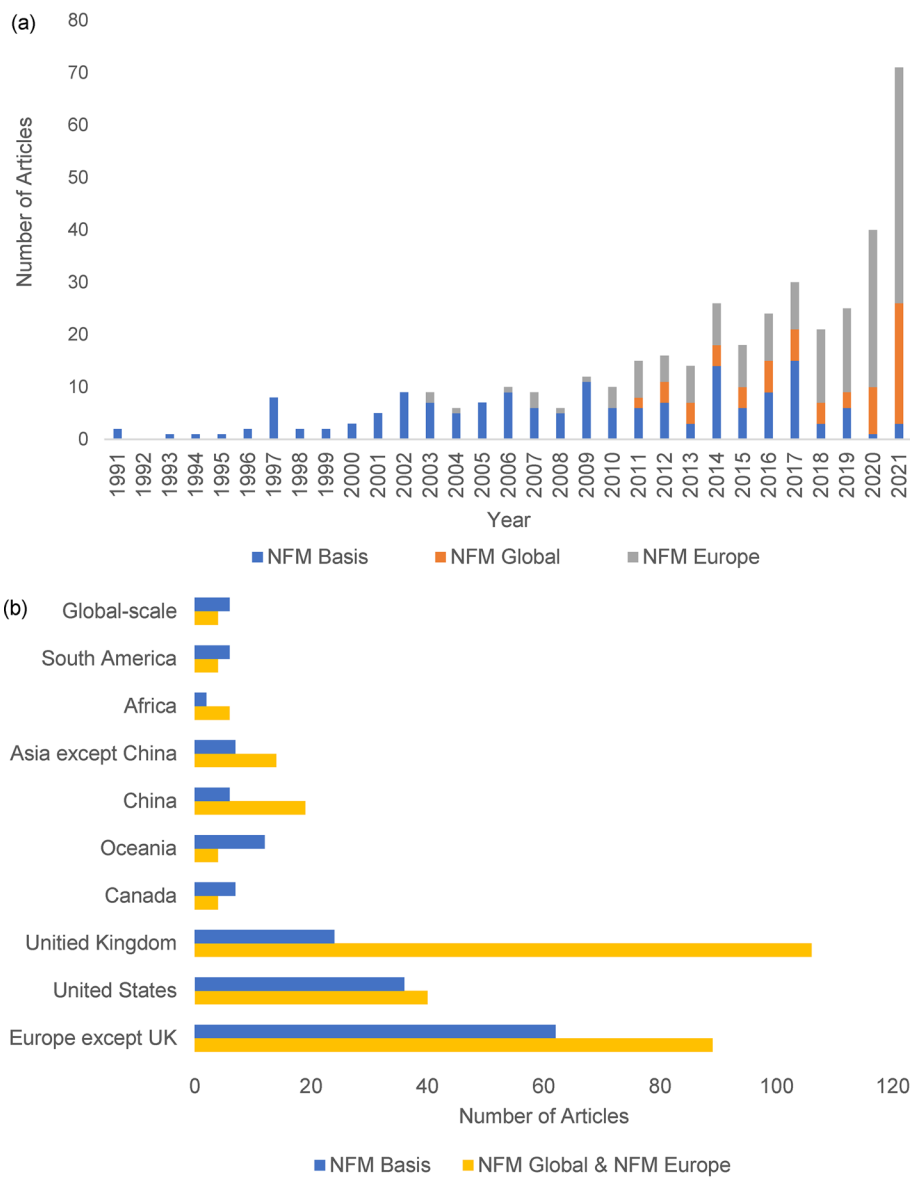


FIGURE 2 | The number of published articles in NFM Basis, NFM Global, and NFM Europe groups for (a) complete years in the time-series; (b) the 10 different regions.

et al. 2000; Slaymaker 2000). For instance, a study in Japan found 22,500 ha of deforestation increased flood peaks by 1.5 to 2.5-fold and shortened peak lag times by 7 h in ~300 km² catchment (Nagasaka and Nakamura 1999). Riparian forest has been evidenced as providing flood buffering effects by enhancing hydraulic roughness during channel overflows to the floodplain and slowing flows during extreme flood events in France (Piegay and Bravard 1997). However, the efficacy of such measures is dependent upon the location, tree species and spatial distribution of the trees in the landscape (Buttle 1994; Nelson et al. 2000).

The term NFM did not appear in the study period 2001–2010 but there was a wide range of studies determining the hydrological impacts of land-use changes. These studies included the impact of different land-use types, scales of land-use change, seasonal characteristics of land use, and field measurement versus modeling studies (Archer, Climent-Soler,

and Holman 2010; Bormann and Klaassen 2008; Hurkmans et al. 2009; Lopez-Moreno, Begueria, and Garcia-Ruiz 2006; O’Connell et al. 2007; Petty and Douglas 2010; Vásquez-Méndez et al. 2010). The most frequent keywords in article titles and abstracts were related to reforestation and restoration research in the catchment. However, more specific topics also emerge, such as the “improvement” of soil properties and changes to hydraulic conductivity via tree roots (Emmanouloudis, Takos, and Spanos 2002; Nakamura et al. 2002), the changes in floodplain surface roughness associated with hedges (Cobby et al. 2003), and the use of buffer strips to mitigate flooding (Evrard et al. 2007). Large woody debris (LWD) received more attention during 2001–2010 than 1991–2000 period, with nine articles studying their dynamics and their interactions with river discharge, sediment movement, and channel regime during rainfall events (Angradi et al. 2004; Faustini and Jones 2003; Seo and Nakamura 2009; Webb and Erskine 2003; Wyzga and Zawiejska 2005). Several

forest-related studies demonstrated that afforestation reduced sediment transport and volume to the river channels (Hughes et al. 2001; Keesstra 2002; Keesstra et al. 2005; Liebault and Piegay 2002), as well as reducing both subsurface and surface runoff to reduce flood discharge (Anderson, Rutherford, and Western 2006; Andreassian 2004; Bahremand et al. 2006; Lambs and Muller 2002; Ranzi, Bochicchio, and Bacchi 2002; Verbunt, Zwaafink, and Gurtz 2005; Yao et al. 2009). For example, a modeling study of a large catchment in Slovakia predicted that a 50% increase in forest areas can decrease the flood peak discharge by 12% (Bahremand et al. 2006), while a monitoring study in Japan showed that the presence of a 36-year old forest reduced mean annual runoff by 11% by decreasing the runoff/precipitation ratio and increasing the evapotranspiration/precipitation ratio (Yao et al. 2009).

Articles from the period 2011–2022 were not limited to the direct effects of individual land-cover types and utilized more developed techniques for monitoring and modeling hydrological changes. The proportion of studies focusing on woodland during this period declined in comparison to the previous two decades. Instead, researchers shifted their focus toward investigating how land-cover changes have impacted runoff by influencing soil properties and surface roughness (Humann et al. 2011; Palmer and Smith 2013; Viola et al. 2014; Zheng, He, and Wu 2012). Remote sensing, aerial photography, and GIS techniques have been used extensively to observe and map long-term changes in land cover, landscape, and sediment movement (Diaz-Redondo et al. 2021; Dufour et al. 2015; Frazier et al. 2012; Hajdukiewicz and Wyzga 2019; Hlozek 2014; Kasai et al. 2019; Keeton et al. 2017; Martinez-Fernandez et al. 2017; Miklin and Cizek 2014; Solin, Feranec, and Novacek 2011; Zhang et al. 2014). Hydraulic and hydrological models are commonly used for hydrological simulation at various scales (Gasser et al. 2019; Keesstra et al. 2014; Munoz-Mas et al. 2017; Pattison et al. 2014; Schilling et al. 2014), while fieldwork and experiments are used for long-term monitoring at small scales (Gao, Holden, and Kirkby 2016; Gao, Ma, and Fu 2016; Kochel et al. 2016; Palmer and Smith 2013; Solin, Feranec, and Novacek 2011). A wide range of management-based research became a major study area during the 2011–2022 period, including investigations into post-flood LWD and the associated problems of debris blockages, which have the potential to increase flood risks (Gasser et al. 2018; MacVicar and Piegay 2012; Ruiz-Villanueva et al. 2014a, 2014b; Ruiz-Villanueva et al. 2017; Schmocker, Detert, and Weitbrecht 2013; Schmocker et al. 2014). Investigations into the development of new flood mitigation strategies such as channel-floodplain reconnection and restoration (Dawson et al. 2017; Eekhout et al. 2015; Hester et al. 2016; Wohl, Lane, and Wilcox 2015) were also dominant at this time.

3.2 | Global NFM Studies

From 1991 to 2022, there was a shift in research focus in the NFM Global group from examining the impacts of floods on ecosystems, geomorphology, and hydrology to investigating the effects of land cover and landscape changes on flood characteristics. The representation and emphasis of nature-based

flood risk management strategies vary across different regions of the world. Except for extensive research on upstream water conservation and restoration of wetlands and forests (Fan et al. 2022; Kabeja et al. 2020; Li et al. 2022; Shih and Chen 2021; Wu et al. 2020; Yu et al. 2015), Chinese studies have recently focused on nature-based urban flood management (Chia, Wang, and Chen 2020; Shen et al. 2019), such as the Sponge Cities Program, which uses urban green infrastructure and underground drainage systems to manage surface water floods (Peng et al. 2022; Qi et al. 2021; Zhai et al. 2021). Studies conducted in other regions of Asia, such as Thailand, have modeled the impact of different land-use types and combined implementation of conservation practices on catchment flood management (Jamrussri and Toda 2017; Kheereemangkla et al. 2016; Trisurat, Eawpanich, and Kalliola 2016). The rationale behind these measures is “more space for water,” both in the upstream and downstream areas, as well as in cities. Studies in Asia have shown that these nature-based measures provide better flood mitigation than traditional structural flood controls (Lo, Huang et al. 2021; San Liew et al. 2021; Sonu, Mohammed, and Bhagyanathan 2022; Zheng, Wang, and Liu 2022). These studies highlight the variability and effectiveness of nature-based, non-structural flood measures under urban planning and climate change.

US-based studies also focus on specific measures including upstream, riparian, and river channel restoration for flood attenuation, via reforestation, floodplain rehabilitation, river channel re-meandering, channel-floodplain reconnection and wetland restoration (Boughton and Pike 2013; Federman, Scott, and Hester 2022; Kurki-Fox et al. 2022a, 2022b; Lau and Franklin 2013; Maxwell et al. 2021; Sholtes and Doyle 2011; Worley et al. 2022). These studies support the storm water mitigation and flood resilience benefits of nature-based restoration measures and have indicated positive evaluation results both in terms of long-term planning and cost-effectiveness. A new concept called “Distributed Flood Attenuation” integrating all flood management measures in the catchment, beyond those mentioned above, also covers structural and non-structural distributed water storage (Antolini and Tate 2021; Wohl 2021). Instream wood and logjams are commonly discussed in the US and Canadian literature. There has been a shift in research from how to avoid logjam hazards in flood events to using and replacing logjams to mitigate flooding and reduce channel erosion (Kramer et al. 2017; Wohl et al. 2016; Wohl and Scamardo 2021).

In the period 1991–2022, the US had a similar number of NFM Basis and NFM Global studies, while Europe had the highest number of NFM Basis studies (Figure 2b). However, the number of studies focused on NFM and NBS studies was greater in the UK compared to other regions. Canada and Oceania have produced NFM Basis papers on the topic, but have not produced any papers directly using NFM and NBS measures, at least as far as is reported in the literature, and possess only a limited number of relevant studies discussing the potential of ecosystem-based adaptation to flooding (Biron, Buffin-Bélanger, and Massé 2018; Daigneault, Brown, and Gawith 2016; Westbrook, Ronnquist, and Bedard-Haughn 2020). In Africa and Asia, research hotspots on land

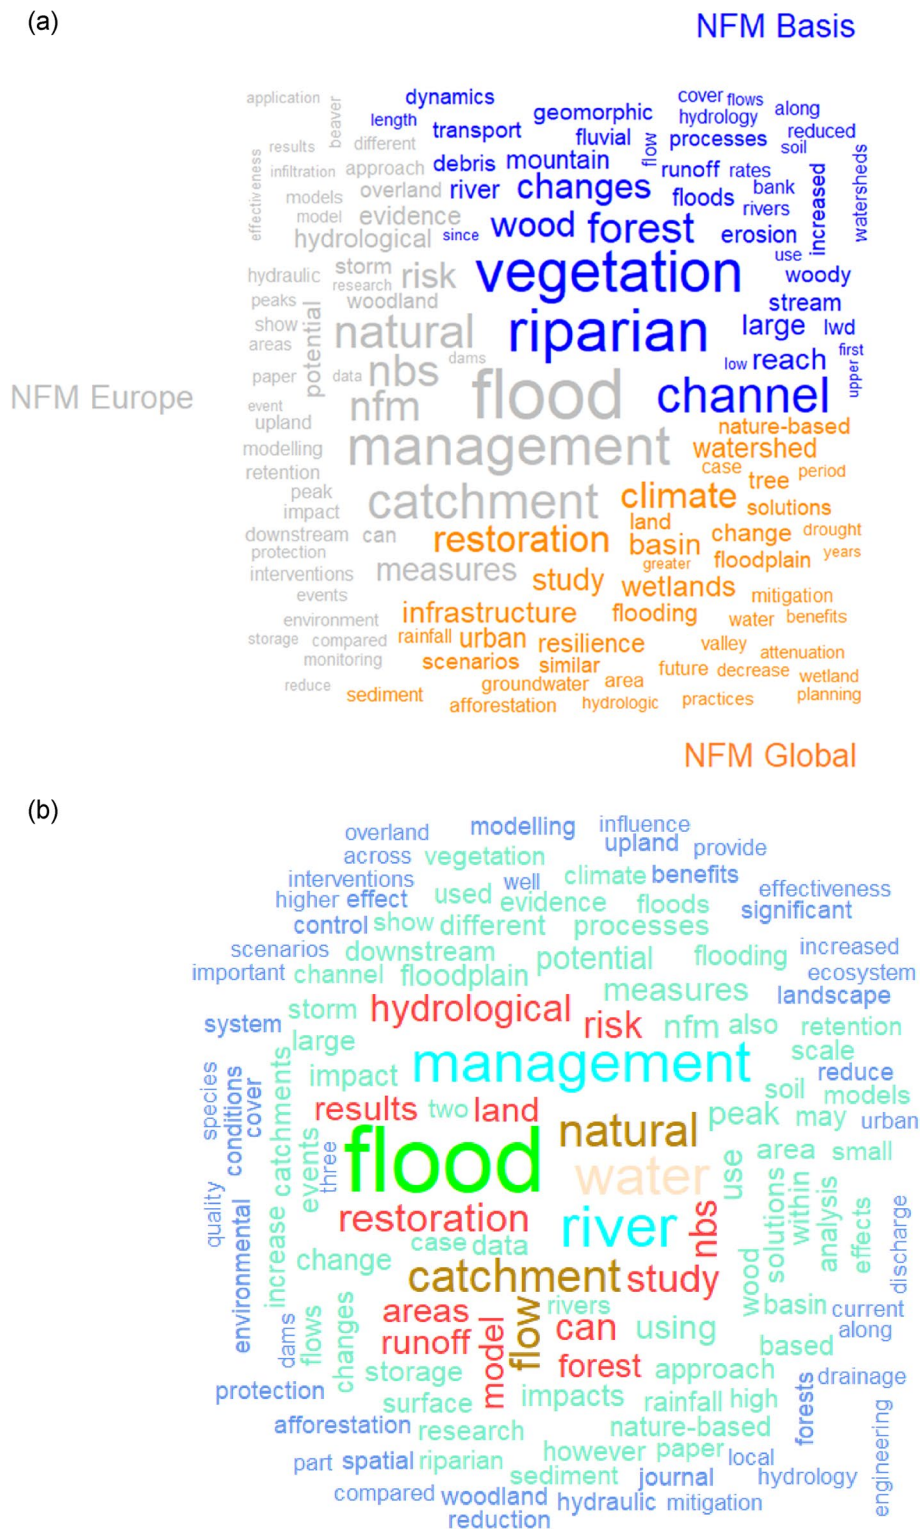


FIGURE 3 | Wordcloud map of the titles and abstracts of articles: (a) for the combined three literature groups (NFM Basis, NFM Global, and NFM Europe); (b) for the NFM Europe group only. The size of a word is proportional to the word frequency in the title and abstracts of papers, the colors in b represent seven levels calculated by equal intervals of word frequency.

management and NBS for flood risk reduction exist, indicating a significant potential for sustainable solutions compared to the traditional flood risk management strategies that have

been employed in these regions. Furthermore, these regions exhibit significant market and research potential for sustainable solutions in the future.

4 | Analysis of Recent Trends and Dynamics Among Main Study Topics

4.1 | Trends of Keywords and Main Topics

Although the different literature groups share similar theoretical premises for solving flooding problems, the focus of studies varies. The most frequent keyword in NFM Basis was “vegetation,” with a concentration in locations such as “riparian” or “mountain” areas, river “channel” or “reach” (Figure 3). This indicates the focus of relevant foundation studies on the hydrological impact of riparian and hillslope vegetation in the catchment (Anderson, Rutherford, and Western 2006; Dufour, Rodriguez-Gonzalez, and Laslier 2019; Keeton et al. 2017; Mosner et al. 2011; Rowinski et al. 2018). Studies in NFM Global started to focus on “restoration,” “infrastructure” and “wetlands” within “river” and “basin” in response to climate and ecosystem resilience since 2011 (Boughton and Pike 2013; Daigneault, Brown, and Gawith 2016; Hobbie and Grimm 2020; Lo, Huang et al. 2021; Muldavin et al. 2017; Opperman and Galloway 2022; Wu et al. 2020).

High-frequency keywords indicate that studies in NFM Europe focused on the impacts of flood risk reduction measures including “decrease,” “reduced,” “resilience,” “mitigation,” “retention,” and “protection” (Figure 3a). “Model” was the most common research method used in NFM Europe and respectively appears in three wordcloud levels developed on word frequency with much higher frequency than other research methods (red, green, and blue in Figure 3b). “Restoration” and “forest” were the two most frequently mentioned interventions, with a higher frequency of the former. The high-frequency term “flow,”

“hydrological” and “runoff” reflect that these studies sought to understand the effects on hydrological conditions. These studies seek evidence for “hydrological” and “hydraulic” effects (including “overland” flow, “infiltration,” and flood “peaks”) of NFM and NBS measures through modeling or monitoring methods (Barnsley et al. 2021; Birkinshaw, Bathurst, and Robinson 2014; Black et al. 2021; Hankin et al. 2021; Lane and Milledge 2013; Lockwood et al. 2022; Metcalfe et al. 2017a, 2017b), while exploring their “potential” in other fields (Auster, Barr, and Brazier 2022; Barber and Quinn 2012; Kowalska et al. 2021; Wilkinson et al. 2014).

4.2 | Hierarchical Clustering for Topic Association

In the hierarchical clustering results, vertical ordering within a cluster is by word frequency from highest to lowest; the contribution of each word to the association χ^2 of that cluster is indicated by the length of the bar, where blue is a positive correlation and red is a negative correlation. Whereas in the horizontal axis, the presence of a link connecting two clusters indicates that they are associated, and the length of the longitudinal link reflects the magnitude of their association χ^2 ; clusters that are not connected by a line segment are mutually exclusive. For example, clusters shown in Figure 4 vertically reflect the change in the frequency of keywords, and horizontally represent the association and mutual repulsion that exists between the different research topics. Words cluster 1 includes perspectives and components of NFM and NBS with management strategy perspectives (e.g., solutions, approaches, knowledge, review) and characterization based on sustainability or other ecological and biological parameters (e.g., restoration, ecosystem,

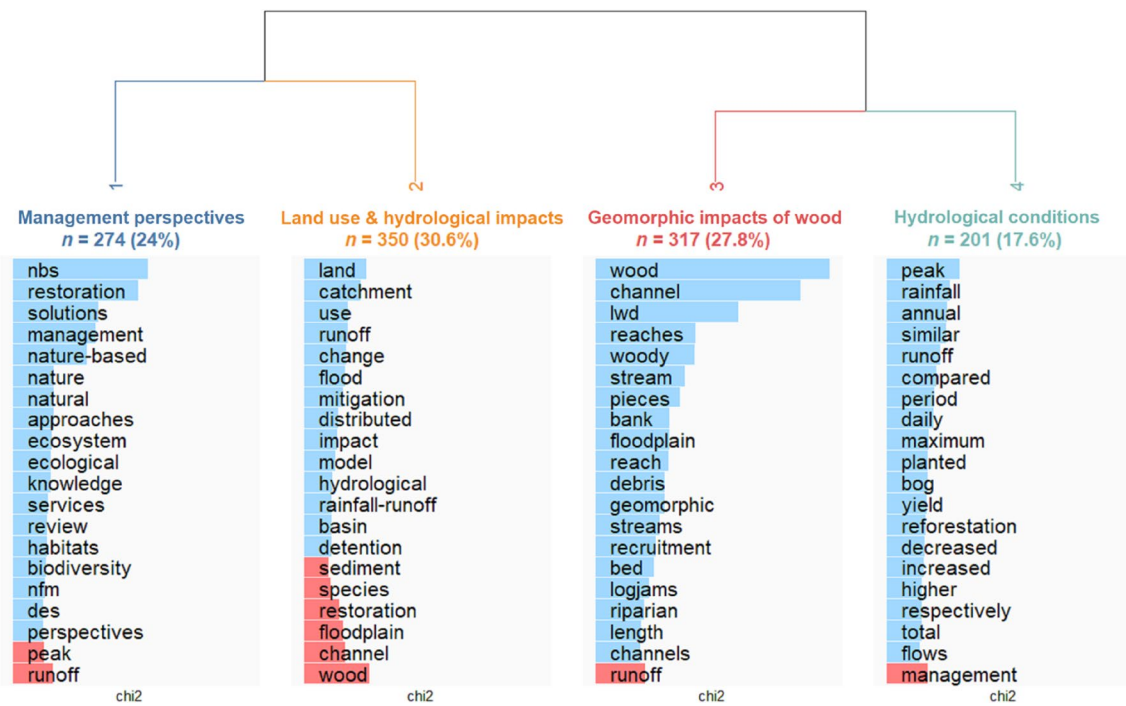


FIGURE 4 | Divisive hierarchical clustering for the combined three literature groups (NFM Basis, NFM Global and NFM Europe). *n* is the number of word segments in each cluster. The length of blue and red bars under a word is proportional to the frequency, at which the word appears in the titles and abstracts in its home cluster (blue represents positive relationship, red represents negative relationship). The length of the longitudinal link between the two clusters represents the sum of the Association χ^2 values between them.

ecological services, habitats, biodiversity). Words cluster 2 focuses on relationships between distributed land use and land change features in the catchment (basin) and hydrological impacts (e.g., flood mitigation, runoff, rainfall-runoff, detention), which are mainly based on modeling research. Words cluster 3 encompasses geomorphic impacts (e.g., recruitment, logjams, length) of wood and LWD in variable river sections (e.g., channel, reach, stream, bank, floodplain, bed, riparian). Words cluster 4 consists of the functioning and dynamics of hydrological conditions (e.g., peak, rainfall, runoff, flows, similar, compared, maximum, yield, decreased, increased) related to vegetation (e.g., planted, bog, restoration) over different temporal scales (e.g., annual, daily, period, total).

Words cluster 1 “Management perspectives” and 2 “Land use and hydrological impacts” are highly connected, where the words with a higher percentage (blue bars in Figure 4) have a stronger correlation to the other clusters. However, there are some terms that might be considered related but are negatively correlated with each other. The strength of negative association (red bars in Figure 4) refers to the probability of these irrelevant words that do not appear in the same word segment when high-frequency keywords appear within it. For example, some terms of flood mitigation (e.g., peak, runoff) are incompatible with “management” in cluster 1; several keywords on ecological benefits (e.g., species, restoration) and geomorphology (e.g., sediment, floodplain, channel, wood) contradict the focus of cluster 2. This also exists between words clusters 3 “Geomorphic impacts of wood” and 4 “Hydrological conditions,” where the term “runoff” related to the hydrological topic was negatively associated with wood-related topics in cluster 3. This is consistent with the patterns observed in cluster 1. The keyword “management” from cluster 1 shows an inverse relationship with the hydrological keywords in cluster 4.

The divisive hierarchical clustering results of NFM Europe (Figure 5) also showed similar grouping content to Figure 4. However, because the terms “land use” and “land change” were replaced by “land management” and their impacts were not emphasized in NFM Europe, when words cluster 2 “Land use and hydrological impacts” in Figure 4 compared to cluster 1 “Hydrological impacts” in Figure 5, this research focus was missing. Instead, the terms of NFM and NBS in words cluster 1 “Management perspectives” were further divided into two separate clusters for the management and the ecological services aspects (words clusters 3 “Ecological impacts” and 4 “Management perspectives” in Figure 5).

The cluster of studies on catchment hydrology (words cluster 1 “Hydrological impacts” in Figure 5) represented the highest proportion of articles (38.3%) in NFM Europe. These studies are highly associated with the research of “wood” and “woody debris” manually installed within the catchment which provides a flood mitigation and storage role (Black et al. 2021; Dixon et al. 2016; Ferguson and Fenner 2020a, 2020b; Lo, Smith et al. 2021; Lo et al. 2022; Metcalfe et al. 2018; Norbury et al. 2021; Thomas and Nisbet 2012). Not all NBS studies refer to flooding issues and the hydrological impacts of their measures. The NBS studies often focused more on the integrated benefits of the implementation of these interventions, where ecological and environmental functions are more intensively

mentioned (Albert et al. 2021; Eekhout et al. 2020; Ellis, Brazier, and Anderson 2021; Guerrero, Haase, and Albert 2018, 2022; Pugliese et al. 2022; Rey 2021; Schmidt, Guerrero, and Albert 2022; Turkelboom et al. 2021). Although the correlation indicated by the Association χ^2 values between clusters 3 and 4 is weaker than that between hydrology and instream wood studies, the overlap between NBS and NFM studies and ecological services and environmental protection studies is higher than with catchment hydrology, and most of these studies do not tackle hydrology-related topics (Andrikopoulou et al. 2021; Keesstra et al. 2018; Spray et al. 2022; Tsaryk et al. 2020; Turconi et al. 2020; Turkelboom et al. 2021).

For NFM Europe, there are differences between the periods of 2006–2018 and 2021–2022. In terms of clusters, cluster 2 “Land use and hydrological impacts” (46.6%) in 2006–2018 (Figure 6a) corresponds to cluster 1 “Management perspectives” (44.5%) in 2021–2022 (Figure 6b). The proportion of wood-related research decreased from 39.3% to 19.3% over time and became more associated with ecological service topics (“ecosystem”, “species,” and “biodiversity”), while the proportion of hydrology-focused research (“overland,” “flow,” “peak,” and “discharge”) increased from 14.1% to 36.2%. The term “NFM” disappeared from words cluster 1 “Management perspectives” in 2021–2022 (Figure 6b), which means the contribution of “NFM” to the relevance of topics declined significantly, and its position was replaced by “NBS” in 2021–2022. However, the change in the frequency of “NBS” and “NFM” did not affect the trend toward hydrology-related studies, which implies both NFM and NBS studies are focusing on the hydrological effects as their potential benefits (Dadson et al. 2017; Dixon et al. 2016; Kumar et al. 2021; Raska et al. 2022; Standen, Costa, and Monteiro 2020; Tafel et al. 2022; Wilkinson et al. 2019). In this context, the association between hydrological studies and NFM and NBS and wood-related studies became stronger respectively. The composition of the hydrology cluster also changed, from focusing on flood peaks and rainfall to addressing overland flow, storms, and flood events. This indicates that research in NBS and NFM is increasingly focusing on the hydrological effects during the entire flood process and the interaction between subsurface and surface water (Bond et al. 2020; Costa et al. 2021; Edokpa et al. 2022; Ellis, Anderson, and Brazier 2021; Ferguson and Fenner 2020a, 2020b; Monger et al. 2022a, 2022b; Revell et al. 2021; Revell, Rubinato, and Blakett 2022; Shuttleworth et al. 2019; Wallace et al. 2021; Westbrook, Ronnquist, and Bedard-Haughn 2020).

5 | NFM Techniques by Target Benefits

5.1 | Understanding Confidence in NFM and NBS Techniques

To understand the confidence level of each NFM technique and measure, we categorized intervention type into four groups (Group A-D) by purpose and eight subgroups by NFM techniques and study regions of UK and Europe excluding UK (EU). Confidence levels were evaluated by four indicators for eight subgroups for the UK and EU separately (the evaluation process and data are provided in Data S2).

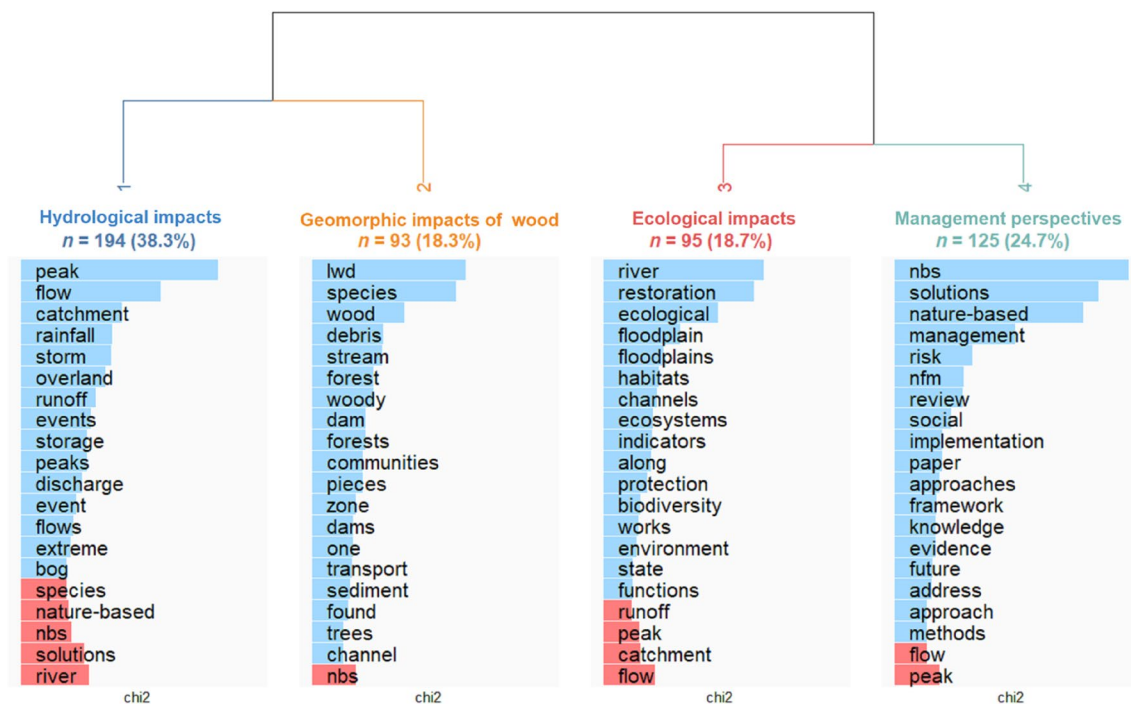


FIGURE 5 | Divisive hierarchical clustering for the “NFM Europe” literature group. *n* is the number of word segments in each cluster. The length of blue and red bars under a word is proportional to the frequency that the word appears in the titles and abstracts under its home cluster (blue represents positive relationship; red represents negative relationship). The length of the longitudinal link between the two clusters represents the sum of the Association χ^2 values between them.

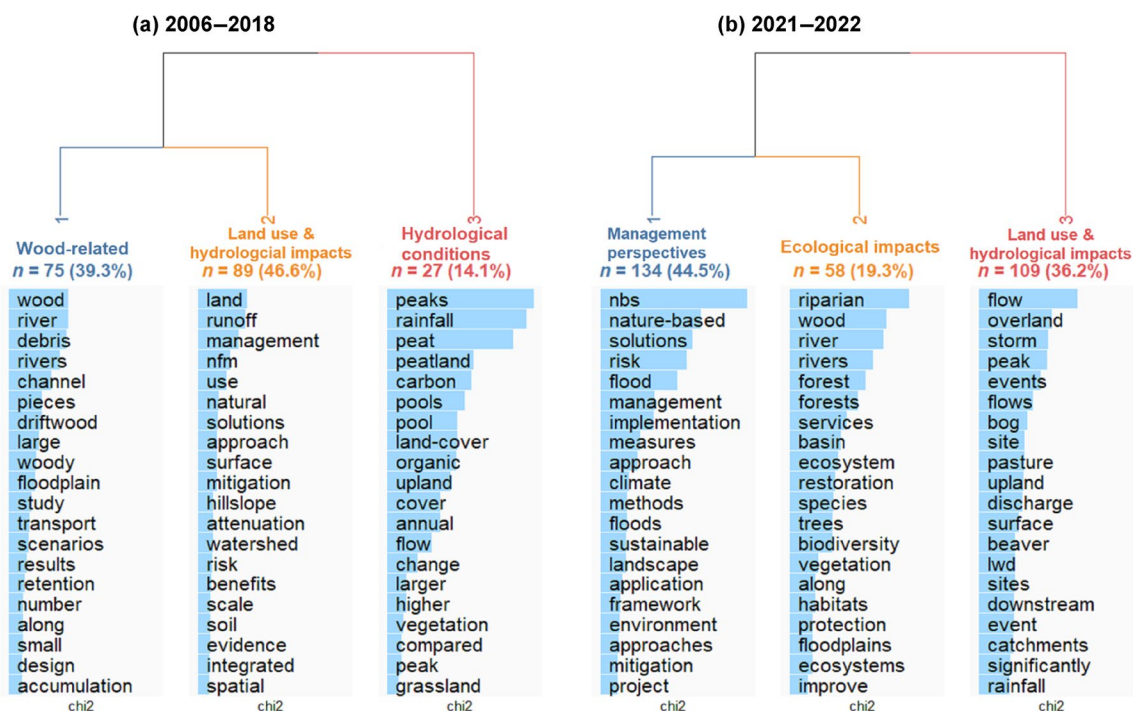


FIGURE 6 | Changes in research topics and keywords by cluster analysis (Divisive hierarchical clustering, Rainette method, excluding words frequency < 10 times) of title and abstract contents for the periods 2006–2018 and 2021–2022. These periods were chosen as they contain the same number of articles (76 articles for each). *n* is the number of word segments in each cluster. The length of blue bars under a word is proportional to the frequency that the word appears in the titles and abstracts under its home cluster. The length of the longitudinal link between the two clusters represents the sum of the Association χ^2 values between them.

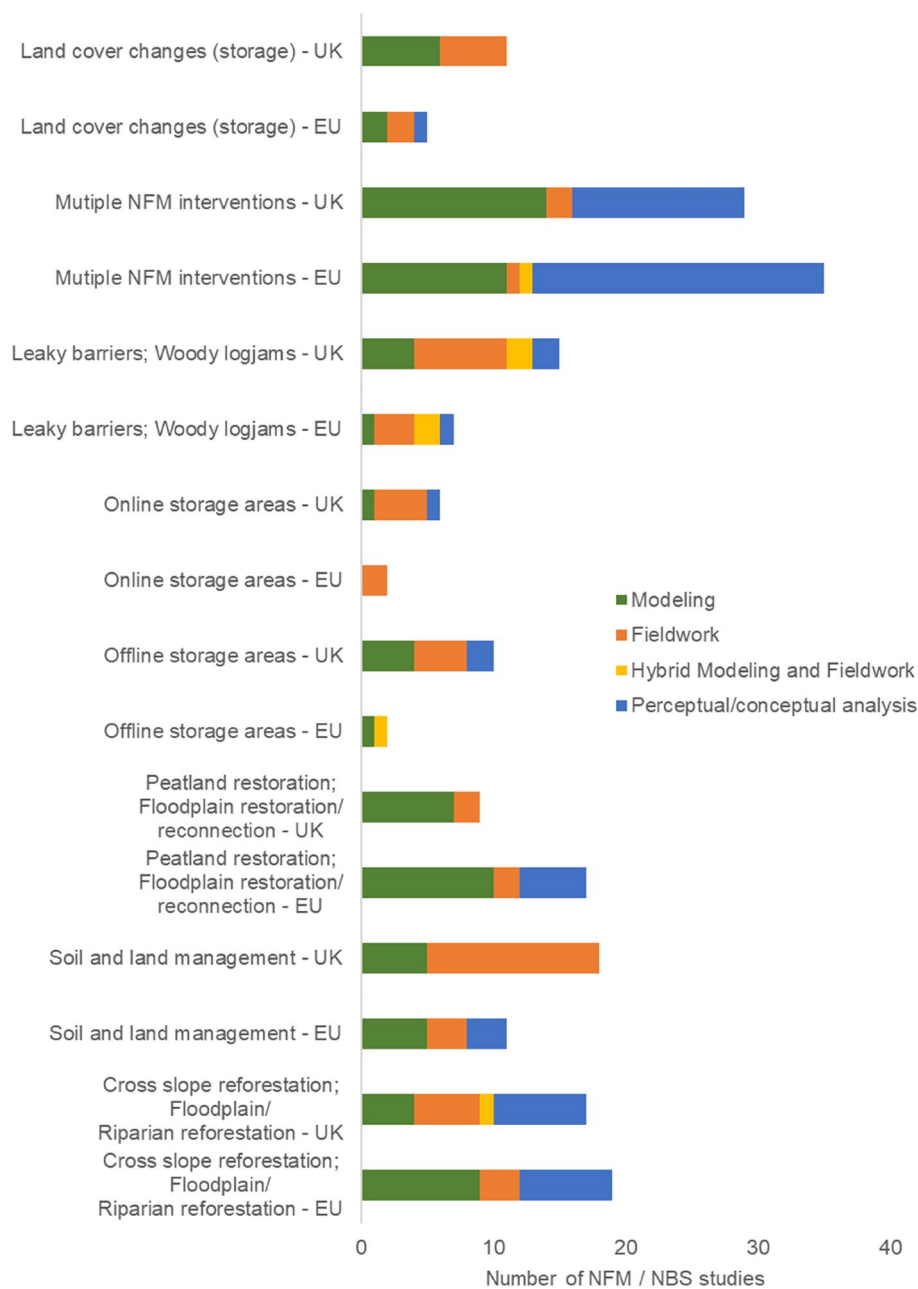


FIGURE 7 | Number of NFM/NBS studies in the UK and other EU regions using research methods of modeling, fieldwork, hybrid modeling and fieldwork, and perceptual/conceptual analysis, grouped by purpose (the same as groups shown in Table 1).

Reviewing the literature within Group A, which focused on studies that slow catchment flow generation and rainfall-runoff processes (off-channel) (Table 1), the highest confidence aligns with soil and land management and reforestation which had the largest number of studies. The share of fieldwork, modeling, and perceptual/conceptual evaluation studies among reforestation effects on flooding is relatively balanced (Figure 7). The contribution of reforestation to flood mitigation effectiveness also comes from a variety of aspects, including reducing overland flow associated with decreased soil saturation, slowing rainfall-runoff processes by increasing soil hydraulic conductivity and soil water storage, as well as increasing surface roughness to attenuate surface runoff (Buechel, Slater, and Dadson 2022; Chandler et al. 2018; Mihalcea 2017; Mongil-Manso, Navarro-Hevia, and San

Martin 2021; Murphy et al. 2021; Revell et al. 2021; Revell, Rubinato, and Blackett 2022; Thomas and Nisbet 2007). The effectiveness of reducing flood flow is more dependent on the number of measures employed within the catchment and the original soil conditions than on the area of the intervention and its proportion of the catchment area (Page et al. 2020; Peskett et al. 2021). In contrast to the other two intervention types (soil and land management and catchment restoration) in Group A, there is no literature indicating that the effect of reforestation on flood risk reduction within catchments changes significantly with the catchment scale.

Maintaining the same criteria of evaluation, Group B (increase surface and subsurface water storage in offline/online areas) has a greater range of confidence levels than Group A. Combining

the three intervention types, the number of fieldwork and modeling studies is almost equal (Figure 7). The reduction of peak discharge by online and offline storage areas is effective and notable in both fieldwork and modeling results (Table S1). However, the location of offline storage features is the most important factor, which depends on the soil type, number, and spatial distribution of these features in the catchment (Bezák et al. 2021; Fennell et al. 2022; Graham et al. 2022; Metcalfe et al. 2017a, 2017b; Metcalfe et al. 2018; Nicholson et al. 2020). In contrast, impacts due to land-cover changes have more uncertainty. Modeling and fieldwork studies have an equal proportion in total, but the majority of modeling studies are from large-scale studies of reforestation and restoration which lack the before-after observed data for comparison, while grassland and hedges studies are dominated by fieldwork with less evidence for downstream reduction (Richet, Ouvry, and Saunierareas 2017). There was variability in the results of restoration studies, where the intervention did not significantly increase water storage or overland flow in the floodplain in a fieldwork-based study (Shuttleworth et al. 2019), while the modeling results showed a 6-fold increase in overland flow storage volume and additional catchment surface storage (Addy and Wilkinson 2021; Clilverd et al. 2016; Goudarzi et al. 2021).

Modeling and experimental studies for leaky dams and woody logjams in Group C have a similar number of studies and both demonstrated significant flood mitigation and peak travel time delay effects at the local scale where the interventions were implemented, independent of rainfall intensity (Kitts 2010; Norbury et al. 2021; Thomas and Nisbet 2012). However, the effectiveness of leaky dams and woody logjams is limited by the catchment scale and mostly only has localized effects in the implemented tributaries or areas. There is still uncertainty about the impact of intensive implementation of leaky dams and woody logjams in small tributaries, where increasing their number does improve the peak reduction, but their location within the tributary and the contribution of the tributary to the entire catchment are important limiting factors (Follett, Schalko, and Nef 2021; Hankin et al. 2020; Leahey et al. 2020).

Studies in Group D have two main purposes: to establish a GIS-based database to support spatial targeting and planning of future NFM and NBS measures; and to assess the effectiveness and cost-benefit of integrated catchment flood management strategies based on existing or designed scenarios. Their findings imply differences in the effectiveness of combining different interventions in the same catchment and implementing individual interventions. A recent empirical study has demonstrated that both single and combinations of several types of NFM measures can effectively increase the lag time of flood peaks (Black et al. 2021), beyond Dadson et al.'s (2017) and Barnsley et al.'s (2021) proposed 20 km² scale limit. Importantly, this indicates that NFM can be considered in isolation or combination with other forms of flood risk management at larger catchment scales, as an integrated catchment flood management strategy.

5.2 | Quantitative Analysis: Catchment Size and Rainfall Intensity Impact on NFM Effectiveness

A total of 88 papers clearly showed that NFM/NBS can be effective in reducing flood peaks, and 41 of them gave specific values

of peak discharge reduction or delay. The studies from Europe (excluding UK) had a lower proportion of literature concluding that flood peak discharge is reduced or delayed compared to the UK studies. 34.3% of multiple intervention studies and 25.9% of individual intervention studies reported a reduction, with only 11.4% and 6.9%, respectively, mentioning exact reduction values. Because NBS interventions in the Europe group were more biased in examining the combined benefits delivered, such as ecosystem services and recreational benefits, the proportion of papers that specifically evidenced flood reduction was relatively low. Studies of multiple interventions in Europe had a higher rate of peak reduction results than studies of single interventions, or for the UK. This is because European studies were more often using multiple interventions of NBS as an integrated catchment strategy than in the UK.

The proportion of articles with flood reduction results drawn from the different study methods also varied considerably. We classified study methods into modeling, fieldwork, hybrid modeling and fieldwork, and perceptual/conceptual analysis. Overall, the highest proportion of flood peak reduction results was from modeling studies in the NFM/NBS literature dataset, followed by fieldwork, hybrid modeling and fieldwork, and perceptual/conceptual analysis. Results from modeling approaches are the most targeted to flood issues (Figure 8), with 65.8% of studies concluding flood reduction effects, whereas this rate is reduced to 43.1% and 42.9% in studies by fieldwork and hybrid modeling and fieldwork methods respectively. The same is true for studies using only fieldwork methods, with 21.6% giving specific reduction or delay values while none of perceptual/conceptual analysis studies give a reduction or delay value. The studies that do not give specific values all demonstrate observations that are mostly indirect evidence of reduced water velocity, increased soil infiltration rates, or water storage, but are limited by the spatial distribution of the concentrated sampling sites, which makes it more difficult to provide direct evidence of attenuated flood peaks in the channels.

For the content analysis, there was no significant correlation between the maximum flood peak discharge reduction and catchment size or rainfall intensity ($p = 0.440$; $p = 0.306$) (Figure 8); an important and novel finding contrasted with previous studies, which have suggested that the attenuation effect on flood peaks is likely to decrease with increasing catchment scale and rainfall intensity, or that effects would only be local (Barnsley et al. 2021; Bezák et al. 2021; Costa et al. 2021; Dadson et al. 2017; Dixon et al. 2016; Ellis, Anderson, and Brazier 2021; Kay et al. 2019; Lane 2017, fig. 3; Leahey et al. 2020; Norbury et al. 2021; Page et al. 2020; Pattison 2010; Thomas and Nisbet 2012; Wahren, Schwarzel, and Feger 2012; Wilkinson et al. 2019).

There is also a large body of literature in our dataset that utilizes modeling or field data and demonstrates that the effectiveness of interventions does not change with increasing catchment size or magnitude of rainfall events, which can support our findings of no significant correlation between them. These studies suggest that the effectiveness of flood attenuation can be amplified by combining and placing multiple measures over a larger catchment scale than a single measure in a local area (Black et al. 2021; Ferreira et al. 2020; Gao, Holden, and Kirkby 2017; Goudarzi et al. 2021; Graham et al. 2022; Metcalfe et al. 2017a,

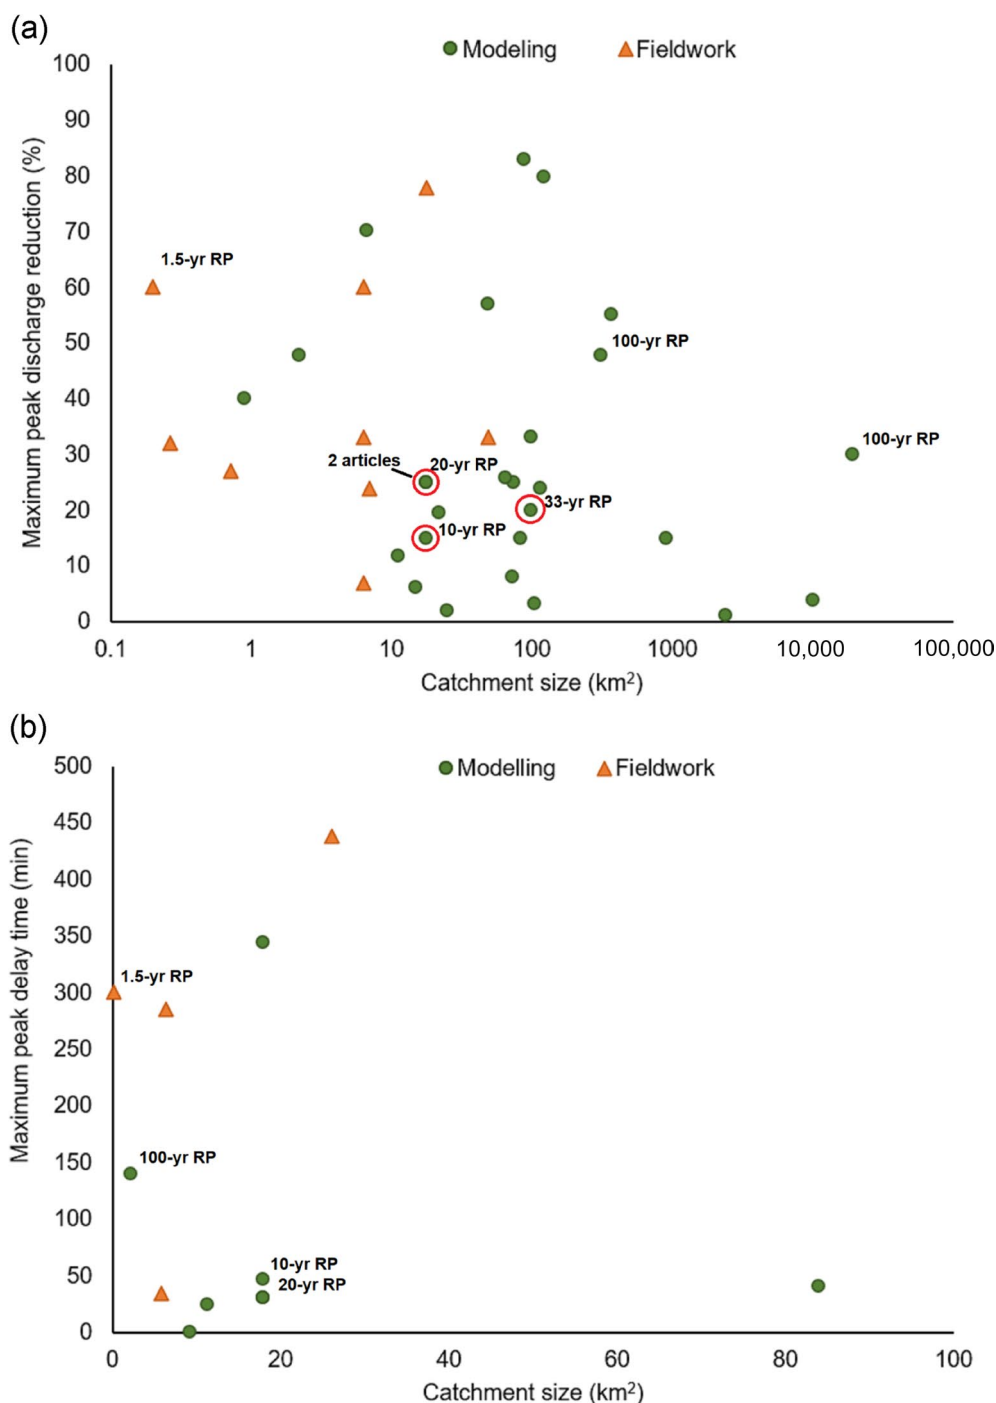


FIGURE 8 | Peak discharge reduction (a) and delay time (b) values from literature in the NFM/NBS studies grouped against catchment size. Corresponding return period labels have been added where available.

2017b; Nicholson et al. 2020; Puttock et al. 2021; Ramsbottom et al. 2019). Although there is heterogeneity among different catchments, the results from one field-based study showed a maximum delay time of 7.3 h measured in a 26 km² headwater catchment by implementing a combination of multiple measures (207 ha woodland planting, 116 large log structures, 31 flow attenuation ponds and 2.9 km of previously straightened river channel re-meandered, with embankment removed) within a 69 km² catchment (Black et al. 2021). The maximum peak discharge reduction rates of 80% and 83% highlighted in Figure 8 were modeled from catchments of 122 and 88 km² (Gabriels,

Willems, and Van Orshoven 2022; Mihalcea 2017). The largest catchment scale study was carried out by modeling, which predicted a 30% reduction of peak discharge for a catchment of 19,224 km² (Terencio et al. 2020). There is no strong empirical evidence from the combined set of field, modeling, and hybrid studies showing that the effectiveness of NFM and NBS interventions on peak discharge reduction and peak delay decreases with increasing catchment size (Figure 8). While there are some smaller peak discharge reduction values using modeling methods for catchments of 1000 km² or above, the number of cases is too small for any effect to be confirmed (Figure 8a).

Nevertheless, there are more small-scale studies than large ones and so further large-scale studies are required to help understand where to locate NFM measures within a catchment and how these measures will respond to future flood events.

There was no significant correlation between the flood reduction effects of interventions and rainfall intensity ($p=0.306$). The comparison of different rainfall intensity impacts used in studies can be categorized into two types: precipitation totals (mm; 7 articles) and event return period (years; 14 articles). Our finding, contrary to earlier literature which suggested that effectiveness could be limited by increasing rainfall intensity (Archer, Climent-Soler, and Holman 2010), opens up the possibility for large-scale, long-term implementation of NFM/NBS at the catchment scale. Some field evidence from northern England showed that the percentage of peak discharge reduction during high-magnitude storm events was lower than for low-magnitude storm events (Dadson et al. 2017; Ferguson and Fenner 2020a, 2020b; Nicholson et al. 2020). However, at the larger catchment scale, the decrease of peak discharge responds more significantly to higher magnitude events due to the possibility of using expandable field storage (Hankin et al. 2021; Kay et al. 2019). Two studies conducted at large catchment scales (315 and 19,234 km²) for extreme rainfall events (100-year return period) yielded peak discharge reductions of 48% and 30%, respectively (Reinhardt et al. 2009; Terencio et al. 2020). This indicates further evidence is required to develop an understanding of the effectiveness of NFM for higher magnitude events. However, the evidence for understanding the impacts of rainfall intensity on NFM effectiveness is limited, as only 8 out of 41 articles with relevant data have reported the peak reduction or delay values with the return period of rainfall events (Figure 8). A key problem is that, depending on the characteristics of rainfall patterns and catchment antecedent conditions, the effect of NFM features on peak discharge reduction in different storm events may vary. The timings of discharge from NFM features might contribute to the timings of peak discharge and flow concentration, which is a potential issue for further research. Considering catchment scales of NFM may be related to the synchronization of runoff peaks, NFM impact assessment on flood risk should be upscaled to immediate sub-catchments and downstream catchment areas.

6 | Conclusions

This review identified several key findings in NFM and related studies. Over the last decade, the number of NFM and NBS related studies has rapidly increased globally with the greatest concentration in the European region. Between 1991 and 2022, the research focus has shifted from examining the impacts of floods on ecosystems, geomorphology, and hydrology to investigating how land cover and landscape changes affect flood characteristics. A shift in keyword frequency indicates a broader evolution in NFM and NBS studies: from flood mitigation to flood management strategies, from localized hydrological impacts to catchment-wide flood processes, and from wood-related studies to broader ecosystem services assessments. There has been a notable transition in research focus from single to multiple interventions for flood mitigation, with a high proportion of studies using modeling methods.

This review, after integrating data and results from NFM and related studies during the past 30 years, concludes that the existing evidence suggests that NFM interventions maintain their flood mitigation effects regardless of catchment size or the magnitude of rainfall intensity. Modeling studies dominate this field and generally predict that NFM and NBS measures are effective for flood mitigation. Importantly, flood mitigation effectiveness of interventions did not appear to diminish with increasing catchment size and rainfall intensity. While numerous large-scale studies, mainly modeling-based, have reported significant flood attenuation and peak flow delays, confidence in NFM and NBS interventions remains limited by variables such as their location and extent, rainfall intensity, catchment antecedent conditions, and catchment scale. Literature evidence suggests that implementing multiple interventions enhances the effectiveness of NFM and NBS. However, more experimental evidence, such as modeling the construction of a network of NFM interventions with physically-based models in large-scale catchments, monitoring the downstream impacts of different NFM intervention types in large-scale catchments, and monitoring the combined effects of different NFM interventions, is needed to provide a more comprehensive understanding of the effectiveness of NFM. Thus, it is critical to design intervention networks at the catchment scale to support spatial models that can aid decision-making.

Author Contributions

Qiuyu Zhu: conceptualization (equal), data curation (equal), formal analysis (equal), investigation (equal), methodology (equal), visualization (equal), writing – original draft (lead), writing – review and editing (equal). **Megan Klaar:** supervision (equal), writing – review and editing (equal). **Thomas Willis:** supervision (equal), writing – review and editing (supporting). **Joseph Holden:** supervision (equal), writing – review and editing (equal).

Acknowledgments

We thank two anonymous reviewers and the Associate Editor and Senior Editor for providing constructive feedback that improved this manuscript.

Conflicts of Interest

The authors declare no conflicts of interest.

Data Availability Statement

The data that supports the findings of this study are available in the [Supporting Information](#) of this article.

Related WIREs Articles

[Natural flood management](#)

[Representing natural and artificial in-channel large wood in numerical hydraulic and hydrological models](#)

[Role of forested land for natural flood management in the UK: A review](#)

[Potential secondary effects of in-stream wood structures installed for natural flood management: A conceptual model](#)

References

Addy, S., and M. E. Wilkinson. 2021. "Embankment Lowering and Natural Self-Recovery Improves River-Floodplain Hydro-Geomorphologic

- Connectivity of a Gravel Bed River." *Science of the Total Environment* 770: 144626. <https://doi.org/10.1016/j.scitotenv.2020.144626>.
- Alaoui, A., M. Rogger, S. Peth, and G. Blöschl. 2018. "Does Soil Compaction Increase Floods? A Review." *Journal of Hydrology* 557: 631–642. <https://doi.org/10.1016/j.jhydrol.2017.12.052>.
- Albert, C., M. Brillinger, P. Guerrero, et al. 2021. "Planning Nature-Based Solutions: Principles, Steps, and Insights." *Ambio* 50, no. 8: 1446–1461. <https://doi.org/10.1007/s13280-020-01365-1>.
- Al-Weshah, R. A., and F. El-Khoury. 1999. "Flood Analysis and Mitigation for Petra Area in Jordan." *Journal of Water Resources Planning and Management—ASCE* 125, no. 3: 170–177. [https://doi.org/10.1061/\(asce\)0733-9496\(1999\)125:3\(170\)](https://doi.org/10.1061/(asce)0733-9496(1999)125:3(170)).
- Anderson, B. G., I. D. Rutherford, and A. W. Western. 2006. "An Analysis of the Influence of Riparian Vegetation on the Propagation of Flood Waves." *Environmental Modelling & Software* 21, no. 9: 1290–1296. <https://doi.org/10.1016/j.envsoft.2005.04.027>.
- Andreassian, V. 2004. "Forest Cover and Watershed Hydrological Behaviour." *Houille Blanche-Revue Internationale De L Eau* 90, no. 2: 31–35. <https://doi.org/10.1051/lhb:200402002>.
- Andrikopoulou, T., R. M. J. Schielen, C. J. Spray, C. A. Schipper, and A. Blom. 2021. "A Framework to Evaluate the SDG Contribution of Fluvial Nature-Based Solutions." *Sustainability* 13, no. 20: 11320. <https://doi.org/10.3390/su132011320>.
- Angradi, T. R., E. W. Schweiger, D. W. Bolgrien, P. Ismert, and T. Selle. 2004. "Bank Stabilization, Riparian Land Use and the Distribution of Large Woody Debris in a Regulated Reach of the Upper Missouri River, North Dakota, USA." *River Research and Applications* 20, no. 7: 829–846. <https://doi.org/10.1002/rra.797>.
- Antolini, F., and E. Tate. 2021. "Location Matters: A Framework to Investigate the Spatial Characteristics of Distributed Flood Attenuation." *Water* 13, no. 19: 2706. <https://doi.org/10.3390/w13192706>.
- Archer, D. R., D. Climent-Soler, and I. P. Holman. 2010. "Changes in Discharge Rise and Fall Rates Applied to Impact Assessment of Catchment Land Use." *Hydrology Research* 41, no. 1: 13–26. <https://doi.org/10.2166/nh.2010.092>.
- Archer, N. A. L., M. Bonell, N. Coles, A. M. MacDonald, C. A. Auton, and R. Stevenson. 2013. "Soil Characteristics and Landcover Relationships on Soil Hydraulic Conductivity at a Hillslope Scale: A View Towards Local Flood Management." *Journal of Hydrology* 497: 208–222. <https://doi.org/10.1016/j.jhydrol.2013.05.043>.
- Auster, R. E., S. W. Barr, and R. E. Brazier. 2022. "Beavers and Flood Alleviation: Human Perspectives From Downstream Communities." *Journal of Flood Risk Management* 15, no. 2: e12789. <https://doi.org/10.1111/jfr3.12789>.
- Bahreman, A., F. De Smedt, J. Corluy, et al. 2006. "Application of WetSpa Model for Assessing Land Use Impacts on Floods in the Margecany-Hornad Watershed, Slovakia." *Water Science and Technology* 53, no. 10: 37–45. <https://doi.org/10.2166/wst.2006.295>.
- Barber, N. J., and P. F. Quinn. 2012. "Mitigating Diffuse Water Pollution From Agriculture Using Soft-Engineered Runoff Attenuation Features." *Area* 44, no. 4: 454–462. <https://doi.org/10.1111/j.1475-4762.2012.01118.x>.
- Bark, R., J. Martin-Ortega, and K. Waylen. 2021. "Stakeholders' Views on Natural Flood Management: Implications for the Nature-Based Solutions Paradigm Shift?" *Environmental Science and Policy* 115: 91–98. <https://doi.org/10.1016/j.envsci.2020.10.018>.
- Barnier, J. 2023. "Rainette: The Reinert Method for Textual Data Clustering." R Package Version 0.3.1.9000. <https://juba.github.io/rainette/>.
- Barnsley, I., R. Spake, J. Sheffield, J. Leyland, T. Sykes, and D. Sear. 2021. "Exploring the Capability of Natural Flood Management Approaches in Groundwater-Dominated Chalk Streams." *Water* 13, no. 16: 2212. <https://doi.org/10.3390/w13162212>.
- Benoit, K., K. Watanabe, H. Wang, et al. 2018. "Quanteda: An R Package for the Quantitative Analysis of Textual Data." *Journal of Open Source Software* 3, no. 30: 774. <https://doi.org/10.21105/joss.00774>.
- Bezak, N., M. Kovacevic, G. Johnen, et al. 2021. "Exploring Options for Flood Risk Management With Special Focus on Retention Reservoirs." *Sustainability* 13, no. 18: 10099. <https://doi.org/10.3390/su131810099>.
- Birkinshaw, S. J., J. C. Bathurst, and M. Robinson. 2014. "45 Years of Non-stationary Hydrology Over a Forest Plantation Growth Cycle, Coalburn Catchment, Northern England." *Journal of Hydrology* 519: 559–573. <https://doi.org/10.1016/j.jhydrol.2014.07.050>.
- Biron, P. M., T. Buffin-Bélanger, and S. Massé. 2018. "The Need for River Management and Stream Restoration Practices to Integrate Hydrogeomorphology." *Canadian Geographer* 62, no. 2: 288–295. <https://doi.org/10.1111/cag.12407>.
- Black, A., L. Peskett, A. MacDonald, et al. 2021. "Natural Flood Management, Lag Time and Catchment Scale: Results From an Empirical Nested Catchment Study." *Journal of Flood Risk Management* 14, no. 3: e12717. <https://doi.org/10.1111/jfr3.12717>.
- Bond, M. H., T. G. Nodine, T. J. Beechie, and R. W. Zabel. 2019. "Estimating the Benefits of Widespread Floodplain Reconnection for Columbia River Chinook Salmon." *Canadian Journal of Fisheries and Aquatic Sciences* 76, no. 7: 1212–1226. <https://doi.org/10.1139/cjfas-2018-0108>.
- Bond, S., M. J. Kirkby, J. Johnston, A. Crowle, and J. Holden. 2020. "Seasonal Vegetation and Management Influence Overland Flow Velocity and Roughness in Upland Grasslands." *Hydrological Processes* 34, no. 18: 3777–3791. <https://doi.org/10.1002/hyp.13842>.
- Bond, S., T. Willis, J. Johnston, et al. 2022. "The Influence of Land Management and Seasonal Changes in Surface Vegetation on Flood Mitigation in Two UK Upland Catchments." *Hydrological Processes* 36, no. 12: e14766. <https://doi.org/10.1002/hyp.14766>.
- Bormann, H., and K. Klaassen. 2008. "Seasonal and Land Use Dependent Variability of Soil Hydraulic and Soil Hydrological Properties of Two Northern German Soils." *Geoderma* 145, no. 3–4: 295–302. <https://doi.org/10.1016/j.geoderma.2008.03.017>.
- Boughton, D. A., and A. S. Pike. 2013. "Floodplain Rehabilitation as a Hedge Against Hydroclimatic Uncertainty in a Migration Corridor of Threatened Steelhead." *Conservation Biology* 27, no. 6: 1158–1168. <https://doi.org/10.1111/cobi.12169>.
- Bren, L. J. 1993. "Riparian Zone, Stream, and Floodplain Issues—A Review." *Journal of Hydrology* 150, no. 2–4: 277–299. [https://doi.org/10.1016/0022-1694\(93\)90113-n](https://doi.org/10.1016/0022-1694(93)90113-n).
- Brown, A. G., D. Harper, and G. F. Peterken. 1997. "European Floodplain Forests: Structure, Functioning and Management." *Global Ecology and Biogeography Letters* 6, no. 3–4: 169–178. <https://doi.org/10.2307/2997730>.
- Buechel, M., L. Slater, and S. Dadson. 2022. "Hydrological Impact of Widespread Afforestation in Great Britain Using a Large Ensemble of Modelled Scenarios." *Communications Earth & Environment* 3, no. 1: 6. <https://doi.org/10.1038/s43247-021-00334-0>.
- Buttle, J. M. 1994. "Hydrological Response to Reforestation in the Ganaraska River Basin, Southern Ontario." *Canadian Geographer* 38, no. 3: 240–253. <https://doi.org/10.1111/j.1541-0064.1994.tb01685.x>.
- Cadier, E. 1996. "Small Watershed Hydrology in Semi-Arid North-Eastern Brazil: Basin Typology and Transposition of Annual Runoff Data." *Journal of Hydrology* 182, no. 1–4: 117–141. [https://doi.org/10.1016/0022-1694\(95\)02933-8](https://doi.org/10.1016/0022-1694(95)02933-8).
- Chandler, K. R., C. J. Stevens, A. Binley, and A. M. Keith. 2018. "Influence of Tree Species and Forest Land Use on Soil Hydraulic Conductivity and

- Implications for Surface Runoff Generation.” *Geoderma* 310: 120–127. <https://doi.org/10.1016/j.geoderma.2017.08.011>.
- Chia, B., Y. H. Wang, and Y. Chen. 2020. “Flood Resilience of Urban River Restoration Projects: Case Studies in Hong Kong.” *Journal of Management in Engineering* 36, no. 5: 05020009. [https://doi.org/10.1061/\(asce\)jme.1943-5479.0000809](https://doi.org/10.1061/(asce)jme.1943-5479.0000809).
- Ciliverd, H. M., J. R. Thompson, C. M. Heppell, C. D. Sayer, and J. C. Axmaver. 2016. “Coupled Hydrological/Hydraulic Modelling of River Restoration Impacts and Floodplain Hydrodynamics.” *River Research and Applications* 32, no. 9: 1927–1948. <https://doi.org/10.1002/rra.3036>.
- Cobby, D. M., D. C. Mason, M. S. Horritt, and P. D. Bates. 2003. “Two-Dimensional Hydraulic Flood Modelling Using a Finite-Element Mesh Decomposed According to Vegetation and Topographic Features Derived From Airborne Scanning Laser Altimetry.” *Hydrological Processes* 17, no. 10: 1979–2000. <https://doi.org/10.1002/hyp.1201>.
- Cooper, M., S. Patil, T. R. Nisbet, H. Thomas, A. Smith, and M. McDonald. 2021. “Role of Forested Land for Natural Flood Management in the UK: A Review.” *WIREs Water* 8, no. 5: e1541. <https://doi.org/10.1002/wat2.1541>.
- Costa, S., R. Peters, R. Martins, L. Postmes, J. J. Keizer, and P. Roebeling. 2021. “Effectiveness of Nature-Based Solutions on Pluvial Flood Hazard Mitigation: The Case Study of the City of Eindhoven (the Netherlands).” *Resources-Basel* 10, no. 3: 24. <https://doi.org/10.3390/resources10030024>.
- Dadson, S. J., J. W. Hall, A. Murgatroyd, et al. 2017. “A Restatement of the Natural Science Evidence Concerning Catchment-Based ‘Natural’ Flood Management in the UK.” *Proceedings of the Royal Society A: Mathematical Physical and Engineering Sciences* 473, no. 2199: 20160706. <https://doi.org/10.1098/rspa.2016.0706>.
- Daigneault, A., P. Brown, and D. Gawith. 2016. “Dredging Versus Hedging: Comparing Hard Infrastructure to Ecosystem-Based Adaptation to Flooding.” *Ecological Economics* 122: 25–35. <https://doi.org/10.1016/j.ecolecon.2015.11.023>.
- Dawson, S. K., R. T. Kingsford, P. Berney, et al. 2017. “Contrasting Influences of Inundation and Land Use on the Rate of Floodplain Restoration.” *Aquatic Conservation: Marine and Freshwater Ecosystems* 27, no. 3: 663–674. <https://doi.org/10.1002/aqc.2749>.
- Decamps, H., G. Pinay, and R. J. Naiman. 1998. “Trees Along River Banks.” In *7th International Congress of Ecology*, Florence, Italy: Perspectives in Ecology: A Glance From the VII International Congress of Ecology.
- Diaz-Redondo, M., F. M. Cortes, B. Molina, and J. Alvarez-Rodriguez. 2021. “Assessing Multi-Temporal River-Floodplain Dynamics as Baseline for Process-Oriented Restoration in a Large River: The Duero River, Spain.” *Restoration Ecology* 29, no. 7: e13434. <https://doi.org/10.1111/rec.13434>.
- Dixon, S. J., D. A. Sear, N. A. Odoni, T. Sykes, and S. N. Lane. 2016. “The Effects of River Restoration on Catchment Scale Flood Risk and Flood Hydrology.” *Earth Surface Processes and Landforms* 41, no. 7: 997–1008. <https://doi.org/10.1002/esp.3919>.
- Dufour, S., M. Rinaldi, H. Piegay, and A. Michalon. 2015. “How Do River Dynamics and Human Influences Affect the Landscape Pattern of Fluvial Corridors? Lessons From the Magra River, Central-Northern Italy.” *Landscape and Urban Planning* 134: 107–118. <https://doi.org/10.1016/j.landurbplan.2014.10.007>.
- Dufour, S., P. M. Rodriguez-Gonzalez, and M. Laslier. 2019. “Tracing the Scientific Trajectory of Riparian Vegetation Studies: Main Topics, Approaches and Needs in a Globally Changing World.” *Science of the Total Environment* 653: 1168–1185. <https://doi.org/10.1016/j.scitotenv.2018.10.383>.
- Edokpa, D., D. Milledge, T. Allott, et al. 2022. “Rainfall Intensity and Catchment Size Control Storm Runoff in a Gullied Blanket Peatland.” *Journal of Hydrology* 609: 127688. <https://doi.org/10.1016/j.jhydrol.2022.127688>.
- Eekhout, J. P. C., C. Boix-Fayos, P. Perez-Cutillas, and J. de Vente. 2020. “The Impact of Reservoir Construction and Changes in Land Use and Climate on Ecosystem Services in a Large Mediterranean Catchment.” *Journal of Hydrology* 590: 125208. <https://doi.org/10.1016/j.jhydrol.2020.125208>.
- Eekhout, J. P. C., A. J. F. Hoitink, J. H. F. de Brouwer, and P. F. M. Verdonshot. 2015. “Morphological Assessment of Reconstructed Lowland Streams in the Netherlands.” *Advances in Water Resources* 81: 161–171. <https://doi.org/10.1016/j.advwatres.2014.10.008>.
- Ellis, N., K. Anderson, and R. Brazier. 2021. “Mainstreaming Natural Flood Management: A Proposed Research Framework Derived From a Critical Evaluation of Current Knowledge.” *Progress in Physical Geography: Earth and Environment* 45, no. 6: 819–841. <https://doi.org/10.1177/0309133321997299>.
- Ellis, N., R. Brazier, and K. Anderson. 2021. “Comparing Fine-Scale Structural and Hydrologic Connectivity Within Unimproved and Improved Grassland.” *Ecohydrology* 14, no. 7: e2330. <https://doi.org/10.1002/eco.2330>.
- Emmanouloudis, D., I. Takos, and I. Spanos. 2002. “Evolution of the Erosive Process After a Watershed Fire: An Example: Prinos Torrent, Thassos Island, Greece.” In *3rd International Conference on Computer Simulation in Risk Analysis and Hazard Mitigation*. Sintra, Portugal: Management Information Systems [Risk Analysis III].
- Evrard, O., C. L. Bielders, K. Vandaele, and B. van Wesemael. 2007. “Spatial and Temporal Variation of Muddy Floods in Central Belgium, Off-Site Impacts and Potential Control Measures.” *Catena* 70, no. 3: 443–454. <https://doi.org/10.1016/j.catena.2006.11.011>.
- Fahey, B., and R. Jackson. 1997. “Hydrological Impacts of Converting Native Forests and Grasslands to Pine Plantations, South Island, New Zealand.” *Agricultural and Forest Meteorology* 84, no. 1–2: 69–82. [https://doi.org/10.1016/s0168-1923\(96\)02376-3](https://doi.org/10.1016/s0168-1923(96)02376-3).
- Fan, Y. S., S. B. Yu, J. H. Wang, et al. 2022. “Changes of Inundation Frequency in the Yellow River Delta and Its Response to Wetland Vegetation.” *Land* 11, no. 10: 1647. <https://doi.org/10.3390/land11101647>.
- Faustini, J. M., and J. A. Jones. 2003. “Influence of Large Woody Debris on Channel Morphology and Dynamics in Steep, Boulder-Rich Mountain Streams, Western Cascades, Oregon.” *Geomorphology* 51, no. 1–3: 187–205. [https://doi.org/10.1016/s0169-555x\(02\)00336-7](https://doi.org/10.1016/s0169-555x(02)00336-7).
- Federman, C. E., D. T. Scott, and E. T. Hester. 2022. “Impact of Floodplain and Stage 0 Stream Restoration on Flood Attenuation and Floodplain Exchange During Small Frequent Storms.” *Journal of the American Water Resources Association* 59, no. 1: 29–48. <https://doi.org/10.1111/1752-1688.13073>.
- Fennell, J., C. Soulsby, M. E. Wilkinson, R. Daalmans, and J. Geris. 2022. “Assessing the Role of Location and Scale of Nature Based Solutions for the Enhancement of Low Flows.” *International Journal of River Basin Management* 16: 743–758. <https://doi.org/10.1080/15715124.2022.2092490>.
- Ferguson, C., and R. Fenner. 2020a. “The Impact of Natural Flood Management on the Performance of Surface Drainage Systems: A Case Study in the Calder Valley.” *Journal of Hydrology* 590: 125354. <https://doi.org/10.1016/j.jhydrol.2020.125354>.
- Ferguson, C. R., and R. A. Fenner. 2020b. “The Potential for Natural Flood Management to Maintain Free Discharge at Urban Drainage Outfalls.” *Journal of Flood Risk Management* 13, no. 3: e12617. <https://doi.org/10.1111/jfr3.12617>.
- Ferreira, C. S. S., S. Mourato, M. Kasanin-Grubin, A. J. D. Ferreira, G. Destouni, and Z. Kalantari. 2020. “Effectiveness of Nature-Based Solutions in Mitigating Flood Hazard in a Mediterranean

- Peri-Urban Catchment." *Water* 12, no. 10: 2893. <https://doi.org/10.3390/w12102893>.
- Follett, E., I. Schalko, and H. Nepf. 2021. "Logjams With a Lower Gap: Backwater Rise and Flow Distribution Beneath and Through Logjam Predicted by Two-Box Momentum Balance." *Geophysical Research Letters* 48, no. 16: e2021GL094279. <https://doi.org/10.1029/2021gl094279>.
- Franklin, D. H., M. L. Cabrera, L. T. West, V. H. Calvert, and J. A. Rema. 2007. "Aerating Grasslands: Effects on Runoff and Phosphorus Losses From Applied Broiler Litter." *Journal of Environmental Quality* 36, no. 1: 208–215. <https://doi.org/10.2134/jeq2006.0012>.
- Frazier, P., D. Ryder, E. McIntyre, and M. Stewart. 2012. "Understanding Riverine Habitat Inundation Patterns: Remote Sensing Tools and Techniques." *Wetlands* 32, no. 2: 225–237. <https://doi.org/10.1007/s13157-011-0229-9>.
- Gabriels, K., P. Willems, and J. Van Orshoven. 2022. "An Iterative Runoff Propagation Approach to Identify Priority Locations for Land Cover Change Minimizing Downstream River Flood Hazard." *Landscape and Urban Planning* 218: 104262. <https://doi.org/10.1016/j.landurbplan.2021.104262>.
- Gao, G. Y., Y. Ma, and B. J. Fu. 2016. "Multi-Temporal Scale Changes of Streamflow and Sediment Load in a Loess Hilly Watershed of China." *Hydrological Processes* 30, no. 3: 365–382. <https://doi.org/10.1002/hyp.10585>.
- Gao, J., J. Holden, and M. Kirkby. 2016. "The Impact of Land-Cover Change on Flood Peaks in Peatland Basins." *Water Resources Research* 52, no. 5: 3477–3492. <https://doi.org/10.1002/2015wr017667>.
- Gao, J., J. Holden, and M. Kirkby. 2017. "Modelling Impacts of Agricultural Practice on Flood Peaks in Upland Catchments: An Application of the Distributed Topmodel." *Hydrological Processes* 31, no. 23: 4206–4216. <https://doi.org/10.1002/hyp.11355>.
- Gasser, E., M. Schwarz, A. Simon, et al. 2019. "A Review of Modeling the Effects of Vegetation on Large Wood Recruitment Processes in Mountain Catchments." *Earth-Science Reviews* 194: 350–373. <https://doi.org/10.1016/j.earscirev.2019.04.013>.
- Gasser, E., A. Simon, P. Perona, L. Dorren, J. Hubl, and M. Schwarz. 2018. "Quantification of Potential Recruitment of Large Woody Debris in Mountain Catchments Considering the Effects of Vegetation on Hydraulic and Geotechnical Bank Erosion and Shallow Landslides." In *E3S Web of Conferences: Ninth International Conference on Fluvial Hydraulics* (River Flow 2018), Lyon, France.
- Ghimire, S., M. E. Wilkinson, and D.-S. Gillian. 2014. "Application of 1D and 2D Numerical Models for Assessing and Visualizing Effectiveness of NFM Measures." In *11th International Conference on Hydroinformatics*, New York, USA.
- Goudarzi, S., D. G. Milledge, J. Holden, et al. 2021. "Blanket Peat Restoration: Numerical Study of the Underlying Processes Delivering Natural Flood Management Benefits." *Water Resources Research* 57, no. 4: e2020WR029209. <https://doi.org/10.1029/2020wr029209>.
- Graham, H. A., A. K. Puttock, M. Elliott, K. Anderson, and R. E. Brazier. 2022. "Exploring the Dynamics of Flow Attenuation at a Beaver Dam Sequence." *Hydrological Processes* 36, no. 11: e14735. <https://doi.org/10.1002/hyp.14735>.
- Grayson, R., J. Holden, and R. Rose. 2010. "Long-Term Change in Storm Hydrographs in Response to Peatland Vegetation Change." *Journal of Hydrology* 389, no. 3–4: 336–343. <https://doi.org/10.1016/j.jhydrol.2010.06.012>.
- Guerrero, P., D. Haase, and C. Albert. 2018. "Locating Spatial Opportunities for Nature-Based Solutions: A River Landscape Application." *Water* 10, no. 12: 1869. <https://doi.org/10.3390/w10121869>.
- Guerrero, P., D. Haase, and C. Albert. 2022. "Identifying Spatial Patterns and Ecosystem Service Delivery of Nature-Based Solutions." *Environmental Management* 69, no. 4: 735–751. <https://doi.org/10.1007/s00267-022-01613-y>.
- Gunnell, K., M. Mulligan, R. A. Francis, and D. G. Hole. 2019. "Evaluating Natural Infrastructure for Flood Management Within the Watersheds of Selected Global Cities." *Science of the Total Environment* 670: 411–424. <https://doi.org/10.1016/j.scitotenv.2019.03.212>.
- Hajdukiewicz, H., and B. Wyzga. 2019. "Aerial Photo-Based Analysis of the Hydromorphological Changes of a Mountain River Over the Last Six Decades: The Czarny Dunajec, Polish Carpathians." *Science of the Total Environment* 648: 1598–1613. <https://doi.org/10.1016/j.scitotenv.2018.08.234>.
- Hankin, B., I. Hewitt, G. Sander, et al. 2020. "A Risk-Based Network Analysis of Distributed In-Stream Leaky Barriers for Flood Risk Management." *Natural Hazards and Earth System Sciences* 20, no. 10: 2567–2584. <https://doi.org/10.5194/nhess-20-2567-2020>.
- Hankin, B., T. J. C. Page, N. A. Chappell, et al. 2021. "Using Micro-Catchment Experiments for Multi-Local Scale Modelling of Nature-Based Solutions." *Hydrological Processes* 35, no. 11: e14418. <https://doi.org/10.1002/hyp.14418>.
- Hester, E. T., C. R. Guth, D. T. Scott, and C. N. Jones. 2016. "Vertical Surface Water–Groundwater Exchange Processes Within a Headwater Floodplain Induced by Experimental Floods." *Hydrological Processes* 30, no. 21: 3770–3787. <https://doi.org/10.1002/hyp.10884>.
- Hlozek, M. 2014. "Horizontal Channel Development on the Upper Jizera and the Upper Vltava Rivers Between 1938 and 2012." *Geografie* 119, no. 2: 105–125.
- Hobbie, S. E., and N. B. Grimm. 2020. "Nature-Based Approaches to Managing Climate Change Impacts in Cities." *Philosophical Transactions of the Royal Society, B: Biological Sciences* 375, no. 1794: 20190124. <https://doi.org/10.1098/rstb.2019.0124>.
- Holden, J., M. J. Kirkby, S. N. Lane, et al. 2008. "Overland Flow Velocity and Roughness Properties in Peatlands." *Water Resources Research* 44, no. 6: W06415. <https://doi.org/10.1029/2007wr006052>.
- Hughes, F. M. R., W. M. Adams, E. Muller, et al. 2001. "The Importance of Different Scale Processes for the Restoration of Floodplain Woodlands." *Regulated Rivers: Research & Management* 17, no. 4–5: 325–345. <https://doi.org/10.1002/rrr.656>.
- Humann, M., G. Schuler, C. Muller, R. Schneider, M. Johst, and T. Caspari. 2011. "Identification of Runoff Processes—The Impact of Different Forest Types and Soil Properties on Runoff Formation and Floods." *Journal of Hydrology* 409, no. 3–4: 637–649. <https://doi.org/10.1016/j.jhydrol.2011.08.067>.
- Hurkmans, R., W. Terink, R. Uijlenhoet, E. J. Moors, P. A. Troch, and P. H. Verburg. 2009. "Effects of Land Use Changes on Streamflow Generation in the Rhine Basin." *Water Resources Research* 45: W06405. <https://doi.org/10.1029/2008wr007574>.
- Iacob, O., J. Rowan, I. Brown, and C. Ellis. 2014. "Evaluating Wider Benefits of Natural Flood Management Strategies: An Ecosystem-Based Adaptation Perspective." *Hydrology Research* 45, no. 6: 774–787. <https://doi.org/10.2166/nh.2014.184>.
- Jamrussri, S., and Y. Toda. 2017. "Simulating Past Severe Flood Events to Evaluate the Effectiveness of Nonstructural Flood Countermeasures in the Upper Chao Phraya River Basin, Thailand." *Journal of Hydrology: Regional Studies* 10: 82–94. <https://doi.org/10.1016/j.ejrh.2017.02.001>.
- Kabeja, C., R. Li, J. P. Guo, et al. 2020. "The Impact of Reforestation Induced Land Cover Change (1990–2017) on Flood Peak Discharge Using HEC-HMS Hydrological Model and Satellite Observations: A Study in Two Mountain Basins, China." *Water* 12, no. 5: 1347. <https://doi.org/10.3390/w12051347>.
- Kasai, M., D. Aoki, D. Peacock, and T. Marutani. 2019. "Channel Evolution Controlled by Valley Configuration During 70 Years in a

- Severely Erosive Catchment: Mangaoporo River, New Zealand." *Catena* 174: 324–338. <https://doi.org/10.1016/j.catena.2018.11.032>.
- Kay, A. L., G. H. Old, V. A. Bell, H. N. Davies, and E. J. Trill. 2019. "An Assessment of the Potential for Natural Flood Management to Offset Climate Change Impacts." *Environmental Research Letters* 14, no. 4: 044017. <https://doi.org/10.1088/1748-9326/aafdbe>.
- Keesstra, S., J. Nunes, A. Novara, et al. 2018. "The Superior Effect of Nature Based Solutions in Land Management for Enhancing Ecosystem Services." *Science of the Total Environment* 610: 997–1009. <https://doi.org/10.1016/j.scitotenv.2017.08.077>.
- Keesstra, S. D. 2002. "Channel and Flood Plain Response to Reforestation in the Dragonja Basin, Southwestern Slovenia: Linking Past and Present." In *Symposium on the Structure, Function and Management Implications of Fluvial Sedimentary Systems*. Alice Springs, Australia: IAHS Publication.
- Keesstra, S. D., E. Kondrlova, A. Czajka, M. Seeger, and J. Maroulis. 2014. "Assessing Riparian Zone Impacts on Water and Sediment Movement: A New Approach." *Netherlands Journal of Geosciences* 91, no. 1–2: 245–255. <https://doi.org/10.1017/s0016774600001633>.
- Keesstra, S. D., J. van Huissteden, J. Vandenberghe, O. Van Dam, J. de Gier, and I. D. Pleizier. 2005. "Evolution of the Morphology of the River Dragonja (SW Slovenia) due to Land-Use Changes." *Geomorphology* 69, no. 1–4: 191–207. <https://doi.org/10.1016/j.geomorph.2005.01.004>.
- Keeton, W. S., E. M. Copeland, S. M. P. Sullivan, and M. C. Watzin. 2017. "Riparian Forest Structure and Stream Geomorphic Condition: Implications for Flood Resilience." *Canadian Journal of Forest Research* 47, no. 4: 476–487. <https://doi.org/10.1139/cjfr-2016-0327>.
- Kheereemangla, Y., R. P. Shrestha, S. Shrestha, and D. Jourdain. 2016. "Modeling Hydrologic Responses to Land Management Scenarios for the Chi River Sub-Basin Part II, Northeast Thailand." *Environmental Earth Sciences* 75, no. 9: 793. <https://doi.org/10.1007/s12665-016-5512-x>.
- Kitts, D. R. 2010. *The Hydraulic and Hydrological Performance of Large Wood Accumulation in a Low-Order Forest Stream*. Southampton, UK: University of Southampton.
- Kochel, R. C., B. R. Hayes, J. Muhlbauer, Z. Hancock, and D. Rockwell. 2016. "Geomorphic Response to Catastrophic Flooding in North-Central Pennsylvania From Tropical Storm Lee (September 2011): Intersection of Fluvial Disequilibrium and the Legacy of Logging." *Geosphere* 12, no. 1: 305–345. <https://doi.org/10.1130/ges01180.1>.
- Kowalska, A., A. Affek, J. Wolski, et al. 2021. "Assessment of Regulating ES Potential of Lowland Riparian Hardwood Forests in Poland." *Ecological Indicators* 120: 106834. <https://doi.org/10.1016/j.ecolind.2020.106834>.
- Kramer, N., E. Wohl, B. Hess-Homeier, and S. Leisz. 2017. "The Pulse of Driftwood Export From a Very Large Forested River Basin Over Multiple Time Scales, Slave River, Canada." *Water Resources Research* 53, no. 3: 1928–1947. <https://doi.org/10.1002/2016wr019260>.
- Kumar, P., S. E. Debele, J. Sahani, et al. 2021. "Nature-Based Solutions Efficiency Evaluation Against Natural Hazards: Modelling Methods, Advantages and Limitations." *Science of the Total Environment* 784: 147058. <https://doi.org/10.1016/j.scitotenv.2021.147058>.
- Kurki-Fox, J., B. A. Doll, D. E. Line, M. E. Baldwin, T. M. Klondike, and A. A. Fox. 2022a. "The Flood Reduction and Water Quality Impacts of Watershed-Scale Natural Infrastructure Implementation in North Carolina, USA." *Ecological Engineering* 181: 106696. <https://doi.org/10.1016/j.ecoleng.2022.106696>.
- Kurki-Fox, J. J., B. A. Doll, D. E. Line, M. E. Baldwin, T. M. Klondike, and A. A. Fox. 2022b. "Estimating Changes in Peak Flow and Associated Reductions in Flooding Resulting From Implementing Natural Infrastructure in the Neuse River Basin, North Carolina, USA." *Water* 14, no. 9: 1479. <https://doi.org/10.3390/w14091479>.
- Lambs, L., and E. Muller. 2002. "Sap Flow and Water Transfer in the Garonne River Riparian Woodland, France: First Results on Poplar and Willow." *Annals of Forest Science* 59, no. 3: 301–315. <https://doi.org/10.1051/forest:2002026>.
- Lane, S. N. 2017. "Natural Flood Management." *WIREs Water* 4, no. 3: e1211. <https://doi.org/10.1002/wat2.1211>.
- Lane, S. N., and D. G. Milledge. 2013. "Impacts of Upland Open Drains Upon Runoff Generation: A Numerical Assessment of Catchment-Scale Impacts." *Hydrological Processes* 27, no. 12: 1701–1726. <https://doi.org/10.1002/hyp.9285>.
- Lau, T. Y., and W. R. Franklin. 2013. "River Network Completion Without Height Samples Using Geometry-Based Induced Terrain." *Cartography and Geographic Information Science* 40, no. 4: 316–325. <https://doi.org/10.1080/15230406.2013.780785>.
- Leakey, S., C. J. M. Hewett, V. Glenis, and P. F. Quinn. 2020. "Modelling the Impact of Leaky Barriers With a 1D Godunov-Type Scheme for the Shallow Water Equations." *Water* 12, no. 2: 371. <https://doi.org/10.3390/w12020371>.
- Li, P. S., D. Li, X. Q. Sun, Z. S. Chu, T. Xia, and B. H. Zheng. 2022. "Application of Ecological Restoration Technologies for the Improvement of Biodiversity and Ecosystem in the River." *Water* 14, no. 9: 1402. <https://doi.org/10.3390/w14091402>.
- Liebault, F., and H. Piegay. 2002. "Causes of 20th Century Channel Narrowing in Mountain and Piedmont Rivers of Southeastern France." *Earth Surface Processes and Landforms* 27, no. 4: 425–444. <https://doi.org/10.1002/esp.328>.
- Lo, H. W., M. W. Smith, M. Klaar, and C. Woulds. 2021. "Potential Secondary Effects of In-Stream Wood Structures Installed for Natural Flood Management: A Conceptual Model." *WIREs Water* 8, no. 5: e1546. <https://doi.org/10.1002/wat2.1546>.
- Lo, H. W., Z. van Leeuwen, M. Klaar, C. Woulds, and M. Smith. 2022. "Geomorphic Effects of Natural Flood Management Woody Dams in Upland Streams." *River Research and Applications* 16: 1787–1802. <https://doi.org/10.1002/rra.4045>.
- Lo, W. C., C. T. Huang, M. H. Wu, et al. 2021. "Evaluation of Flood Mitigation Effectiveness of Nature-Based Solutions Potential Cases With an Assessment Model for Flood Mitigation." *Water* 13, no. 23: 3451. <https://doi.org/10.3390/w13233451>.
- Lockwood, T., J. Freer, K. Michaelides, R. E. Brazier, and G. Coxon. 2022. "Assessing the Efficacy of Offline Water Storage Ponds for Natural Flood Management." *Hydrological Processes* 36, no. 6: e14618. <https://doi.org/10.1002/hyp.14618>.
- Lopez-Moreno, J. I., S. Begueria, and J. M. Garcia-Ruiz. 2006. "Trends in High Flows in the Central Spanish Pyrenees: Response to Climatic Factors or to Land-Use Change?" *Hydrological Sciences Journal* 51, no. 6: 1039–1050. <https://doi.org/10.1623/hysj.51.6.1039>.
- MacVicar, B., and H. Piegay. 2012. "Implementation and Validation of Video Monitoring for Wood Budgeting in a Wandering Piedmont River, the Ain River (France)." *Earth Surface Processes and Landforms* 37, no. 12: 1272–1289. <https://doi.org/10.1002/esp.3240>.
- Marshall, M. R., C. E. Ballard, Z. L. Frogbrook, et al. 2014. "The Impact of Rural Land Management Changes on Soil Hydraulic Properties and Runoff Processes: Results From Experimental Plots in Upland UK." *Hydrological Processes* 28, no. 4: 2617–2629. <https://doi.org/10.1002/hyp.9826>.
- Marshall, M. R., O. J. Francis, Z. L. Frogbrook, et al. 2009. "The Impact of Upland Land Management on Flooding: Results From an Improved Pasture Hillslope." *Hydrological Processes* 23, no. 3: 464–475. <https://doi.org/10.1002/hyp.7157>.
- Martinez-Fernandez, V., M. G. del Tanago, J. Maroto, and D. G. de Jalon. 2017. "Fluvial corridor changes over time in regulated and non-regulated rivers (Upper Esla River, NW Spain)." *River Research and Applications* 33, no. 2: 214–223. <https://doi.org/10.1002/rra.3032>.

- Maxwell, C. M., A. G. Fernald, D. Cadol, A. M. Faist, and J. P. King. 2021. "Managing Flood Flow Connectivity to Landscapes to Build Buffering Capacity to Disturbances: An Ecohydrologic Modeling Framework for Drylands." *Journal of Environmental Management* 278: 111486. <https://doi.org/10.1016/j.jenvman.2020.111486>.
- Merot, P. 2003. "Small Rural Catchment Functioning in the Framework of Floods and Rainfall-Runoff Events." *Houille Blanche-Revue Internationale De L Eau* 89, no. 6: 74–82. <https://doi.org/10.1051/lhb/2003115>.
- Metcalfe, P., K. Beven, B. Hankin, and R. Lamb. 2017a. "A Modelling Framework for Evaluation of the Hydrological Impacts of Nature-Based Approaches to Flood Risk Management, With Application to In-Channel Interventions Across a 29-Km(2) Scale Catchment in the United Kingdom." *Hydrological Processes* 31, no. 9: 1734–1748. <https://doi.org/10.1002/hyp.11140>.
- Metcalfe, P., K. Beven, B. Hankin, and R. Lamb. 2017b. "Simplified Representation of Runoff Attenuation Features Within Analysis of the Hydrological Performance of a Natural Flood Management Scheme." *Hydrology and Earth System Sciences* 22: 17. <https://doi.org/10.5194/hess-2017-398>.
- Metcalfe, P., K. Beven, B. Hankin, and R. Lamb. 2018. "A New Method, With Application, for Analysis of the Impacts on Flood Risk of Widely Distributed Enhanced Hillslope Storage." *Hydrology and Earth System Sciences* 22, no. 4: 2589–2605. <https://doi.org/10.5194/hess-22-2589-2018>.
- Mihalcea, A. 2017. "Preliminary Analysis of the Afforestation Role in the Maximum Runoff in Valea Rece Catchment." *Present Environment and Sustainable Development* 11, no. 1: 173–182. <https://doi.org/10.1515/pesd-2017-0016>.
- Miklin, J., and L. Cizek. 2014. "Erasing a European Biodiversity Hot-Spot: Open Woodlands, Veteran Trees and Mature Forests Succumb to Forestry Intensification, Succession, and Logging in a UNESCO Biosphere Reserve." *Journal for Nature Conservation* 22, no. 1: 35–41. <https://doi.org/10.1016/j.jnc.2013.08.002>.
- Monger, F., S. Bond, D. V. Spracklen, and M. J. Kirkby. 2022a. "Overland Flow Velocity and Soil Properties in Established Semi-Natural Woodland and Wood Pasture in an Upland Catchment." *Hydrological Processes* 36, no. 4: e14567. <https://doi.org/10.1002/hyp.14567>.
- Monger, F., D. V. Spracklen, M. J. Kirkby, and L. Schofield. 2022b. "The Impact of Semi-Natural Broadleaf Woodland and Pasture on Soil Properties and Flood Discharge." *Hydrological Processes* 36, no. 1: e14453. <https://doi.org/10.1002/hyp.14453>.
- Mongil-Manso, J., J. Navarro-Hevia, and R. San Martin. 2021. "Does Forest Restoration Influence Soil Infiltrability? A Case Study in the Restored Woodland of Sierra de Avila (Central Spain)." *Journal of Mountain Science* 18, no. 7: 1778–1793. <https://doi.org/10.1007/s11629-020-6636-8>.
- Mosner, E., S. Schneider, B. Lehmann, and I. Leyer. 2011. "Hydrological Prerequisites for Optimum Habitats of Riparian Salix Communities—Identifying Suitable Reforestation Sites." *Applied Vegetation Science* 14, no. 3: 367–377. <https://doi.org/10.1111/j.1654-109X.2011.01121.x>.
- Muldavin, E. H., E. R. Milford, N. E. Umbreit, and Y. D. Chauvin. 2017. "Long-Term Outcomes of Natural-Process Riparian Restoration on a Regulated River Site: The Rio Grande Albuquerque Overbank Project After 16 Years." *Ecological Restoration* 35, no. 4: 341–353. <https://doi.org/10.3368/er.35.4.341>.
- Munoz-Mas, R., V. Garofano-Gomez, I. Andres-Domenech, et al. 2017. "Exploring the Key Drivers of Riparian Woodland Successional Pathways Across Three European River Reaches." *Ecohydrology* 10, no. 8: e1888. <https://doi.org/10.1002/eco.1888>.
- Murphy, T. R., M. E. Hanley, J. S. Ellis, and P. H. Lunt. 2021. "Native Woodland Establishment Improves Soil Hydrological Functioning in UK Upland Pastoral Catchments." *Land Degradation & Development* 32, no. 2: 1034–1045. <https://doi.org/10.1002/ldr.3762>.
- Nagasaka, A., and F. Nakamura. 1999. "The Influences of Land-Use Changes on Hydrology and Riparian Environment in a Northern Japanese Landscape." *Landscape Ecology* 14, no. 6: 543–556. <https://doi.org/10.1023/a:1008164123102>.
- Nakamura, F., M. Jitsu, S. Kameyama, and S. Mizugaki. 2002. "Changes in Riparian Forests in the Kushiro Mire, Japan, Associated With Stream Channelization." *River Research and Applications* 18, no. 1: 65–79. <https://doi.org/10.1002/rra.621>.
- Nelson, E. A., N. C. Duloher, R. K. Kolka, and W. H. McKee. 2000. "Operational Restoration of the Pen Branch Bottomland Hardwood and Swamp Wetlands—The Research Setting." *Ecological Engineering* 15: S23–S33. [https://doi.org/10.1016/S0925-8574\(99\)00069-5](https://doi.org/10.1016/S0925-8574(99)00069-5).
- Nicholson, A. R., G. M. O'Donnell, M. E. Wilkinson, and P. F. Quinn. 2020. "The Potential of Runoff Attenuation Features as a Natural Flood Management Approach." *Journal of Flood Risk Management* 13: e12565. <https://doi.org/10.1111/jfr3.12565>.
- Nicholson, A. R., M. E. Wilkinson, G. M. O'Donnell, and P. F. Quinn. 2012. "Runoff Attenuation Features: A Sustainable Flood Mitigation Strategy in the Belford Catchment, UK." *Area* 44, no. 4: 463–469. <https://doi.org/10.1111/j.1475-4762.2012.01099.x>.
- Norbury, M., H. Phillips, N. Macdonald, et al. 2021. "Quantifying the Hydrological Implications of Pre- and Post-Installation Willowed Engineered Log Jams in the Pennine Uplands, NW England." *Journal of Hydrology* 603: 126855. <https://doi.org/10.1016/j.jhydrol.2021.126855>.
- O'Connell, E., J. Ewen, G. O'Donnell, and P. F. Quinn. 2007. "Is There a Link Between Agricultural Land-Use Management and Flooding?" *Hydrology and Earth System Sciences* 11, no. 1: 12–107.
- Opperman, J. J., and G. E. Galloway. 2022. "Nature-Based Solutions for Managing Rising Flood Risk and Delivering Multiple Benefits Comment." *One Earth* 5, no. 5: 461–465. <https://doi.org/10.1016/j.oneear.2022.04.012>.
- Page, T., N. A. Chappell, K. J. Beven, B. Hankin, and A. Kretzschmar. 2020. "Assessing the Significance of Wet-Canopy Evaporation From Forests During Extreme Rainfall Events for Flood Mitigation in Mountainous Regions of the United Kingdom." *Hydrological Processes* 34, no. 24: 4740–4754. <https://doi.org/10.1002/hyp.13895>.
- Palmer, R. C., and R. P. Smith. 2013. "Soil Structural Degradation in SW England and Its Impact on Surface-Water Runoff Generation." *Soil Use and Management* 29, no. 4: 567–575. <https://doi.org/10.1111/sum.12068>.
- Pattison, I. 2010. *Rural Land Management Impacts on Catchment Scale Flood Risk*. Durham, UK: Durham University.
- Pattison, I., S. N. Lane, R. J. Hardy, and S. M. Reaney. 2014. "The Role of Tributary Relative Timing and Sequencing in Controlling Large Floods." *Water Resources Research* 50, no. 7: 5444–5458. <https://doi.org/10.1002/2013wr014067>.
- Peng, X., X. P. Heng, Q. Li, J. X. Li, and K. J. Yu. 2022. "From Sponge Cities to Sponge Watersheds: Enhancing Flood Resilience in the Sishui River Basin in Zhengzhou, China." *Water* 14, no. 19: 3084. <https://doi.org/10.3390/w14193084>.
- Peskett, L. M., K. V. Heal, A. M. MacDonald, A. R. Black, and J. J. McDonnell. 2021. "Tracers Reveal Limited Influence of Plantation Forests on Surface Runoff in a UK Natural Flood Management Catchment." *Journal of Hydrology: Regional Studies* 36: 100834. <https://doi.org/10.1016/j.ejrh.2021.100834>.
- Petty, A. M., and M. M. Douglas. 2010. "Scale Relationships and Linkages Between Woody Vegetation Communities Along a Large

- Tropical Floodplain River, North Australia." *Journal of Tropical Ecology* 26: 79–92. <https://doi.org/10.1017/s0266467409990319>.
- Piegay, H. 1997. "Interactions Between Floodplain Forests and Overbank Flows: Data From Three Piedmont Rivers of Southeastern France." *Global Ecology and Biogeography Letters* 6, no. 3–4: 187–196. <https://doi.org/10.2307/2997732>.
- Piegay, H., and J. P. Bravard. 1997. "Response of a Mediterranean Riparian Forest to a 1 in 400 Year Flood, Ouveze River, Drome-Vaucluse, France." *Earth Surface Processes and Landforms* 22, no. 1: 31–43.
- Pugliese, F., G. Caroppi, A. Zingraff-Hamed, G. Lupp, and C. Gerundo. 2022. "Assessment of NBSs Effectiveness for Flood Risk Management: The Isar River Case Study." *Aqua-Water Infrastructure Ecosystems and Society* 71, no. 1: 42–61. <https://doi.org/10.2166/aqua.2021.101>.
- Puttock, A., H. A. Graham, J. Ashe, D. J. Luscombe, and R. E. Brazier. 2021. "Beaver Dams Attenuate Flow: A Multi-Site Study." *Hydrological Processes* 35, no. 2: e14017. <https://doi.org/10.1002/hyp.14017>.
- Qi, Y. F., F. K. S. Chan, J. Griffiths, et al. 2021. "Sponge City Program (SCP) and Urban Flood Management (UFM)—The Case of Guiyang, SW China." *Water* 13, no. 19: 2784. <https://doi.org/10.3390/w13192784>.
- Quinn, P., G. O'Donnell, A. Nicholson, et al. 2013. *Potential Use of Runoff Attenuation Features in Small Rural Catchments for Flood Mitigation*. Newcastle upon Tyne, UK: Newcastle University.
- Ramsbottom, D., A. Pinto, M. Roca, and R. Body. 2019. "Water: Connecting the World." In *Effectiveness of Natural Flood Management Measures 38th IAHR World Congress*.
- Ranzi, R., M. Bochicchio, and B. Bacchi. 2002. "Effects on Floods of Recent Afforestation and Urbanisation in the Mella River (Italian Alps)." *Hydrology and Earth System Sciences* 6, no. 2: 239–253. <https://doi.org/10.5194/hess-6-239-2002>.
- Raska, P., N. Bezak, C. S. S. Ferreira, et al. 2022. "Identifying Barriers for Nature-Based Solutions in Flood Risk Management: An Interdisciplinary Overview Using Expert Community Approach." *Journal of Environmental Management* 310: 114725. <https://doi.org/10.1016/j.jenvman.2022.114725>.
- Reinert, M. 1983. "Une méthode de classification descendante hiérarchique: application à l'analyse lexicale par contexte." *Les Cahiers de l'analyse Des données* 8, no. 2: 187–198.
- Reinhardt, C., J. Bolscher, M. Ramelow, R. Wenzel, and A. Schulte. 2009. "Alternatives in Flood Protection: The Effect of Decentralized Measures in the Upper Floha Watershed (Southeastern Germany)." In *WIT Transactions on Ecology and the Environment. 5th International Conference on River Basin Management*, Malta.
- Revell, N., C. Lashford, M. Blackett, and M. Rubinato. 2021. "Modelling the Hydrological Effects of Woodland Planting on Infiltration and Peak Discharge Using HEC-HMS." *Water* 13, no. 21: 3039. <https://doi.org/10.3390/w13213039>.
- Revell, N., M. Rubinato, and M. Blackett. 2022. "The Impact of Tree Planting on Infiltration Dependent on Tree Proximity and Maturity at a Clay Site in Warwickshire, England." *Water* 14, no. 6: 892. <https://doi.org/10.3390/w14060892>.
- Rey, F. 2021. "Harmonizing Erosion Control and Flood Prevention With Restoration of Biodiversity Through Ecological Engineering Used for Co-Benefits Nature-Based Solutions." *Sustainability* 13, no. 20: 11150. <https://doi.org/10.3390/su132011150>.
- Richet, J. B., J. F. Ouvry, and M. Saunierareas. 2017. "The Role of Vegetative Barriers Such as Fascines and Dense Shrub Hedges in Catchment Management to Reduce Runoff and Erosion Effects: Experimental Evidence of Efficiency, and Conditions of Use." *Ecological Engineering* 103: 455–469. <https://doi.org/10.1016/j.ecoleng.2016.08.008>.
- Rogger, M., M. Agnoletti, A. Alaoui, et al. 2017. "Land Use Change Impacts on Floods at the Catchment Scale: Challenges and Opportunities for Future Research." *Water Resources Research* 53, no. 7: 5209–5219. <https://doi.org/10.1002/2017WR020723>.
- Roni, P., T. Beechie, G. Pess, K. Hanson, and B. Jonsson. 2015. "Wood Placement in River Restoration: Fact, Fiction, and Future Direction." *Canadian Journal of Fisheries and Aquatic Sciences* 72, no. 3: 466–478. <https://doi.org/10.1139/cjfas-2014-0344>.
- Rowinski, P. M., K. Vastila, J. Aberle, J. Jarvela, and M. B. Kalinowska. 2018. "How Vegetation Can Aid in Coping With River Management Challenges: A Brief Review." *Ecohydrology & Hydrobiology* 18, no. 4: 345–354. <https://doi.org/10.1016/j.ecohyd.2018.07.003>.
- Ruiz-Villanueva, V., J. M. Bodoque, A. Diez-Herrero, and E. Blade. 2014a. "Large Wood Transport as Significant Influence on Flood Risk in a Mountain Village." *Natural Hazards* 74, no. 2: 967–987. <https://doi.org/10.1007/s11069-014-1222-4>.
- Ruiz-Villanueva, V., A. Diez-Herrero, J. A. Ballesteros, and J. M. Bodoque. 2014b. "Potential Large Woody Debris Recruitment Due to Landslides, Bank Erosion and Floods in Mountain Basins: A Quantitative Estimation Approach." *River Research and Applications* 30, no. 1: 81–97. <https://doi.org/10.1002/rra.2614>.
- Ruiz-Villanueva, V., B. Wyzga, P. Mikus, M. Hajdukiewicz, and M. Stoffel. 2017. "Large Wood Clogging During Floods in a Gravel-Bed River: The Dlugopole Bridge in the Czarny Dunajec River, Poland." *Earth Surface Processes and Landforms* 42, no. 3: 516–530. <https://doi.org/10.1002/esp.4091>.
- San Liew, Y., S. M. Desa, M. N. M. Noh, M. L. Tan, N. A. Zakaria, and C. K. Chang. 2021. "Assessing the Effectiveness of Mitigation Strategies for Flood Risk Reduction in the Segamat River Basin, Malaysia." *Sustainability* 13, no. 6: 3286. <https://doi.org/10.3390/su13063286>.
- Schilling, K. E., P. W. Gassman, C. L. Kling, et al. 2014. "The Potential for Agricultural Land Use Change to Reduce Flood Risk in a Large Watershed." *Hydrological Processes* 28, no. 8: 3314–3325. <https://doi.org/10.1002/hyp.9865>.
- Schmidt, S., P. Guerrero, and C. Albert. 2022. "Advancing Sustainable Development Goals With Localised Nature-Based Solutions: Opportunity Spaces in the Lahn River Landscape, Germany." *Journal of Environmental Management* 309: 114696. <https://doi.org/10.1016/j.jenvman.2022.114696>.
- Schmocker, L., M. Detert, and V. Weitbrecht. 2013. "Bypass Driftwood Retention River Sihl." In *Proceedings of the 35th Jahr World Congress, Vols I and II. 35th World Congress of the International-Association-For-Hydro-Environment-Engineering-and-Research (IAHR)*, Int Assoc Hydro Environm Engn & Res, Chengdu, Peoples R China.
- Schmocker, L., R. Hunziker, U. Muller, and V. Weitbrecht. 2014. "Driftwood Retention in Pre-Alpine Rivers." In *Swiss Competences in River Engineering and Restoration. 7th International Conference on Fluvial Hydraulics (River Flow)*. Lausanne, Switzerland: Ecole Polytechnique Federale Lausanne.
- Seo, J. I., and F. Nakamura. 2009. "Scale-Dependent Controls Upon the Fluvial Export of Large Wood From River Catchments." *Earth Surface Processes and Landforms* 34, no. 6: 786–800. <https://doi.org/10.1002/esp.1765>.
- Shen, J., S. Q. Du, Q. X. Huang, et al. 2019. "Mapping the City-Scale Supply and Demand of Ecosystem Flood Regulation Services—A Case Study in Shanghai." *Ecological Indicators* 106: 105544. <https://doi.org/10.1016/j.ecolind.2019.105544>.
- Shih, S. S., and P. C. Chen. 2021. "Identifying Tree Characteristics to Determine the Blocking Effects of Water Conveyance for Natural Flood Management in Urban Rivers." *Journal of Flood Risk Management* 14, no. 4: e12742. <https://doi.org/10.1111/jfr3.12742>.
- Sholtes, J. S., and M. W. Doyle. 2011. "Effect of Channel Restoration on Flood Wave Attenuation." *Journal of Hydraulic Engineering* 137, no. 2: 196–208. [https://doi.org/10.1061/\(asce\)hy.1943-7900.0000294](https://doi.org/10.1061/(asce)hy.1943-7900.0000294).

- Shuttleworth, E. L., M. G. Evans, M. Pilkington, et al. 2019. "Restoration of Blanket Peat Moorland Delays Stormflow From Hillslopes and Reduces Peak Discharge." *Journal of Hydrology X* 2: 100006. <https://doi.org/10.1016/j.hydroa.2018.100006>.
- Slymaker, O. 2000. "Assessment of the Geomorphic Impacts of Forestry in British Columbia." *Ambio* 29, no. 7: 381–387. [https://doi.org/10.1639/0044-7447\(2000\)029\[0381:Aotgio\]2.0.Co;2](https://doi.org/10.1639/0044-7447(2000)029[0381:Aotgio]2.0.Co;2).
- Solin, L., J. Feranec, and J. Novacek. 2011. "Land Cover Changes in Small Catchments in Slovakia During 1990–2006 and Their Effects on Frequency of Flood Events." *Natural Hazards* 56, no. 1: 195–214. <https://doi.org/10.1007/s11069-010-9562-1>.
- Sonu, S. T., F. C. Mohammed, and A. Bhagyanathan. 2022. "The Impact of Upstream Land Use Land Cover Change on Downstream Flooding: A Case of Kuttanad and Meenachil River Basin, Kerala, India." *Urban Climate* 41: 101089. <https://doi.org/10.1016/j.uclim.2022.101089>.
- Spray, C., A. Black, D. Bradley, et al. 2022. "Strategic Design and Delivery of Integrated Catchment Restoration Monitoring: Emerging Lessons From a 12-Year Study in the UK." *Water* 14, no. 15: 2305. <https://doi.org/10.3390/w14152305>.
- Standen, K., L. R. D. Costa, and J. P. Monteiro. 2020. "In-Channel Managed Aquifer Recharge: A Review of Current Development Worldwide and Future Potential in Europe." *Water* 12, no. 11: 3099. <https://doi.org/10.3390/w12113099>.
- Tafel, L., E. Ott, M. Brillinger, C. Schulze, and B. Schroter. 2022. "Attitudes of Administrative Decision-Makers Towards Nature-Based Solutions for Flood Risk Management in Germany." *Sustainability Science* 17, no. 1: 135–149. <https://doi.org/10.1007/s11625-021-01072-0>.
- Terencio, D. P. S., L. F. S. Fernandes, R. M. V. Cortes, J. P. Moura, and F. A. L. Pacheco. 2020. "Flood Risk Attenuation in Critical Zones of Continental Portugal Using Sustainable Detention Basins." *Science of the Total Environment* 721: 137727. <https://doi.org/10.1016/j.scitotenv.2020.137727>.
- Thomas, H., and T. Nisbet. 2012. "Modelling the Hydraulic Impact of Reintroducing Large Woody Debris Into Watercourses." *Journal of Flood Risk Management* 5, no. 2: 164–174. <https://doi.org/10.1111/j.1753-318X.2012.01137.x>.
- Thomas, H., and T. R. Nisbet. 2007. "An Assessment of the Impact of Floodplain Woodland on Flood Flows." *Water and Environment Journal* 21, no. 2: 114–126. <https://doi.org/10.1111/j.1747-6593.2006.00056.x>.
- Trisurat, Y., P. Eawpanich, and R. Kalliola. 2016. "Integrating Land Use and Climate Change Scenarios and Models Into Assessment of Forested Watershed Services in Southern Thailand." *Environmental Research* 147: 611–620. <https://doi.org/10.1016/j.envres.2016.02.019>.
- Tsaryk, L. P., I. P. Kovalchuk, P. L. Tsaryk, B. S. Zhdaniuk, and I. R. Kuzyk. 2020. "Basin Systems of Small Rivers of Western Podillya: State, Change Tendencies, Perspectives of Nature Management and Nature Protection Optimization." *Journal of Geology Geography and Geoecology* 29, no. 3: 606–620. <https://doi.org/10.15421/112055>.
- Turconi, L., F. Faccini, A. Marchese, et al. 2020. "Implementation of Nature-Based Solutions for Hydro-Meteorological Risk Reduction in Small Mediterranean Catchments: The Case of Portofino Natural Regional Park, Italy." *Sustainability* 12, no. 3: 1240. <https://doi.org/10.3390/su12031240>.
- Turkelboom, F., R. Demeyer, L. Vranken, P. De Becker, F. Raymaekers, and L. De Smet. 2021. "How Does a Nature-Based Solution for Flood Control Compare to a Technical Solution? Case Study Evidence From Belgium." *Ambio* 50, no. 8: 1431–1445. <https://doi.org/10.1007/s13280-021-01548-4>.
- Vásquez-Méndez, R., E. Ventura-Ramos, K. Oleschko, L. Hernández-Sandoval, J.-F. Parrot, and M. A. Nearing. 2010. "Soil Erosion and Runoff in Different Vegetation Patches From Semiarid Central Mexico." *Catena* 80, no. 3: 162–169. <https://doi.org/10.1016/j.catena.2009.11.003>.
- Verbunt, A., M. G. Zwaafink, and J. Gurtz. 2005. "The Hydrologic Impact of Land Cover Changes and Hydropower Stations in the Alpine Rhine Basin." *Ecological Modelling* 187, no. 1: 71–84. <https://doi.org/10.1016/j.ecolmodel.2005.01.027>.
- Viola, M. R., C. R. Mello, S. Beskow, and L. D. Norton. 2014. "Impacts of Land-Use Changes on the Hydrology of the Grande River Basin Headwaters, Southeastern Brazil." *Water Resources Management* 28, no. 13: 4537–4550. <https://doi.org/10.1007/s11269-014-0749-1>.
- Wahren, A., K. Schwarzel, and K. H. Feger. 2012. "Potentials and Limitations of Natural Flood Retention by Forested Land in Headwater Catchments: Evidence From Experimental and Model Studies." *Journal of Flood Risk Management* 5, no. 4: 321–335. <https://doi.org/10.1111/j.1753-318X.2012.01152.x>.
- Wallace, E. E., G. McShane, W. Tych, A. Kretzschmar, T. McCann, and N. A. Chappell. 2021. "The Effect of Hedgerow Wild-Margins on Topsoil Hydraulic Properties, and Overland-Flow Incidence, Magnitude and Water-Quality." *Hydrological Processes* 35, no. 3: e14098. <https://doi.org/10.1002/hyp.14098>.
- Webb, A. A., and W. D. Erskine. 2003. "Distribution, Recruitment, and Geomorphic Significance of Large Woody Debris in an Alluvial Forest Stream: Tonghi Creek, Southeastern Australia." *Geomorphology* 51, no. 1–3: 109–126. [https://doi.org/10.1016/s0169-555x\(02\)00327-6](https://doi.org/10.1016/s0169-555x(02)00327-6).
- Westbrook, C. J., A. Ronnquist, and A. Bedard-Haughn. 2020. "Hydrological Functioning of a Beaver Dam Sequence and Regional Dam Persistence During an Extreme Rainstorm." *Hydrological Processes* 34, no. 18: 3726–3737. <https://doi.org/10.1002/hyp.13828>.
- Wilkinson, M. E., S. Addy, P. F. Quinn, and M. Stutter. 2019. "Natural Flood Management: Small-Scale Progress and Larger-Scale Challenges." *Scottish Geographical Journal* 135, no. 1–2: 23–32. <https://doi.org/10.1080/14702541.2019.1610571>.
- Wilkinson, M. E., P. F. Quinn, N. J. Barber, and J. Jonczyk. 2014. "A Framework for Managing Runoff and Pollution in the Rural Landscape Using a Catchment Systems Engineering Approach." *Science of the Total Environment* 468: 1245–1254. <https://doi.org/10.1016/j.scitotenv.2013.07.055>.
- Wingfield, T., N. Macdonald, K. Peters, J. Spees, and K. Potter. 2019. "Natural Flood Management: Beyond the Evidence Debate." *Area* 51, no. 4: 743–751. <https://doi.org/10.1111/area.12535>.
- Wohl, E. 2021. "An Integrative Conceptualization of Floodplain Storage." *Reviews of Geophysics* 59, no. 2: e2020RG000724. <https://doi.org/10.1029/2020rg000724>.
- Wohl, E., B. P. Bledsoe, K. D. Fausch, N. Kramer, K. R. Bestgen, and M. N. Gooseff. 2016. "Management of Large Wood in Streams: An Overview and Proposed Framework for Hazard Evaluation." *Journal of the American Water Resources Association* 52, no. 2: 315–335. <https://doi.org/10.1111/1752-1688.12388>.
- Wohl, E., S. N. Lane, and A. C. Wilcox. 2015. "The Science and Practice of River Restoration." *Water Resources Research* 51, no. 8: 5974–5997. <https://doi.org/10.1002/2014wr016874>.
- Wohl, E., and J. E. Scamardo. 2021. "The Resilience of Logjams to Floods." *Hydrological Processes* 35, no. 1: 15. <https://doi.org/10.1002/hyp.13970>.
- Worley, L. C., K. L. Underwood, N. L. V. Vartanian, M. M. Dewoolkar, J. E. Matt, and D. M. Rizzo. 2022. "Semi-Automated Hydraulic Model Wrapper to Support Stakeholder Evaluation: A Floodplain Reconnection Study Using 2D Hydrologic Engineering center's River Analysis System." *River Research and Applications* 38, no. 4: 799–809. <https://doi.org/10.1002/rra.3946>.
- Wu, Y. F., G. X. Zhang, A. N. Rousseau, Y. J. Xu, and E. Foulon. 2020. "On How Wetlands Can Provide Flood Resilience in a Large River Basin: A Case Study in Nenjiang River Basin, China." *Journal of Hydrology* 587: 125012. <https://doi.org/10.1016/j.jhydrol.2020.125012>.

- Wyzga, B., and J. Zawiejska. 2005. "Wood Storage in a Wide Mountain River: Case Study of the Czarny Dunajec, Polish Carpathians." *Earth Surface Processes and Landforms* 30, no. 12: 1475–1494. <https://doi.org/10.1002/esp.1204>.
- Yao, H., M. Hashino, J. U. N. Xia, and X. Chen. 2009. "Runoff Reduction by Forest Growth in Hiji River Basin, Japan." *Hydrological Sciences Journal* 54, no. 3: 556–570. <https://doi.org/10.1623/hysj.54.3.556>.
- Youngblood, A. P., and J. C. Zasada. 1991. "White spruce artificial regeneration options on river floodplains in interior Alaska." *Canadian Journal of Forest Research* 21, no. 4: 423–433. <https://doi.org/10.1139/x91-057>.
- Yu, P. T., Y. H. Wang, N. Coles, W. Xiong, and L. H. Xu. 2015. "Simulation of Runoff Changes Caused by Cropland to Forest Conversion in the Upper Yangtze River Region, SW China." *PLoS One* 10, no. 7: e0132395. <https://doi.org/10.1371/journal.pone.0132395>.
- Zhai, J., J. Ren, M. Xi, X. N. Tang, and Y. X. Zhang. 2021. "Multiscale Watershed Landscape Infrastructure: Integrated System Design for Sponge City Development." *Urban Forestry & Urban Greening* 60: 127060. <https://doi.org/10.1016/j.ufug.2021.127060>.
- Zhang, J. L., T. T. H. Pham, M. Kalacska, and S. Turner. 2014. "Using Landsat Thematic Mapper Records to Map Land Cover Change and the Impacts of Reforestation Programmes in the Borderlands of Southeast Yunnan, China: 1990–2010." *International Journal of Applied Earth Observation and Geoinformation* 31: 25–36. <https://doi.org/10.1016/j.jag.2014.01.006>.
- Zheng, J. H., H. L. Wang, and B. J. Liu. 2022. "Impact of the Long-Term Precipitation and Land Use Changes on Runoff Variations in a Humid Subtropical River Basin of China." *Journal of Hydrology: Regional Studies* 42: 101136. <https://doi.org/10.1016/j.ejrh.2022.101136>.
- Zheng, Z., S. He, and F. Wu. 2012. "Relationship Between Soil Surface Roughness and Hydraulic Roughness Coefficient or Sloping Farmland." *Water Science and Engineering* 5, no. 2: 11. <https://doi.org/10.3882/j.issn.1674-2370.2012.02.007>.

Supporting Information

Additional supporting information can be found online in the Supporting Information section.