



Weekly train timetabling approach for high-speed railway lines

Bowen Nie, Lei Nie, Zhiyuan Lin, Ronghui Liu & Huiling Fu

To cite this article: Bowen Nie, Lei Nie, Zhiyuan Lin, Ronghui Liu & Huiling Fu (18 Jun 2025): Weekly train timetabling approach for high-speed railway lines, Transportmetrica A: Transport Science, DOI: [10.1080/23249935.2025.2513010](https://doi.org/10.1080/23249935.2025.2513010)

To link to this article: <https://doi.org/10.1080/23249935.2025.2513010>



© 2025 The Author(s). Published by Informa UK Limited, trading as Taylor & Francis Group.



Published online: 18 Jun 2025.



Submit your article to this journal [↗](#)



Article views: 42



View related articles [↗](#)



View Crossmark data [↗](#)

Weekly train timetabling approach for high-speed railway lines

Bowen Nie ^{a,b,c}, Lei Nie^b, Zhiyuan Lin^a, Ronghui Liu^a and Huiling Fu^b

^aInstitute for Transport Studies, University of Leeds, Leeds, UK; ^bSchool of Traffic and Transportation, Beijing Jiaotong University, Beijing, People's Republic of China; ^cScientific & Technological Information Research Institute, China Academy of Railway Sciences Group Co., Ltd., Beijing, People's Republic of China

ABSTRACT

Traditional train timetabling methods typically schedule trains for periods ranging from half an hour to a single day, often neglecting the fluctuations in passenger demand over an entire week. To overcome this limitation, this study proposes a weekly train timetabling (WTT) model that schedules trains for the entire week. To effectively implement the WTT model under practical high-speed railway (HSR) scenarios, an Estimate-Generation-Evaluate (EGE) solution process is introduced, incorporating a customised hierarchical train generation strategy. Testing the EGE process on Chinese HSR lines demonstrates its superior performance improvement over CPLEX. Compared to manually generated timetables, the weekly timetable produced by EGE enhances passenger travel speeds and better aligns train schedules with passenger demand patterns. Further comparisons between solutions for two typical HSR lines verify the universality and robustness of the proposed approach.

ARTICLE HISTORY

Received 2 September 2024
Accepted 25 May 2025

KEYWORDS

Train timetabling;
high-speed railway; weekly
timetable; passenger
demand

1. Introduction

As a key mode of transportation in modern society, aligning High-Speed Railway (HSR) services with passenger demand fluctuations has long been a fundamental goal of HSR train scheduling and optimisation. The HSR train optimisation process is typically divided into sequential subproblems (Schöbel 2017). At the strategic level, the line planning problem involves determining the origin and terminal stations, travel routes, operation frequencies, and train stops based on passenger demand. At the tactical level, the train timetabling problem specifies the departure and arrival times at each station the train passes or stops, as well as the specific departure times and travel durations for passengers. Finally, at the operational level, the vehicle and crew scheduling problem assigns vehicle units and crew to serve the passengers. Among these planning processes, the timetabling problem plays a critical role in providing customised services for passengers.

Passenger demand fluctuations vary between different origin and destination (OD) pairs. On a macro scale, annual peaks in passenger volumes can typically be observed at the start

CONTACT Ronghui Liu  r.liu@its.leeds.ac.uk  Institute for Transport Studies, University of Leeds, Room 2.05, 34-40 University Road, Leeds, LS2 9JT, UK

© 2025 The Author(s). Published by Informa UK Limited, trading as Taylor & Francis Group.
This is an Open Access article distributed under the terms of the Creative Commons Attribution License (<http://creativecommons.org/licenses/by/4.0/>), which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited. The terms on which this article has been published allow the posting of the Accepted Manuscript in a repository by the author(s) or with their consent.

and end of national holidays on most HSR lines. Although these significant peaks prompt railway companies to adjust timetables and add more trains, such occurrences are rare, typically happening only once a year. The more frequent and critical fluctuation, however, occurs across different days of the week and periods of the day.

Within a single day, commuter travel between city centres and surrounding areas often creates distinct morning and evening peaks on short-distance HSR lines. Business travellers, on the other hand, typically depart later in the morning, creating smaller peaks during periods such as 8:00 am to 10:00 am on HSR lines connecting major metropolitan areas. These demand features are commonly considered while scheduling trains among a day (e.g. Martin-Iradi and Ropke 2022; Şahin et al. 2020; Yao et al. 2023). Weekly demand fluctuations, which are often overlooked, also play a significant role on many HSR lines. Notable differences can be seen between weekday and weekend demand characteristics. On weekdays, particularly from Tuesday to Thursday, passenger demand is relatively stable due to regular work schedules. While on weekends, increased commuting demand, especially from individuals who live and work in different locations, can be observed resulting in peaks on Friday and Sunday afternoons, as well as Saturday mornings. Additionally, tourist cities may also experience a surge in demand during the weekend as tourists travel to these locations.

Railway companies commonly adjust train frequencies and stops manually to align timetables with weekly demand fluctuations. For instance, on regional lines in European countries, weekday morning peak timetables often include more short-distance trains connecting smaller cities to major urban centres. In China, where passenger flow on HSR lines is often saturated, timetables are typically adjusted based on a saturated schedule designed for peak periods. However, OD pairs along an HSR line vary in distance and city attributes, leading to different proportions of commuter, tourist, and business travellers, each with distinct demand fluctuation patterns. As a result, simply increasing or decreasing the number of trains is not always sufficient to accommodate these varying demand patterns. Moreover, adjusting train stops could potentially disrupt the regularity of the timetable and diminish the service quality for other OD pairs.

The limitations of manual adjustments urgently require weekly train timetabling methods, while previous train timetabling studies generally focus on periodic timetabling with fixed train cycles (Yao et al. 2023; Zhang and Nie 2016), flexible train cycles (Yan and Goverde 2019), non-periodic timetabling (Cacchiani, Caprara, and Toth 2010; Robenek et al. 2016), and combined periodic and non-periodic timetabling (Şahin et al. 2020) that consider intra-day demand fluctuations. The typical timetabling models in these studies are based on integer decision variables (Yuan et al. 2023; Zhang et al. 2021; Zhao, Yang, and Wu 2021) for the specific departure and arrival times, or time–space networks with binary decision variables to the time–space routes of trains (Brännlund et al. 1998; Liao et al. 2021; Zhang et al. 2022). Headway constraints between departure and arrival times of any two trains (Tian and Niu 2020) and overtaking forbidding constraints between two neighbouring stations (Caprara, Fischetti, and Toth 2002) are always included in the models to guarantee the timetable feasibility. These studies provide a classic framework for modelling the train timetabling problem, including decision variables and critical constraints, upon which our approach is built and customised. While previous literature has widely explored periodic and non-periodic trains, our model incorporates both types along with a third category – **weekly trains**, which operate only on selected days of the week. This feature

introduces intentional variation between daily timetables, allowing better alignment with weekly fluctuations in passenger demand, which constitutes a key distinction from classical timetabling approaches.

Many studies have tailored their methods to address demand variations across different origin-destination (OD) pairs or periods of the day. For instance, some studies introduce direct service frequency constraints to guarantee service level for each OD (Yan and Goverde 2019), robust constraints to address demand uncertainty (Cacchiani, Qi, and Yang 2020), and train capacity constraints according to demand fluctuation (Wang, Li, and Cao 2020). In terms of optimisation objectives, passenger travel indicators are often incorporated to enhance the alignment between train services and demand fluctuations, such as minimising passenger travel time (Borndörfer, Hoppmann, and Karbstein 2016; Kaspi and Raviv 2013), passenger waiting time at stations (Niu and Zhou 2013), and intermediate train dwelling time (Yue et al. 2016). Minimising the difference between obtained timetable and an ideal timetable generated totally based on passenger preference (Cacchiani, Caprara, and Toth 2010; Cacchiani, Galli, and Toth 2015) can also be regarded as objective. Building on research that estimates passenger travel choice behaviours (Fischer 2020; Wu et al. 2022), some studies form the integrated optimisation models to jointly schedule trains and determine passenger travelling routes (Martin-Iradi and Ropke 2022; Schmidt and Schöbel 2014; Xu, Li, and Xu 2021) to improve the demand-matching level of obtained timetable. Rolling stock schedules (Liu et al. 2024; Zhou et al. 2022; Yang et al. 2024) and stop plans (Dong et al. 2020; Yao et al. 2023; Yuan et al. 2023) are also jointly optimised in some studies to further enhance passenger service. Additionally, other measures, such as flow control (Hu, Li, and Ren 2025) and pricing and seat allocation (Yuan et al. 2025), have been considered in recent research to improve service efficiency and demand satisfaction. Building on the various methods proposed to enhance service, this study integrates an estimation of passenger behaviours before timetable generation, followed by an evaluation of the generated timetable based on detailed passenger preferences after timetable generation. This estimation-generation-evaluation approach further improves the alignment between train schedules and passenger preferences.

To solve the train timetabling models under larger-scale practical scenarios, if it is constructed based on time–space networks, Lagrangian relaxation (earlier proposed in Brännlund et al. 1998, and widely used by recent researches, e.g. Liao et al. 2021; Xu, Li, and Xu 2021; Tian et al. 2024) or alternating direction method of multipliers (ADMM, Yao et al. 2023; Zhang et al. 2022) is commonly applied to decompose it into submodels for routing individual trains. Developing heuristic algorithms is also effective if customised search rules are designed, such as inserting or deleting trains (Dong et al. 2020), adjusting headway time intervals between adjacent trains (Yuan et al. 2022; Zhou et al. 2022), and changing the running time of trains (Shi et al. 2023). These tailored solution strategies significantly reduce the computational effort required to solve large-scale timetabling problems. In this study, we draw upon various methods from the existing literature and propose a customised heuristic strategy to generate train schedules following a hierarchical approach, with its efficiency in solving the weekly train timetabling problem demonstrated through extensive case studies.

While previous studies have established classic methods for modelling and solving train timetabling problems, the consideration of complex weekly demand fluctuations presents the following challenges that limit the efficiency of these widely used approaches: First,

the increased number of trains over seven days results in an extensive number of decision variables and constraints, posing significant challenges to find solutions. Second, widely applied demand modelling approaches struggle to manage the larger scale of passenger data and the more complex fluctuation characteristics observed over a week. Using a single passenger demand indicator in the objective function inevitably introduces bias, while an integrated optimisation of timetabling and passenger estimation results in models that are too large to solve efficiently.

To address these challenges, we propose a customised Weekly Train Timetabling (WTT) approach that targets weekly demand fluctuations. Our earlier research (Nie et al. 2022) focused on the weekly line planning problem and proposed a genetic algorithm. Building on this, the current study introduces a WTT model using an Estimation-Generation-Evaluation (EGE) method to determine the specific departure and arrival times for all trains at all stations over a week. To enhance solution efficiency, a hierarchical train generation strategy is incorporated into the EGE. The contributions of this research are summarised as follows

- Proposing weekly train operational modes based on weekly passenger demand fluctuations:** Previous studies have typically focused on single periods or days, with trains operating in either periodic or non-periodic modes. In this study, we introduce weekly operational modes for trains: periodic trains that operate consistently across all periods and days; daily trains that run once or several times each day; and weekly trains that operate only on specific days of the week. Among these three operational modes, periodic and daily trains ensure the timetable regularity, while weekly trains provide the flexibility needed to accommodate fluctuations in weekly demand.
- Developing an EGE method for solving the WTT problem:** The EGE method accounts for refined passenger travel behaviours by estimating the passenger attraction for each train before timetabling. Once the weekly timetable is determined, an evaluation model assesses the solution quality comprehensively. Numerical experiments demonstrate that the resulting weekly timetable is superior to those manually generated by HSR operators, as evidenced by indicators such as passenger travel speed, the number of intermediate stops, and passenger departure times.
- Incorporating a hierarchical train generation strategy in the EGE:** The large number of trains in real-world scenarios poses significant challenges in generating a weekly timetable. To address this, we introduce a customised hierarchical train generation strategy, designed according to the weekly operational modes, and incorporate it into the EGE framework. This strategy prioritises different train categories and follows a three-stage method to generate the weekly timetable. Case studies verify that this strategy significantly reduces computation time while maintaining stable solution quality compared to the commercial solver CPLEX.

The remainder of this paper is organised as follows: Section 2 describes the WTT problem and explains the weekly train operational modes in weekly timetables. Section 3 details the mathematical models used in the EGE method to solve the WTT problem, while Section 4 discusses the hierarchical train generation strategy. Section 5 presents numerical experiments based on a Chinese HSR case study, and Section 6 concludes the study and suggests future research directions.

2. Problem description

The Weekly Train Timetabling (WTT) problem focus on the planning period of a whole week, the continuous daily train operation time is divided into specific periods, such as 8:00 am to 10:00 am and 10:00 am to 12:00 pm Train schedules within different days of the week should vary to align with weekly passenger fluctuations, such as the weekly commuting peaks at Friday, Saturday, and Sunday mentioned in Section 1. Additionally, timetables across different periods of the day should reflect daily demand variations.

While scheduling trains for a week, a certain level of regularity must also be maintained. To ensure the consistency of daily timetables, a proportion of trains within each period should retain identical schedules to facilitate passenger convenience and regular transfers. Furthermore, timetables between adjacent days should not vary significantly, enabling passengers to easily recall train schedules.

To formulate this complex train scheduling problem, the trains in the weekly timetable are classified into three operational modes based on the regularity of their schedules across different periods and days:

- **Periodic trains:** These trains operate in every period each day, with the interval between their departure and arrival times at the same station equal to the length of the period. For example, a periodic train might depart at 8:05 am, 9:05 am, 10:05 am, and so forth, continuing at the same times throughout each day of the week. Periodic trains have been the primary focus in recent studies on periodic timetabling.
- **Daily trains:** These trains operate every day but only during specific periods. For example, a daily train might depart at 8:05 am each day of the week. These trains are considered non-periodic in research related to periodic train timetabling.
- **Weekly trains:** These trains operate only on specific days, such as at 8:05 am from Monday to Friday. Their schedules can be flexibly adjusted without any regular restrictions.

At critical time slots – such as integral time points like 8:00 am and 9:00 am within each period – faster trains with fewer stops, connecting two terminals of an HSR line, are scheduled to ensure regular direct services between distant major cities. These slots are referred to as **mandatory slots**, and the trains operating at these slots are termed **mandatory trains**.

Figure 1 illustrates a typical weekly timetable, with trains labelled from l_1 to l_8 . Trains l_2 , l_4 , and l_6 on both days d_1 and d_2 constitute a set of periodic trains. The departure or arrival time difference between these trains in adjacent periods, such as l_2 in period T_1 and l_4 in period T_2 , is equal to the length of the period. Daily trains l_1 and l_2 run on both days d_1 and d_2 , during period T_1 and T_2 , respectively. Weekly trains l_3 , l_7 , and l_8 operate in different periods and on different days.

Based on these concepts, the WTT problem takes as input a **weekly line plan**, developed in our earlier work (Nie et al. 2022). In that study, a customised genetic algorithm was applied to select trains from a candidate set, resulting in a weekly line plan that determines the origin and terminal stations, intermediate stops, service frequencies, and operational modes of all trains across each day and period. With these elements fixed, the WTT problem then focuses on determining the precise departure and arrival times of the trains at all stations, thereby generating their specific time–space trajectories.

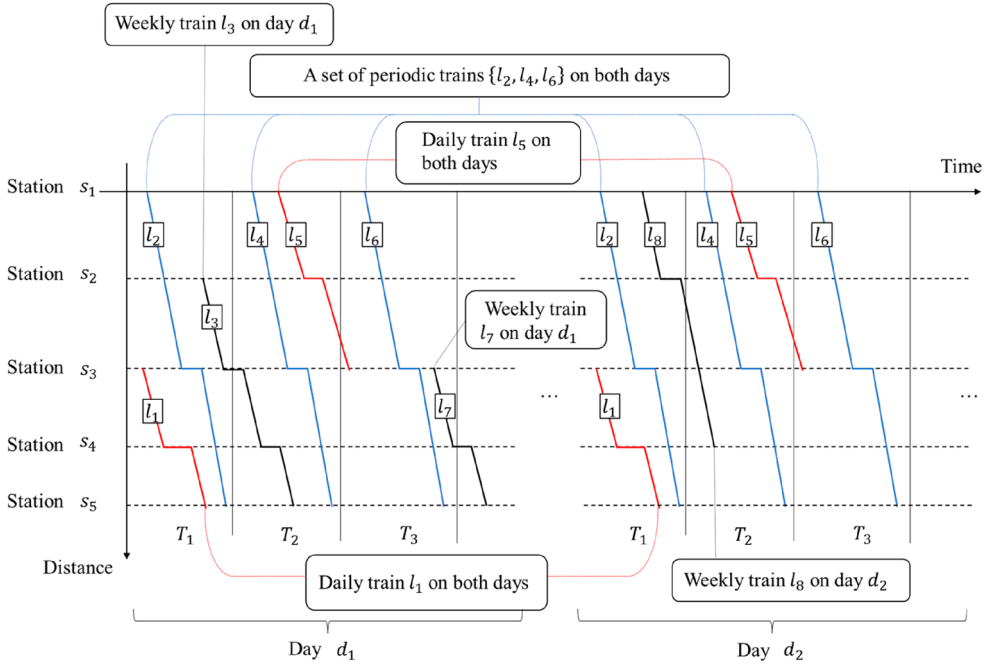


Figure 1. The periodic trains, daily trains, and weekly trains in a weekly timetable.

To formulate the mathematical model and algorithm for WTT problem, the following assumptions are presented. Assumptions 2.1–2.3, established based on practical train operation rules, simplify the decisions regarding train travel speeds between adjacent stations and train dwelling times at various stations. Assumptions 2.4 and 2.5 are derived from passenger preference surveys.

Assumption 2.1: All the trains are of the same maximum speed, which depends on the technical condition of the HSR line. Therefore, with determined train stops in input weekly line plan, running times between any two adjacent stations are considered as fixed values. This assumption simplifies the problem by eliminating the need to optimise running times between stations.

Assumption 2.2: Stations along the HSR line are classified into different levels based on the volume of trains originating, terminating, and stopping at the station, as well as the passenger demand. The train dwelling time at these stations varies within specific upper and lower bounds according to the station levels. At higher-level stations with sufficient track resource, faster trains are allowed to overtake slower trains. This bounded dwelling time reduces the solution space and helps to control the total number of trains stopping at each station by limiting the maximum allowable dwelling time.

Assumption 2.3: The seating capacities of trains are fixed, and overloading is prohibited. This assumption establishes a constraint linking passenger flow with train schedules during the optimisation process.

Assumption 2.4: When the weekly timetable is established, passengers are assigned to their most preferred trains. Indicators related to their travel routes are used to evaluate the quality of the weekly timetable. Passenger preferences for train services are influenced by factors such as departure times, intermediate dwelling times, and transfer time consumption. Passengers are allowed to shift their departure to adjacent periods if no service is available in their desired departure period but are not permitted to depart on different days.

Assumption 2.5: Before solving the WTT problem, passengers are also assigned to train lines based on the input weekly line plan. In this context, passenger-related factors for each train in the line plan, such as the load factor, are used to represent the passenger attraction of each train, serving as input for train scheduling. Since the specific departure and arrival times of trains are not yet determined, passenger preferences are influenced by departure periods, intermediate stops, and the need for transfers. This passenger assignment approach was also examined in our earlier work (Nie et al. 2022).

Assumption 2.6: Passengers travelling between a specific origin-destination pair (OD) within the same period constitute a passenger group, and the preferences of passengers in a same group are of the same. Assumptions 2.4–2.6 are designed to model passenger behaviours.

Assumption 2.7: Periodic trains of the same set operate only once per period. If the frequency of a periodic train is more than one in weekly line plan, multiple distinct periodic train sets should be established.

Assumption 2.8: Trains in input weekly line plan may be cancelled or depart in adjacent periods when their original departure periods become oversaturated, in this case a penalty is incorporated into the objective value. Assumptions 2.7 and 2.8 are introduced to ensure that train schedules adhere to their respective weekly operational modes.

Based on the description of the weekly timetable and the associated assumptions, the Weekly Train Timetabling (WTT) problem is defined as follows: Given the conditions of the HSR line – including the length of each period, the maximum speed of trains, the distance between stations, the categorisation of stations, and the upper and lower bounds of dwell times at various stations – alongside the weekly line plan, which specifies the origin and terminal stations, routes and stops, weekly operational modes, operational periods and days, and the operational frequencies of the trains, as well as the passenger demand data, the objective is to generate a weekly timetable that schedules trains across all seven days of the week and all periods within each day.

The generated weekly timetable must adhere to several constraints to ensure its feasibility: The departure and arrival time constraints for periodic trains within the same set, the consistency of schedules for daily trains within the same set, the safety headway constraints between the departure and arrival times of any two trains, and the running and dwell time constraints for each train.

3. Mathematical models for estimation-generation-evaluation method (EGE)

In the weekly timetable, the schedules for periodic or daily trains remain identical across different days, allowing these trains to be consolidated into a single entity with only one set of decision variables for their departure and arrival times. In contrast, weekly trains, which operate on specific days, are represented as distinct entities with separate sets of decision variables for each day they operate. This consolidation effectively reduces the Weekly Train Timetabling (WTT) problem to a one-day timetabling problem, albeit with additional special headway constraints that govern the relationships between periodic trains, daily trains, and weekly trains.

As depicted in Figure 2, headway constraints are essential between the schedules of any two periodic or daily trains, as these trains operate every day, ensuring safe and efficient spacing between trains on the same line. However, such headway constraints are not necessary between the schedules of two weekly trains that operate on different days, for instance, one operating on weekdays and the other on weekends. By simplifying the WTT problem in this manner, it becomes more manageable while still accommodating the necessary constraints and maintaining the integrity of the weekly schedule.

Based on the consolidated timetable, this section proposes three models to form the Estimation-Generation-Evaluation (EGE) method for solving the WTT problem. The related mathematical expressions are shown in Table 1.

- **Estimation:** The passenger estimation model uses weekly line plan as input and initially assesses passenger travel behaviour based on the stops and periods of the trains before the weekly timetable is determined. It outputs the estimated passenger attraction factor for each train.

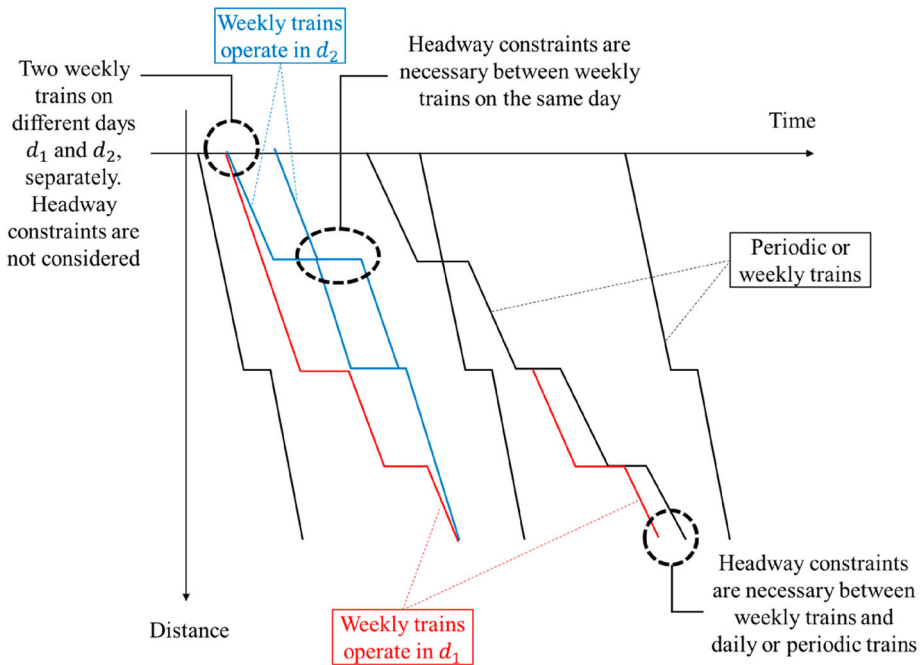


Figure 2. Special headway constraints in consolidated timetable.

Table 1. Notations for mathematical models of the Estimation-Generation-Evaluation (EGE) method.

Notation	Definition
S	The set of stations s along the railway line.
L	The set of all the trains l (or its corresponding train line in the weekly line plan).
W	The set of passenger groups w . $W_{s_i s_j}$ denotes the set of passenger groups between station s_i and s_j .
T	The set of time unites t of each day, typically in minutes.
Q	The set of mandatory train operation slots q .
AL	The set of trains operate in generated weekly timetable. Then $(L - AL)$ denotes the set of cancelled trains.
S_l	The set of station that the train l passes through. Let $S_l = \{s_0, s_1, \dots, s_k\}$ denotes the sequence of stations indexed in the order.
T_l	The departure period of train l determined in weekly line plan.
OR_l	The feasible departure time of train l at its originating station, it includes period T_l and its adjacent periods.
DR_{ls}	The range of departure time of train l at station s .
AR_{ls}	The range of arrival time of train l at station s .
WR_{ls}	The range of dwelling time of train l at station s . If l not stop at s , $WR_{ls} = \{0\}$.
$T_0, T_1, T_2, \dots$	The sequence of different periods indexed in the order, e.g. 6:00–8:00, 8:00–10:00, ...
T_w	The original departure period for passenger group w .
L_q	The set of alternative mandatory trains that can operate at mandatory slot q .
$L^P_{s_i s_{i+1}}, TL^P_{s_i s_{i+1}}$	The set of direct and transfer routes in passenger estimation model that pass the segment between s_i and s_{i+1} .
$L^T_{s_i s_{i+1}}, TL^T_{s_i s_{i+1}}$	The set of direct and transfer routes l in timetable evaluation model that pass the segment between s_i and s_{i+1} .
τ^T	The length of each period.
τ_q	The specific timestep of mandatory slot q .
DH_s	The safety headway for departure times between adjacent trains at station s .
AH_s	The safety headway for arrival times between adjacent trains at station s .
σ_l	The original station of train l
ρ_l	The terminal station of train l .
d_l	The number of days that train l operates. For example, it equals 7 if l is a periodic or daily train that runs every day of the week.
$\tau_{lss'}$	The travel time for train l between two adjacent stations s and s' .
$\theta_{ll'}$	Whether the train l and l' operate in the same day ($\theta_{ll'} = 1$) or not ($\theta_{ll'} = 0$).
VL_w	The volume of passenger group w .
$VL_{l s_i s_{i+1}}$	The seating capacity of train l between station s_i and s_{i+1} .
$u_{w\eta}, u_{wl}$	The matching utility of passenger group w travel through transfer route η or direct route l .
TR_w	The range of rational transfer time for passenger group w .
DT_i	The i -th set of daily trains. DT denotes the set of all the daily trains.
PT_i	The i -th set of periodic trains. PT denotes the set of all the periodic trains
LF_l	The estimated passenger attraction factor of train l .
PA_l	The penalty for the cancellation of train l .
PD_l	The penalty per minute for dwelling time of train l .
PS_l	The penalty for train l switching to another period for departure.
M	A maximum value

- **Generation:** The weekly timetabling model takes the weekly line plan and the estimated passenger attraction factors for each train as input to generate the weekly timetable using the modelling approach of the consolidated timetable.
- **Evaluation:** The timetable evaluation model takes the weekly timetable as input and simulates passenger travel behaviour. Indicators such as passenger travel speeds are used to evaluate the service of weekly timetable.

3.1. Passenger estimation model

The passenger estimation model is constructed similarly to the passenger routing model in our previous research (Nie et al. 2022), which was originally designed to evaluate the quality of a weekly line plan. It estimates the passenger attraction of trains within the line

plan based on their departure periods, stops, and compositions. Output indicators, such as the load factors of trains, serve as evaluations of the passenger attraction ability of the trains and are used as inputs when scheduling trains to reflect their importance in the weekly timetable.

According to Assumption 2.6, the set W includes all passenger groups across different periods and days, covering all OD pairs. Each passenger group w consists of passengers travelling between a specific pair of stations, departing during a specific period on a specific day. To formulate the routes for different passenger groups, two types of decision variables are involved: m_{wl}^p are continuous variables representing the volumes of passengers of group w travelling along direct path $l \in L_w^p$, and $n_{w\eta}^p$ are continuous variables representing the volumes of passengers of group w travelling along transfer path $\eta \in TL_w^p$. The direct and transfer paths for passengers are determined based on the input weekly line plan. The set L_w^p includes all trains that stop at both the origin and destination stations and operate on the same day that passenger group w departs. The set TL_w^p includes all transfer routes. A transfer route can be formed by two trains only if operate on the same day as group w , and the connection at the transfer station is sufficiently close in time, for example, within the same period. This path formation process significantly reduces the number of alternative paths, making the model more computationally efficient.

The objective of the passenger estimation model is to maximise the total matching utility of all passengers, as formulated in (p1). Constraint (p2) set the maximum volume of travelling passengers, while constraint (p3) ensures that passenger volume does not exceed the seating capacity of the train. A detailed discussion of this model can be found in Nie et al. (2022).

$$\text{Max : } Z = \sum_{w,l \in L_w^p} m_{wl}^p \cdot u_{wl}^p + \sum_{w,\eta \in TL_w^p} n_{w\eta}^p \cdot u_{w\eta}^p \quad (\text{p1})$$

$$\sum_{l \in L_w^p} m_{wl}^p + \sum_{\eta \in TL_w^p} n_{w\eta}^p \leq VL_w \quad \forall w \in W \quad (\text{p2})$$

$$\sum_{w,l \in L_{s_i s_{i+1}}^p \cap L_w^p} m_{wl}^p + \sum_{w,\eta \in TL_{s_i s_{i+1}}^p \cap TL_w^p} n_{w\eta}^p \leq VL_{s_i s_{i+1}} \quad \forall l \in AL; s_i, s_{i+1} \in S_l \quad (\text{p3})$$

$$m_{wl}^p \in [0, p_w] \quad \forall w \in W; l \in L_w^p \quad (\text{p4})$$

$$n_{w\eta}^p \in [0, p_w] \quad \forall w \in W; \eta \in TL_w^p \quad (\text{p5})$$

3.2. Weekly timetabling model

The decision variables of weekly timetabling model are listed as follows:

- x_{ls} is an integer variable representing the arrival time of train l at station s .
- y_{ls} is an integer variable representing the departure time of train l at station s .
- z_{lq} is a binary variable, equals 1 if train l is served as mandatory train at the mandatory slot q .
- r_l is a binary variable, equals 1 if train l is cancelled.
- p_l is a binary variable, equals 1 if train l departs within its original departure period.

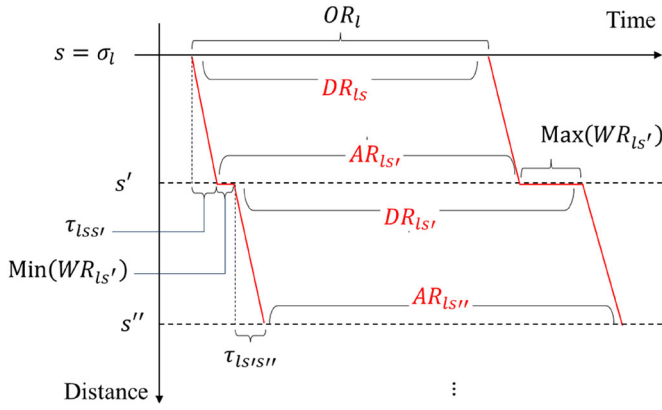


Figure 3. Computing the ranges for train departure and arrival times.

The range of departure and arrival times of train l at each station is restricted by the feasible originating time range $OR_l = DR_{l\sigma_l} = [\text{Min}(T_l) - \tau_T, \text{Max}(T_l) + \tau_T]$. With fixed upper and lower dwelling times at intermediate stations, the upper and lower departure and arrival times at stations can be determined as shown in Figure 3. Assume that train l originates at the earliest time in OR_l and dwells for the shortest time, the earliest departure and arrival times can be computed. Assume that train l originates at the latest time in OR_l and dwells for the longest time at each station s , the latest departure and arrival times can be computed. This computation method is formulated as (g1) and (g2).

$$DR_{l s_j} = \left[\text{Min}(OR_l) + \sum_{j=0}^{i-1} \tau_{l s_j s_{j+1}} + \sum_{j=1}^i \text{Min}(WR_{l s_j}), \text{Max}(OR_l) + \sum_{j=0}^{i-1} \tau_{l s_j s_{j+1}} + \sum_{j=1}^i \text{Max}(WR_{l s_j}) \right]$$

$$i \in [1, k-1] \quad (\text{g1})$$

$$AR_{l s_j} = \left[\text{Min}(OR_l) + \sum_{j=0}^{i-1} \tau_{l s_j s_{j+1}} + \sum_{j=1}^{i-1} \text{Min}(WR_{l s_j}), \text{Max}(OR_l) + \sum_{j=0}^{i-1} \tau_{l s_j s_{j+1}} + \sum_{j=1}^{i-1} \text{Max}(WR_{l s_j}) \right]$$

$$i \in [1, k] \quad (\text{g2})$$

The objective value of weekly timetabling model is formulated as (g3), which consists of three penalty components: The penalty for intermediate dwelling times (PD_l per minute); the penalty for train cancellation (PA_l per train); and the penalty for train departing at adjacent periods (PS_l per train). The parameter d_l represents the penalty weights assigned to trains based on the number of days it operates during the week. Constraints are formulated as (g4) ~ (g19). The restricted range of dwelling times and travelling times are formulated as (g4) and (g5). The departure and arrival headway constraints are initially formulated as (g6) and (g7) and are linearised as described in Appendix 1. Constraints (g8) and (g9) restrict the departure and arrival times of periodic trains of the same periodic set. Constraint (g10) ensure that only one train is selected for each mandatory slot, and constraints (g11) and (g12) restrict the departure time of train l if it is selected as a mandatory train. The rationale of the M-method applied in (g6), (g7), (g11), and (g12) is discussed in Appendix 2. Constraints (g13) and (g14) restrict the departure time of train l within T_l if its departure

period is not changed ($p_l = 1$). Constraint (g15) ensures that if one periodic train within a set is cancelled, all trains in that set are also cancelled to maintain the periodicity of the weekly timetable. Formulations (g16) through (g20) set the lower and upper bounds for the decision variables.

$$\text{Min} : Z = \sum_{l,s \in (S_l - \sigma_l - \rho_l)} d_l(y_{ls} - x_{ls}) + PA_l \cdot \sum_l d_l \cdot r_l + PS_l \cdot \sum_{l \in L-PT} d_l(p_l - 1) \quad (\text{g3})$$

$$y_{ls} - x_{ls} \in WR_{ls} \quad \forall l, s \in (S_l - \sigma_l - \rho_l) \quad (\text{g4})$$

$$x_{ls_{i+1}} - y_{ls_i} = \tau_{ls_i s_{i+1}} \quad \forall l; s_i, s_{i+1} \in S_l \quad (\text{g5})$$

$$|y_{ls} - y_{l's}| + M(r_l + r_{l'} + \theta_{ll'}) \geq DH_s \quad (\text{g6})$$

$$|x_{ls} - x_{l's}| + M(r_l + r_{l'} + \theta_{ll'}) \geq AH_s \quad (\text{g7})$$

$$x_{l_{j+1}s} - x_{l_js} = \tau_T \quad \forall PT_i; l_j, l_{j+1} \in PT_i \quad (\text{g8})$$

$$y_{l_{j+1}s} - y_{l_js} = \tau_T \quad \forall PT_i; l_j, l_{j+1} \in PT_i \quad (\text{g9})$$

$$\sum_{l \in L_q} z_{lq} = 1 \quad \forall q \in Q \quad (\text{g10})$$

$$x_{l\sigma_l} + M \cdot (1 - z_{lq}) \geq \tau_q \quad \forall q \in Q, l \in L^Q \quad (\text{g11})$$

$$x_{l\sigma_l} - M \cdot (1 - z_{lq}) \leq \tau_q \quad \forall q \in Q, l \in L^Q \quad (\text{g12})$$

$$x_{l\sigma_l} + M \cdot p_l \geq \text{Min}(T_l) \quad \forall l \in L - PT \quad (\text{g13})$$

$$x_{l\sigma_l} - M \cdot p_l \leq \text{Max}(T_l) \quad \forall l \in L - PT \quad (\text{g14})$$

$$r_{l_j} = r_{l_{j+1}} \quad \forall PT_i; l_j, l_{j+1} \in PT_i \quad (\text{g15})$$

$$x_{ls} \in DR_{ls} \quad \forall l, s \in (S_l - \rho_l) \quad (\text{g16})$$

$$y_{ls} \in DR_{ls} \quad \forall l, s \in (S_l - \sigma_l) \quad (\text{g17})$$

$$z_{lq} \in \{0, 1\} \quad \forall q \in Q, l \in L^Q \quad (\text{g18})$$

$$r_l \in \{0, 1\} \quad \forall l \quad (\text{g19})$$

$$p_l \in \{0, 1\} \quad \forall l \in L - PT \quad (\text{g20})$$

3.3. Timetable evaluation model

The obtained weekly timetable forms direct routes L_w^T and transfer routes TL_w^T for each passenger group w in a similar way as L_w^P and TL_w^P in Section 3.1. Since the departure and arrival times of trains are determined in weekly timetable, transfer routes are formed according to the specific transfer times additionally. Routes with infeasible transfer times are rejected.

Method to compute the passenger travelling utilities u_{wl}^T and $u_{w\eta}^T$ is described as follows: Set $\hat{u}_{wl}$ as the sum of all the intermediate dwelling times (in minute) of train l between original and terminal stations, and $\hat{u}_{w\eta}$ as the sum of all the intermediate dwelling times (in minute) of train l and l' that form the transfer route η and include the transfer time of η (in minute, with a larger weight due to the more inconvenience caused by transferring). Next, add a penalty to both $\hat{u}_{wl}$ and $\hat{u}_{w\eta}$ if the departure time of route is not

within the original departure period of passenger group w . This penalty can either be uniform across all non-preferred periods or vary according to the deviation from the original departure period. In this study, we apply a significant penalty regardless of the period difference, as our objective is to ensure that all passengers depart within their original preferred periods. Finally, $u_{wl}^T \in DU_w$ is determined as the normalised value of $-\hat{u}_{wl}$ for different l , and $u_{w\eta}^T \in TU_w$ is determined as the normalised value of $-\hat{u}_{w\eta}$ for different η . Generally, $\text{Min}(DU_w) \geq \text{Max}(TU_w)$.

Decision variables m_{wl}^T are continuous one representing the volumes of passengers of group w travelling along direct path $l \in L_w^T$, and $n_{w\eta}^T$ are continuous variables representing the volumes of passengers of group w travelling along transfer path $\eta \in TL_w^T$. The objective, and constraints of timetable evaluation model are formulated as (t1) ~ (t5), which is similar to the passenger estimation model in Section 3.1.

$$\text{Max: } Z = \sum_{w,l \in L_w^T} m_{wl}^T \cdot u_{wl}^T + \sum_{w,\eta \in TL_w^T} n_{w\eta}^T \cdot u_{w\eta}^T \quad (\text{t1})$$

$$\sum_{l \in L_w^T} m_{wl}^T + \sum_{\eta \in TL_w^T} n_{w\eta}^T \leq VL_w \quad \forall w \in W \quad (\text{t2})$$

$$\sum_{w,l \in L_{s_i s_{i+1}}^T \cap L_w^T} m_{wl}^T + \sum_{w,\eta \in TL_{s_i s_{i+1}}^T \cap TL_w^T} n_{w\eta}^T \leq VL_{s_i s_{i+1}} \quad \forall l \in AL; s_i, s_{i+1} \in S_l \quad (\text{t3})$$

$$m_{wl}^T \in [0, p_w] \quad \forall w \in W; l \in L_w^T \quad (\text{t4})$$

$$n_{w\eta}^T \in [0, p_w] \quad \forall w \in W; \eta \in TL_w^T \quad (\text{t5})$$

4. EGE incorporating hierarchical train generation strategy

In the Estimation-Generation-Evaluation (EGE) method, solving the weekly timetabling model is most challenging due to the inclusion of integer decision variables, while in other models all the decision variables are continuous. To address this challenge a hierarchical train generation strategy is incorporated into EGE. The outline of EGE is illustrated in Figure 4.

First, the passenger estimation model route passengers based on the input weekly line plan, the values of decision variables are denoted as $\bar{m}_{wl}^P$ and $\bar{n}_{w\eta}^P$. To measure the passenger attraction of each train line, the load factors are served as passenger attraction factor LF_l . The distance between station s_1 and s_2 is denoted as $DIS_{s_1 s_2}$, and the computation of LF_l is formulated as (e1).

$$LF_l = \sum_{s_i, s_{i+1} \in S_l} \frac{DIS_{s_i s_{i+1}}}{DIS_{\sigma_l \rho_l} \cdot VL_{s_i s_{i+1}}} \cdot \left(\sum_{w,l \in L_{s_i s_{i+1}}^P \cap L_w^P} \bar{m}_{wl}^P + \sum_{w,\eta \in TL_{s_i s_{i+1}}^P \cap TL_w^P} \bar{n}_{w\eta}^P \right) \quad (\text{e1})$$

The passenger attraction factor LF_l , computed in the passenger estimation model, is then used as critical input in the weekly timetabling model. The penalty values for different trains l in the objective (g3) of weekly timetabling model are computed based on LF_l , formulated as $PD_l = F^{PD}(LF_l)$, $PA_l = F^{PA}(LF_l)$, and $PS_l = F^{PS}(LF_l)$. These penalties reflect the potential risk of passenger service reduction associated with the train adjustments and cancellation.

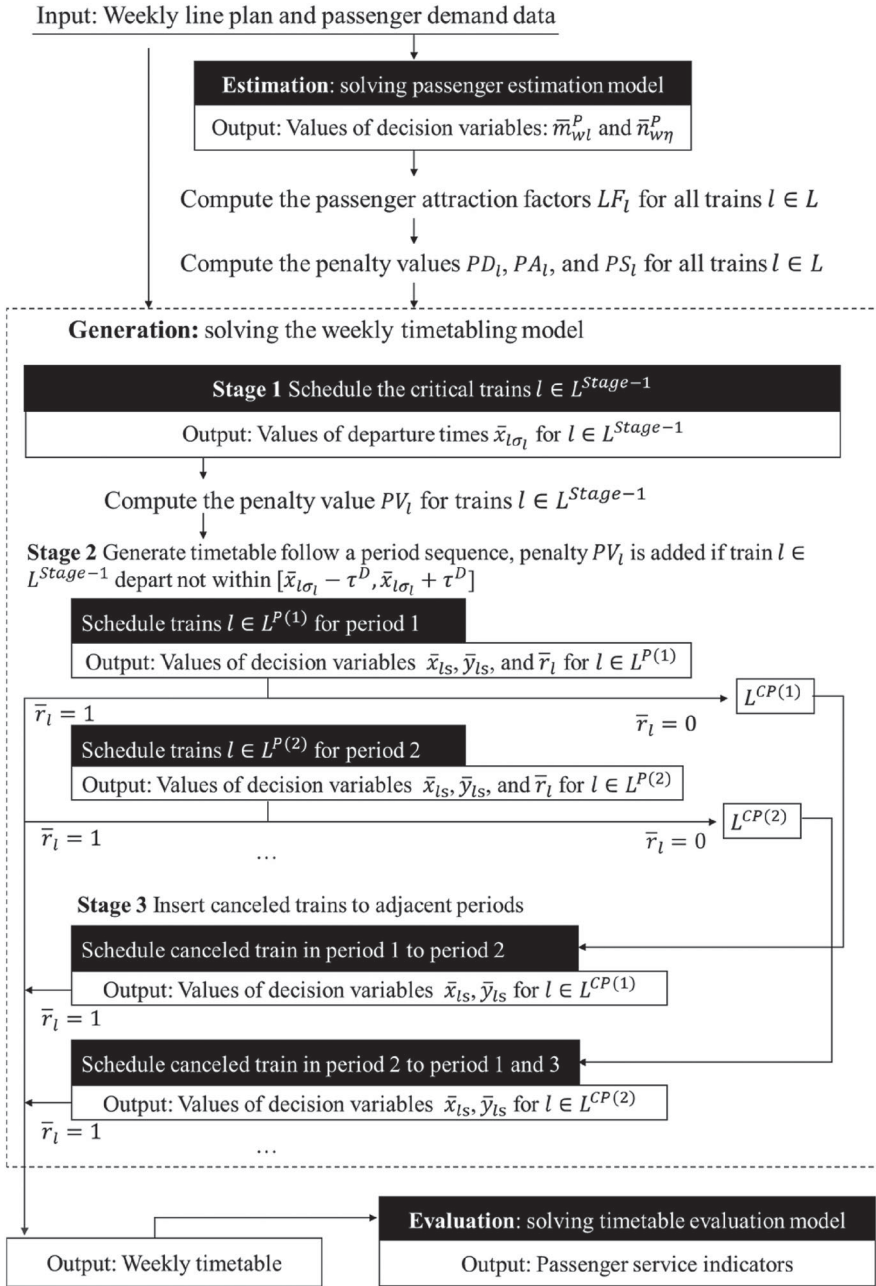


Figure 4. The procedure for Estimation-Generation-Evaluation (EGE) method incorporating hierarchical train generation strategy.

Sections 4.1, 4.2, and 4.3 describe the hierarchical train generation process, which decomposes the original optimisation problem – considering all trains as input – into multiple stages. In each stage, a smaller subset of trains is selected as input and scheduled using commercial solvers to solve the optimisation model presented in Section 3.2, with different parameters applied.

Finally, through evaluating the output weekly timetable, demand-related indicators are used to measure passenger service level. For example, the total matching utility, which is the value of the objective function, indicating the extent to which passengers can select the optimal travel paths. Other detailed indicators, such as passenger travel speed, can also be implemented into discussion. An iterative method could be developed as follows, though it is not included in this study due to its current instability in efficiency: The weekly timetable evaluation can also generate LF_I values for scheduled trains, which can then be used as inputs for the weekly timetabling model in the next iteration.

4.1. Scheduling the critical trains

The first stage of hierarchical train generation is scheduling the critical trains in weekly timetable, which containing three types of trains: all alternative mandatory trains for each mandatory slot, all periodic trains, and daily or weekly trains with higher passenger attractions. The steps of scheduling the critical train are given as follows.

Step 1 Let $L^{Stage-1}$ represent the set of critical trains that are scheduled in this Stage-1. And select trains from L into $L^{Stage-1}$. Order the trains $I \in L$ according to LF_I , and for each I :

if I is the alternative mandatory train for a mandatory slot $q \in Q$ ($I \in L_q$), add I into $L^{Stage-1}$;
 if I is a periodic train ($I \in L^P$), add I into $L^{Stage-1}$;
 if I is a daily train ($I \in L^D$) or weekly train ($I \in L^W$), and the number of trains in $L^{Stage-1}$ is less than a pre-given value ($|L^{Stage-1}| < VT^{Stage-1}$), add I into $L^{Stage-1}$.

Step 2 Compute the penalties PD_I , PA_I , and PS_I of trains $I \in L^{Stage-1}$ with linear formulations (e2), (e3), and (e4).

$$PD_I = F^{PD}(LF_I) = a_I^{PD} \cdot LF_I + b_I^{PD} \quad (e2)$$

$$PA_I = F^{PA}(LF_I) = a_I^{PA} \cdot LF_I + b_I^{PA} \quad (e3)$$

$$PS_I = F^{PS}(LF_I) = a_I^{PS} \cdot LF_I + b_I^{PS} \quad (e4)$$

Step 3 Regarding the trains $I \in L^{Stage-1}$ and their penalties PD_I , PA_I , and PS_I as input, solve the weekly timetabling model described in Section 3.2 with commercial solver. The values of decision variables $x_{I\sigma_I}$ is recorded as $\bar{x}_{I\sigma_I}$, which is the expected departure values for critical trains.

In this process, the set $L^{Stage-1}$ must include at least all periodic trains, while the maximum number of trains $VT^{Stage-1}$ in the critical set should not be excessively large. An overly large critical train set may prevent the commercial solver from solving the weekly timetabling problem within a reasonable time frame, resulting in suboptimal scheduling of critical trains. This balance is crucial for maintaining computationally feasibility while effectively covering essential and high-demand services in the timetable. Values of a_I^{PD} , a_I^{PA} , and a_I^{PS} as well as b_I^{PD} , b_I^{PA} , and b_I^{PS} for different trains I and are set according to the distance and the number of stations they pass and stop at to measure the potential impact of their adjustments on passengers.

4.2. Scheduling the trains following the period sequence

This stage schedule all the trains by solving local timetables for each period. This method neglects the global information and leads to only local optimal solutions, which is the motivation of scheduling critical trains firstly, with demand fluctuation across different periods considered.

In this section, critical trains in $L^{Stage-1}$ are assumed to departure within a certain time range according to their schedules determined in Section 1, or a new penalty PV_I will be added in the objective of the weekly timetabling model, which is formulated as (e5). New type of decision variables e_I is incorporated for critical trains $I \in L^{Stage-1}$. When e_I equals 1, train I departs within a range of $[\bar{x}_{I\sigma_I} - \tau^D, \bar{x}_{I\sigma_I} + \tau^D]$, where τ^D represents the flexibility for adjusting the departure time of critical trains. Additional constraints (e6) and (e7) are included in the weekly timetabling model to restrict the relationship between e_I and $x_{I\sigma_I}$. The rationale of the M-method is discussed in Appendix 2. These constraints ensure that critical trains are positioned within time slots determined based on the global passenger demand information, aiming to achieve a higher level of demand matching.

$$\text{Min} : Z = PD_I \cdot \sum_{I,s \in (S_I - \sigma_I - \rho_I)} d_I(y_{Is} - x_{Is}) + PA_I \cdot \sum_I d_I r_I - PV_I \cdot \sum_{I \in L^{Stage-1}} d_I e_I \quad (\text{e5})$$

$$x_{I\sigma_I} - M \cdot (1 - e_I) \leq \bar{x}_{I\sigma_I} + \tau^D \forall I \in L^{Stage-1} \quad (\text{e6})$$

$$x_{I\sigma_I} + M \cdot (1 - e_I) \geq \bar{x}_{I\sigma_I} - \tau^D \forall I \in L^{Stage-1} \quad (\text{e7})$$

The process for scheduling trains following the period sequence is given as follows.

Step 1. Compute the penalties PD_I , PA_I , and PS_I of trains $I \in L$ with (e2), (e3), and (e4), respectively. Compute the penalties PV_I for trains $I \in L^{Stage-1}$ with (e8).

$$PV_I = F^{PV}(LF_I) = a_I^{PV} \cdot LF_I + b_I^{PV} \quad (\text{e8})$$

Step 2. Order the periods according to a certain rule (for example, from the latest to the earliest within a day). Let $L^{P(i)}$ represents the set of trains operating in the period indexed by i in this sequence. For example, $L^{P(1)}$ corresponds to the last period of the day.

Steps 3–7 describe the procedure to schedule all the trains in the period indexed by i :

Step 3. For each train $I \in L^{P(i)}$, if I is also included in L_j^{PT} . Add the trains $I' \in L_j^{PT} \cap L^{P(i-1)}$ and $I' \in L_j^{PT} \cap L^{P(i+1)}$ to $L^{P(i)}$ if they have not been scheduled yet.

Step 4. Compute the departure and arrival time ranges DR_{Is} and AR_{Is} with (g1) and (g2). If $i \geq 2$, adjust the upper bounds of DR_{Is} and AR_{Is} are adjusted according to (e9) and (e10) based on the schedules of trains in adjacent period indexed $(i - 1)$.

$$\text{Max}(AR_{Is}) = \text{Min}_{I \in L^{P(i-1)}} (\bar{x}_{Is}) - AH_s \quad \forall I, s \in (S_I - \rho_I) \quad (\text{e9})$$

$$\text{Max}(DR_{Is}) = \text{Min}_{I \in L^{P(i-1)}} (\bar{y}_{Is}) - DH_s \quad \forall I, s \in (S_I - \sigma_I) \quad (\text{e10})$$

Step 5. If a mandatory slot q falls within the time range of this period ($\tau_q \in T^{P(i)}$), add the trains $I \in L_q$ to $L^{P(i)}$ and include decision variables z_{Iq} along with constraints (g11) and (g12) for slot q .

Step 6. With the trains $I \in L^{P(i)}$ and their penalties PD_I , PA_I , PS_I , and PV_I (only for $I \in L^{Stage-1} \cap L^{P(i)}$) as input, a commercial solver is applied to solve the weekly timetabling model with formulation (e5) as the objective and include additional constraints (e6) and

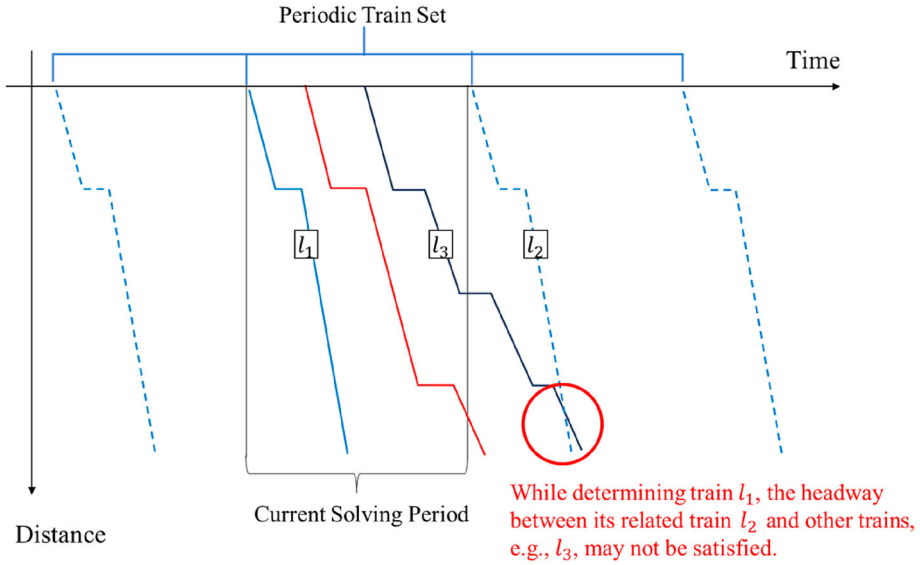


Figure 5. Potential conflicts between two periods while solving local timetables.

(e7). In this step, all trains within the selected period are scheduled in the output solution. The resulting values of the decision variables for train l at station s are denoted as $\bar{x}_{ls}$ and $\bar{y}_{ls}$. These values remain fixed and will not be adjusted when scheduling trains in subsequent periods. If the timetable capacity within the period is insufficient to accommodate all planned trains, a subset of trains in this period will be cancelled. The set of cancelled trains is denoted as $L^{CP(i)}$.

Step 7. For each train $l \in L^{P(i)} - L^{CP(i)}$, if l is also included in L_j^{PT} . Determine the schedules for other trains $l' \in L_j^{PT} \cap L^{P(k)}$ with (e11) and (e12)

$$\bar{x}_{l's} = \bar{x}_{ls} - (k - i) \cdot \tau^T \forall l \in L_j^{PT} \cap L^{P(i)}; l' \in L_j^{PT} \cap L^{P(k)} \quad (e11)$$

$$\bar{y}_{l's} = \bar{y}_{ls} - (k - i) \cdot \tau^T \forall l \in L_j^{PT} \cap L^{P(i)}; l' \in L_j^{PT} \cap L^{P(k)} \quad (e12)$$

Potential conflicts while scheduling trains following period sequence is described as follows. Corresponding methods for addressing them during the procedure is also outlined.

First, given that some trains may extend into adjacent periods, scheduling periodic trains at the earliest times of a period may violate the safety headway intervals between the latest departing trains of the current period and the earliest departing trains of the next period. For instance, in Figure 5, where trains l_1 and l_2 are scheduled to depart early in the current solving period and next period, respectively. Train l_3 , however, departs late in the current solving period and extends to the next period. In this case, safety headway should be satisfied between trains l_2 and l_3 . To handle this potential conflict, in **Step 3** when solving a period concluding periodic trains, other periodic trains departing in adjacent periods should also be scheduled simultaneously, with their safety headway constraints considered in weekly timetabling model.

Second, model may fail to schedule mandatory trains due to the other trains scheduled close to the mandatory slot. For example, in Figure 6, if train l_1 is scheduled too close to the

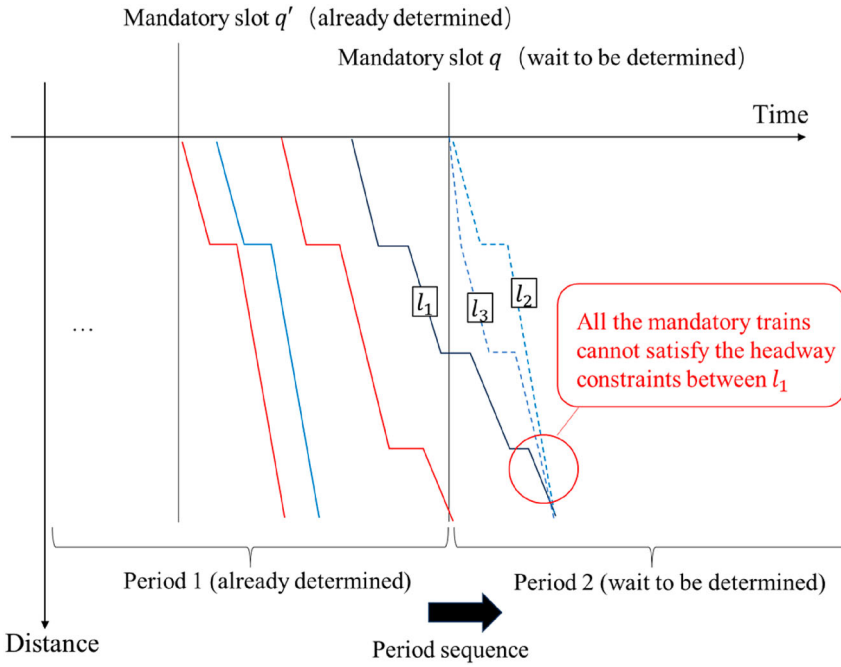


Figure 6. Potential conflicts of mandatory slots while solving local timetables.

mandatory slot q , it may violate the headway constraints between any potential mandatory trains l_2 and l_3 at this slot. Therefore, in **Step 5** if a single mandatory slot may span two adjacent periods, its mandatory train should be determined in the prioritised period in the sequence.

Third, if trains in adjacent periods are both scheduled, the range for departure and arrival times at some stations may be reduced or even eliminated. For example, in Figure 7 the latest train l_3 in period 1 significantly intrudes into the departure time range of period 2. However, trains in period 2 cannot extend into period 3 to achieve a larger operating time range due to the scheduled mandatory train l_3 , leading to a significant compression of the departure and arrival time range of period 2 trains. Therefore, in **Step 2** if there are fewer trains in later time periods, the period sequence should be constructed from the earliest to the latest one of a day. Conversely, if there are fewer trains in earlier periods, or if trains departing in the latest periods are prone to intruding into subsequent maintenance windows, the sequence could be constructed from the latest to the earliest one.

4.3. Rescheduling the cancelled trains

This stage aims to reschedule trains that are cancelled in previous stage described in Section 4.2. By expanding the range of decision variables for departure and arrival times, feasible routes may be found in adjacent periods. The original periods and its adjacent periods of train l is added into OR_l , then DR_{lS} and AR_{lS} can be computed by (g1) and (g2). The process for rescheduling the trains cancelled in previous stage is given as follows.

Step 1. Select the period indexed by i if its scheduled trains number less than a certain value ($|L^{P(i)}| - |L^{CP(i)}| \leq NL$).

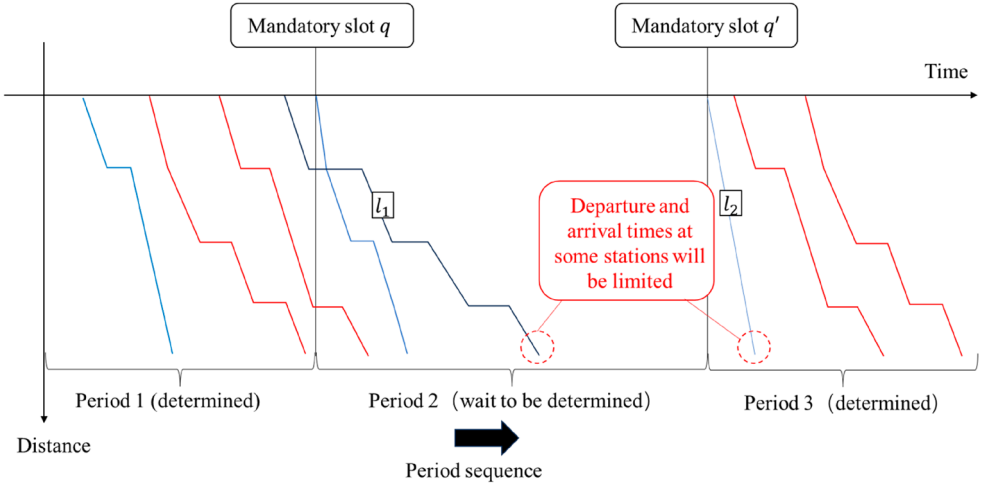


Figure 7. The train operation time range of a period may be limited by scheduled trains in adjacent periods.

Following steps 2–4 reschedule cancelled trains departing at the adjacent periods indexed by $(i - 1)$ and $(i + 1)$.

Step 2. Let the set $L^{S3P(i)} = L^{P(i)} - L^{CP(i)} + L^{CP(i-1)} + L^{CP(i+1)}$, in which $(L^{CP(i-1)} + L^{CP(i+1)})$ represents the cancelled trains in adjacent periods that are ready to be scheduled in period i in stage 3, and $(L^{P(i)} - L^{CP(i)})$ represents the already scheduled trains.

Step 3. Reset the departure and arrival time ranges DR_{I_S} and AR_{I_S} for trains $I \in L^{S3P(i)}$:

If $I \in L^{P(i)} - L^{CP(i)}$, $DR_{I_S} = \bar{x}_{I_S}$ and $AR_{I_S} = \bar{y}_{I_S}$. The scheduled trains won't change its departure and arrival times.

If $I \in L^{CP(i-1)}$, use (g1) and (g2) to compute DR_{I_S} and AR_{I_S} , in which $OR_I = [\text{Min}(T_{P(i)}), \text{Max}(T_{P(i-1)})]$. $T_{P(i)}$ represents the range of timesteps for period indexed by i in the period sequence.

If $I \in L^{CP(i+1)}$, use (g1) and (g2) to compute DR_{I_S} and AR_{I_S} , in which $OR_I = [\text{Min}(T_{P(i+1)}), \text{Max}(T_{P(i)})]$.

Step 4. With the trains $I \in L^{S3P(i)}$ and adjusted DR_{I_S} and AR_{I_S} as input, solve the weekly timetabling model. The values of decision variables are denoted as $\bar{x}_{I_S}$, $\bar{y}_{I_S}$, and $\bar{r}_I$. If $\bar{r}_I > 0$, this operated train is moved out of $L^{CP(i)}$.

Step 5. After all the periods in the sequence are computed, all scheduled trains are output as the weekly timetable.

5. Numerical experiment

Based on the typical Shanghai-Nanjing high-speed railway (HSR) line, we first construct smaller-scale scenarios to compare the solution quality between the Estimation-Generation-Evaluation (EGE) method and the commercial solver CPLEX, demonstrating the solution efficiency of EGE. Subsequently, practical passenger demand data and the weekly line plan from Nie et al. (2022) are used as inputs for a large-scale practical scenario. This



Figure 8. Condition of Nanjing-Shanghai high-speed railway line.

allows us to compare the EGE-generated weekly timetable with a manually generated timetable and assess EGE's performance. Finally, the EGE is applied to the Beijing-Shanghai HSR line, which represents a typical long-distance route distinct from the Shanghai-Nanjing line. By comparing the solutions for these two HSR lines, we demonstrate the universality of the EGE method.

The railway condition of Shanghai-Nanjing HSR is illustrated in Figure 8. Stations are classified into three levels: major stations of level 1, larger intermediate stations of level 2, and smaller intermediate stations of level 3. The test computer runs on Windows 11 operating system, with an CPU of AMD R9 7490H, a main frequency of 4.00 GHz, 8 cores, 16 threads, and 16GB of memory.

5.1. Solution analysis based on small-scale scenarios

Five smaller-scale scenarios containing from 50 to 100 trains are constructed. The input weekly line plans for these scenarios are derived by removing a portion of trains from the original plan developed in Nie et al. (2022). Efforts were made to maintain similar proportions of periodic, daily, and weekly trains across the scenarios; however, these manually generated line plans do not match passenger demand as effectively as the original. The primary objective of comparing these scenarios is to evaluate the performance of the 'Generation' stage of the EGE method, which employs a hierarchical train generation strategy. The commercial solver CPLEX is used as benchmark, with a maximum solution time to 7200 s. The objectives and solution gaps for the hierarchical strategy and CPLEX are documented in Table 2.

While solving the smallest scenario (scenario 1), CPLEX can obtain the optimal solution with negligible time consumption. However, as the number of trains increase, the solution performance of CPLEX decreases significantly. In scenario 3 and 4, CPLEX fails to find solution with a small gap within 7200-s limit. And in scenario 5, CPLEX cannot find any feasible solution within 7200 s and only a lower bound value can be estimated.

Table 2. Solution comparison between hierarchical strategy and CPLEX.

Scenarios		1	2	3	4	5
Num. of trains in the consolidated timetable		51	86	103	124	150
Num. of periodic trains in the consolidated timetable		6	18	18	24	30
Num. of daily trains in the consolidated timetable		21	23	28	29	43
Num. of trains in original weekly line plan		244	394	457	538	700
CPLEX	Computation time for the first solution with gap less than 5%	117s	2159s	> 7200s	> 7200s	> 7200s
	Total computation time	356s	7200s	7200s	7200s	–
	Obj. value of the best solution	4000	6455	23,297	72,178	–
	Gap of the best solution	0.00%	1.04%	67.57%	88.19%	–
	Estimated lower bound value	4000	6388	7555	8587	12,343
Hierarchical train generation strategy	Computation time	2s	29s	158s	612s	3525s
	Obj. value	4261	75,67	9063	10,532	17,236
	Gap	6.12%	15.58%	16.63%	18.47%	28.39%

For the hierarchical train generation strategy in the EGE, the computation times for all the scenarios are shorter than that of CPLEX. However, the hierarchical strategy divides the original model into multiple stages, leading to only local optimal solutions instead of the global ones. Therefore, while solving smaller scenarios 1 and 2, the solution gaps times of hierarchical strategy are larger than those of CPLEX. As the number of trains increases, the solution gaps become much smaller compared to those obtained by CPLEX, demonstrating a significant efficiency improvement while solving larger-scale weekly timetabling models.

Since the hierarchical strategy cannot directly estimate the lower bound of the solution, gaps in Table 2 are computed based on the lower bounds estimated by CPLEX. Therefore, in scenario 5 when CPLEX fails to find good solutions, this estimation of lower bound may also be biased. Figure 9 illustrates the comparison between the train number and the changes in the objective values obtained by the hierarchical strategy across the five scenarios. The objective of the weekly timetabling model is strongly correlated with the number of trains. Hence, in scenarios 1–4, the trends of the two lines in Figure 9 are similar, indicating consistent solution quality. Due to an additional penalty value of totally 8 trains rescheduled to adjacent periods in scenario 5, a significant increase in the objective value can be observed between scenarios 4 and 5.

Combining the trends observed in the curves depicted in Figure 9 with the gaps for the solutions in Table 2, it becomes evident that the hierarchical strategy consistently outperforms CPLEX when solving weekly timetabling model in the process of EGE method under larger-scale scenarios. Moreover, the solution quality of the hierarchical strategy remains consistent across different scales of cases.

5.2. Solution analysis based on large-scale piratical scenarios

With the practical passenger demand data and weekly line plan of the Nanjing-Shanghai HSR line as inputs, the implementation details of the hierarchical train generation strategy are discussed in sections 5.2.1 and 5.2.2. In section 5.2.3, the EGE-obtained weekly timetable is compared to the manually generated timetable, which is currently applied in this practical scenario.

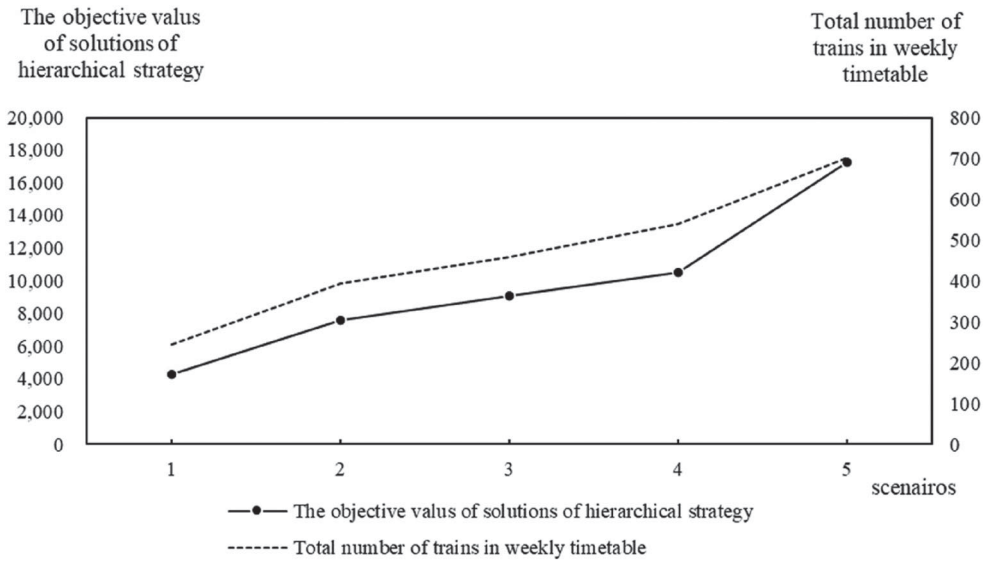


Figure 9. The changing trend of objective values of HTG strategy across different scenarios.

5.2.1. Implementation details related to stage 1 in the hierarchical strategy

With the implementation of stage 1 in hierarchical strategy, two parameters playing critical roles are analysed in detail:

- (1) The schedule adjustment duration τ^D for critical trains in stage 2.
- (2) The penalty value PV_l , which will be added into objective if the critical trains / departure not in the given time range. The value of PV_l can be set as a certain proportion of the penalty PA_l .

In Table 3, a timetable generated without involving stage 1 is recorded as ID 1. The other solutions are generated with the values of PV_l/PA_l set as 0.7, 0.5, 0.3, 0.1, and 0.05; and with the values of τ^D set as 0, 10, 20, 40, and 80. Solutions with demand matching utilities significantly higher than that of ID 1 are highlighted in bold. Generally, involving stage 1 leads an increase in computation time. However, if appropriate values are set for PV_l and τ^D , the passenger matching utility of solution with stage 1 incorporated can be 17.23% (the data of ID 20) higher than the solution without stage 1. This increase can be attributed to the following aspects.

- (1) **Increase in the number of trains and seat kilometres.** This trend is particularly evident in IDs 15 and 20 in Table 3. Without stage 1, periodic trains will be scheduled at suboptimal times in stage 2, making it difficult to insert enough number of trains in the subsequent periods. While by introducing the stage 1 and setting appropriate values for PV_l and τ^D , both the number of trains and the total seat kilometres increase. This offers passengers more diverse travel options and greater transport capacity thus increase the total passenger matching utility.

Table 3. Solution indicators with different values of PV_I and τ^D .

ID	Whether stage 1 is included	PV_I/PA_I	τ^D	Computation time (min)	Total train penalty ($\times 10^4$)	Total demand matching utility ($\times 10^6$)	Total number of trains	Total seat kilometres ($\times 10^8$)	Number of passengers departing at original period
1	not included	–	–	86	2.04	2.62	759	1.71	64.3%
2	included	0.7	0	105	4.11	2.30	728	1.64	64.1%
3			10	107	4.68	2.50	734	1.66	67.6%
4			20	101	5.32	2.69	762	1.72	65.4%
5			40	101	2.81	2.62	754	1.71	66.3%
6			80	102	2.15	2.65	770	1.75	63.8%
7		0.5	0	110	3.52	2.44	735	1.67	64.1%
8			10	104	5.37	2.54	750	1.69	66.7%
9			20	103	3.11	2.67	758	1.72	69.9%
10			40	111	2.44	2.83	795	1.80	67.0%
11			80	112	2.08	2.60	758	1.71	64.3%
12		0.3	0	102	4.06	2.38	737	1.66	64.5%
13			10	102	2.61	2.53	763	1.72	66.0%
14			20	114	2.92	2.32	713	1.63	64.0%
15			40	110	2.36	3.01	803	1.82	66.9%
16			80	106	3.45	2.18	711	1.61	58.8%
17		0.1	0	102	3.38	2.59	753	1.69	66.1%
18			10	103	4.69	2.41	749	1.69	66.9%
19			20	102	4.93	2.56	733	1.71	68.7%
20			40	110	2.26	3.08	804	1.83	69.3%
21			80	105	2.03	2.89	784	1.78	68.0%
22		0.05	0	102	3.62	2.50	738	1.68	65.0%
23			10	111	4.49	2.51	750	1.71	68.8%
24			20	102	2.28	2.48	730	1.64	67.6%
25			40	105	7.00	2.04	687	1.58	63.3%
26			80	106	2.42	2.79	788	1.78	68.5%

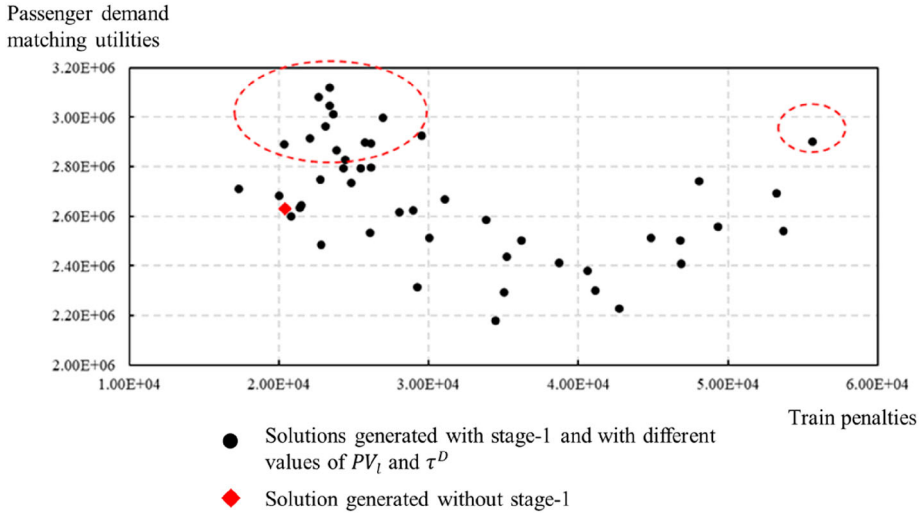


Figure 10. Train penalties and demand matching utilities of solutions with different values of PV_i and τ^D .

- (2) **Increase in passengers travelling within their original departure periods.** This trend is particularly evident in IDs 9, 20, 21, and 26 in Table 3. Although maintaining passengers' original departure periods is not explicitly defined as an objective in the weekly timetabling model, it is achieved by prioritising critical trains with higher passenger demand in the hierarchical strategy. When critical trains are scheduled to operate within their original periods, a higher proportion of passengers are accommodated within their preferred departure times, leading to a higher passenger matching utility.
- (3) **Slight increase in penalties for the solutions.** This trend is particularly evident in IDs 4 and 9 in Table 3. Since the train penalties is the objective of weekly timetabling model, a large proportion of solutions with higher matching utilities typically reflect lower train penalties. However, in Figure 10 which prints the solutions generated with various PV_i and τ^D (the one generated without the stage 1 is marked in red as a benchmark), solutions can both achieve high values of demand matching utility when the penalties for the solutions are lower (below 2.5×10^4) or higher (above 5.0×10^4). Most solutions with higher matching utilities (above 2.8×10^6) fall within the penalty values of 2.0×10^4 to 3.0×10^4 , as indicated by the red dashed circles. This suggests a certain degree of bias between the specific passenger service level and the objective of the model. Therefore, the directly obtained optimal solution not necessary being the solution with best passenger matching utility. While the hierarchical strategy proposed in this study can further enhance the demand matching utility when appropriate PV_i and τ^D values are applied, with the cost of a slightly increased in the objective value.

The records in Table 3 reveal the crucial influence of PV_i and τ^D on the optimisation effort of the hierarchical strategy. In practical scenarios, PV_i/PA_i is typically less than 1, and τ^D should be less than the length of each period. According to Table 3, solutions generally exhibit higher quality when PV_i/PA_i is between 0.1 and 0.5. Therefore, the values of 0.1, 0.3,

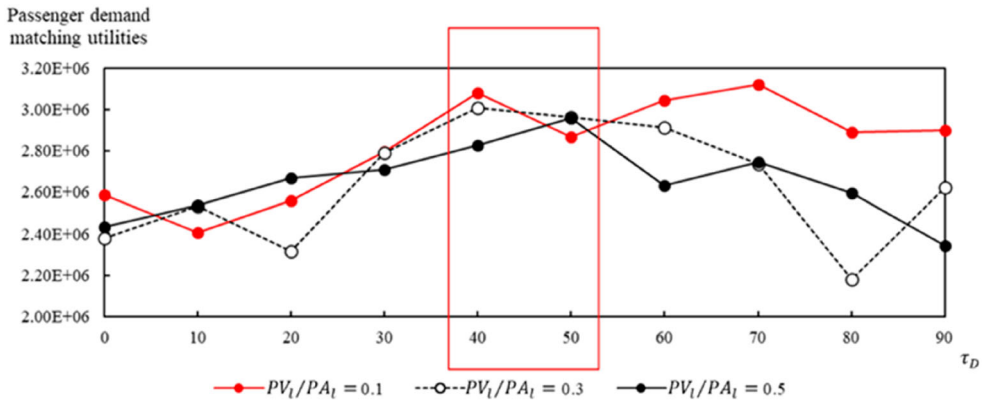


Figure 11. Passenger demand matching utilities changing trends with different values of PV_I and τ^D .

and 0.5 for PV_I/PA_I is tested, and the values of τ^D is set between 0 and 90, the changing trends of passenger demand matching utilities are illustrated in Figure 11.

When τ^D is less than 30, the demand matching utilities of the three series are generally low and exhibit an upward trend. When $\tau^D = 40$ or 50, all three series achieve good solutions. As τ^D increases further, the demand matching utilities for $PV_I/PA_I = 0.3$ and 0.5 series tend to decrease overall, while the $PV_I/PA_I = 0.1$ series further achieved the highest demand matching utility at $\tau^D = 70$. Referring to the overall trend changes in other series, $PV_I/PA_I = 0.1$ and $\tau^D = 40$ are set as considered reasonable values and will be utilised in subsequent experiments.

5.2.2. Optimisation effort related to stage 3 in the hierarchical strategy

To reveal the optimisation effort of stage 3, two alternative strategies are compared. The first is the '2-stage strategy', in which stage 3 is omitted and trains cancelled in stage 2 are not reconsidered. The second, called the 'Improved 2-stage strategy', also omits stage 3 but take into account cancelled trains in adjacent periods if these periods have already been solved.

With more trains included in Stage 2, the computation time for the Improved 2-stage strategy increases by approximately 16–23 min compared to the 2-stage strategy. However, when Stage 3 is introduced, the computation time of Stage 2 is reduced, resulting in a slight overall decrease in total computation time – approximately 5–7 min less than the Improved 2-stage strategy.

While the Improved 2-stage strategy demonstrates a 9.7% higher demand matching utility compared to the 2-stage strategy, the 3-stage hierarchical strategy further improves demand matching utility by 18.9% over the Improved 2-stage strategy. This clearly highlights the optimisation benefits of incorporating stage 3.

To further demonstrate the differences among these strategies, Figure 12 shows the number of trains cancelled in each period. The hierarchical strategy results in significantly fewer cancellations than the other two strategies. Notably, the 2-stage and Improved 2-stage strategies both cancel 91 trains between 16:00 and 18:00, while the peak cancellation for the hierarchical strategy is only 54 trains, indicating a better balance of service.

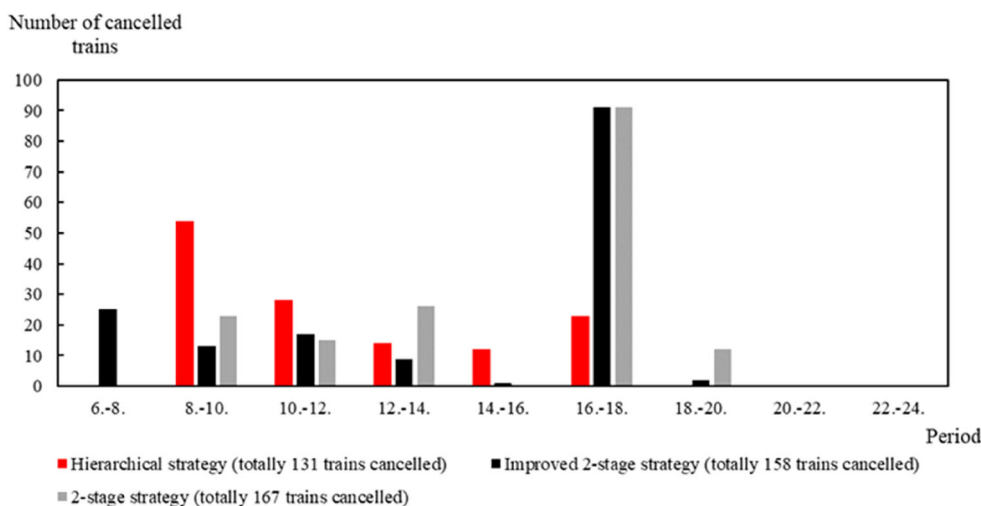


Figure 12. The cancellation distribution across periods in the three methods regarding stage 3 differently.

5.2.3. Solution comparison: weekly timetable and manually generated timetable

The optimisation of the proposed weekly timetabling approach is demonstrated by comparing it with the manually generated timetable, as indicated by the metrics recorded in Table 4. The passenger matching utility of the manually generated timetable is higher, as the trains generally operate at slower speeds. This allows passengers to more easily select routes that approximate the optimal ones, thereby yielding higher matching utilities. However, a closer examination of the detailed indicators reveals several advantages associated with the weekly timetable.

(1) **The increase in train travel speed is both significant and hierarchically distributed.** As illustrated in Figure 13, the peak distribution of train travel speeds differs markedly between the manual and weekly timetables. Trains in the weekly timetable predominantly operate at speeds exceeding 200 km/h, whereas those in the manual timetable are primarily within the 120–160 km/h range. This significant improvement in speed enhances the service level for passengers, particularly at major stations.


Furthermore, the weekly timetable exhibits a hierarchical distribution of travel speeds. A secondary peak is observed in the 140–160 km/h range, and it includes a greater number of trains operating below 100 km/h compared to the manual timetable. This hierarchical structure categorises trains into ‘last direct trains’, ‘common trains’, and ‘slower all-stopping trains’, thereby accommodating the diverse travel needs of passengers across various ODs.

(2) **Passenger attraction for both fast trains and mandatory trains is significantly greater.** The average load factors of trains across various speed ranges are depicted in Figure 14. In the weekly timetable, trains operating at speeds exceeding 260 km/h exhibit the highest load factors, indicating the strongest passenger attraction. With the introduction of differentiated pricing strategies, these high-speed trains could be designated as


Table 4. Indicator comparison between weekly timetable and manually generated timetable.

	Manually generated timetable	Weekly timetable
Passenger demand matching utility ($\times 10^6$)	3.42	3.08
Average travel speed of trains (km/h)	142.17	210.71
Average number of intermediate stops of passengers	1.97	0.89
Average travel speed of passengers (km/h)	158.41	211.03
Average train load factor	68.23%	71.10%
Number of mandatory trains per day	10	15
Average load factor of mandatory trains	95.08%	97.13%
Proportion of passengers travelling in their original departure periods	70.14%	69.26%
Proportion of passengers travelling in their original departure periods and adjacent periods	84.42%	93.13%
Total number of trains	882	804

Number of trains

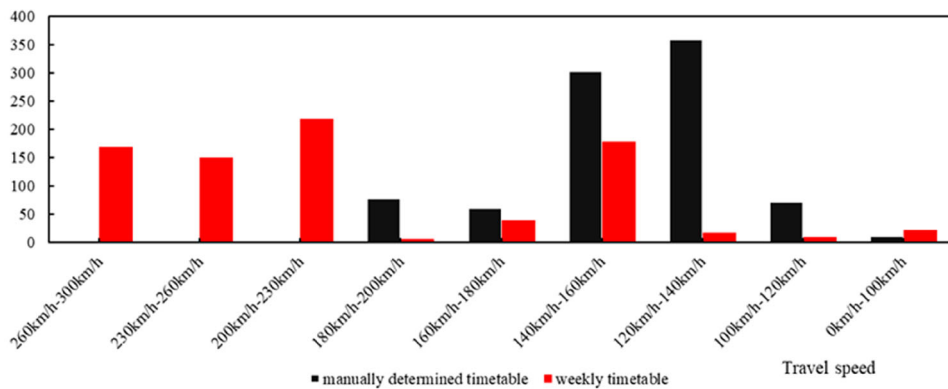**Figure 13.** The travel speed distribution of trains in manual and weekly timetables.

The average load factor

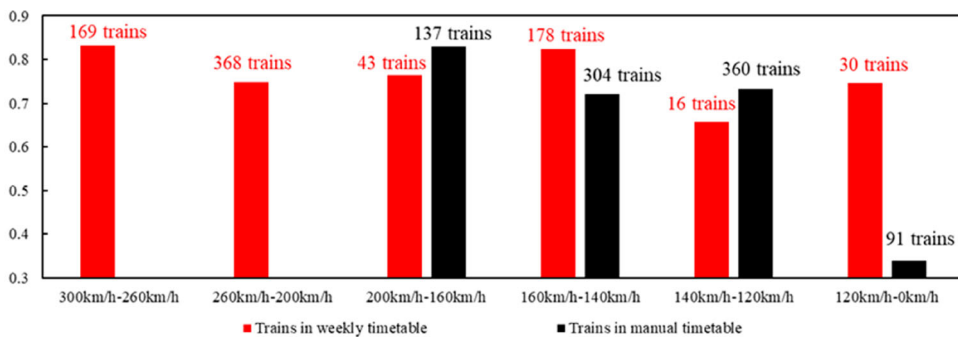**Figure 14.** The average load factors of trains with different speed in the manual and weekly timetables.

premium services, allowing for higher ticket prices to enhance the profitability of railway companies while offering additional services to passengers. Trains operating at speeds of 160–200 km/h in the manual timetable also show elevated load factors, although their speeds are considerably lower.

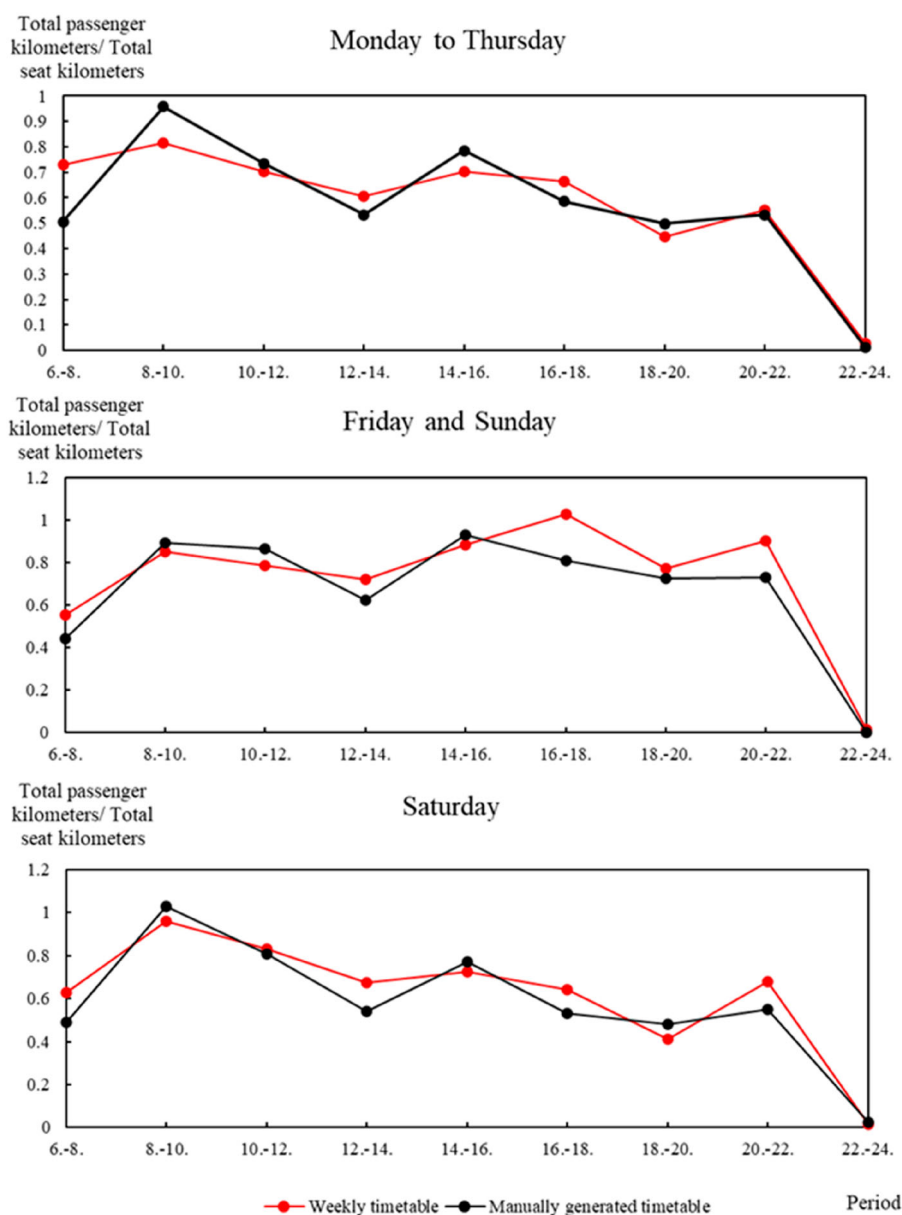


Figure 15. The changes in the ratio of total passenger kilometres to total seat kilometres across periods.

The weekly timetable includes a greater number of mandatory trains, most of which achieve a 100% load factor, surpassing those in the manual timetable. These essential trains in the weekly timetable could also be marketed as premium services in mandatory slots, facilitating higher ticket prices and enhanced passenger offerings.

(3) **Enhanced alignment between passenger kilometres and seat kilometres.** The frequency of train operations more accurately reflects passenger demand due to the

optimisation of train stops in the weekly line plan. Figure 15 illustrates the ratio of total passenger kilometres to total seat kilometres – referred to as the ‘overall load factor’ – for each period and day, highlighting the alignment between passenger demand and train capacity in both the weekly and manually generated timetables.

The weekly timetable exhibits smaller fluctuations in the overall load factor, indicating a closer alignment between seat kilometres and passenger kilometres. For example, in the manual timetable, 120 trains operate between 6:00 am and 8:00 am, resulting in significantly lower overall load factors compared to the 78 trains operating in the same period in the weekly timetable. A similar pattern is observed between 4:00 pm and 6:00 pm, where the manual timetable runs 136 trains compared to 110 trains in the weekly timetable.

Although the overall load factor in the weekly timetable increases during peak periods, it remains lower than that in the manual timetable, demonstrating its capacity to provide sufficient services during high-demand periods. During low-demand periods, the overall load factor in the weekly timetable decreases but often surpasses that of the manual timetable, underscoring its effectiveness in reducing resource wastage.

Additionally, as the demand input in this study is derived from corrections and predictions based on actual demand, the overall load factor in certain periods may approach or exceed 1. In such instances, excess passengers are likely to be transferred to adjacent periods.

(4) Trains exhibit a hierarchical and more regular departure sequence. The hierarchical travel speeds of trains generally result in wider time intervals between departures, particularly between fast trains with few stops and slower trains with multiple stops. These intervals create triangular blank areas at the end of each period between the slower trains departing late in the current period and the faster trains departing early in the next period, as illustrated in Figure 16, which depicts the weekly timetable for the Nanjing-Shanghai HSR.

To mitigate imbalances in train services at stations within these blank triangular areas, the weekly timetable schedules trains with similar stop patterns to depart consecutively. For instance, as shown in Table 5, several fast trains depart consecutively between 8:00 am and 8:24 am, forming a ‘faster train group’ in the weekly timetable. The last two fast trains in this period depart at 9:42 am and 9:44 am, creating another fast train group with those departing at the beginning of the next period. In contrast, this phenomenon is not observed in the manual timetable due to the smaller differences in train speeds (with the exception of two mandatory trains). The regular and balanced departure sequence of trains in the weekly timetable enhances the efficiency and predictability of train services.

5.3. Solution comparison: Nanjing-Shanghai and Beijing-Shanghai HSR lines

The Nanjing-Shanghai HSR, analysed in Sections 5.1 and 5.2, represents a typical shorter-distance commuter line between metropolitan areas. The weekly timetable for this HSR line is depicted in Figure 16. In contrast, the Beijing-Shanghai HSR, spanning 1318 km and exemplifying a typical long-distance line connecting multiple metropolitan areas, is examined as another case study in this section. Due to the larger number of periodic trains on the

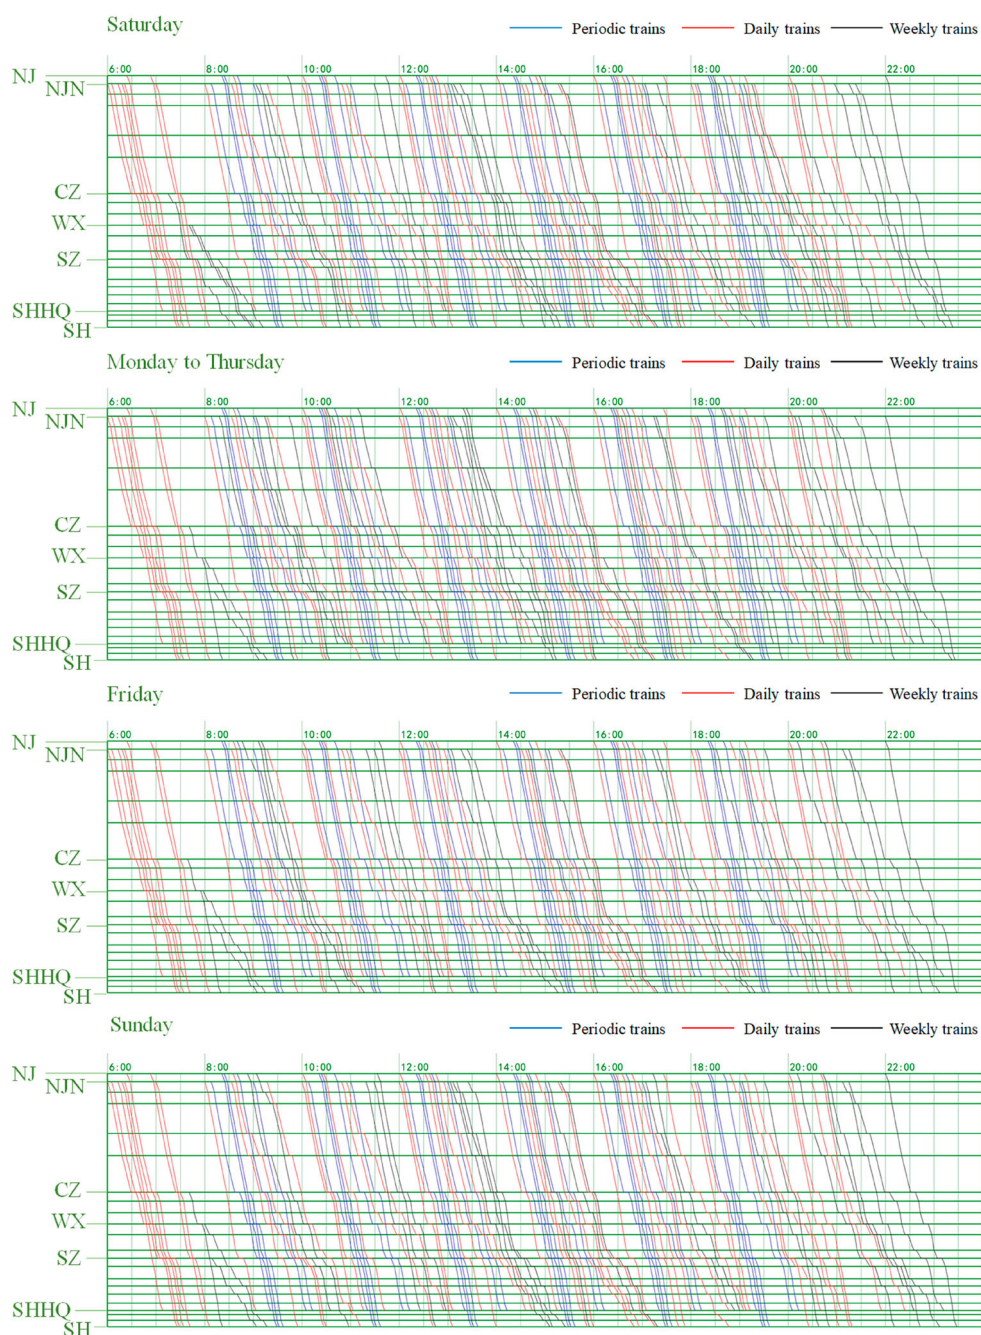


Figure 16. Weekly timetable for Nanjing-Shanghai high-speed railway line.

Beijing-Shanghai HSR, a greater number of trains are included in stage 1 of the hierarchical strategy. Additionally, given the longer distance, more trains depart in earlier periods, leading to local timetables being solved from the earliest to the latest period in stage 2. The resulting weekly timetable is shown in Figures 17 and 18. The key differences between the Nanjing-Shanghai and Beijing-Shanghai HSR lines are as follows.

Table 5. Long-distance train departure sequence between 8:00 am and 10:00 am in manual and weekly timetables.

Manually generated timetable		Weekly timetable		
Departure time	Travel speed (km/h)	Departure time	Travel speed (km/h)	Operating day
8:00	182 (Mandatory train)	8:00	267 (Mandatory train)	
9:09	110	8:08	230	
8:10	146	8:18	196	
8:40	136	8:21	274	
8:47	143	8:24	274	
9:00	182 (Mandatory train)	8:33	158	
9:01	140	8:35	162	
9:10	131	8:40	205	
9:17	123	8:46	155	Fri.
9:28	142	8:48	133	Mon. to Thu.
9:42	126	8:53	171	
9:55	135	9:00	230 (Mandatory train)	
9:56	130	9:03	160	Sat.
		9:03	166	Mon. to Thu.
		9:04	163	Sun.
		9:06	157	Fri.
		9:08	180	Sat.
		9:10	146	Fri.
		9:14	225	Mon. to Thu.
		9:17	157	
		9:42	239	Sat.
		9:44	230	Mon. to Thu.

- (1) **Alternating operation of trains with different speeds and stops.** Unlike the hierarchical departure sequence on the Nanjing-Shanghai HSR, the Beijing-Shanghai HSR passes through a greater number of major stations. As a result, even the fast trains have varying stopping patterns, making it impractical to reduce time intervals between schedules solely by having fast trains depart consecutively. Instead, on the Beijing-Shanghai HSR, trains with different speeds and stops operate alternately. To maintain travel speeds, more frequent overtakes occur between adjacent trains with differing stop patterns.
- (2) **Less pronounced triangle blank areas between adjacent periods.** As analysed in Section 5.2.3, the hierarchical departure sequence on the Nanjing-Shanghai HSR typically creates triangular blank areas between two adjacent periods. Additionally, short-distance trains are operated only between intermediate stations and Shanghai Hongqiao (SHHQ) or Shanghai (SH), leaving the triangular areas near Nanjing (NJ) and Nanjing South (NJN) unfilled. In contrast, the alternating operation of trains on the Beijing-Shanghai HSR results in smaller triangular blank areas. Short-distance trains operate along all segments of the route, with trains terminating and originating at various major stations along the HSR line. These short-distance trains fill the triangular blank areas, ensuring more balanced and consistent service across the entire route.

These differences underscore the necessity for distinct scheduling strategies tailored to the specific characteristics of each HSR line, demonstrating the flexibility and adaptability of our weekly timetabling approach in accommodating diverse operational scenarios.

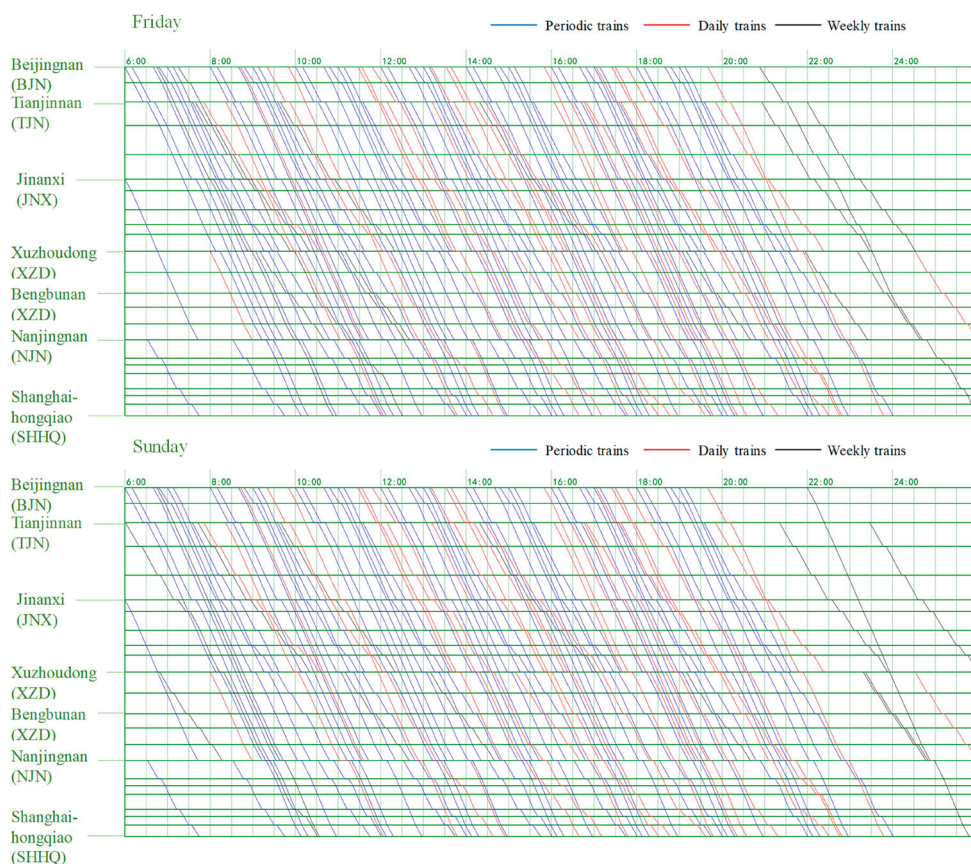


Figure 17. Weekly timetable for Beijing-Shanghai high-speed railway line (Friday and Sunday).

6. Conclusion

This study addresses the weekly train timetabling (WTT) problem for high-speed railways (HSR), aiming to determine train schedules for all seven days of the week while accommodating fluctuations in passenger demand across different periods of the day and varying days of the week. The study utilises detailed passenger demand data over a week and the weekly line plan obtained in previous research (Nie et al. 2022) as inputs. To effectively solve the WTT problem under practical real-world scenarios, an Estimation-Generation-Evaluation (EGE) method is proposed, incorporating three mathematical models.

To enhance the efficiency of the EGE method, a three-stage customised hierarchical train generation strategy is introduced during the ‘Generation’ step. In stage 1, critical trains with higher passenger attraction are scheduled first. In stage 2, local timetables for each period are determined sequentially, while efforts are made to preserve the departure times of critical trains established in stage 1. In stage 3, trains cancelled in stage 2 are rescheduled in adjacent periods near their original departure times.

To evaluate the performance of the EGE method, the Nanjing-Shanghai HSR is selected as the primary case in the numerical experiments. First, the solution quality of the hierarchical strategy is compared against CPLEX in a series of small-scale scenarios. The results

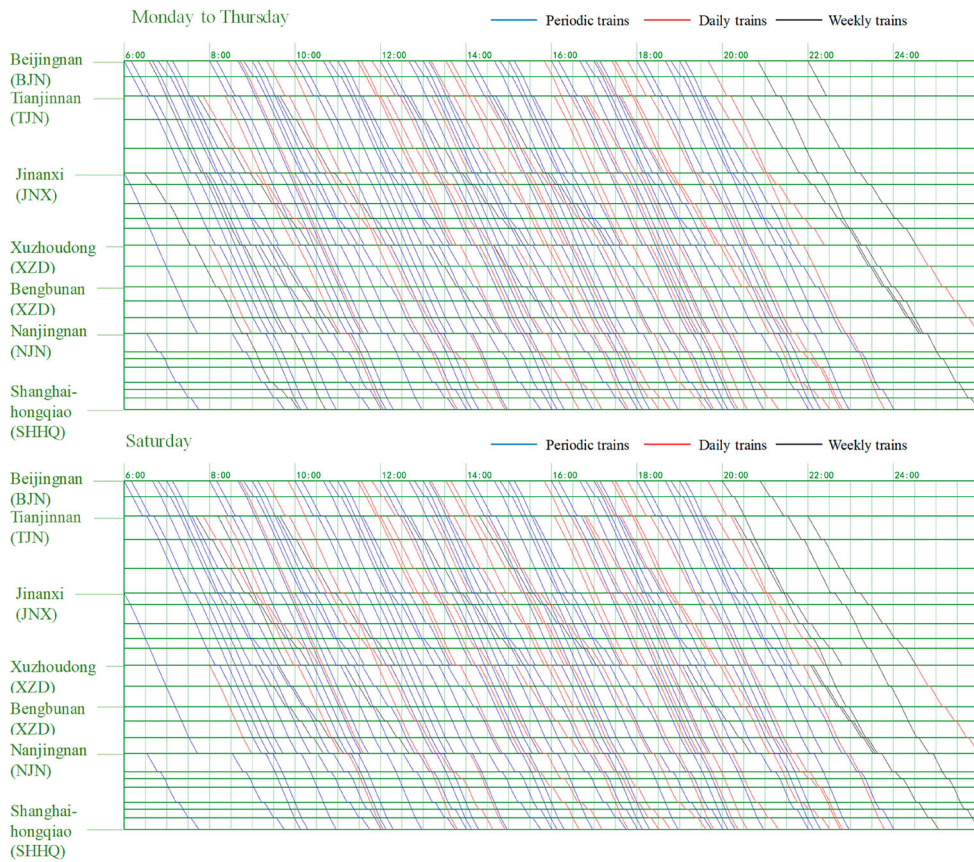


Figure 18. The weekly timetable for Beijing-Shanghai high-speed railway line (Monday to Thursday, and Saturday).

confirm the stability and efficiency of the proposed hierarchical strategy. Subsequently, using the entire weekly line plan as input, solutions derived from different implementations of stages 1 and 3 are compared to demonstrate the improvement in solution quality due to the hierarchical strategy. By comparing the EGE-generated weekly timetable with a manually generated timetable across various indicators, the optimisation effectiveness of the EGE method is verified. Finally, a case study of the Beijing-Shanghai HSR is conducted to demonstrate the flexibility and universality of the weekly train timetabling approach.

The potential advancements of this research can be explored from two perspectives. First, the weekly timetabling process could be enhanced by integrating vehicle scheduling, as varying timetables may result in more empty train movements to depots between days. Second, the staged solution approach inherent in the hierarchical strategy tends to produce locally optimal solutions rather than globally optimal ones. Therefore, further research is warranted to explore train stop adjustments or timetable modifications based on a comprehensive timetable evaluation. Additionally, an effective iterative methodology could be developed, incorporating an adjustment mechanism guided by the evaluation of the weekly timetable.

Disclosure statement

No potential conflict of interest was reported by the author(s).

Funding

This work was supported by the Railway Joint Fund Project of the National Natural Science Foundation of China (No. U2468224); the Fundamental Research Funds for the Central Universities (No. 2022JBQY005); the Research Plan of China Railway (No. K2023X031); and China Scholarship Council.

ORCID

Bowen Nie  <http://orcid.org/0009-0004-6567-7503>

References

- Borndörfer, Ralf, Heide Hoppmann, and Marika Karbstein. 2016. "Passenger Routing for Periodic Timetable Optimization." *Public Transport* 9 (1-2): 115–135. <https://doi.org/10.1007/s12469-016-0132-0>.
- Brännlund, Ulf, Per Olov Lindberg, A. Nöu, and Jan-Eric Nilsson. 1998. "Railway Timetabling Using Lagrangian Relaxation." *Transportation Science* 32 (4): 358–369. <https://doi.org/10.1287/trsc.32.4.358>.
- Cacchiani, Valentina, Alberto Caprara, and Paolo Toth. 2010. "Non-cyclic Train Timetabling and Comparability Graphs." *Operations Research Letters* 38 (3): 179–184. <https://doi.org/10.1016/j.orl.2010.01.007>.
- Cacchiani, Valentina, Laura Galli, and Paolo Toth. 2015. "A Tutorial on Non-periodic Train Timetabling and Platforming Problems." *EURO Journal on Transportation and Logistics* 4 (3): 285–320. <https://doi.org/10.1007/s13676-014-0046-4>.
- Cacchiani, Valentina, Jianguo Qi, and Lixing Yang. 2020. "Robust Optimization Models for Integrated Train Stop Planning and Timetabling with Passenger Demand Uncertainty." *Transportation Research Part B: Methodological* 136:1–29. <https://doi.org/10.1016/j.trb.2020.03.009>.
- Caprara, Alberto, Matteo Fischetti, and Paolo Toth. 2002. "Modeling and Solving the Train Timetabling Problem." *Operations Research* 50 (5): 851–861. <https://doi.org/10.1287/opre.50.5.851.362>.
- Dong, Xinlei, Dewei Li, Yonghao Yin, Shishun Ding, and Zhichao Cao. 2020. "Integrated Optimization of Train Stop Planning and Timetabling for Commuter Railways with an Extended Adaptive Large Neighborhood Search Metaheuristic Approach." *Transportation Research Part C: Emerging Technologies* 117:102681. <https://doi.org/10.1016/j.trc.2020.102681>.
- Fischer, Samuel M. 2020. "Locally Optimal Routes for Route Choice Sets." *Transportation Research Part B: Methodological* 141:240–266. <https://doi.org/10.1016/j.trb.2020.09.007>.
- Hu, Lu, Dongjie Li, and Zhicheng Ren. 2025. "Collaborative Train Timetabling and Passenger Flow Control in Oversaturated Metro Lines considering State-Dependence." *Expert Systems with Applications* 261:125436. <https://doi.org/10.1016/j.eswa.2024.125436>.
- Kaspi, Mor, and Tal Raviv. 2013. "Service-Oriented Line Planning and Timetabling for Passenger Trains." *Transportation Science* 47 (3): 295–311. <https://doi.org/10.1287/trsc.1120.0424>.
- Liao, Zhengwen, Haiying Li, Jianrui Miao, and Francesco Corman. 2021. "Railway Capacity Estimation considering Vehicle Circulation: Integrated Timetable and Vehicles Scheduling on Hybrid Time-Space Networks." *Transportation Research Part C: Emerging Technologies* 124:102961. <https://doi.org/10.1016/j.trc.2020.102961>.
- Liu, Jie, David Canca, Hongxia Lv, and Shaoquan Ni. 2024. "Demand-adapted Train Timetabling with Coupling-Decoupling Operations on a Bidirectional Intercity Railway Line." *Computers & Industrial Engineering* 189:109999. <https://doi.org/10.1016/j.cie.2024.109999>.
- Martin-Iradi, Bernardo, and Stefan Ropke. 2022. "A Column-Generation-Based Matheuristic for Periodic and Symmetric Train Timetabling with Integrated Passenger Routing." *European Journal of Operational Research* 297 (2): 511–531. <https://doi.org/10.1016/j.ejor.2021.04.041>.

- Nie, Bowen, Lei Nie, Huiling Fu, and Xin Wu. 2023. "Weekly Line Planning to Improve the Match between Rail Supply and Passenger Demand." *Computer-Aided Civil and Infrastructure Engineering* 38 (13): 1810–1833. <https://doi.org/10.1111/mice.12941>.
- Niu, Huimin, and Xuesong Zhou. 2013. "Optimizing Urban Rail Timetable under Time-Dependent Demand and Oversaturated Conditions." *Transportation Research Part C: Emerging Technologies* 36:212–230. <https://doi.org/10.1016/j.trc.2013.08.016>.
- Robenek, Tomáš, Yousef Maknoon, Shadi Sharif Azadeh, Jianghang Chen, and Michel Bierlaire. 2016. "Passenger Centric Train Timetabling Problem." *Transportation Research Part B: Methodological* 89:107–126. <https://doi.org/10.1016/j.trb.2016.04.003>.
- Şahin, Güvenç, Amin Ahmadi Digehsara, Ralf Borndörfer, and Thomas Schlechte. 2020. "Multi-period Line Planning with Resource Transfers." *Transportation Research Part C: Emerging Technologies* 119:102726. <https://doi.org/10.1016/j.trc.2020.102726>.
- Schmidt, Marie, and Anita Schöbel. 2015. "Timetabling with Passenger Routing." *OR Spectrum* 37 (1): 75–97. <https://doi.org/10.1007/s00291-014-0360-0>.
- Schöbel, Anita. 2017. "An Eigenmodel for Iterative Line Planning, Timetabling and Vehicle Scheduling in Public Transportation." *Transportation Research Part C: Emerging Technologies* 74:348–365. <https://doi.org/10.1016/j.trc.2016.11.018>.
- Shi, Jungang, Jing Yang, Lixing Yang, Lefeng Tao, Shengjie Qiang, Zhen Di, and Junhua Guo. 2023. "Safety-oriented Train Timetabling and Stop Planning with Time-Varying and Elastic Demand on Overcrowded Commuter Metro Lines." *Transportation Research Part E: Logistics and Transportation Review* 175:103136. <https://doi.org/10.1016/j.tre.2023.103136>.
- Tian, Xiaopeng, and Huimin Niu. 2020. "Optimization of Demand-oriented Train Timetables Under Overtaking Operations: A Surrogate-dual-variable Column Generation for Eliminating Indivisibility." *Transportation Research Part B: Methodological* 142: 143–173. doi:10.1016/j.trb.2020.09.010.
- Tian, Xiaopeng, Huimin Niu, Yuxing Jiang, and Hetian Chai. 2024. "A Variable-Splitting Lagrangian Decomposition for Train Timetabling and Skip-Stopping with Train-Type Decision." *Transportation Research Part C: Emerging Technologies* 163. <https://doi.org/10.1016/j.trc.2024.104645>.
- Wang, Yizhen, Dewei Li, and Zhichao Cao. 2020. "Integrated Timetable Synchronization Optimization with Capacity Constraint under Time-Dependent Demand for a Rail Transit Network." *Computers & Industrial Engineering* 142:106374. <https://doi.org/10.1016/j.cie.2020.106374>.
- Wu, Runfa, Feng Shi, Shuo Zhao, Guangming Xu, and Hai Yang. 2022. "A Dantzig-Wolfe Decomposition-Based Algorithm for Capacitated Passenger Assignment Problem with Time-Varying Demand in High-Speed Railway Networks." *Transportation Research Part C: Emerging Technologies* 145:103909. <https://doi.org/10.1016/j.trc.2022.103909>.
- Xu, Xiaoming, Chung-Lun Li, and Zhou Xu. 2021. "Train Timetabling with Stop-Skipping, Passenger Flow, and Platform Choice Considerations." *Transportation Research Part B: Methodological* 150:52–74. <https://doi.org/10.1016/j.trb.2021.06.001>.
- Yan, Fei, and Rob M. P. Goverde. 2019. "Combined Line Planning and Train Timetabling for Strongly Heterogeneous Railway Lines with Direct Connections." *Transportation Research Part B: Methodological* 127:20–46. <https://doi.org/10.1016/j.trb.2019.06.010>.
- Yang, Lin, Dewei Li, Hui Wang, and Yuan Gao. 2024. "Integrating Stop Planning, Timetabling and Rolling Stock Planning on High-Speed Railway Lines: A Multi-objective Optimization Approach." *Expert Systems with Applications* 237. <https://doi.org/10.1016/j.eswa.2023.121515>.
- Yao, Zhiyuan, Lei Nie, Yixiang Yue, Zhenhuan He, Yu Ke, Yuxin Mo, and Hongda Wang. 2023. "Network Periodic Train Timetabling with Integrated Stop Planning and Passenger Routing: A Periodic Time-Space Network Construct and ADMM Algorithm." *Transportation Research Part C: Emerging Technologies* 153:104201. <https://doi.org/10.1016/j.trc.2023.104201>.
- Yuan, Jiawei, Yuan Gao, Jiannan Ke, and Lin Yang. 2025. "Integrated Train Timetable with Supply-Demand Interactions at the Chinese High-Speed Railway." *Omega* 131:103185. <https://doi.org/10.1016/j.omega.2024.103185>.
- Yuan, Jiawei, Yuan Gao, Shukai Li, Pei Liu, and Lixing Yang. 2022. "Integrated Optimization of Train Timetable, Rolling Stock Assignment and Short-Turning Strategy for a Metro Line." *European Journal of Operational Research* 301 (3): 855–874. <https://doi.org/10.1016/j.ejor.2021.11.019>.

- Yuan, Yin, Shukai Li, Ronghui Liu, Lixing Yang, and Ziyu Gao. 2023. "Decomposition and Approximate Dynamic Programming Approach to Optimization of Train Timetable and Skip-Stop Plan for Metro Networks." *Transportation Research Part C: Emerging Technologies* 157:104393. <https://doi.org/10.1016/j.trc.2023.104393>.
- Yue, Yixiang, Shifeng Wang, Leishan Zhou, Lu Tong, and M. Rapik Saat. 2016. "Optimizing Train Stopping Patterns and Schedules for High-Speed Passenger Rail Corridors." *Transportation Research Part C: Emerging Technologies* 63:126–146. <https://doi.org/10.1016/j.trc.2015.12.007>.
- Zhang, Xin, and Lei Nie. 2016. "Integrating Capacity Analysis with High-Speed Railway Timetabling: A Minimum Cycle Time Calculation Model with Flexible Overtaking Constraints and Intelligent Enumeration." *Transportation Research Part C: Emerging Technologies* 68:509–531. <https://doi.org/10.1016/j.trc.2016.05.005>.
- Zhang, Yongxiang, Qiyuan Peng, Gongyuan Lu, Qingwei Zhong, Xu Yan, and Xuesong Zhou. 2022. "Integrated Line Planning and Train Timetabling through Price-Based Cross-Resolution Feedback Mechanism." *Transportation Research Part B: Methodological* 155:240–277. <https://doi.org/10.1016/j.trb.2021.11.009>.
- Zhang, Chuntian, Jianguo Qi, Yuan Gao, Lixing Yang, Ziyu Gao, and Fanting Meng. 2021. "Integrated Optimization of Line Planning and Train Timetabling in Railway Corridors with Passengers' Expected Departure Time Interval." *Computers & Industrial Engineering* 162:107680. <https://doi.org/10.1016/j.cie.2021.107680>.
- Zhao, Shuo, Hai Yang, and Yinghui Wu. 2021. "An Integrated Approach of Train Scheduling and Rolling Stock Circulation with Skip-Stopping Pattern for Urban Rail Transit Lines." *Transportation Research Part C: Emerging Technologies* 128:103170. <https://doi.org/10.1016/j.trc.2021.103170>.
- Zhou, Housheng, Jianguo Qi, Lixing Yang, Jungang Shi, Hanchuan Pan, and Yuan Gao. 2022. "Joint Optimization of Train Timetabling and Rolling Stock Circulation Planning: A Novel Flexible Train Composition Mode." *Transportation Research Part B: Methodological* 162:352–385. <https://doi.org/10.1016/j.trb.2022.06.007>.

Appendices

Appendix 1. The linearisation of safety headway constraints in section 3.2

The original formulation (g6) and (g7) are as follows

$$|y_{ls} - y_{l's}| + M(r_l + r_{l'} + \theta_{ll'}) \geq DH_s \quad (g6)$$

$$|x_{ls} - x_{l's}| + M(r_l + r_{l'} + \theta_{ll'}) \geq AH_s \quad (g7)$$

Introduce two auxiliary binary variables $\xi_{ll's}$ and $\zeta_{ll's}$. $\xi_{ll's}$ equals 1 if $y_{ls} - y_{l's} > 0$ and equals 0 if $y_{ls} - y_{l's} < 0$. $\zeta_{ll's}$ equals 1 if $x_{ls} - x_{l's} > 0$, equals 0 if $x_{ls} - x_{l's} < 0$. In this case (g6) is linearised into (a1) and (a2); and (g7) is linearised into (a3) and (a4).

$$y_{ls} - y_{l's} - M \cdot \xi_{ll's} - M(r_l + r_{l'} + \theta_{ll'}) \leq -DH_s \quad \forall l, l'; s \in (S_l - \rho_l) \cap (S_{l'} - \rho_{l'}) \quad (a1)$$

$$y_{ls} - y_{l's} - M \cdot \xi_{ll's} + M(r_l + r_{l'} + \theta_{ll'}) \geq DH_s - M \quad \forall l, l'; s \in (S_l - \rho_l) \cap (S_{l'} - \rho_{l'}) \quad (a2)$$

$$x_{ls} - x_{l's} - M \cdot \zeta_{ll's} - M(r_l + r_{l'} + \theta_{ll'}) \leq -AH_s \quad \forall l, l'; s \in (S_l - \sigma_l) \cap (S_{l'} - \sigma_{l'}) \quad (a3)$$

$$x_{ls} - x_{l's} - M \cdot \zeta_{ll's} + M(r_l + r_{l'} + \theta_{ll'}) \geq AH_s - M \quad \forall l, l'; s \in (S_l - \sigma_l) \cap (S_{l'} - \sigma_{l'}) \quad (a4)$$

The relationship between $\xi_{ll's}$ and $\zeta_{ll's}$ and x_{ls} and y_{ls} is formulated as (a5) and (a6).

$$y_{ls} - y_{l's} - M \cdot \xi_{ll's} \in (-M, 0) \quad \forall l, l'; s \in (S_l - \rho_l) \cap (S_{l'} - \rho_{l'}) \quad (a5)$$

$$x_{ls} - x_{l's} - M \cdot \zeta_{ll's} \in (-M, 0) \quad \forall l, l'; s \in (S_l - \sigma_l) \cap (S_{l'} - \sigma_{l'}) \quad (a6)$$

Appendix 2. Discussing the rationale of M-method in equations (g6), (g7), (g11), (g12), (e6) and (e7).

The original formulation (g6) and (g7) are as follows.

$$|y_{ls} - y_{l's}| + M(r_l + r_{l'} + \theta_{ll'}) \geq DH_s \quad (g6)$$

$$|x_{ls} - x_{l's}| + M(r_l + r_{l'} + \theta_{ll'}) \geq AH_s \quad (g7)$$

These constraints ensure that if trains l and l' depart on the same day ($r_l = 0$, $r_{l'} = 0$, and $\theta_{ll'} = 0$), the term $M(r_l + r_{l'} + \theta_{ll'})$ equals 0. In this case (g6) and (g7) are classical formulations to ensure the departure and arrival times of the two trains, x_{ls} , $x_{l's}$, y_{ls} and $y_{l's}$, maintain the required safety headways. However, if one of the trains is cancelled ($r_l = 1$ or $r_{l'} = 1$) or if both are weekly trains departing on different days ($\theta_{ll'} = 1$), the sum $r_l + r_{l'} + \theta_{ll'}$ will exceed 0, as all three variables are binary. In such cases, these constraints will no longer apply, ensuring that the left-hand sides of inequalities (g6) and (g7) are always greater than their right-hand sides. Consequently, the decision variables x_{ls} , $x_{l's}$, y_{ls} and $y_{l's}$ are no longer restricted.

The formulation (g11) and (g12) are as follows.

$$x_{l\sigma_l} + M \cdot (1 - z_{lq}) \geq \tau_q \quad \forall q \in Q, l \in L^Q \quad (g11)$$

$$x_{l\sigma_l} - M \cdot (1 - z_{lq}) \leq \tau_q \quad \forall q \in Q, l \in L^Q \quad (g12)$$

These constraints ensure that if train l is selected as a mandatory train and departs in slot q ($z_{lq} = 1$), the term $M \cdot (1 - z_{lq})$ equals 0. In this case its departure time at the first station, $x_{l\sigma_l}$, is restricted to τ_q , the designated time for slot q . However, if train l is not selected ($z_{lq} = 0$), then $1 - z_{lq} = 1$. In this case the left-hand side of constraint (g11) will always exceed the right-hand side, and the left-hand side of constraint (g12) will always be less than the right-hand side. Consequently, the decision variable $x_{l\sigma_l}$ is no longer restricted.

The formulation (e6) and (e7) are as follows.

$$x_{l\sigma_l} - M \cdot (1 - e_l) \leq \bar{x}_{l\sigma_l} + \tau^D \quad \forall l \in L^{Stage-1} \quad (e6)$$

$$x_{l\sigma_l} + M \cdot (1 - e_l) \geq \bar{x}_{l\sigma_l} - \tau^D \quad \forall l \in L^{Stage-1} \quad (e7)$$

These constraints are formulated in almost the same manner as (g11) and (g12). They use the variable e_l to measure whether $x_{l\sigma_l}$ lies within the range $[\bar{x}_{l\sigma_l} - \tau^D, \bar{x}_{l\sigma_l} + \tau^D]$. When $x_{l\sigma_l}$ exceeds $\bar{x}_{l\sigma_l} + \tau^D$, equation (e6) requires $e_l = 0$ to ensure that the term $M \cdot (1 - e_l)$ is positive. Conversely, when $x_{l\sigma_l}$ is smaller than $\bar{x}_{l\sigma_l} - \tau^D$, equation (e7) also sets $e_l = 0$. When $x_{l\sigma_l}$ lies in the range $[\bar{x}_{l\sigma_l} - \tau^D, \bar{x}_{l\sigma_l} + \tau^D]$, the term $M \cdot (1 - e_l)$ equals 0, implying that $e_l = 1$.