

This is a repository copy of Vertical stratification and its impact on device performance in a polycarbazole based copolymer solar cells.

White Rose Research Online URL for this paper: http://eprints.whiterose.ac.uk/105439/

Version: Accepted Version

Article:

Wang, T., Scarratt, N.W., Yi, H. et al. (9 more authors) (2015) Vertical stratification and its impact on device performance in a polycarbazole based copolymer solar cells. Journal of Materials Chemistry C, 3 (16). pp. 4007-4015. ISSN 2050-7526

https://doi.org/10.1039/C4TC02884H

Reuse

Unless indicated otherwise, fulltext items are protected by copyright with all rights reserved. The copyright exception in section 29 of the Copyright, Designs and Patents Act 1988 allows the making of a single copy solely for the purpose of non-commercial research or private study within the limits of fair dealing. The publisher or other rights-holder may allow further reproduction and re-use of this version - refer to the White Rose Research Online record for this item. Where records identify the publisher as the copyright holder, users can verify any specific terms of use on the publisher's website.

Takedown

If you consider content in White Rose Research Online to be in breach of UK law, please notify us by emailing eprints@whiterose.ac.uk including the URL of the record and the reason for the withdrawal request.



Journal of Materials Chemistry C

Accepted Manuscript



This is an *Accepted Manuscript*, which has been through the Royal Society of Chemistry peer review process and has been accepted for publication.

Accepted Manuscripts are published online shortly after acceptance, before technical editing, formatting and proof reading. Using this free service, authors can make their results available to the community, in citable form, before we publish the edited article. We will replace this Accepted Manuscript with the edited and formatted Advance Article as soon as it is available.

You can find more information about *Accepted Manuscripts* in the **Information for Authors**.

Please note that technical editing may introduce minor changes to the text and/or graphics, which may alter content. The journal's standard <u>Terms & Conditions</u> and the <u>Ethical guidelines</u> still apply. In no event shall the Royal Society of Chemistry be held responsible for any errors or omissions in this *Accepted Manuscript* or any consequences arising from the use of any information it contains.



Vertical stratification and its impact on device performance in a polycarbazole based copolymer solar cells

Tao Wang^{1,2*}, Nicholas W. Scarratt¹, Hunan Yi³, Iain F. Coleman³, Yiwei Zhang¹, Richard T. Grant¹, Jizhong Yao⁴, Maximilian W. A. Skoda⁵, Alan D. F. Dunbar⁶, Richard A. L. Jones¹, Ahmed Iraqi^{3*}, David G. Lidzey^{1*}

¹Department of Physics and Astronomy, University of Sheffield, Sheffield, S3 7RH, UK

²School of Materials Science & Engineering, Wuhan University of Technology, Wuhan, 430070, China

³Department of Chemistry, University of Sheffield, Sheffield, S3 7HF, UK

⁴Centre for Plastic Electronics and Department of Physics, Blackett Laboratory, Imperial College London, London SW7 2AZ, UK

⁵ISIS Pulsed Neutron and Muon Source; Science and Technology Facilities Council,
Rutherford Appleton Laboratory, Harwell Science and Innovation Campus, Didcot
OX11 0QX, UK

⁶Department of Chemical and Biological Engineering, University of Sheffield, Sheffield S1 3JD, UK

E-mail: twang@whut.edu.cn, a.iraqi@sheffield.ac.uk, d.g.lidzey@sheffield.ac.uk

Abstract: Using neutron-reflectivity, we study vertical stratification and device performance in bulk hetero-junction organic photovoltaic (OPV) cells consisting of a blend of PC₇₁BM with a carbazole-based donor-acceptor copolymer PCDTBT1. We find that when the blend is cast on a PEDOT:PSS/ITO anode, a PC₇₁BM-depleted (polymer-rich) layer is formed at the PEDOT:PSS interface, whilst a PC₇₁BM-depleted layer is instead located at the air-interface when the same blend is cast on a solution

processed MoOx thin film. OPV device characterization measurements indicate that unfavourable vertical segregation can have a profound effect on OPV device characteristics via increased charge recombination.

Keywords: bulk heterojunction, organic photovoltaic, donor-acceptor copolymer, vertical stratification, neutron reflectivity, device characteristics.

1. Introduction

Bulk heterojunction (BHJ) organic photovoltaic (OPV) devices employing conjugated polymers as electron donors and fullerene derivatives PCBM as electron acceptors convert the energy of sunlight directly into electric current based on the photovoltaic effect.^{1,2} This type of device represents a promising renewable energy source and has attracted significant attention due to the potential of solution-processability over large-area on mechanically-flexible substrates using low cost manufacturing techniques. BHJ OPV devices using donor-acceptor (D-A) copolymers as electron donors and PC₇₁BM as electron acceptor have now been used to create organic photovoltaic (OPV) devices having a power conversion efficiency (PCE) of 9.2% in single junction solar cells³ and 10.6% in tandem solar cells.⁴

To fabricate an OPV device, a bulk heterojunction layer is usually deposited from a solution containing both electron donor (e.g. a conjugated polymer) and an electron acceptor (e.g. the fullerene derivative PCBM). After the evaporation of the solvent, a thin film of tens to hundreds of nanometers thick is created that acts as the solar cell active layer. A complex evolution of film morphology can occur during this solution casting and film drying process that includes phase separation and vertical stratification. ^{5,6} A significant body of work has shown that the nanoscale morphology in both lateral and vertical directions within a BHJ film plays a critical role in determining

the efficiency of an organic photovoltaic device. ⁷ For example, lateral morphology (e.g. domain size, purity and connectivity within the BHJ layer) has been widely investigated using both morphological⁸ and scattering techniques^{9,10,11}. Techniques such as Neutron Reflectivity (NR)¹², Dynamic Secondary Ion Mass Spectroscopy (DSIMS)¹³, X-ray Reflectivity (XRR)¹⁴, X-ray photoelectron spectroscopy (XPS)^{15,16,17}, near edge X-ray absorption fine structure spectroscopy (NEXAFS)^{18,19} and spectroscopic ellipsometry (SE)²⁰ have been used to examine the vertical distribution of the components within polymer-fullerene thin film blends.

The technique of specular neutron reflectivity (NR) has proved to be particularly successful in determining vertical composition in BHJ bends; although this technique requires a longer measurement time due to the low neutron flux intensity, it benefits from a significant scattering length density (SLD) contrast between conjugated polymers (~ 1.0 x10⁻⁶ Å⁻²) and fullerenes (> 4.0 x 10⁻⁶ Å⁻²) and has been used to study the vertical component distribution in P3HT:PCBM^{12, 21, 22, 23} and low band-gap polymer:PCBM^{24,25,26} photovoltaic blends. Furthermore, NR can also measure samples covered by a metallic cathode layer and thus provides an opportunity to probe the effects of surface on modification of the depth profile formed during thermal annealing.²⁷ In this work, we report a study of the structure of a BHJ film made of PC₇₁BM and a carbazole-based D-A copolymer termed PCDTBT1, and show that the vertical stratification in the film driven by the nature of the underlying substrate plays a significant role in determining the eventual device characteristics and efficiency of the OPV device.

2. Experimental

The structure of polymer PCDTBT1 (molecular weight and polydispersity of 57.3 kDa and 2.02 respectively) is shown in Figure 1a, with its preparation described in the Supporting Information to this paper. PCDTBT1 and PC71BM were dissolved in chlorobenzene at a concentration of 10 and 40 mg/ml respectively, and put on a hot plate held at 70°C for 1h. The solutions were then allowed to cool to room temperature and blended at a number of different blend-ratios. To cast thin films, we have used both spin- and spray-coating. Spray coating was performed using a Prism ultrasonic spraycoating system (Ultrasonic Systems, Inc), with deposition parameters described in our previous work.²⁵ Thin-films were cast on two different hole transport layers; PEDOT:PSS and a solution-processed MoOx film (henceforth termed sMoOx). The PEDOT:PSS (HC Starck Clevios P AI4083) was spin cast from a water-based solution in air, forming a film having a thickness of around 30 nm. This film was then annealed at 110°C for several minutes to evaporate any absorbed moisture before the deposition of the active layer. sMoOx films were deposited from an ammonium molybdate tetrahydrate precursor that was dissolved in a blend of water and acetonitrile at a solid content around 3.5 mg/ml and then spin cast at 3000 rpm for 30 seconds. This precursor-film was then thermally annealed at 350°C for 1 min under ambient conditions to create a 10 nm thick sMoOx film having a typical surface roughness ca. 1 and a workfunction of ca. 5.17eV as previously measured by ultraviolet photoelectron spectroscopy²⁸. The thickness of all thin films was measured using a spectroscopic ellipsometer (M2000v, J.A. Woollam Co., USA).

The samples for neutron reflectivity measurement were either spin or spray cast on a PEDOT:PSS or sMoOx surface. The PEDOT:PSS or sMoOx films were fabricated by spin-casting on a silicon wafer having a 5 nm SiOx surface-layer. Neutron reflectivity

measurements were performed on the INTER reflectometer at the ISIS pulsed neutron source at the Rutherford Appleton Laboratory, UK. Reflectivity data were recorded over the wavelength range 1.5 to 15 Å at two different angles (0.5 and 2.3°). The samples The data-sets were then combined to give a q range from 0.01 Å⁻¹ to 0.2 Å⁻¹, with a resolution of $\Delta q/q = 0.03$. Beyond this q-range, we find that the reflectivity was dominated by the scattering background. The NR data was analyzed using a slab model consisting of multiple, thin stacked layers, with each layer being assigned a thickness, roughness and a scattering length density (SLD).¹² The data was fitted RASCAL software developed at ISIS.


Dynamic (water) contact angles were measured using a Theta Optical Tensiometer. Here, a droplet of water (having a volume of around 8 μ L) was deposited onto a film surface of interest with a sequence of images recorded every second over a period of 60 seconds. The contact angle was then determined from each image using the average of the contact angles determined from either side of the droplet. For each film, three independent measurements were performed at different locations on the film surface.

OPV devices were defined on pre-patterned ITO substrates purchased from Ossila Ltd. The ITO/glass substrates were first cleaned by sonication in dilute NaOH followed by IPA. The ITO/glass substrate used in this work had an area of 20 x 15 mm², onto which six pixels were defined, each having an area of 4.5 mm². All active layers were either spin or spray-coated in air onto the glass/ITO/anode substrate, following which they were transferred to a nitrogen glovebox connected to a thermal evaporator system for deposition of the OPV cathode (5 nm of calcium capped by a 100 nm of aluminum evaporated at a base pressure of ~10⁻⁷ mbar). The cathode was deposited through a shadow-mask, producing a series of independent pixels. Devices were finally encapsulated using a glass slide and epoxy glue before testing. PCEs were determined

using a Newport 92251A-1000 AM1.5 solar simulator. An NREL calibrated silicon cell was used to calibrate the power output to 100mW cm⁻² at 25°C. At least two devices were prepared for each sample and device parameters from 12 pixels were collected to report the average values presented in Table 2. A recent cross-check of the accuracy of our solar simulator system and calibrated silicon solar cell with a solar simulator at Loughborough University UK (CREST) indicated that the systematic uncertainty on the device PCE quoted here $(\Delta \eta/\eta)$ is around 5%. The structures of the hole-dominated and electron-dominated devices are glass/ITO/PEDOT:PSS/Active layer/Au and glass/ITO/Al/Active layer/Ca/Al, respectively.

3. Results and Discussion

The conjugated copolymer PCDTBT1 (see the chemical structure in Figure 1a) consists of a carbazole donor moiety, flanked by two thienyl groups that are copolymerized with a benzothiadiazole (BT) acceptor. This BT acceptor group is itself functionalized with two alkoxy side-chains to impart improved solubility. Our grazing-incidence X-ray measurements suggest that PCDTBT1 is a largely amorphous polymer when deposited from solution, with weak order in the form of π - π stacking. The optical absorption spectrum of PCDTBT1 is shown in Figure 1b. It can be seen that in chloroform, PCDTBT1 has an absorption maximum (λ_{max}) at 518 nm, with λ_{max} being red-shifted to 535 nm on casting into a solid film. From the absorption spectrum (onset of absorption band), we determine an optical-bandgap for PCDTBT1 as 1.90 eV. Cyclic voltammetry measurements performed on PCDTBT1 are shown in Figure 1c, from which HOMO and LUMO levels of -5.4 and -3.2 eV are determined. The energy level diagrams of OPV devices in this work are depicted in Figure 1d and 1e.

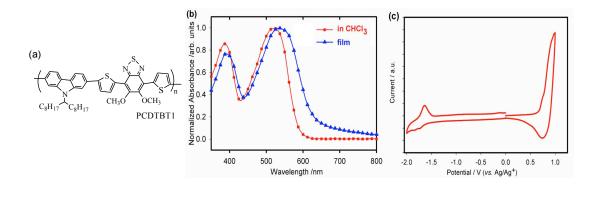

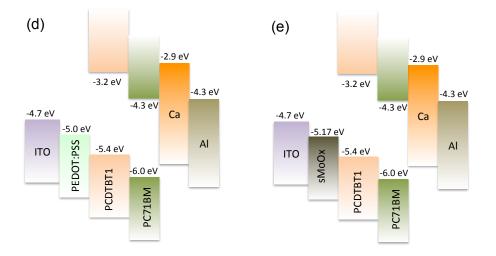


Fig. 1. (a) The chemical structure of PCDTBT1. (b) Absorption spectra of PCDTBT1 in solution and when cast into a thin film. (c) Cyclic voltammetry curves recorded on a PCDTBT1 thin film. (d) and (e) A energy-level diagram of the OPV devices studied using two different hole transport layers (PEDOT:PSS and sMoOx).

From device studies, we determined that the optimum device efficiency occurs at a PCDTBT1:PC₇₁BM blend ratio of 1:4. At this point, device efficiency is 10% higher than in devices based on a PCDTBT1 and PC₇₁BM blend ratio of 1:3, and much higher than devices with blending ratios of 1:2 and 1:1 (see Figure S1a). This optimum blend ratio is in fact similar to that determined in photovoltaic blends of PC₇₁BM with other carbazole-based D-A copolymers (e.g. PCDTBT and PCDTBT8²⁹). Thermal annealing of the devices was found to be detrimental to device efficiency, an effect similar to OPV devices made of donor-acceptor copolymers.^{30,31} The structure and device studies in this

work were therefore performed with the photovoltaic films in an as-cast state without any thermal annealing treatment.

Figure 2(a) shows neutron reflectivity curves of the three blend films deposited by spin or spray-coating on the surface of two different hole transport layers (HTL); PEDOT:PSS and sMoOx. Here, the solid symbols correspond to the measured reflectivity data points, whilst the magenta lines are a fit using a slab model consisting of multiple thin layers, as described in our previous work. ^{12,25} As input to the model, values of scattering length density (SLD) of PCDTBT1 and PEDOT:PSS were calculated from the NIST online database ³² and had values of 1.40x10⁻⁶ and 1.80x10⁻⁶ Å⁻² respectively. A value of 4.74x10⁻⁶ Å⁻² was used as the SLD of PC₇₁BM, as has been reported in the literature. ³³ The parameters from the best fit are summarized in Table 1.

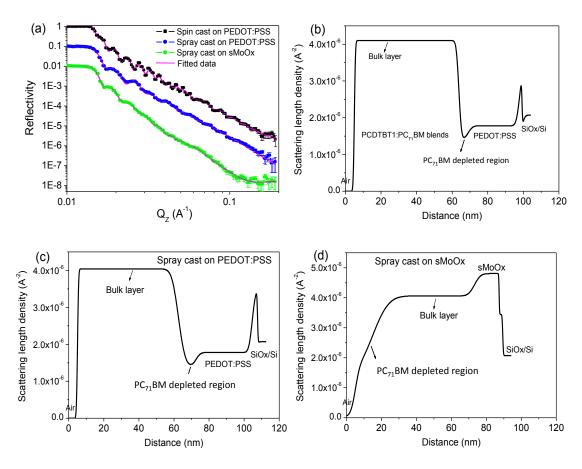


Fig. 2. (a) Neutron reflectivity of PCDTBT1:PC₇₁BM (1:4) blends spin and spray cast on PEDOT:PSS, as well as spray cast on sMoOx surface. The curves are vertically

shifted for clarity. Part (b) shows a SLD profile of PCDTBT1:PC₇₁BM (1:4) blend deposited by spin-casting on a PEDOT:PSS surface, with parts (c) and (d) showing the SLD of the same film spray-cast on a PEDOT:PSS and sMoOx surface respectively.

Table 1. Parameters obtained from neutron reflectivity fitting of PCDTBT1:PC₇₁BM 1:4 blend film deposited on different HTLs by spin or spray coating.

	Spin cast on	Spray cast on	st on Spray cast or	
	PEDOT:PSS	PEDOT:PSS	sMoOx	
Thickness of the bulk layer (nm)	60±2	60±2	59±2	
SLD of the bulk layer (x10 ⁻⁶ Å ⁻²)	4.10±0.16	4.04±0.18	4.06±0.20	
PC ₇₁ BM content in the bulk layer (wt%)	~86±3	~84.5±4	~85±5	
Thickness of the depleted region (nm)	5.2 ±0.4	10±0.6	9.8±0.6	
SLD of the depletion region (x10 ⁻⁶ Å ⁻²)	1.42±0.1	1.42±0.1	1.42±0.1	
PC ₇₁ BM content in the depletion region (wt%)	~1±0.2	~1±0.2	~1±0.2	
Roughness at air interface (nm)	0.5±0.1	0.5±0.1	2±0.2	
Roughness of depleted-bulk interface (nm)	1.2±0.1	3±0.2	7±0.4	
Roughness at HTL interface (nm)	2±0.2	2±0.2	2.8±0.2	

Figure 2(b) plots the calculated SLD profile of PCDTBT1:PC₇₁BM spin cast on a PEDOT:PSS film surface. We find that the vertical concentration of PC₇₁BM throughout the active layer is not uniform. The PC₇₁BM distribution is initially constant in the region from the surface through the middle of the film, but then undergoes a relative reduction in concentration towards the PEDOT:PSS interface. We define the region across which the PC₇₁BM content is constant as the "bulk layer", and the region where the PC₇₁BM content is less than 80% (corresponding to a 1:4 blending ratio) as the " $PC_{71}BM$ depleted region". The weight fraction of the PC₇₁BM component in the

blend films was determined following the method described in the literature³³, with the density of PCDTBT1 and PC₇₁BM taken as 1.1 and 1.61 g cm⁻³ respectively. The PC₇₁BM depleted layer is identified in Figure 2, together with the location of the Si/SiOx layer, the PEDOT:PSS layer and the bulk polymer:fullerene layer. Our NR fits indicate an SLD value of 4.1 x 10⁻⁶ Å⁻² in the bulk layer, corresponding to a PC₇₁BM content of 86%. The PC₇₁BM depleted layer near the PEDOT:PSS interface had an SLD of 1.42 x 10⁻⁶ Å⁻², corresponding to a PC₇₁BM concentration of around 1%. This suggests that the interface region near the substrate is comprised of almost pure PCDTBT1 and contains very little PC₇₁BM when cast on PEDOT:PSS. This behavior is in qualitative accord with the vertical stratification observed in other photovoltaic blends made from PC₇₁BM and carbazole-based conjugated polymers. ^{7,25} For example, such a PC₇₁BM depleted layer was also observed near the anode interface in PCDTBT:PC₇₁BM, PCDTBT8:PC₇₁BM and PCDT2BT8:PC₇₁BM 1:4 blends that were cast on a PEDOT:PSS film. 7,25 However, in such films, the concentration of PC₇₁BM in the depleted layer was always found to be greater than 60%. Further studies to explore the effects of molecular structure of the conjugated polymer on vertical stratification is currently in progress.

To determine whether the technique used to deposit the PCDTBT1:fullerene blend film played a significant role in directing this vertical segregation, we have deposited a PCDTBT1:PC₇₁BM blend film by spray-casting. Here, the film was spray cast onto a PEDOT:PSS film from a CB solution with the substrate held at a temperature of 40°C (corresponding to the optimal spray conditions for optimal OPV efficiency as identified in our previous work on this type of co-polymer solar cell).²⁵ The SLD profile of this film is shown in Figure 2c. Again, we find a PC₇₁BM depleted region is observed near the PEDOT:PSS interface. The SLD of this layer is around 1.42x10⁻⁶ Å⁻², again

indicating that it is composed of almost pure PCDTBT1. Note that in our previous work²⁵, we found that by spray-casting a polymer:fullerene blend onto a substrate held at a temperature in excess of that used here (40°C), the film drying kinetics could be accelerated with vertical stratification of the PC₇₁BM during film formation being suppressed. The fact that a similar degree of vertical stratification is observed here by both spin- and spray-casting (see Figure 2b and 2c) indicates that the drying kinetics of a PCDTBT1:PC₇₁BM film formed by spray-casting on a PEDOT:PSS substrate held at 40°C are very similar to those spin-cast at room temperature.

Figure 2d shows the SLD profile of a PCDTBT1:PC₇₁BM film spray-cast onto a solution-processed molybdenum oxide (sMoOx) film. Here, a very different vertical composition is formed; it can be seen that a PC₇₁BM depleted region having a thickness of 9.8 nm is instead observed at the film-surface; a location that will clearly correspond to the cathode-interface in a regular (non-inverted) OPV device.

To further confirm that the surface-composition of PCDTBT1:PC₇₁BM films deposited on PEDOT:PSS and sMoOx are different, we have used water contact angle measurements to characterize the surface property of the films. This is shown in Figure 3, where we plot the contact angle as a function of time after the deposition of the water droplet on a PC₇₁BM, PCDTBT1, PCDTBT1:PC₇₁BM/sMoOx and a PCDTBT1:PC₇₁BM/PEDOT:PSS surface. We find that the contact angle reduces gradually as the system evolves towards an equilibrium state even after 60 seconds. This is most obvious for the water droplets on a PC₇₁BM film, with the contact angle changing from an initial value of 102° to around 93° after 60 seconds. We believe this change in contact angle is indicative of adsorption of water molecules by the PC₇₁BM molecules. Indeed, we believe this water adsorption most likely explains the apparent spread of contact-angle values reported in the literature for PCBM.^{13,19,34} We also find

that when making contact-angle measurements on a PCDTBT1:PC₇₁BM film deposited on PEDOT:PSS film, the contract angles reduce slowly in the first 10-15 seconds and then dramatically level off in to an angle of less than 10° as can be seen in Figure 3(d). We suspect that water molecules diffuse through the active layer and penetrate the PEDOT:PSS interface causing it to swell. This swelling of PEDOT:PSS increases the porosity of the active layer by opening up pinholes or diffusion channels which further increase the diffusion of water. This results in a delamination of the PEDOT:PSS film from the silicon substrate as manifested by a dramatically reduced contact angle. Thus as the contact angle evolves throughout the course of the experiment, we report the initial contact angle value that is recorded as soon as the water droplet lands on the film surface, rather than selecting an angle at an arbitrary time by assuming that the water droplet has reached the equilibrium state.

Using this approach, we determine contact angles of water on pure PC₇₁BM and PCDTBT1 films of 102° and 96° respectively. For the blend film cast on sMoOx, the water initially assumes a contact angle of around 97°; a value consistent with that of a pure PCDTBT1 film. This suggests that the surface region of this film is mostly composed of pure PCDTBT1. However for the blend film cast on PEDOT:PSS, the water initial assumes a contact angle of around 100°, indicative of a PC₇₁BM-rich phase (refers to the bulk layer of a blend film) near the film surface. Such water contact angle measurements are therefore consistent with our neutron scattering analysis and suggest that the surface composition of a PC₇₁BM:PCDTBT1 blend is highly dependent on the nature of the underlying substrate.

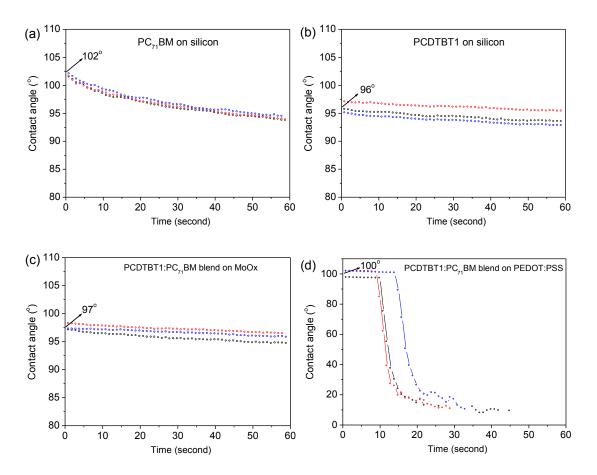


Fig. 3. Dynamic water contact angle measurements on films of (a) PC₇₁BM cast on silicon; (b) PCDTBT1 cast on silicon; (c) PCDTBT1:PC₇₁BM 1:4 spray cast on sMoOx; and (d) PCDTBT1:PC₇₁BM 1:4 spray cast on PEDOT:PSS.

Our measurements thus indicate that vertical composition of a 1:4 blends PCDTBT1:PC₇₁BM is dependent on the nature of the substrate on which it is cast. A review of different reports in the literature⁷ suggests that vertical stratification in polymer:fullerene bulk heterojunction photovoltaic blends is likely to be materials system dependent, with the driving force being the interplay of thermodynamic stability and kinetic limitations during film drying process. We believe therefore that the non-uniform vertical composition we observe here is driven by selective solubility of polymer and fullerene in the casting solvent that either favours or limits the respective diffusion kinetics of each component during the film drying process. Other work has

previously reported vertical segregation in polymer-fullerene blend films, including the closely related polymer PCDTBT in which a PCBM-depleted region was identified around the substrate interface^{24,25}. We note that in comparison with PCDTBT, the BT unit in PCDTBT1 that has been functionalized with two alkoxy side-chains will impart significantly improved solubility to the polymer²⁹. We speculate that if the solubility of PCDTBT1 approaches – or even exceeds – that of PC₇₀BM in CB, it is possible that the order in which each material vitrifies during film drying may change³⁵, with fullerene aggregates forming before the polymer fully vitrifies. Furthermore, the enhanced solubility of PCDTBT1 may well permit it to undergo increased diffusion during film drying. The interactions between the inorganic sMoOx and conjugated PCDTBT1 is not expected to be strong, thus as the PCDTBT1:PC₇₀BM blend solution is cast onto it, the solvated PCDTBT1 chains may preferentially diffuse to the surface region to minimize the total surface energy of the blend film, and create a polymer-rich surface layer. Notably however such solvated PCDTBT1 chains appear to diffuse to the substrate interface when cast on a PEDOT:PSS; a process that will be driven by the thermodynamic interactions between PCDTBT1 and PEDOT:PSS. We note that similar polymer-rich surface layers (having a thickness of around 5 nm) have also been identified in a P3HT:PCBM blend cast on low temperature annealed sMoOx surface.³⁶ In another work investigating PCDTBT:PC₇₀BM blend, an unfavorable polymer-rich layer was also identified near cathode interface upon thermal annealing at a temperature higher than 140 °C.³⁷

To explore the effect of vertical segregation on the operational efficiency of PCDTBT1:PC₇₁BM based OPVs, we have fabricated solar-cell devices utilizing both PEDOT:PSS and sMoOx as hole transport layers. We first fabricated a series of OPV devices to identify the thickness of the active layer at which device efficiency is

maximized. This is shown in Figure 4 where we plot PCE, V_{oc} , FF and J_{sc} as a function of active layer thickness for OPVs utilizing a PEDOT:PSS anode. It can be seen that an optimized PCE of around 4% was obtained for an active layer thickness of approximately 60 nm. The maximum values of J_{sc} , V_{oc} and FF are at the thickness ca. 75, 40 and 60 nm, respectively. We note that the maximum V_{oc} values achieved in PCDTBT1:PC₇₁BM solar cell devices (0.98 V) are amongst the highest values reported from carbazole-based donor-acceptor copolymers, e.g. PCDTBT, PCDTBT8. 25,29 We believe such high V_{oc} value can be accounted for by the strong vertical segregation in these films, with the high polymer concentration found towards the PEDOT:PSS anode expected to block electron leakage-currents and aid hole extraction.

Additional confidence in our device optimization process can be confirmed on the basis of modeling studies. Here, we have extracted the optical constants (n & k, see Figure S1b) of PCDTBT1:PC₇₁BM 1:4 blend film cast from CB following the methods used in our previous work ^{38,39}, and have simulated the maximum achievable photocurrent as a function of active layer thickness (see Figure S1c) using a transfer matrix reflectivity model that we have previously employed for PCDTBT:PC₇₁BM devices. ⁴⁰ We find that J_{sc} first takes its maximal value at a film thickness of ca. 70 nm; a value very close to the optimum thickness determined from our empirical experiments (see Figure 4a).

In Figure 4b it can be seen that both FF and V_{oc} reduce as the PCDTBT:PC₇₁BM active layer thickness is increased beyond 40 and 60 nm respectively. The observation of reduced FF is consistent with increasingly inefficient charge extraction and concomitant recombination⁴¹. A range of mechanisms have been proposed to account for the V_{oc} loss, including band bending at the device electrodes⁴², energetic disorder⁴³, the existence of charge transfer states^{44,45}, charge recombination⁴⁶, as well as charge

selectivity at the active layer/electrode interfaces⁴⁷. The carbazole copolymer explored here is a largely amorphous material (see Figure S2) having relatively low charge-carrier mobility. We have determined the hole and electron mobility from the dark J-V measurements of hole- and electron-dominated devices, and found that $\mu_{\text{hole}} = 1.54 \times 10^{-5}$ cm²/Vs, with $\mu_{\text{electron}} = 9.12 \times 10^{-5}$ cm²/Vs. Therefore charge extraction can become problematic when the active layer is too thick. It is likely that in our devices, part of the observed reduction in V_{oc} results from energetic disorder and charge recombination, resulting from the low degree of structure order in these amorphous copolymers.

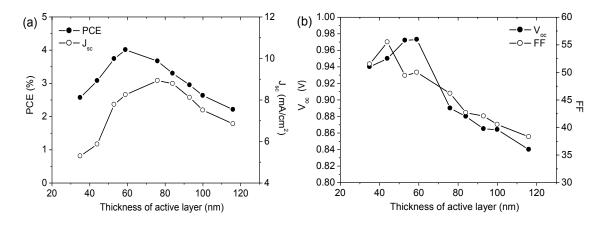


Fig. 4. Device metrics of spin-cast PCDTBT1:PC₇₁BM (1:4) solar cells using PEDOT:PSS as HTL.

Using the optimized deposition conditions determined from our previous work²⁵, we have used spray-casting to fabricate PCDTBT1:PC₇₁BM OPVs onto a PEDOT:PSS/ITO and a sMoOx/ITO anode. We summarize key device metrics in Table 2, along with the devices series and shunt-resistance as extracted from the J-V curve. The devices utilizing the PEDOT:PSS/ITO anode had the highest PCE of 4.1%; a value comparable to that created by spin coating (highest PCE \sim 4.0%) - see *J-V* curves for a spin-cast and spray-cast devices in Figure 5a and 5b respectively. In contrast, the PCE of comparable devices either spin- or spray cast onto the sMoOx/ITO anode is significantly reduced, having a value of around 1.4% (again see Figures 5a and 5b).

This reduced efficiency is reflected in both reduced *average* and *peak* PCE values as can be seen in Table 2. It can be seen that reduction in efficiency of devices fabricated onto sMoOx primarily results from a large drop in V_{oc} going from 0.97 V to 0.57 V, and *FF* going from 50% to 30%. The average device metrics and their standard deviations from 12 pixel devices for each are also summarized in Table 2.

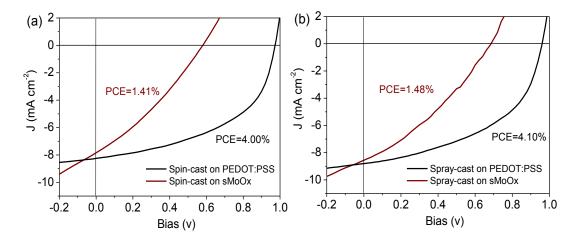


Fig. 5. J-V curves of PCDTBT1:PC₇₁BM solar cells using PEDOT:PSS and sMoOx as HTL by (a) spin casting and (b) spray casting in air.

Table 2. Device metrics of PCDTBT1:PC₇₁BM solar cells using PEDOT:PSS and sMoOx as HTL by spin and spray casting in air. The average values with standard deviation are presented in parentheses.

Deposition method	HTL	J_{sc} (mA/cm ²)	<i>V</i> oc (V)	FF (%)	<i>PCE</i> (%)	R_{shunt} $(\Omega \text{ cm}^2)$	R_{series} $(\Omega \text{ cm}^2)$
Spin-cast	PEDOT:PSS	8.25 (8.40 ±0.11)	0.97 (0.95 ± 0.01)	50.0 (49.1 ±0.82)	4.00 (3.93 ±0.11)	568	12
Spin-cast	sMoOx	7.84 (7.79 ± 0.30)	0.58 (0.55 ± 0.05)	30.9 (31.9 ±0.80)	1.41 (1.39 ±0.28)	122	39
Spray-cast	PEDOT:PSS	8.80 (8.70 ±0.11)	0.96 (0.96 ±0.01)	48.5 (48.5 ±0.82)	4.10 (4.05 ±0.07)	450	11
Spray-cast	sMoOx	8.33 (7.85 ±0.21)	0.56 (0.55 ± 0.03)	31.8 (32.7 ±0.79)	1.48 (1.41 ±0.26)	121	28

We believe the reduced efficiency of devices utilizing a sMoOx hole extraction layer results from unfavourable vertical stratification within the active layer (i.e. a 10 nm thick polymer-rich layer located at the cathode interface), rather than a failure of the sMoOx layer to act as an effective anode material. Indeed, we have previously created polymer:fullerene blend OPVs using a sMoOx anode, with devices based on the polymer PCDTBT having a peak PCE of 4.4%. Other work has also demonstrated that solution-processed MoO₃ films containing a small fraction of oxygen vacancies can act as an efficient hole-extraction layer in organic solar cells.⁴⁸

It is apparent that the segregated polymer-rich layer at the cathode interface in OPVs based on a sMoOx anode causes a small reduction in J_{sc} but results in a significant reduction in both V_{oc} and FF. We note previous Monte Carlo charge transport simulations have been used to quantify the effect of surface wetting layer on photocurrent generation within bulk heterojunction PV devices. 49 Such simulations demonstrated that minimal reductions in charge extraction efficiency occur providing the composition of the "wrong" component in the wetting layer was less than 85%, with a reduction in photocurrent of around 30% expected even when the fraction of the "wrong" component reaches 95%. Other experimental studies on P3HT:PCBM OPVs have shown that a PCBM fraction as low as 3% in the P3HT wetting layer is sufficient to provide a percolation pathways for electron extraction. 50 Here, our neutronreflectivity fits suggest that the PC₇₁BM fraction in the PCDTBT1 rich layer is less than 1%, with the device J_{sc} being some 95% of that observed in devices in which there is a large surface concentration of PC₇₁BM. Notably however, the device V_{oc} and FF are substantially reduced as a result of the polymer-rich surface-layer at the cathode interface. We believe this results from bimolecular recombination at the polymer-rich layer interface; a problem that becomes more acute at higher forward drive-bias. This

effect is similar to that observed in previous work^{36,51,52} in which the electron/hole-blocking layer in an OPV device was also found to have a substantial influence on V_{oc} but only have minor impact on J_{sc} .

The effect of a polymer-rich layer near the cathode interface apparently manifests itself in a reduced shunt resistance (see Table 2). We have further explored the operation of our devices by measuring their light ideality factors under light illumination. Light ideality factors were firstly determined by fitting a straight line to the plots in Figure S2a. However, it has been suggested that ideality factor determined by fitting a straight line to the V_{oc} versus light intensity plot will average different recombination mechanisms. 53 The light-ideality factor $(n_{id,l})$ is therefore determined differentially by $n_{id,l} = \frac{q}{kT} \frac{dV_{OC}}{d \ln(\phi)}$, where q is the electron charge, k is Boltzmann's constant, T is the absolute temperature, and φ is the fractional light intensity normalized to one sun. 53 The results are plotted in Figure S2b. From our linear fits, we found $n_{id,l}$ of PCDTBT:PC₇₁BM device with PEDOT:PSS as HTL is 1.19. In contrast, $n_{id,1}$ value is 6 when sMoOx is used as HTL. From the differential fit, we found that when operating at one sun, the $\eta_{id,l}$, is again around 1.2 for the device with PEDOT:PSS as the HTL, and is much higher than 2 for the device with sMoOx as the HTL. A n_{id.l.} of around 1.2 indicates the presence of both bimolecular and trap-assisted recombination in the device. ⁵⁴ However, the high $n_{id,l}$ value observed (> 2) cannot simply be explained by an interplay of different recombination mechanisms. Instead, we attribute such large ideality factors to a small shunt resistance that is caused by unfavorable vertical segregation.

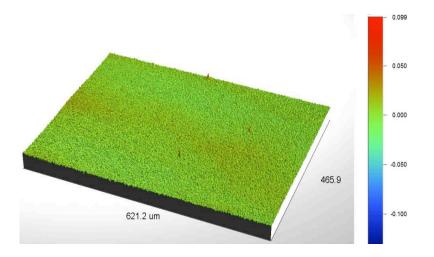


Fig. 6. Optical interferometry image of a PCDTBT1:PC₇₁BM (1:4) film cast on sMoOx film surface.

The shunt resistance of a device can often be reduced by the presence of pinholes in the film, as well as recombination and trapping of charge carriers during their transit towards the electrodes. We have used interferometric mapping measurements to characterize film morphology (see Figure 6) and find that PCDTBT1:PC $_{71}$ BM films deposited on a sMoOx anode are uniform and pin-hole free over areas of up to \sim 0.30 mm². This suggests that the reduction in the effective-shunt resistance observed in such devices might be a consequence of bimolecular recombination caused by the polymerrich layer near the cathode interface. In contrast, PCDTBT1 based devices utilizing a PEDOT:PSS anode have a PC $_{71}$ BM do not have such a polymer-rich layer towards the cathode interface, and thus have increased FF, V_{oc} and shunt-resistance and thus improved device efficiency.

4. Conclusions

We have observed contrasting vertical stratification of the PC₇₁BM component in PCDTBT1:PC₇₁BM photovoltaic blends cast by two different methods on two different

hole transport layers. Although the precise mechanism of solution deposition (spin-casting versus spray-casting) did not significantly affect vertical composition within the film, we found that the nature of the hole-transport layer significantly affects the vertical stratification of PCDTBT1:PC₇₁BM blends. Specifically, we found that in a 1:4 PCDTBT1:PC₇₁BM blend, a PC₇₁BM-depleted layer was located at the substrate interface in films cast upon a PEDOT:PSS/ITO anode, whilst this polymer-rich layer was instead located at the air-interface when the same film was cast onto a solution-cast MoOx film. Device studies indicate the importance of such vertical segregation, as a PC₇₁BM-depleted layer located at the cathode interface was shown to reduce the extraction efficiency of charge and thus increase charge recombination, which results in a sharp reduction in open circuit voltage and fill-factor.

Acknowledgements

We thank financial support from EPSRC via grant EP/I028641/1 "Polymer/fullerene photovoltaic devices: new materials and innovative processes for high-volume manufacture" and for funding the Supergen Supersolar Hub (EP/J017361/1). We thank Andrew Pearson (now at University of Cambridge), Darren Watters (University of Sheffield) and Tom Glen (University of Cambridge) for assistance with the neutron scattering beamline experiments at ISIS. We thank Jenny Nelson (Imperial College London) and Chris Groves (Durham University) for very helpful discussions.

References

^[1] G. Dennler, M. C. Scharber, C. J. Brabec, Adv. Mater., 2009, 21, 1323.

^[2] P. W. M. Blom, V. D. Mihailetchi, L. J. A. Koster, D. E. Markov, Adv. Mater., 2007, 19, 1551.

- [3] Z. He, C. Zhong, S. Su, M. Xu, H. Wu, Y. Cao, Nat. Photon., 2012, 6, 593.
- [4] J. You, L. Dou, K. Yoshimura, T. Kato, K. Ohya, T. Moriarty, K. Emery, C.-C. Chen, J. Gao, G. Li, Y. Yang, *Nat. Commun.*, 2013, 4, 1446.
- [5] S. Y. Heriot, R. A. L. Jones, Nat. Mater., 2005, 4, 782.
- [6] A. M. Higgins, S. J. Martin, R. L. Thompson, J. Chappell, M. Voigt, D. G. Lidzey, R. A. L. Jones, M. Geoghegan, *J. Phys.: Condens. Matter*, 2005, 17, 1319.
- [7] T. Wang, A. J. Pearson, D. G. Lidzey, J. Mater. Chem. C, 2013, 1, 7266.
- [8] S. S. van Bavel, E. Sourty, G. de With, J. Loos, *Nano Lett.*, 2009, 9, 507.
- [9] J. Rivnay, S. C. B. Mannsfeld, C. E. Miller, A. Salleo, M. F. Toney, *Chem. Rev.*, 2012, 112, 5488.
- [10] B. A. Collins, Z. Li, J. R. Tumbleston, E. Gann, C. R. McNeill, H. Ade, *Adv. Energy Mater.*, 2012, 3, 65.
- [11] W. Chen, M. P. Nikiforov, S. B. Darling, Energy Environ. Sci., 2012, 5, 8045.
- [12] A. J. Parnell, A. D. F. Dunbar, A. J. Pearson, P. A. Staniec, A. J. C. Dennison, H. Hamamatsu, M. W. A. Skoda, D. G. Lidzey, R. A. L. Jones, *Adv. Mater.*, *2010*, 22, 2444.
- [13] H. Y. Lu, B. Akgun, T. P. Rusell, Adv. Energy Mater., 2011, 1, 870.
- [14] S. B. Kirschner, N. P. Smith, K. A. Wepasnick, H. E. Katz, B. J. Kirby, J. A. Borchers, D. H. Reich, *J. Mater. Chem.*, 2012, 22, 4364.
- [15] X. Zheng, L.-M. Chen, G. Yang, C.-H. Huang, J. Hou, Y. Wu, G. Li, C.-S. Hsu, Y. Yang, Adv. Funct. Mater., 2009, 19, 1227.
- [16] M. P. Felicissimo, D. Jarzab, M. Gorgoi, M. Forster, U. Scherf, M. C. Scharber, S. Svensson, P. Rudolf, M. A. Loi, *J. Mater. Chem.*, 2009, 19, 4899.
- [17] A. Orimo, K. Masuda, S. Honda, H. Benten, S. Ito, H. Ohkita, H. Tsuji, *Appl. Phys. Lett.*, 2010, 96, 043305.


- [18] A. F. Tillack, K. M, Noone, B. A. MacLeod, D. Nordlund, K. P. Nagl, J. A. Bradley, S. K. Hau, H.-L. Yip, A. K.-Y. Jen, G. T. Seidler, D. S. Ginger, *ACS Appl. Mater. Interfaces*, 2011, 3, 726.
- [19] B. Xue, B. Vaughan, C.-H. Poh, K. B. Burke, L. Thomsen, A. Stapleton, X. Zhou,G. W. Bryant, W. Belcher, P. C. Dastoor, *J. Phys. Chem. C*, 2011, 114, 15797.
- [20] M. Campoy-Quiles, T. Ferenczi, T. Agostinelli, P. G. Etchegoin, Y. Kim, T. D. Anthopoulos, P. N. Stavrinou, D. D. C. Bradley, J. Nelson, *Nat. Mater.*, 2008, 7, 158.
- [21] J. W. Kiel, B. J. Kirby, C. F. Majkrzak, B. B. Maranville, M. E. Mackay, *Soft Matter*, 2010, 6, 641.
- [22] W. Yin, M. Dadmun, ACS Nano, 2011, 5, 4756.
- [23] H. Chen, R. Hegde, J. Browning, M. Dadmun, *Phys. Chem. Chem. Phys.*, 2012, 14, 5635.
- [24] P. A. Staniec, A. J. Parnell, A. D. F. Dunbar, H. Yi, A. J. Pearson, T. Wang, P. E. Hopkinson, C. Kinane, R. M. Dalgliesh, A. M. Donald, A. J. Ryan, A. Iraqi, R. A. L. Jones, D. G. Lidzey, *Adv. Energy Mater.*, 2011, 1, 499.
- [25] T. Wang, N. W. Scarratt, H. Yi, A. D. F. Dunbar, A. J. Pearson, D. C. Watters, T.
 S. Glen, A. C. Brook, J. Kingsley, A. R. Buckley, M. W. A. Skoda, A. M. Donald, R. A.
 L. Jones, A. Iraqi, D. G. Lidzey, *Adv. Energy Mater.*, 2013, 3, 505.
- [26] H. Chen, J. Peet, S. Hu, J. Azoulay, G. Bazan, M. Dadmun, *Adv. Funct. Mater.*, 2014, 24, 140.
- [27] S. A. Mauger, L. Chang, S. Friedrich, C. W. Rochester, D. M. Huang, P. Wang, A. J. Moule, Adv. Funct. Mater., 2013, 23, 1935.
- [28] J. Griffin, A. J. Pearson, N. W. Scarratt, T. Wang, D. G. Lidzey, A. R. Buckley, Org. Electron., 2014, 15, 692.

- [29] H. Yi, S. Al-Faifi, A. Iraqi, D. C. Watters, J. Kingsley, D. G. Lidzey, *J. Mater. Chem.*, 2011, 21, 13649.
- [30] T. Wang, A. J. Pearson, A. D. F. Dunbar, P. A. Staniec, D. C. Watters, H. Yi, A. J. Ryan, R. A. L. Jones, A. Iraqi, D. G. Lidzey, *Adv. Funct. Mater.*, 2012, 22, 1399.
- [31] J. A. Bartelt, Z. M. Beiley, E. T. Hoke, W. R. Mateker, J. D. Douglas, B. A. Collins, J. R. Tumbleston, K. R. Graham, A. Amassian, H. Ade, J. M. J. Fréchet, M. F. Toney, M. D. McGehee, *Adv. Energy Mater.*, 2013, 3, 364.
- [32] http://www.ncnr.nist.gov/resources/sldcalc.html. Last access Oct. 2013.
- [33] A. J. Clulow, A. Armin, K. H. Lee, A. K. Pandey, C. Tao, M. Velusamy, M. James, A. Nelson, P. L. Burn, I. R. Gentle, P. Meredith, *Langmuir*, 2014, 30, 1410.
- [34] M. D. Clark, M. L. Jespersen, R. J. Patel, B. J. Leever, ACS Appl. Mater. Interfaces, 2013, 5, 4799.
- [35] A. J. Pearson, T. Wang, A. D. F. Dunbar, H. Yi, D. C. Watters, D. M. Coles, P. A. Staniec, A. Iraqi, R. A. L. Jones, D. G. Lidzey *Adv. Funct. Mater.* 2014, 22, 659.
- [36] B. J. Tremolet de Villers, R. C. I. MacKenzie, J. J. Jasieniak, N. D. Treat, M. L. Chabinyc, *Adv. Energy Mater.*, 2014, 4, 1301290.
- [37] O. Synooka, K.-R. Eberhardt, C. R. Singh, F. Hermann, G. Ecke, B. Ecker, E. von Hauff, G. Gobsch, H. Hoppe, *Adv. Energy Mater.*, 2014, 4, 1300981.
- [38] T. Wang, A. D. F. Dunbar, P. A. Staniec, A. J. Pearson, P. E. Hopkison, J. E. Macdonald, S. Lilliu, C. Pizzey, N. J. Terrill, A. M. Donald, A. J. Ryan, R. A. L. Jones, D. G. Lidzey, *Soft Matter* 2010, 6, 4128.
- [39] T. Wang, A. J. Pearson, D. G. Lidzey, R. A. L. Jones, Adv. Funct. Mater., 2011, 21, 1383.
- [40] D. C. Watters, J. Kingsley, H. Yi, T. Wang, A. Iraqi, D. G. Lidzey. *Org. Electron.*, 2012, 13, 1401.

- [41] M. Lenes, M. Morana, C. J. Brabec, P. W. M. Blom, *Adv. Funct. Mater.*, 2009, 19, 1106.
- [42] V. D. Mihailetchi, P. W. M. Blom, J. C. Hummelen, M. T. Rispens, *J. Appl. Phys.*, 2003, 94, 6849.
- [43] J. C. Blakesley, D. Neher, Phy. Rev. B, 2011, 84, 075210.
- [44] K. Vandewal, K. Tvingstedt, A. Gadisa, O. Inganas, J. V. Manca, *Nat. Mater.*, 2009, 8, 904.
- [45] B. Qi, J. Wang. J. Mater. Chem., 2012, 22, 24315
- [46] D. Credgington, J. R. Durrant, J. Phys. Chem. Lett., 2012, 3, 1465.
- [47] E. L. Ratcliff, A. Garcia, S. A. Paniagua, S. R. Cowan, A. J. Giordano, D. S. Ginley, S. R. Marder, J. J. Berry, D. C. Olson, *Adv. Energy Mater.*, 3, 647.
- [48] F. Xie, W. C. H. Choy, C. Wang, X. Li, S. Zhang, J. Hou, *Adv. Mater.*, 2013, 25, 2051.
- [49] S. A. Choulis, Y. Kim, J. Nelson, D. D. C. Bradley, M. Giles, M. Shkunov, I. McCulloch, *Appl. Phys. Lett.* 2004, 85, 3890.
- [50] H. Wang, E. D. Gomez, J. Kim, Z. Guan, C. Jaye, D. A. Fischer, A. Kahn, Y.-L. Loo, *Chem. Mater.*, 2011, 23, 2020.
- [51] A. W. Hains, T. J. Marks, Appl. Phys. Lett., 2008, 92, 023504.
- [52] A. W. Hains, J. Liu, A. B. F. Martinson, M. D. Irwin, T. J. Marks, Adv. Funct. Mater., 2010, 20, 595.
- [53] T. Kirchartz, F. Deledalle, P. S. Tuladhar, J. R. Durrant, J. Nelson, *J. Phys. Chem. Lett.* 2013, 4, 2371.
- [54] C. M. Proctor, M. Kuik, T.-Q. Nguyen, *Prog. Polym. Sci.* 2013, 38, 1941.
- [55] S.-S. Sun, N. S. Sariciftci, Organic photovoltaics: Mechanisms, materials, and devices. CRC press, 2005.

TOC entry

Vertical stratification in PCDTBT1:PC₇₁BM bulk heterojunction solar cells were investigated by neutron reflectivity and found to have profound impacts on device performance.

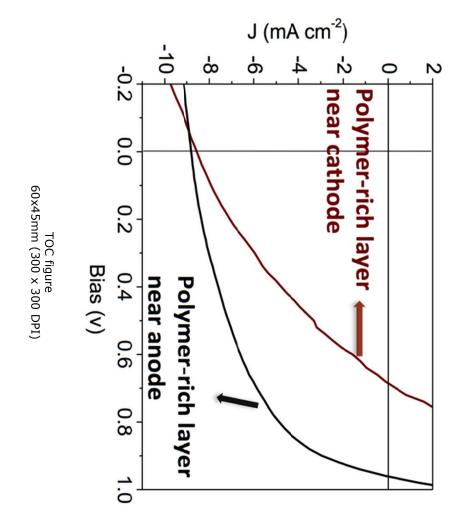

Journal of Materials Chemistry C Accepted Manuscript