



Deposited via The University of Sheffield.

White Rose Research Online URL for this paper:

<https://eprints.whiterose.ac.uk/id/eprint/101807/>

Version: Accepted Version

---

**Proceedings Paper:**

Bell, P., Gales, M., Hain, T. et al. (2015) The MGB Challenge: Evaluating Multi-genre Broadcast Media Recognition. In: Proceedings of the 2015 IEEE Workshop on Automatic Speech Recognition and Understanding (ASRU). 2015 IEEE Workshop on Automatic Speech Recognition and Understanding (ASRU), 13-17 Dec 2015, Scottsdale, AZ. IEEE, pp. 687-693. ISBN: 978-1-4799-7291-3.

<https://doi.org/10.1109/ASRU.2015.7404863>

---

© 2015 IEEE. Personal use of this material is permitted. Permission from IEEE must be obtained for all other users, including reprinting/ republishing this material for advertising or promotional purposes, creating new collective works for resale or redistribution to servers or lists, or reuse of any copyrighted components of this work in other works.

**Reuse**

Items deposited in White Rose Research Online are protected by copyright, with all rights reserved unless indicated otherwise. They may be downloaded and/or printed for private study, or other acts as permitted by national copyright laws. The publisher or other rights holders may allow further reproduction and re-use of the full text version. This is indicated by the licence information on the White Rose Research Online record for the item.

**Takedown**

If you consider content in White Rose Research Online to be in breach of UK law, please notify us by emailing [eprints@whiterose.ac.uk](mailto:eprints@whiterose.ac.uk) including the URL of the record and the reason for the withdrawal request.

# THE MGB CHALLENGE: EVALUATING MULTI-GENRE BROADCAST MEDIA RECOGNITION

*P Bell*<sup>1</sup>, *MJF Gales*<sup>2</sup>, *T Hain*<sup>3</sup>, *J Kilgour*<sup>1</sup>, *P Lanchantin*<sup>2</sup>, *X Liu*<sup>2</sup>,  
*A McParland*<sup>4</sup>, *S Renals*<sup>1</sup>, *O Saz*<sup>3</sup>, *M Wester*<sup>1</sup>, *PC Woodland*<sup>2</sup>

(1) Centre for Speech Technology Research, University of Edinburgh, Edinburgh EH8 9AB, UK

(2) Cambridge University Engineering Department, Cambridge CB2 1PZ, UK

(3) Speech and Hearing Group, Department of Computer Science, University of Sheffield, Sheffield S1 4DP, UK

(4) BBC R&D, South Lab, London, W12 7SB, UK

mgb-admin@inf.ed.ac.uk

www.mgb-challenge.org

## ABSTRACT

This paper describes the Multi-Genre Broadcast (MGB) Challenge at ASRU 2015, an evaluation focused on speech recognition, speaker diarization, and “lightly supervised” alignment of BBC TV recordings. The challenge training data covered the whole range of seven weeks BBC TV output across four channels, resulting in about 1,600 hours of broadcast audio. In addition several hundred million words of BBC subtitle text was provided for language modelling. A novel aspect of the evaluation was the exploration of speech recognition and speaker diarization in a longitudinal setting – i.e. recognition of several episodes of the same show, and speaker diarization across these episodes, linking speakers. The longitudinal tasks also offered the opportunity for systems to make use of supplied metadata including show title, genre tag, and date/time of transmission. This paper describes the task data and evaluation process used in the MGB challenge, and summarises the results obtained.

**Index Terms**— Speech recognition, broadcast speech, transcription, multi-genre, longitudinal, diarization, alignment

## 1. INTRODUCTION

The Multi-Genre Broadcast (MGB) Challenge was a controlled evaluation of speech recognition, speaker diarization, and lightly supervised alignment using BBC TV recordings. A broad, multi-genre dataset, spanning the whole range of BBC TV output, was used – the training set provided by the BBC contained about 1 600 hours of broadcast audio, together with several hundred million words of subtitle text. Transcriptions for the acoustic training data were the broadcast subtitles which have an average word error rate of about 33% (26% due to deletions) compared with verbatim transcripts.

There have been evaluations of, and corpora for, the rich transcription and diarization of broadcast speech since the mid-1990s [1, 2, 3, 4, 5], but all have been limited domain – typically broadcast news. The MediaEval evaluation of multimodal search and hyper-linking [6] used, but did not evaluate, automatic transcriptions of multi-genre broadcast data (in fact the same acoustic data used in the MGB challenge).

The MGB challenge had four main evaluation conditions:

1. **Speech-to-text transcription** of broadcast audio;

---

Authors listed alphabetically. Supported by EPSRC Programme Grant grant EP/I031022/1, Natural Speech Technology (NST). Supplementary data relating to the MGB Challenge may be accessed from the NST research data collection at <http://datashare.is.ed.ac.uk/handle/10283/786>.

2. **Alignment** of broadcast audio to subtitles;
3. **Longitudinal speech-to-text transcription** of a sequence of episodes from the same series;
4. **Longitudinal speaker diarization** and linking, requiring the identification of speakers across multiple recordings.

In order to compare the different models and algorithms used by MGB challenge participants, the acoustic model and language model training data was fixed, with no additional data or annotations allowed to be used. This also opened the challenge to any research team, since the data was made available free of charge by the BBC for the purpose of the MGB Challenge. A novel aspect of the MGB challenge was the exploration of speech recognition and speaker diarization in a longitudinal setting, offering the opportunity for systems to make use of supplied metadata including show title, genre tag, and date/time of transmission.

In this paper we describe the challenge data and metadata, with a focus on metadata refinement and data selection. We discuss the four evaluation conditions in greater detail, and also outline the baseline systems provided for each task. We then outline the different systems that participants developed for the challenge, and give an overview of challenge results.

## 2. MGB CHALLENGE DATA

The MGB Challenge used acoustic and language model training data (summarised in Table 1) provided to participants by the BBC under a non-commercial use license. It included:

- Approximately 1,600 hours of broadcast audio taken from seven weeks of BBC output across four TV channels (BBC1, BBC2, BBC3, BBC4) over the period 1 April 2008 – 19 May 2008 (around 70–80% of the total broadcast time is speech.<sup>1</sup>);
- Subtitles (closed captions) as originally broadcast on TV, accompanied by baseline lightly-supervised alignments using an ASR system, with confidence measures;
- About 640 million words of BBC subtitles collected from 1979 – 2013. These are pre-recorded subtitles, with near duplicates (by ID) removed and no live subtitles included.

Both the training acoustic data and the subtitles were filtered to avoid partial overlap with development and evaluation data. In addition participants were offered a non-commercial license to the

---

<sup>1</sup>The original set of data for this period contained 1,974 hours of audio, obtained from 2,759 shows; we have removed repeated shows and shows with damaged subtitle files.

MGB Challenge 2015					
<i>Data set</i>	<i>num Shows</i>	<i>Total duration(h)</i>	<i>Aligned speech(h)</i>	<i>num Aligned segments</i>	<i>num Words</i>
train.full	2 193	1 580	1 197	635 827	10 566 560
dev.full	47	28	20	13 165	183 811
train.short	274	199	152	81 027	1 373 913
dev.short	12	8	6	3 583	51 466
dev.long	19	12	9	5 962	72 884
eval.std	16	11			
eval.long	19	14			

**Table 1:** Training, development and evaluation data sets for the MGB Challenge. Data sets `train.short` and `dev.short` are subsets of `train.full` and `dev.full` respectively. Evaluation tasks 1 (transcription) and 2 (alignment) use the same evaluation data (`eval.std`); evaluation tasks 3 (longitudinal transcription) and 4 (longitudinal diarization) use `eval.long`. Data set `dev.long` contained 2 series each of 6 episodes, and 7 additional shows taken from 3 series. Data set `eval.long` contained 2 series of 11 and 8 episodes.

hand-compiled Combilex British English lexicon<sup>2</sup> [7, 8].

## 2.1. Metadata

The subtitles provided with the training data included transcripts, speaker changes indicated by different text colours (used for subtitle display), time stamps, and other metadata such as an indication of music and sound effects, or indications of the way the text has been pronounced. The title, date, and time of transmission, TV channel, and genre of each show was also provided. The quality of the metadata varied considerably across genres and shows in terms of precision of the alignment, owing to varying subtitle time-lags, and transcript reliability, owing to differences in the subtitle creation process (pre-recorded (offline) or live (re-speaking)). This metadata was refined in order to be used for the selection of training data.

To facilitate the task of the MGB challenge participants, we provide some output of the pre-processing we applied to the raw data. However participants were free to apply their own pre-processing to the raw subtitle data.

The metadata were first extracted from the BBC subtitle files and the transcripts were normalised. A two-step refinement procedure was carried out: alignment of the whole transcription for each show and computation of different measures for training data selection.

The alignment was based on a lightly supervised approach [9, 10]. Each audio file was segmented and the segments were clustered for speaker adaptation using the segmenter and clusterer part of the Cambridge University RT-04 transcriptipn system [11]. Each speech segment was decoded using a two-pass recognition framework [12, 11] including speaker adaptation, with the decoding employing a biased language model (LM) and tandem-SAT acoustic models trained on a subset of the training dataset. The biased LM was initially trained on the subtitle transcripts and interpolated with the overall language model, with a 0.9/0.1 interpolation weight ratio, resulting in an interpolated LM biased to the transcripts. The vocabulary was chosen to ensure coverage of words from the original transcripts. The decoder output was then compared with the original transcripts to identify matching sequences. Non-matching word sequences from the transcripts were force-aligned to the remaining speech segments. Once the whole transcript was aligned, each show was segmented according to silence duration and speaker change. The obtained segments were finally re-clustered.

A number of different measures were computed to facilitate the selection of training data. First, confusion networks were used for

minimum word error rate decoding of the aligned segments considering the biased LM. The estimates of the word posterior probabilities encoded in the confusion networks could be used directly as confidence scores (which are essentially word-level posteriors), but they tended to over-estimate the true posteriors. To compensate for this, a decision tree was trained on a reference dataset to map the estimates to confidence scores.

Two other measures were computed by scoring the decoding against the aligned transcripts used as reference. *Phone Matched Error Rate* (PMER) and *Word Matched Error Rate* (WMER) were calculated as traditional error rates but are described as matched error rates since there are not accurate transcripts to be used as reference. Finally an *Average Word Duration* (AWD, in seconds) was computed for each aligned segment in order to reject those having too large a portion of non-speech audio. Those segments were mainly due to unreliable transcripts which failed to be matched and aligned during the refinement procedure. It was found preferable to keep them in the transcripts for possible future processing and to reject them during the selection process. These measures were made available to participants.

Data from “week 6” was initially aligned using a GMM-based system discriminatively-trained on about 18 hours of hand-transcribed BBC Radio 4 data, plus 11 hours of subtitled TV data [13]. The resultant alignments were used to train a more elaborate GMM-based system with tandem features and speaker adaptive training, using  $WMER \leq 40\%$  and  $AWD \leq 1s$ , which was then used to align all the MGB challenge data.


## 2.2. Data selection

In this subsection we show some examples of data selection according to the different measures provided in the refined transcripts. Without selection, the training set has a duration of 1 197 hours.

**Selection according to average word duration:** A few segments contain a large portion of non-speech events mainly due to unreliable transcription which is not matched and aligned during the refinement procedure. Those segments can be detected and rejected according to the average word duration measure. At the top of Figure 1 we present the segment distribution according to the AWD value. At the bottom of the same figure, we present cumulative distribution of the selected training set according to a threshold on the average word duration. According to those plots,  $0.2 < AWD < 0.7$  is a reasonable range for data selection and is used in the following examples. By doing so, we reject 16% of the 1197 hours leading to 1005 hours of training data.

**Selection according to phone and word MER:** The selection

<sup>2</sup><http://www.cstr.ed.ac.uk/research/projects/combilex/>

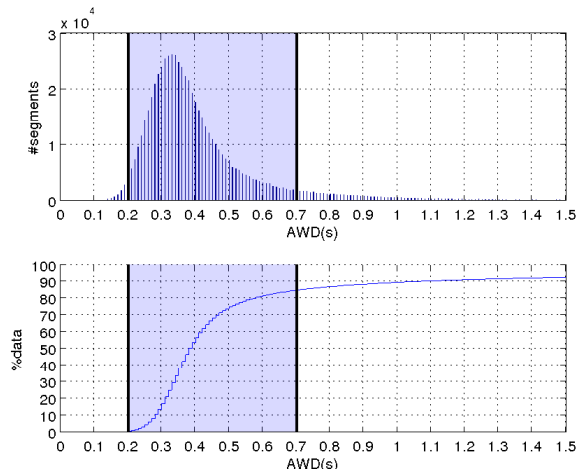

**Fig. 1:** Average word duration: *top*: segment distribution according to AWD value; *bottom*: cumulative duration in percentage of data of the selected training set according to threshold on AWD. The shaded portion corresponds to the region ( $0.2 < \text{AWD} < 0.7$ ).

can also be done according to the value of WMER or PMER [14]. Our experiments indicate that considering phone-level instead of word-level matched error rate significantly increases the quantity of data for a given threshold – for example, a threshold of 40% WMER results in about 625 hours training data, whereas a threshold of 40% PMER leads to about 700 hours of training data.

MER-based selection can be refined by considering the genre of the shows. Figure 2 shows the cumulative duration of the selected training data by genre which varies significantly given the PMER threshold. The output of the lightly supervised decoding may be used as training material [15]. The selection of recognition hypothesis can be done by comparison with the original transcripts or using a confidence score.


### 2.3. Development and evaluation data

Two hand-transcribed development sets were also provided – one for the standard transcription and the alignment tasks (`dev.full`), and a second development set for the longitudinal transcription and diarization tasks (`dev.long`). Two evaluation data sets were released during the evaluation period (`eval.std` and `eval.long`).

The development and evaluation data sets were manually transcribed by two people. The data was supplied with time-aligned subtitles which were corrected to be verbatim transcriptions, using the AMI transcription guidelines [16]. It took an average 8 hours to transcribe 1 hour of broadcast data. To ascertain the quality of the transcriptions three 1-hour programs were cross-coded by both transcribers and 96% agreement was achieved.

## 3. EVALUATION TASKS

The MGB Challenge featured four evaluation tasks: for each the only allowable acoustic and language model training data was that specified above. To enable comparability, there was no option for participants to bring additional training data to the evaluation. Use of the provided other resources (e.g. dictionary) was optional.

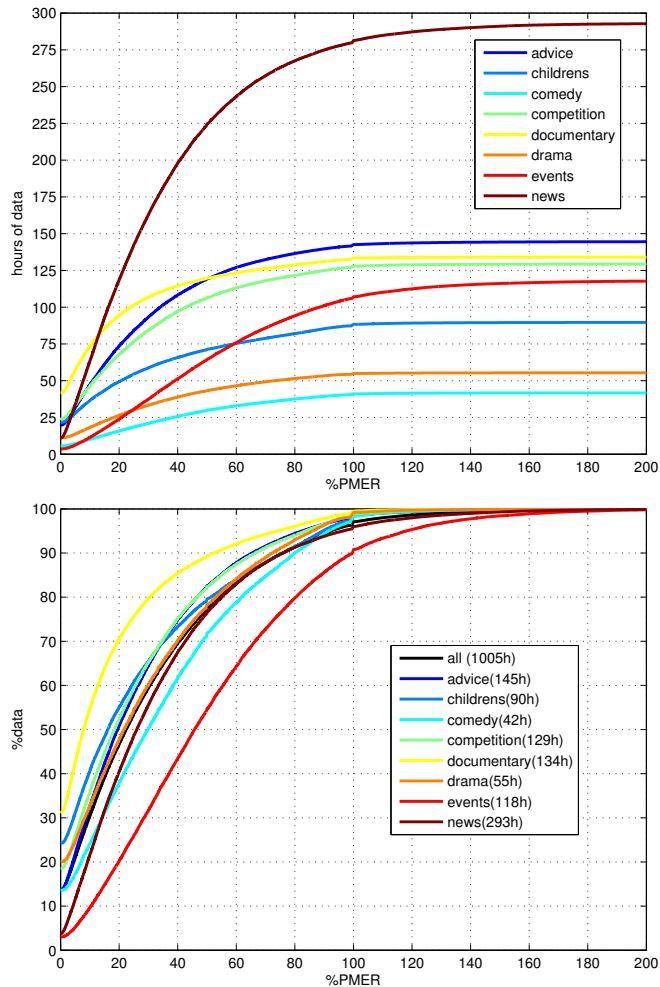

**Fig. 2:** Cumulative duration of the selected training data (1005 hours) according to a threshold on PMER depending on genre, in terms of hours of data (top) and in percentage of data (bottom).

### 3.1. Speech-to-text transcription

This is a standard speech transcription task operating on a collection of whole TV shows drawn from diverse genres. Scoring required ASR output with word-level timings. Segments with overlap were ignored for scoring purposes (where overlap is defined to minimise the regions removed – at word level where possible). Speaker labels were not required in the hypothesis for scoring.

For the evaluation data, show titles and genre labels were supplied. Some titles appeared in the training data, some were new. All genre labels were seen in the training data. Other metadata present in the development data was not supplied for the evaluation data. Speakers may be shared across training and evaluation data, and participants were free to automatically identify these themselves and make use of the information. Each show in the evaluation set was to be processed independently, so it was not possible to link speakers across shows. Systems for speech/silence segmentation were trained only on the official training set. A baseline speech/silence segmentation and speaker clustering for the evaluation data was supplied.

System	3gram	4gram
GMM SI	53.1	-
+ fMLLR	51.3	48.5
DNN CE 1	40.9	37.4
DNN CE 2	40.5	37.1
+ sMBR	37.1	33.7

**Table 2:** Baseline system results (WER%) on `dev.full`, decoding with a pruned 3gram LM; and rescoring with a 4gram LM

### 3.2. Alignment

In this task, participants were supplied with a tokenised version of the subtitles (the script) as originally broadcast, without timing information. The task was to align these subtitles to the spoken audio at word level, where possible. TV captioning often differs from the actual spoken words for a variety of reasons: edits to enhance clarity; paraphrasing; and deletions where the speech is too fast. There may be words in the captions not appearing in the reference, and equally words missing in the subtitles that were spoken. As in the transcription task, it was possible to make use of the show title and genre labels, and any automatic speaker labelling across shows that participants choose to generate. Speaker change information was supplied as in the original captions.

Scoring was performed by a script that calculated a precision/recall measure, derived from automatic alignment of a careful manual transcription. A word is considered to be a match if both start and end times fall within a 100ms window of the associated reference word. Participants were only allowed to include words from the script in their output, however words could be removed. Their scoring therefore only matches the system output with the script prior to the matching process. As before, output was filtered to remove words falling in regions of overlapped speech.

### 3.3. Longitudinal speech-to-text transcription

This task aims to evaluate ASR in a realistic longitudinal setting – processing complete TV series, where the output from shows broadcast earlier may be used to adapt and enhance the performance of later shows. The evaluation data consisted of a collection of TV series with title and genre labels. Initial models were trained on the same data as for the standard transcription task. Systems then processed each series in strict broadcast order, producing output for each show using only the initial models, and optionally, adaptation data from shows that have gone before.

### 3.4. Longitudinal speaker diarization

This task evaluated speaker diarization in the longitudinal setting. Systems aimed to label speakers uniquely across the whole series. Speaker labels for each show were obtained using only material from the show in question, and those broadcast earlier in time. Participants were not able to use external sources of training data in their diarization systems (e.g. for building i-vector extractors).

## 4. BASELINE SYSTEM

We created an open recipe to enable participants to build a baseline ASR system using the Kaldi toolkit [17], as well as XMLStar-

	<code>dev.long</code>	<code>eval.long</code>
missed speech	11.4	6.1
false speech	1.3	3.8
speaker error	34.1	37.2
DER	46.9	47.1

**Table 3:** Unlinked speaker diarization results (DER/%) for baseline systems on `dev.long` and `eval.long`

let<sup>3</sup>, and the SRILM<sup>4</sup> and IRSTLM<sup>5</sup> toolkits. This baseline system simplified and automated the data pre-processing tasks, thus allowing participants to focus on more advanced aspects of ASR model-building. The version of the recipe distributed during the challenge constructed a speaker-adapted GMM system, which we have since extended to more state-of-the-art DNN acoustic models. The main features of the system were:

- Three-state cross-word triphone HMMs (11,500 tied states, 200,000 Gaussians in total);
- Maximum likelihood training using PLP features with LDA and MLLT applied, with speaker-adaptive training using one fMLLR transform per speaker (using automatic speaker-clustering supplied in the metadata);
- A language model trained on a normalised version of the supplied BBC subtitle text [18]. By default the recipe builds a 3-gram LM pruned with threshold of  $10^{-7}$ ;
- A vocabulary of the 150k most frequently-occurring words in the text. An additional automatically-generated lexicon was supplied containing words not present in Combilex. These pronunciations are generated automatically using Sequitur [19], or using a rule-based method for acronyms.
- An option for the user to automatically select training data according to a WMER threshold at the per-utterance level, based on the lightly-supervised transcriptions supplied. The default setting of 10% yields 260 hours of speech.

We also supplied a baseline speech/non-speech segmentation and speaker clustering for each show in the development and evaluation sets. The segmentation used a 2-layer DNN trained to detect 2 outputs (speech and non-speech). The posteriors were fed to a Viterbi decoder using a 2-state HMM to produce a smoothed segmentation. Clustering was based on an unsupervised iterative procedure where speakers were clustered using the Bayesian Information Criterion. When using the baseline segmentation, the performance of DNN-based systems with no speaker adaptation was worse by around 5% absolute WER compared to a gold-standard segmentation derived from the reference transcriptions.

Table 2 shows the performance on the Task 1 development set of the baseline recipe systems trained on 260hrs of data. The speaker-independent (SI) system uses the supplied baseline segmentation; adapted systems used the baseline speaker clustering. Our experience suggests that around 2% absolute WER is gained by expanding the training set to 700hrs by increasing the MER threshold to 40%. We also show the results from applying a standard DNN training recipe with CE training followed by sMBR sequence training [20]. Two iterations of CE training are used, with state alignments regenerated after the first iteration. The final system scores 34.9% WER on the evaluation set. Table 3 shows the performance of the baseline speaker segmentation and clustering systems for unlinked speaker

<sup>3</sup><http://xmlstar.sourceforge.net/>

<sup>4</sup><http://www.speech.sri.com/projects/srilm/>

<sup>5</sup><https://hlt.fbk.eu/technologies/irstlm>

diarization on the development and evaluation data.

## 5. SUBMITTED SYSTEMS AND RESULTS

19 teams submitted systems to the MGB challenge, across the four tasks. We have attempted to highlight key features of the systems below. Detailed system descriptions are available at <http://mgb-challenge.org/>.

### Task 1: Speech-to-text transcription

- *Brno University of Technology (BUT; vutbr.cz)*: train on matched portions of lightly supervised transcriptions (800 hrs). DNNs with sMBR training, fMLLR features.
- *CRIM (crim.ca)* [21]: train on 1070hrs, utterances with higher WMER used only to update hidden layers; genre-dependent LMs used for rescoring. DNNs trained on TRAP + ivector features (various systems combined). Used LIUM's diarization in joint system.
- *Inferret (inferret.com)*: 152 hours of data; DNNs trained on fMLLR features with 4 sMBR iterations.
- *Intelligent Voice (IV; intelligentvoice.com)*: 170k utterances selected following data cleanup, with 1% WER improvement over WMER=50% selection. Kernel additive modelling investigated, but not effective. Time-delay DNNs with i-vector features. Errors with acronym splitting.
- *LIMSI (limsi.fr)* [22, 23]: one-pass system, decoding entire shows, makes use of baseline segmentation and their own, three different NNLMs, additional data cleaning and normalisation. Incremental selection of training data using own alignment tool - 900 hrs finally. Features are BNs derived from PLP+TRAP features.
- *LIUM (www-lium.univ-lemans.fr)* [21]: realignment of training data with own diarization; 5-gram feed-forward NNLM; AMs similar to CRIM.
- *NAIST (naist.jp)* [24]: p-norm DNNs with i-vector features; 338 hours of training data.
- *NTU (ntu.edu.sg)*: 700 hrs of data; initial GMM trained on WMER=10% used to select remaining data with a confidence threshold. CE DNN training on full set; sequence training using only smaller most confident portion.
- *University of Cambridge (CU; mi.eng.cam.ac.uk)* [25]: Primarily HTK-based hybrid DNN and tandem systems via joint decoding. Trained on 700 hrs (PMER=30%). DNN-based segmenter. DNN adaptation by parametrised activation functions in Task 3 system. RNNLMs with adaptation. Also combination with Kaldi based CNN, DNN and LSTM systems.
- *University of Edinburgh (UE; cstr.ed.ac.uk)*: data selected on WMER=40%. CNNs are trained on alignments generated from DNN. No sequence training.
- *University of Sheffield (SU; spandh.dcs.shef.ac.uk)* [26]: 1st pass - DNNs with PLP+bMMI features with global cMLLR xform. Speech segmented based on 1st-pass output. 2nd pass combines 3-complementary DNN systems. Genre-dependent LMs used in some systems.

### Task 2: Alignment

- *CRIM*: forced alignment with Task 1 AMs using a wide pruning beam – except used recognition output for two shows.
- *NHK (nhk.or.jp)*: DNN-based AM. Forced alignment with ASR output used when subtitles not given.
- *Quorate / UEDIN (quoratetechnology.com)* [27]: data selected on WMER=40%; DNNs with sMBR sequence training; 2-pass alignment with factor-transducers.

- *CU* [28]: DNN-based segmentation. Lightly supervised decoding with SI DNN. Text-aligned to original script to get anchor points, followed by forced alignment and comparison with confidence-marked lightly supervised output.
- *SU*: lightly supervised decoding. After alignment with the text, force-alignment is used to obtain final word timings.
- *Vocapia / LIMSI (vocapia.com)*: Rover combination of task 1 primary system with a system using LM biased towards show captions.

### Task 3: Longitudinal speech-to-text transcription

- No participants attempted explicit longitudinal adaptation. There were some system improvements due to the additional week allowed for submitting results for this task.

### Task 4: Longitudinal speaker diarization

- *IDIAP (idiap.ch)*: speaker clustering using a fusion of Information Bottleneck clustering and a traditional HMM-GMM method. Agglomerative clustering using i-vectors.
- *Orange/LIUM (orange.com)*: segmentation based on ASR output; clustered using i-vectors with PLDA distance metric.
- *CU* [29]: DNN-based segmentation including change point-detection and iterative agglomerative clustering to get homogeneous segments. Speaker clustering using feature warped data on a MAP-adapted UBM model for each cluster to optimise a cross-likelihood ratio (CLR). Linking uses complete-linking clustering with a distance measure based on CLR.
- *UE*: GMM-based agglomerative speaker clustering.
- *SU* [30]: clustering using the SHoUT toolkit; posteriors are generated from a Speaker Separation DNN, used as input to a speaker-state HMM.
- *University of Zaragoza (UZ; unizar.es)* [31]: i-vector approach using unsupervised version of PLDA with Dirichlet prior, approximated with variational Bayes.

The results for all participants across all tasks are summarised in Table 4. For the recognition and alignment tasks the results are presented per show and as an overall average. The variance across shows is quite high: for example the most accurate system for task 1, has an average WER of 23.7%, with the WER per show varying from 10.4 – 41.4% across the 16 test shows.

## 6. CONCLUSIONS AND FUTURE CHALLENGES

The first MGB Challenge developed a process for evaluating systems for multi-genre broadcast speech recognition, diarization, and alignment, using fixed training sets for acoustic and language model training. We achieved wide participation from 19 teams. Recognition, alignment, and diarization of multi-genre broadcast speech is indeed a substantial challenge. Performance is highly variable across shows – for example, the WER by show varied from 10 – 40% for the most accurate system in the transcription task. Speaker diarization of this broadcast content is considerably more difficult than what is typically addressed in the literature. Evaluation of alignment and longitudinal evaluation conditions were novel aspects. The alignment evaluation had a tight temporal constraint (looking for matches with 0.1s of the start/end times of each word) which was difficult. Finally, no team attempted direct longitudinal modelling for task 3, probably because of the tight deadlines of the challenge. We plan to continue the MGB Challenge, using the current tasks and training data. Possible extension tasks include moving to significantly larger training set for speech-to-text transcription, and to extend the challenge to different languages.

Show	CU	CRIM/LIUM	LIMS	CRIM	SU	LIUM	UE	NAIST	NTU	BUT	IV	Inferret	Average
<i>Daily Politics</i>	10.4	13.0	11.8	13.5	13.6	14.5	15.4	17	16.8	19.4	20.1	23.2	15.7
<i>Magnetic North</i>	11.6	12.5	13.0	13.8	16.9	14.9	14.1	13.2	18.8	22.0	20.1	20.9	16.0
<i>Dragons' Den</i>	11.5	13.0	13.5	13.9	14.3	14.1	15.8	15.7	21.2	22.9	21.8	24.7	16.9
<i>Eggheads</i>	14.1	16.9	17.6	17.5	19.2	19.8	19.1	20.5	24.5	26.1	24.9	25.8	20.5
<i>Athletics London</i>	14.7	16.8	15.8	17.7	20.7	19.4	19.3	21.8	20.6	25.1	26.2	30.2	20.7
<i>Point of View</i>	13.5	17.1	14.2	17.4	18.9	23.4	21.7	21.8	22.2	25.6	27.1	32.8	21.3
<i>Syd Barrett</i>	21.3	22.7	23.2	23.9	24.0	25.7	28.4	29.4	30.8	32.8	36.2	36.4	27.9
<i>Top Gear</i>	21.8	25.7	26.3	27.6	27.2	29.3	31.4	28.9	36.1	37.8	38.3	39.7	30.8
<i>Blue Peter</i>	24.6	26.6	25.6	27.8	28.4	30.4	31.1	31.1	34.3	38.3	37.9	44.4	31.7
<i>Legend of the Dragon</i>	21.7	25.2	26.1	26.0	25.2	31.7	29.9	33.0	41.7	42.6	43.8	39.0	32.2
<i>The North West 200</i>	27.7	30.4	31.6	31.2	32.2	34.4	36.9	38.3	43.4	45.6	46.9	49.1	37.3
<i>Holby City</i>	32.1	36.6	40.9	38.0	39.3	41.7	39.1	38.4	47.3	49.8	48.6	54.5	42.2
<i>The Wall</i>	33.7	39.2	38.7	40.4	40.8	43.8	42.6	42.7	46.1	48.8	51.2	53.2	43.4
<i>One Life Special Mum</i>	35.3	40.2	40.5	42.2	42.2	43.8	45.1	45.7	49.6	51.4	53.8	52.8	45.2
<i>Goodness Gracious Me</i>	37.2	36.5	41.9	37.6	42.5	45.1	46.0	45.3	48.7	52.9	55.7	54.1	45.3
<i>Oliver Twist</i>	41.4	44.2	50.1	45.9	49.4	52.2	49.2	48.9	55.4	58.8	58.6	60.2	51.2
<b>Overall WER (%)</b>	<b>23.7</b>	<b>26.6</b>	<b>27.5</b>	<b>27.8</b>	<b>28.8</b>	<b>30.4</b>	<b>30.9</b>	<b>31.2</b>	<b>35.5</b>	<b>38.0</b>	<b>38.7</b>	<b>40.8</b>	

**Task 1: Speech-to-text transcription (WER/%)**. Italics in adjacent systems indicates no significant difference at the 1% level; all differences between systems two or more places apart in ranking were found to be statistically significant at 1% (Matched Pairs Sentence Segment Word Error Test).

Show	CU*	Quorate/UE	CRIM	Vocapia/LIMS	SU	NHK	Average
<i>Magnetic North</i>	0.977	0.962	0.971	0.920	0.973	0.944	0.958
<i>Dragons' Den</i>	0.946	0.944	0.912	0.935	0.934	0.910	0.930
<i>Points of View</i>	0.957	0.941	0.934	0.888	0.929	0.907	0.926
<i>Eggheads</i>	0.938	0.904	0.920	0.894	0.892	0.887	0.906
<i>Syd Barrett</i>	0.892	0.887	0.850	0.877	0.874	0.824	0.867
<i>Daily Politics</i>	0.901	0.887	0.870	0.888	0.792	0.849	0.865
<i>Legend of the Dragon</i>	0.899	0.867	0.879	0.833	0.876	0.792	0.858
<i>Top Gear</i>	0.891	0.886	0.826	0.876	0.855	0.786	0.853
<i>Blue Peter</i>	0.883	0.860	0.863	0.854	0.799	0.803	0.844
<i>Athletics London</i>	0.886	0.848	0.822	0.875	0.803	0.801	0.839
<i>Holby City</i>	0.883	0.880	0.889	0.785	0.780	0.735	0.825
<i>Oliver Twist</i>	0.863	0.865	0.849	0.738	0.787	0.733	0.806
<i>One Life Special Mum</i>	0.856	0.844	0.860	0.766	0.767	0.731	0.804
<i>Goodness Gracious Me</i>	0.855	0.832	0.835	0.761	0.790	0.722	0.799
<i>The North West 200</i>	0.855	0.801	0.822	0.794	0.737	0.720	0.788
<i>The Wall</i>	0.787	0.773	0.760	0.742	0.696	0.620	0.730
<b>Overall f-score</b>	<b>0.893</b>	<b>0.877</b>	<b>0.863</b>	<b>0.846</b>	<b>0.834</b>	<b>0.797</b>	

**Task 2: Alignment (f-score)**. (\*: After a bugfix, the CU system has an overall f-score of 0.900).

Show/Episode	CU	SU	UE	Average
<i>Celebrity Masterchef</i> Ep 1	18.9	23.3	25.1	22.4
Ep 2	15.4	20.5	21.2	19.0
Ep 3	15.7	20.6	22.1	19.5
Ep 4	17.4	21.4	24.1	21.0
Ep 5	13.8	19.2	19.3	17.4
Ep 6	19.5	24.1	26.9	23.5
Ep 7	20.2	26.6	27.8	24.9
Ep 8	15.5	21.8	24.0	20.4
Ep 9	23.5	30.7	34.9	29.7
Ep 10	23.6	30.3	33.1	29.0
Ep 11	13.7	17.5	18.5	16.6
<i>The Culture Show Uncut</i> Ep 1	20.3	27.5	26.0	24.6
Ep 2	22.5	28.4	29.0	26.6
Ep 3	14.9	20.7	21.9	19.2
Ep 4	22.2	27.7	27.9	25.9
Ep 5	23.3	30.7	29.0	27.7
Ep 6	19.6	23.3	25.0	22.6
Ep 7	21.0	25.4	26.5	24.3
Ep 8	21.5	27.5	29.6	26.2
<b>Overall WER (%)</b>	<b>19.3</b>	<b>24.8</b>	<b>26.3</b>	
<i>Task 1 WER (%)</i>	22.1	28.8	29.7	

**Task 3: Longitudinal speech-to-text transcription (WER/%)**.

	CU	Orange/LIUM	UZ	SU	UE	IDIAP
Linked Speaker Diarization						
missed speech	4.5	10.0	6.1	2.1	6.0	6.0
false speech	2.8	1.3	4.0	4.8	4.1	4.1
speaker error	40.2	38.5	40.4	50.3	48.4	57.9
diarization error	<b>47.5</b>	<b>49.8</b>	<b>50.5</b>	<b>57.2</b>	<b>58.5</b>	<b>68.1</b>
masterchef error	51.9	51.4	55.3	64.6	61.6	67.9
culture show error	40.2	48.1	42.7	45.3	53.4	68.3
Unlinked Speaker Diarization						
missed speech	4.5	10.0	6.1	2.1	6.0	6.0
false speech	2.6	1.2	3.9	4.7	3.9	4.0
speaker error	33.1	33.5	33.0	43.2	41.3	44.4
diarization error	<b>40.2</b>	<b>44.7</b>	<b>43.0</b>	<b>50.1</b>	<b>51.2</b>	<b>54.4</b>
masterchef error	44.6	47.9	47.6	55.8	52.8	58.2
culture show error	33.1	39.5	35.2	40.8	48.6	48.1

**Task 4: Longitudinal speaker diarization (DER/%)**.

**Table 4: Evaluation results for the four MGB Challenge tasks**. The error rate of applying the Task 3 ASR systems to Task 1 is also shown.

## 7. REFERENCES

- [1] J Garofolo, J Fiscus, and W Fisher, "Design and preparation of the 1996 HUB-4 broadcast news benchmark test corpora," in *Proc. DARPA Speech Recognition Workshop*, 1997.
- [2] D Graff, "An overview of broadcast news corpora," *Speech Communication*, vol. 37, no. 1, pp. 15–26, 2002.
- [3] S Galliano, E Geoffrois, G Gravier, J-F Bonastre, D Mostefa, and K Choukri, "Corpus description of the ESTER evaluation campaign for the rich transcription of French broadcast news," in *Proc LREC*, 2006.
- [4] M Zelenak, H Schulz, and J Hernando, "Speaker diarization of broadcast news in Albayzin 2010 evaluation campaign," *EURASIP Journal on Audio, Speech and Music Processing*, vol. 19, pp. 1–9, 2012.
- [5] O Galibert and J Kahn, "The first official REPERE evaluation," in *Proc SLAM*, 2013.
- [6] M Eskevich, R Aly, DN Racca, R Ordelman, S Chen, and GJF Jones, "The Search and Hyperlinking task at MediaEval 2014," in *Proc MediaEval*, 2014.
- [7] K Richmond, R Clark, and S Fitt, "Robust LTS rules with the Combilex speech technology lexicon," in *Proc Interspeech*, 2009, pp. 1295–1298.
- [8] K Richmond, R Clark, and S Fitt, "On generating Combilex pronunciations via morphological analysis," in *Proc Interspeech*, 2010, pp. 1974–1977.
- [9] N Braunschweiler, MJF Gales, and S Buchholz, "Lightly supervised recognition for automatic alignment of large coherent speech recordings," in *Proc. Interspeech*, 2010, pp. 2222–2225.
- [10] P Lanchantin, PJ Bell, MJF Gales, T Hain, X Liu, Y Long, J Quinell, S Renals, O Saz, MS Seigel, P Swietojanski, and PC Woodland, "Automatic transcription of multi-genre media archives," in *Proc. of SLAM workshop*, Marseille, France, 2013.
- [11] MJF Gales, DY Kim, PC Woodland, HY Chan, D Mrva, R Sinha, and SE Tranter, "Progress in the CU-HTK Broadcast News Transcription System," in *IEEE Trans. on Audio, Speech, and Language Processing*, 2006, vol. 14, pp. 1513–1525.
- [12] G Evermann and PC Woodland, "Design of fast LVCSR systems," in *Proc. ASRU Workshop*, 2003.
- [13] PJ Bell, MJF Gales, P Lanchantin, X Liu, Y Long, S Renals, P Swietojanski, and PC Woodland, "Transcription of multi-genre media archives using out-of-domain data," in *Proc. SLT*, 2012.
- [14] Y Long, MJF Gales, P Lanchantin, X Liu, MS Seigel, and PC Woodland, "Improving lightly supervised training for broadcast transcriptions," in *Proc. Interspeech*, 2013.
- [15] L Lamel, J-L Gauvain, and G Adda, "Lightly supervised and unsupervised acoustic model training," in *Computer Speech and Language*, 2002, vol. 16, pp. 115–129.
- [16] J Moore, M Kronenthal, and S Ashby, "Guidelines for AMI speech transcriptions," 2005, <http://groups.inf.ed.ac.uk/ami/corpus/Guidelines/speech-transcription-m%annual.v1.2.pdf>.
- [17] D Povey, A Ghoshal, G Boulianne, L Burget, O Glembek, N Goel, M Hannemann, P Motlicek, Y Qian, P Schwarz, J Silovský, G Semmer, and K Veselý, "The Kaldi speech recognition toolkit," in *Proc ASRU*, 2011.
- [18] PJ Bell, F McInnes, S Gangireddy, M Sinclair, A Birch, and S Renals, "The UEDIN English ASR system for the IWSLT 2013 evaluation," in *Proc. International Workshop on Spoken Language Translation*, 2013.
- [19] M Bisani and H Ney, "Joint-sequence models for grapheme-to-phoneme conversion," *Speech Communication*, vol. 50, no. 5, 2008.
- [20] K Vesely, A Ghoshal, L Burget, and D Povey, "Sequence-discriminative training of deep neural networks," in *Proc Interspeech*, 2013.
- [21] V Gupta, P Deléglise, G Boulianne, Y Estève, S Meignier, and A Rousseau, "CRIM and LIUM approaches for multi-genre broadcast media transcription," in *Proc IEEE ASRU*, 2015.
- [22] L Lamel and J-L Gauvain, "Speech processing for audio indexing," in *Advances in Natural Language Processing*, pp. 4–15. Springer Berlin Heidelberg, 2008.
- [23] P Fousek, L Lamel, and J-L Gauvain, "Transcribing broadcast data using mlp features.," in *Proc Interspeech*, 2008, pp. 1433–1436.
- [24] QT Do, M Heck, S Sakti, G Neubig, T Toda, and S Nakamura, "The NAIST ASR system for the 2015 Multi-Genre Broadcast Challenge: On combination of deep learning systems using a rank-score function," in *Proc IEEE ASRU*, 2015.
- [25] PC Woodland, X Liu, Y Qian, C Zhang, MJF Gales, P Karanasou, P Lanchantin, and L Wang, "Cambridge University transcription systems for the Multi-Genre Broadcast Challenge," in *Proc IEEE ASRU*, 2015.
- [26] O Saz, M Doulaty, S Deena, R Milner, R Ng, M Hasan, Y Liu, and T Hain, "The 2015 Sheffield system for transcription of multi-genre broadcast media," in *Proc IEEE ASRU*, 2015.
- [27] P Bell and S Renals, "A system for automatic alignment of broadcast media captions using weighted finite-state transducers," in *Proc IEEE ASRU*, 2015.
- [28] P Lanchantin, M Gales, P Karanasou, X Liu, Y Qian, L Wang, P Woodland, and C Zhang, "The development of the Cambridge University alignment systems for the Multi-Genre Broadcast Challenge," in *Proc IEEE ASRU*, 2015.
- [29] P Karanasou, MJF Gales, P Lanchantin, X Liu, Y Qian, L Wang, PC Woodland, and C Zhang, "Speaker diarisation and longitudinal linking in multi-genre broadcast data," in *IEEE Proc ASRU*, 2015.
- [30] R Milner, O Saz, S Deena, M Doulaty, R Ng, and T Hain, "The 2015 Sheffield system for longitudinal diarisation of broadcast media," in *Proc IEEE ASRU*, 2015.
- [31] J Villalba, A Ortega, A Miguel, and L Lleida, "Variational Bayesian PLDA for speaker diarization in the MGB Challenge," in *IEEE Proc ASRU*, 2015.