



UNIVERSITY OF LEEDS

This is a repository copy of *Applications of Z-Numbers and Neural Networks in Engineering*.

White Rose Research Online URL for this paper:
<https://eprints.whiterose.ac.uk/156091/>

Version: Accepted Version

Proceedings Paper:

Jafari, R orcid.org/0000-0001-7298-2363, Razvarz, S and Gegov, A (2020) Applications of Z-Numbers and Neural Networks in Engineering. In: *Advances in Intelligent Systems and Computing*. SAI 2020 Computing Conference, 16-17 Jul 2020, Online. Springer Verlag , pp. 12-25. ISBN 978-3-030-52242-1

https://doi.org/10.1007/978-3-030-52243-8_2

© Springer Nature Switzerland AG 2020. This is an author produced version of an article published in *Advances in Intelligent Systems and Computing*. Uploaded in accordance with the publisher's self-archiving policy.

Reuse

Items deposited in White Rose Research Online are protected by copyright, with all rights reserved unless indicated otherwise. They may be downloaded and/or printed for private study, or other acts as permitted by national copyright laws. The publisher or other rights holders may allow further reproduction and re-use of the full text version. This is indicated by the licence information on the White Rose Research Online record for the item.

Takedown

If you consider content in White Rose Research Online to be in breach of UK law, please notify us by emailing eprints@whiterose.ac.uk including the URL of the record and the reason for the withdrawal request.



eprints@whiterose.ac.uk
<https://eprints.whiterose.ac.uk/>

Applications of Z-numbers and Neural Networks in Engineering

Raheleh Jafari¹, Sina Razvarz², and Alexander Gegov³

¹ School of design, University of Leeds, Leeds, LS2 9JT, UK
r.jafari@leeds.ac.uk

² Departamento de Control Automático, CINVESTAV-IPN (National Polytechnic Institute), Mexico City, Mexico
srazvarz@yahoo.com

³ School of Computing, University of Portsmouth, Buckingham Building, Portsmouth PO1 3HE, UK
alexander.gegov@port.ac.uk

Abstract. In the real world, much of the information on which decisions are based is vague, imprecise and incomplete. Artificial intelligence techniques can deal with extensive uncertainties. Currently, various types of artificial intelligence technologies, like fuzzy logic and artificial neural network are broadly utilized in the engineering field. In this paper, the combined Z-number and neural network techniques are studied. Furthermore, the applications of Z-numbers and neural networks in engineering are introduced.

Keywords: artificial intelligence, fuzzy logic, Z-number, neural network

1 Introduction

Intelligent systems are composed of fuzzy systems and neural networks. They have particular properties such as the capability of learning, modeling and resolving optimizing problems, suitable for specific kind of applications. The intelligent system can be named hybrid system in case that it combines a minimum of two intelligent systems. For example, the mixture of the fuzzy system and neural network causes the hybrid system to be called a neuron-fuzzy system.

Neural networks are made of interrelated groups of artificial neurons that have information which is obtainable by computations linked to them. Mostly, neural networks can adapt themselves to structural alterations while the training phase. Neural networks have been utilized in modeling complicated connections among inputs and outputs or acquiring patterns for the data [1–12].

Fuzzy logic systems are broadly utilized to model the systems characterizing vague and unreliable information [13–29]. During the years, investigators have proposed extensions to the theory of fuzzy logic. Remarkable extension includes Z-numbers [30]. The Z-number is defined as an ordered pair of fuzzy numbers (C, D) , such that C is a value of some variables and D is the reliability which

is a value of probability rate of C . Z-numbers are widely applied in various implementations in different areas [31–36].

In this paper, the basic principles and explanations of Z-numbers and neural networks are given. The applications of Z-numbers and neural networks in engineering are introduced. Also, the combined Z-number and neural network techniques are studied. The rest of the paper is organized as follows. The theoretical background of Z-numbers and artificial neural networks are detailed in Section 2. Comparison analysis of neural networks and Z-number systems is presented in Section 3. The combined Z-number and neural network techniques are given in Section 4. The conclusion of this work is summarized in Section 5.

2 Theoretical background

In this section, we provide a brief theoretical insight of Z-numbers and artificial neural networks.

2.1 Z-numbers

Mathematical preliminaries Here some necessary definitions of Z-number theory are given.

Definition 1. If q is: 1) normal, there exists $\omega_0 \in \mathfrak{R}$ where $q(\omega_0) = 1$, 2) convex, $q(v\omega + (1 - v)\omega) \geq \min\{q(\omega), q(\tau)\}$, $\forall \omega, \tau \in \mathfrak{R}, \forall v \in [0, 1]$, 3) upper semi-continuous on \mathfrak{R} , $q(\omega) \leq q(\omega_0) + \epsilon$, $\forall \omega \in N(\omega_0)$, $\forall \omega_0 \in \mathfrak{R}, \forall \epsilon > 0$, $N(\omega_0)$ is a neighborhood, 4) $q^+ = \{\omega \in \mathfrak{R}, q(\omega) > 0\}$ is compact, so q is a fuzzy variable, $q \in E : \mathfrak{R} \rightarrow [0, 1]$.

The fuzzy variable q is defined as below

$$q = (\underline{q}, \bar{q}) \quad (1)$$

such that \underline{q} is the lower-bound variable and \bar{q} is the upper-bound variable.

Definition 2. The Z-number is composed of two elements $Z = [q(\omega), p]$. $q(\omega)$ is considered as the restriction on the real-valued uncertain variable ω and p is considered as a measure of the reliability of q . The Z-number is defined as Z^+ -number, when $q(\omega)$ is a fuzzy number and p is the probability distribution of ω . If $q(\omega)$, and p , are fuzzy numbers, then the Z-number is defined as Z^- -number.

The Z^+ -number has more information in comparison with the Z^- -number. In this work, we use the definition of Z^+ -number, i.e., $Z = [q, p]$, q is a fuzzy number and p is a probability distribution.

The triangular membership function is defined as

$$\mu_q = G(a, b, c) = \begin{cases} \frac{\omega - a}{b - a} & a \leq \omega \leq b \\ \frac{c - \omega}{c - b} & b \leq \omega \leq c \\ 0 & \text{otherwise} \end{cases} \quad (2)$$

and the trapezoidal membership function is defined as

$$\mu_q = G(a, b, c, d) = \begin{cases} \frac{\omega - a}{b - a} & a \leq \omega \leq b \\ \frac{d - \omega}{d - c} & c \leq \omega \leq d \\ 1 & b \leq \omega \leq c \\ 0 & \text{otherwise} \end{cases} \quad (3)$$

The probability measure of q is defined as

$$P(q) = \int_{\mathfrak{R}} \mu_q(\omega) p(\omega) d\omega \quad (4)$$

such that p is the probability density of ω . For discrete Z -numbers we have

$$P(q) = \sum_{j=1}^n \mu_q(\omega_j) p(\omega_j) \quad (5)$$

Definition 3. The α -level of the Z -number $Z = (q, p)$ is stated as below

$$[Z]^\alpha = ([q]^\alpha, [p]^\alpha) \quad (6)$$

such that $0 < \alpha \leq 1$. $[p]^\alpha$ is calculated by the Nguyen's theorem

$$[p]^\alpha = p([q]^\alpha) = p([\underline{q}^\alpha, \bar{q}^\alpha]) = [\underline{P}^\alpha, \bar{P}^\alpha] \quad (7)$$

such that $p([q]^\alpha) = \{p(\omega) | \omega \in [q]^\alpha\}$. Hence, $[Z]^\alpha$ is defined as

$$[Z]^\alpha = (\underline{Z}^\alpha, \bar{Z}^\alpha) = ((\underline{q}^\alpha, \underline{P}^\alpha), (\bar{q}^\alpha, \bar{P}^\alpha)) \quad (8)$$

such that $\underline{P}^\alpha = \underline{q}^\alpha p(\underline{\omega}_j^\alpha)$, $\bar{P}^\alpha = \bar{q}^\alpha p(\bar{\omega}_j^\alpha)$, $[\omega_j]^\alpha = (\underline{\omega}_j^\alpha, \bar{\omega}_j^\alpha)$.

Let $Z_1 = (q_1, p_1)$ and $Z_2 = (q_2, p_2)$, we have

$$Z_{12} = Z_1 * Z_2 = (q_1 * q_2, p_1 * p_2) \quad (9)$$

where $*$ \in $\{\oplus, \ominus, \odot\}$. \oplus , \ominus and \odot , indicate sum, subtract and multiply respectively.

The operations utilized for the fuzzy numbers $[q_1]^\alpha = [q_{11}^\alpha, q_{12}^\alpha]$ and $[q_2]^\alpha = [q_{21}^\alpha, q_{22}^\alpha]$ are defined as [37],

$$\begin{aligned} [q_1 \oplus q_2]^\alpha &= [q_1]^\alpha + [q_2]^\alpha = [q_{11}^\alpha + q_{21}^\alpha, q_{12}^\alpha + q_{22}^\alpha] \\ [q_1 \ominus q_2]^\alpha &= [q_1]^\alpha - [q_2]^\alpha = [q_{11}^\alpha - q_{22}^\alpha, q_{12}^\alpha - q_{21}^\alpha] \\ [q_1 \odot q_2]^\alpha &= \left(\begin{array}{l} \min\{q_{11}^\alpha q_{21}^\alpha, q_{11}^\alpha q_{22}^\alpha, q_{12}^\alpha q_{21}^\alpha, q_{12}^\alpha q_{22}^\alpha\} \\ \max\{q_{11}^\alpha q_{21}^\alpha, q_{11}^\alpha q_{22}^\alpha, q_{12}^\alpha q_{21}^\alpha, q_{12}^\alpha q_{22}^\alpha\} \end{array} \right) \end{aligned} \quad (10)$$

For the discrete probability distributions, the following relation is defined for all $p_1 * p_2$ operations

$$p_1 * p_2 = \sum_{\iota} p_1(\omega_{1,j}) p_2(\omega_{2,(n-j)}) = p_{12}(\omega) \quad (11)$$

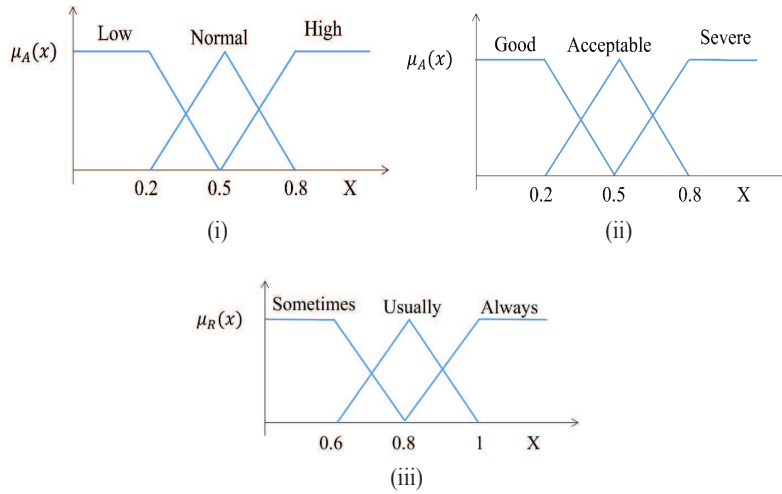


Fig. 1. Membership functions applied for (a) cereal yield, cereal production, economic growth, (b) threat rate, and (c) reliability

Background and related work The implementations of Z-numbers based techniques are bounded because of the shortage of effective approaches for calculation with Z-numbers.

In [38], the capabilities of the Z-numbers in the improvement of the quality of risk assessment are studied. Prediction equal to (High, Very Sure) is institutionalized in the form of Z-evaluation "y is $Z(c, p)$ ", such that y is considered as a random variable of threat probability, c and p are taken to be fuzzy sets, demonstrating soft constraints on a threat probability and a partial reliability, respectively. The likelihood of risk is illustrated by Z-number as: Probability = Z_1 (High, Very Sure), such that c is indicated through linguistic terms High, Medium, Low, also, p is indicated through terms Very Sure, Sure, etc. Likewise, consequence rate is explained as: Consequence measure = Z_2 (Low, Sure). Threat rates (Z_{12}) is computed as the product of the probability (Z_1) and consequence measure (Z_2).

In [39], Z-number-based fuzzy system is suggested to determine the food security risk level. The proposed system is relying on fuzzy If-Then rules, which applies the basic parameters such as cereal production, cereal yield, and economic growth to specify the threat rate of food security. The membership functions applied to explain input, as well as output variables, are demonstrated in Figure 1.

In [40], the application of the Z-number theory to selection of optimal alloy is illustrated. Three alloys named Ti12Mo2Sn alloy, Ti12Mo4Sn alloy, and Ti12Mo6Sn alloy are examined and an optimal titanium alloy is selected using

the proposed approach. The optimality of the alloys is studied based on three criteria: strength level, plastic deformation degree, and tensile strength.

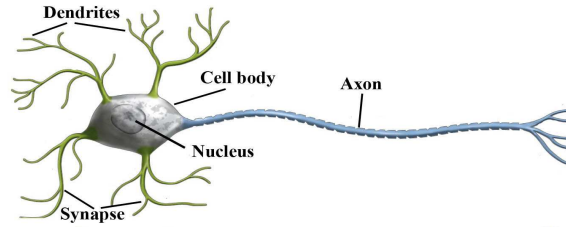


Fig. 2. The structure of a biological neuron

2.2 Neural networks

Neural networks are constructed from neurons and synapses. They alter their rates in reply from nearby neurons as well as synapses. Neural networks operate similar to computer as they map inputs to outputs. Neurons, as well as synapses, are silicon members, which mimic their treatment. A neuron gathers the total incoming signals from other neurons, afterward simulate its reply represented by a number. Signals move among the synapses, which contain numerical rates. Neural networks learn once they vary the value of their synapsis. The structure of a biological neuron or nerve cell is shown in Figure 2. The processing steps inside each neuron is demonstrated in Figure 3.

Background and related work In [41], artificial neural network technique is utilized for modeling the void fraction in two-phase flow inside helical vertical coils with water as work fluid. In [42] artificial neural network and multi-objective genetic algorithm are applied for optimizing the subcooled flow boiling in a vertical pipe. Pressure, the mass flux of the water, inlet subcooled temperature, as well as heat flux are considered as inlet parameters. The artificial neural network utilizes inlet parameters for predicting the objective functions, which are the maximum wall surface temperature as well as averaged vapor volume fraction at the outlet. The optimization procedure of design parameters is shown in Figure 4.

In [43], artificial neural network technique is applied for predicting heat transfer in supercritical water. The artificial neural network is trained on the basis of 5280 data points gathered from experimental results. Mass flux, heat flux, pressure, tube diameter, as well as bulk specific enthalpy are taken to be the inputs of the proposed artificial neural network. The tube wall temperature is taken to be the output, see Figure 5.

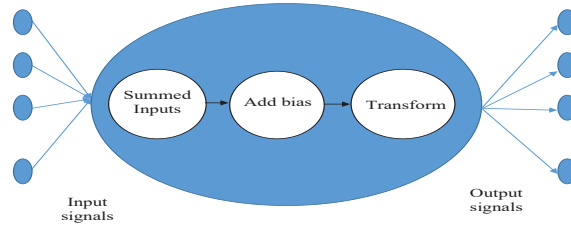


Fig. 3. Processing steps inside each neuron

3 Comparison analysis of neural networks and Z-number systems

Neural networks and Z-number systems can be considered as a part of the soft computing field. The comparison of Neural networks and Z-number systems is represented in Table 1. Neural networks have the following advantages:

Table 1. The comparison of Neural networks and Z-number systems.

| | Z-number systems | Neural networks |
|-------------------------------------|------------------|-----------------|
| Knowledge presentation | Very good | Very bad |
| Uncertainty tolerance | Very good | Very good |
| Inaccuracy tolerance | Very good | Very good |
| Compatibility | Bad | Very good |
| Learning capability | Very bad | Very good |
| Interpretation capability | Very good | Very bad |
| Knowledge detection and data mining | Bad | Very good |
| Maintainability | Good | Very good |

- i** Adaptive Learning: capability in learning tasks on the basis of the data supplied to train or initial experience.
- ii** Self-organization: neural networks are able to create their organization while time learning.
- iii** Real-time execution: the calculations of neural networks may be executed in parallel, also specific hardware devices are constructed, which can capture the benefit of this feature.

Neural networks have the following drawbacks:

- i** The utilization of neural networks is in direct connection with the availability of the training data.
- ii** The acquired solution from the learning procedure may not be often explained.

- iii Almost all the neural network systems contain black boxes such that the ultimate state may not be explained.

Fuzzy logic has the following advantageous:

- i Simple to learn and apply.
- ii A user-friendly procedure to produce.
- iii Generation of more effective performance.

Fuzzy logic has the following drawbacks:

- i Constructing an uncertain system is complex.
- ii It is not easy to define proper membership values for uncertain systems.

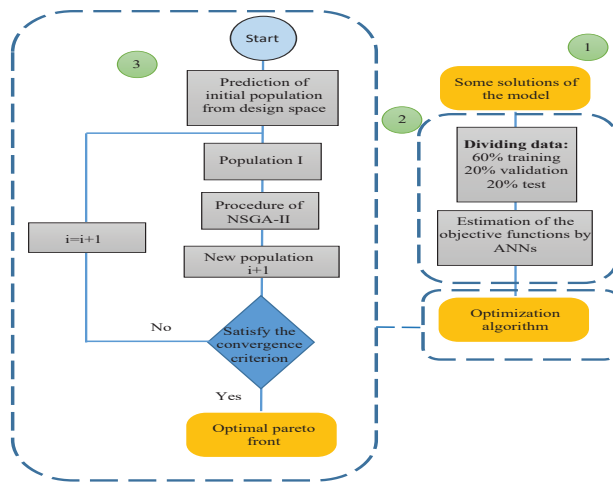


Fig. 4. The optimization procedure of input parameters

4 Combined Z-number and neural network techniques

4.1 Why apply Z-numbers in neural networks

Each neuron in the artificial neural network is linked with another neuron via a connection link in such a manner that the connecting link is related to a weight with the information regarding the input signal. Therefore, the weights contain beneficial information regarding input to resolve the problems. Some reasons for applying Z-numbers in neural networks are as follows:

- i** In a case that crisp values cannot be implemented, uncertain values such as Z-numbers are utilized.
- ii** Since the training, as well as learning, assist neural network to have a high performance in unanticipated status, therefore in such status, uncertain values like Z-numbers are more suitable than crisp values.
- iii** In neural networks, Z-numbers are more applicable than fuzzy numbers. Z-numbers are more precise when compared with fuzzy numbers. Also, Z-numbers have less difficulty in computation in comparison with nonlinear system modeling approaches.

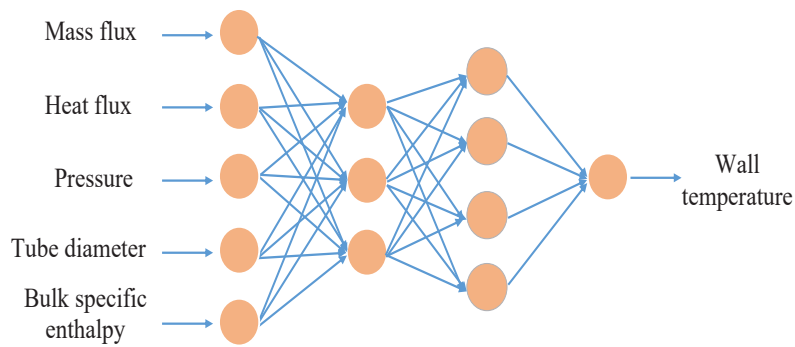


Fig. 5. Proposed artificial neural network for predicting heat transfer in supercritical water

4.2 Complexity in applying Z-numbers in neural networks

There exist some troubles when utilizing Z-numbers in neural networks. The complexity is associated with membership rules, the requirement to construct an uncertain system since it is often difficult to derive it by supplied set of complicated data.

Neural networks can be used to train Z-numbers. The advantageous of using neural networks for training Z-numbers are as follows:

- i** Novel patterns of data may be learned simply using neural networks therefore, it may be utilized for preprocessing data in uncertain systems.
- ii** Neural networks due to their abilities in learning new relation with new input data may be utilized for refining fuzzy rules to generate the fuzzy adaptive system.

4.3 Examples of combined Z-number and neural network techniques

Example 1. The following system is designed such that inputs and outputs are in the form of Z-numbers [44],

$$\begin{aligned} \zeta(t) &= \vartheta \cos(\varphi \Delta k t) \\ v(t+1) &= \frac{\Delta k^2 [\zeta(t) - \psi v^3(t)] - v(t-1) + \rho v(t)}{(1 + \omega \Delta k)} \end{aligned} \quad (12)$$

such that $\rho = \omega \Delta k - \theta \Delta k^2 + 2$. $\Delta k, \omega, \theta, \psi, \vartheta$ are Z-number parameters. φ is

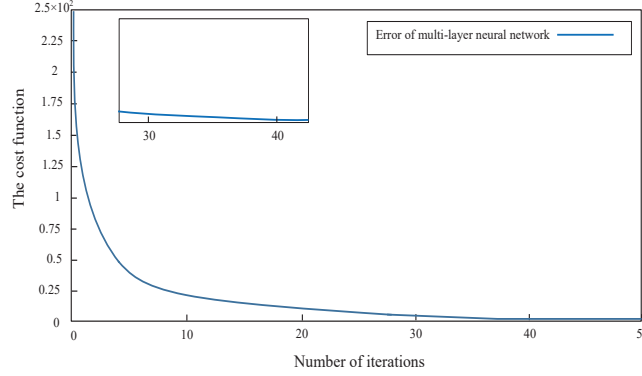


Fig. 6. Approximated error of multi-layer neural network

taken to be a random variable uniformly distributed in the interval $[0.1, 2.9]$ with mean $E\{\varphi\} = 1.5$, as well as the initial conditions being $v(0) = v(1) = 1$. The following are assumed,

$$\begin{aligned} \Delta k &= [(0.03, 0.05, 0.06), p(0.6, 0.8, 0.86)] \\ \omega &= [(0.1, 0.3, 0.5), p(0.6, 0.7, 0.87)] \\ \theta &= [(-4.2, -4, -3.8), p(0.6, 0.8, 86)] \\ \psi &= [(0.8, 1, 1.2), p(0.7, 0.8, 0.85)] \\ \vartheta &= [(0.2, 0.5, 0.7), p(0.7, 0.8, 0.85)] \end{aligned} \quad (13)$$

In order to model the uncertain nonlinear system (12), a multi-layer neural network is used such that obtains the Z-number coefficients of (12). The error plot is demonstrated in Figure 6.

Example 2. A liquid tank system is demonstrated in Figure 7, which is modeled as below

$$\frac{d}{dt}v(t) = -\frac{1}{SO}v(t) + \frac{d}{S} \quad (14)$$

where $d = t + 1$ is inflow disturbances of the tank that generates vibration in liquid level v , $O = 1$ is the flow obstruction which can be curbed utilizing the

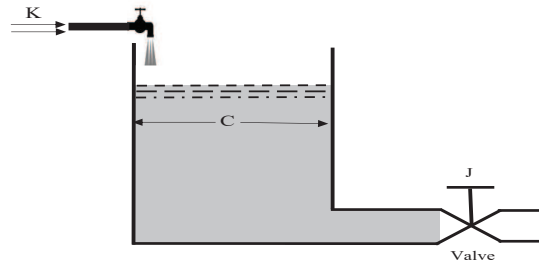


Fig. 7. Liquid tank system

valve, also $S = 1$ is the cross-section of the tank. Two types of neural networks, static Bernstein neural network (SBNN) and dynamic Bernstein neural network (DBNN) [45], are used to estimate the Z-number solutions of (14). The error plots of SBNN and DBNN are demonstrated in Figure 8.

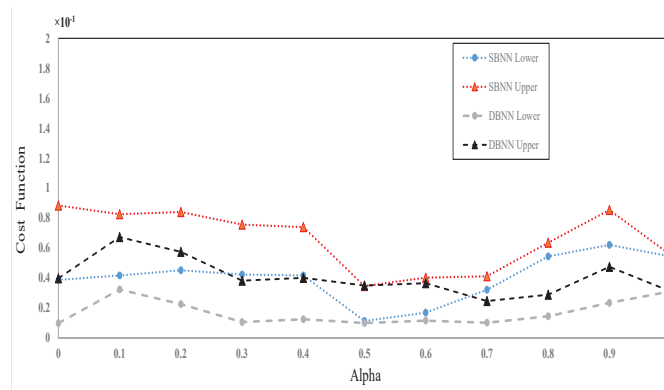


Fig. 8. Approximated errors of SBNN and DBNN

Example 3. The heat source by insulating materials is demonstrated in Figure 9, which is modeled as below

$$\frac{M_1}{N_1} \oplus \frac{M_2}{N_2} = \frac{M_3}{N_3} \oplus \frac{M_4}{N_4} \oplus J \tag{15}$$

A heat source is placed in the center of insulating materials. The widths of the insulating materials are in the form of Z-numbers. The coefficients of conductivity materials are $N_1 = h, N_2 = h\sqrt{h}, N_3 = h^2, N_4 = \sqrt{h}$, such that h is elapsed

time. J is thermal resistance. Neural network technique is used to approximate Z-number solutions of (15)[46].

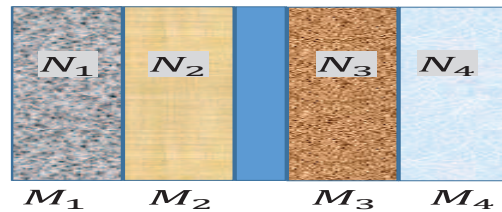


Fig. 9. The heat source

5 Conclusion

The notion of Z-numbers is rather naturally obtained while gathering vague information in a linguistic appearance. In this paper, the combined Z-number and neural network techniques are studied. Furthermore, the applications of Z-numbers and neural networks in engineering are introduced. As some researchers have effectively used Z-numbers, in-depth discussions are given for stimulating future studies.

References

1. Dote, Y., Hoft, R.G.: Intelligent Control Power Electronics Systems, Oxford, U.K.: Oxford Univ. Press, (1998).
2. Mohanty, S.: Estimation of vapour liquid equilibria for the system carbon dioxide difluoromethane using artificial neural networks, *International Journal of Refrigeration*, 29, 243249, (2006).
3. Razvarz, S., Jafari, R., Yu, W., Khalili, A.: PSO and NN Modeling for Photocatalytic Removal of Pollution in Wastewater, *14th International Conference on Electrical Engineering, Computing Science and Automatic Control (CCE) Electrical Engineering*, 1-6, (2017).
4. Jafari, R., Yu, W.: Artificial neural network approach for solving strongly degenerate parabolic and burgers-fisher equations, *12th International Conference on Electrical Engineering, Computing Science and Automatic Control*, doi:10.1109/ICEEE.2015.7357914, (2015).
5. Jafari, R., Razvarz, S., Gegov, A.: A New Computational Method for Solving Fully Fuzzy Nonlinear Systems, In: *Computational Collective Intelligence. ICCCI 2018. Lecture Notes in Computer Science, Springer, Cham*, 11055, 503-512, (2018).

6. Razvarz, S., Jafari, R.: ICA and ANN Modeling for Photocatalytic Removal of Pollution in Wastewater, *Mathematical and Computational Applications*, 22, 38-48, (2017).
7. Razvarz, S., Jafari, R., Gegov, A., Yu, W., Paul, S.: Neural network approach to solving fully fuzzy nonlinear systems, *Fuzzy modeling and control Methods Application and Research*, Nova science publisher, Inc, New York. ISBN: 978-1-53613-415-5, 45-68 (2018).
8. Razvarz, S., Jafari, R.: Intelligent Techniques for Photocatalytic Removal of Pollution in Wastewater, *Journal of Electrical Engineering*, 5, 321-328, doi: 10.17265/2328-2223/2017.06.004, (2017).
9. Graupe, D.: Chapter 112. In: Chen W, Mlynski DA (eds) Principles of artificial neural networks, *Advanced Series in circuits and systems*, 3, 1st edn. World Scientific, p. 4e189, (1997).
10. Jafari, R., Yu, W., Li, X.: Solving Fuzzy Differential Equation with Bernstein Neural Networks, *IEEE International Conference on Systems, Man, and Cybernetics, Budapest, Hungary*, 1245-1250 (2016).
11. Jafari, R. Yu, W.: Uncertain nonlinear system control with fuzzy differential equations and Z-numbers, *18th IEEE International Conference on Industrial Technology, Canada*, 890-895, doi:10.1109/ICIT.2017.7915477, (2017).
12. Jafarian, A., Measoomy nia, S., Jafari, R.: Solving Fuzzy Equations Using Neural Nets with a New Learning Algorithm, *Journal of Advances in Computer Research*, 3, 33-45, (2012).
13. Werbos, P.J.: Neuro-control and elastic fuzzy logic: Capabilities, concepts, and applications, *IEEE Trans. Ind. Electron.*, 40, 170180, (1993).
14. Jafari, R., Yu, W., Razvarz, S., Gegov, A.: Numerical methods for solving fuzzy equations: A Survey, *Fuzzy Sets and Systems*, ISSN 0165-0114, <https://doi.org/10.1016/j.fss.2019.11.003>, (2019).
15. Kim, J.H., Kim, K.S., Sim, M.S., Han, K.H., Ko, B.S., An application of fuzzy logic to control the refrigerant distribution for the multi type air conditioner, in *Proc. IEEE Int. Fuzzy Systems Conf.*, 3, 1350-1354, (1999).
16. Wakami, N., Araki, S., Nomura, H.: Recent applications of fuzzy logic to home appliances, in *Proc. IEEE Int. Conf. Industrial Electronics, Control, and Instrumentation, Maui, HI*, 155160, (1993).
17. Jafari, R., Razvarz, S.: Solution of Fuzzy Differential Equations using Fuzzy Sumudu Transforms, *IEEE International Conference on Innovations in Intelligent Systems and Applications*, 84-89, (2017).
18. Jafari, R., Razvarz, S., Gegov, A., Paul, S.: Fuzzy modeling for uncertain nonlinear systems using fuzzy equations and Z-numbers, *Advances in Computational Intelligence Systems: Contributions Presented at the 18th UK Workshop on Computational Intelligence, September 5-7, 2018, Nottingham, UK . Advances in Intelligent Systems and Computing*, Springer, 840, 66-107 (2018).
19. Jafari, R., Razvarz, S.: Solution of fuzzy differential equations using fuzzy sumudu transforms, *Mathematical and Computational Applications*, 1-15, (2018).
20. Jafari R., Razvarz S., Gegov A.: Solving Differential Equations with Z-Numbers by Utilizing Fuzzy Sumudu Transform, *Intelligent Systems and Applications. IntelliSys 2018. Advances in Intelligent Systems and Computing*, Springer, Cham. 869, 1125-1138, (2019).
21. Yu, W., Jafari, R.: Fuzzy Modeling and Control with Fuzzy Equations and Z-Number, *IEEE Press Series on Systems Science and Engineering, Wiley-IEEE Press*, ISBN-13: 978-1119491552, (2019).

22. Negoita, C.V., Ralescu, D.A.: Applications of Fuzzy Sets to Systems Analysis, *Wiley, New York*, (1975).
23. Zadeh, L.A.: Probability measures of fuzzy events, *Journal of Mathematical Analysis and Applications*, 23, 421-427, (1968).
24. Zadeh, L.A.: Calculus of fuzzy restrictions, *Fuzzy sets and Their Applications to Cognitive and Decision Processes*, Academic Press, New York, 1975, 1-39.
25. Zadeh, L.A.: Fuzzy logic and the calculi of fuzzy rules and fuzzy graphs, *Multiple-Valued Logic*, 1, 1-38, (1996).
26. Razvarz, S., Jafari, R.: Experimental study of Al₂O₃ nanofluids on the thermal efficiency of curved heat pipe at different tilt angle, *Journal of Nanomaterials*, 1-7 (2018).
27. Razvarz, S., Vargas-Jarillo, C., Jafari, R.: Pipeline Monitoring Architecture Based on Observability and Controllability Analysis, *IEEE International Conference on Mechatronics (ICM)*, Ilmenau, Germany, 1, 420-423, doi:10.1109/ICMECH.2019.872287, (2019).
28. Razvarz, S., Vargas-jarillo, C., Jafari, R., Gegov, A.: Flow Control of Fluid in Pipelines Using PID Controller, *IEEE Access*, 7, 25673-25680, doi:10.1109/ACCESS.2019.2897992, (2019).
29. Razvarz, S., Jafari, R.: Experimental Study of Al₂O₃ Nanofluids on the Thermal Efficiency of Curved Heat Pipe at Different Tilt Angle, *2nd international congress on technology engineering and science (ICONTESS)*, Malaysia, (2016).
30. Zadeh, L.A.: A note on Z-numbers, *Inform. Sciences*. 181, 2923-2932, (2011).
31. Jiang, W., Xie, C., Luo, Y., Tang, Y.: Ranking Z-numbers with an improved ranking method for generalized fuzzy numbers, *Journal of Intelligent and Fuzzy Systems*, 32, 1931-1943, (2017).
32. Yaakob, A.M., Gegov, A.: Fuzzy rule based approach with Z-numbers for selection of alternatives using TOPSIS, *Proceedings of the IEEE International Conference on Fuzzy Systems*, 1-8, (2015).
33. Zamri, N., Ahmad, F., Rose, A.N.M., Makhtar, M.: A Fuzzy TOPSIS with Z-Numbers Approach for Evaluation on Accident at the Construction Site, *Proceedings of the International Conference on Soft Computing and Data Mining*, 41-50, (2016).
34. Azadeh, A., Saberi, M., Atashbar, N.Z., Chang, E., Pazhoheshfar, P.: Z-AHP: a Z-number extension of fuzzy analytical hierarchy process, *Proc 7th IEEE Int Conf on Digital Ecosystems and Technologies*, 141-147, <https://doi.org/10.1109/DEST.2013.6611344>, (2013).
35. Aliev, R.A., Alizadeh, A.V., Huseynov, O.H.: The arithmetic of discrete Z-numbers, *Inform Sci*, 290, 134-155, <https://doi.org/10.1016/j.ins.2014.08.024>, (2015).
36. Aliev, R.A., Huseynov, O.H., Zeinalova, L.M.: The arithmetic of continuous Z-numbers, *Inform Sci*, 373, 441-460, <https://doi.org/10.1016/j.ins.2016.08.078>, (2016).
37. De Barros, L.C., Bassanezi, R.C., Lodwick, W.A.: The Extension Principle of Zadeh and Fuzzy Numbers, *A First Course in Fuzzy Logic, Fuzzy Dynamical Systems, and Biomathematics. Studies in Fuzziness and Soft Computing*, Springer, Berlin, Heidelberg, 347, 23-41, (2017).
38. Nuriyev, A.M.: Application of Z-Numbers Based Approach to Project Risks Assessment, *European Journal of Interdisciplinary Studies*, 5, 67-73, ISSN 2411-4138.
39. Abiyev, R.H., Uyar, K., Ilhan, U., Imanov, E., Abiyeva, E.: Estimation of Food Security Risk Level Using Z-Number-Based Fuzzy System, *Journal of Food Quality*, 2018, Article ID 2760907, 9 pages, <https://doi.org/10.1155/2018/2760907>, (2018).

40. Babanlia, M.B., Huseynov, V.M.: Z-number-based alloy selection problem, *12th International Conference on Application of Fuzzy Systems and Soft Computing, ICAFS 2016, 29-30 August 2016, Vienna, Austria, Procedia Computer Science* 102, 183-189, (2016).
41. Parrales, A., Colorado, D., Diaz-Gomez, J.A., Huicochea, A., Alvarez, A., Hernandez J.A.: New void fraction equations for two-phase flow in helical heat exchangers using artificial neural networks, *Appl. Therm. Eng.* 130, 149-160, (2018).
42. Alimoradi, H., Shams, M.: Optimization of subcooled flow boiling in a vertical pipe by using artificial neural network and multi objective genetic algorithm, *Appl. Therm. Eng.* 111, 1039-1051, (2017).
43. Chang, W., Chu, X., Fareed, A.F.B.S., Pandey, S., Luo, J., Weigand, B., Laurien, E.: Heat transfer prediction of supercritical water with artificial neural networks, *Appl. Therm. Eng.* 131, 815-824, (2018).
44. Jafari, R., Razvarz, S., Gegov, A.: Neural Network Approach to Solving Fuzzy Nonlinear Equations using Z-Numbers, *IEEE Transactions on Fuzzy Systems*, doi: 10.1109/TFUZZ.2019.2940919, (2019).
45. Jafari, R., Yu, W., Li, X., Razvarz, S.: Numerical solution of fuzzy differential equations with Z-numbers using bernstein neural networks, *International Journal of Computational Intelligence Systems*, 10, 1226-1237, (2017).
46. Jafari, R., Yu, W., Li, X.: Numerical solution of fuzzy equations with Z-numbers using neural networks, *Intelligent automation and Soft Computing*, 1-7, (2017).